

NACOmatic

Effective: 22-October-2009

Expires: 17-December-2009

Your Ad Here

~60,000 Page views/month

Contact:

Doug Ranz

248-318-0011

NACOmatic@hotmail.com

Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS OR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

00C => 228	AJZ => 222	COS => 217	FTG => 226
00V => 219	AKO => 210	CPM => 94	FUL => 110
01U => 253	ALM => 274	CPU => 172	GAB => 257
04V => 245	ALS => 211	CRO => 95	GCN => 42
05U => 255	ANK => 245	CRQ => 87	GEU => 40
05V => 213	APA => 223	CVH => 118	GJT => 233
06U => 257	APC => 142	CVN => 281	GNB => 232
07V => 239	APV => 71	CVS => 278	GNT => 285
08U => 267	ASE => 212	CXL => 84	GOO => 112
0L7 => 258	ATS => 277	CXP => 252	GUC => 234
10U => 268	AUN => 72	DAG => 97	GUP => 285
11V => 233	AVQ => 62	DEN => 224	GWS => 232
13Q => 276	AVX => 73	DGL => 34	GXY => 234
17V => 235	AXX => 276	DLO => 99	GYR => 41
18V => 236	AZC => 32	DMA => 33	HAF => 113
1O3 => 126	BAB => 76	DMN => 282	HDN => 235
20V => 237	BAM => 250	DPG => 314	HEQ => 236
24N => 283	BCE => 304	DRO => 228	HES => 116
2Q9 => 253	BDG => 302	DTA => 305	HGT => 199
2V5 => 249	BDU => 213	DUG => 35	HHR => 114
2V6 => 249	BFL => 74	DVO => 145	HIF => 310
33U => 306	BIH => 78	DVT => 53	HII => 45
33V => 248	BJC => 227	DWA => 98	HJO => 113
36S => 114	BKF => 214	E20 => 141	HMN => 287
36U => 309	BLH => 79	E26 => 289	HMT => 116
38U => 312	BLU => 103	E37 => 55	HND => 259
3Q0 => 263	BMC => 303	E60 => 35	HOB => 286
40G => 42	BNG => 75	EDU => 98	HTH => 257
40U => 313	BTF => 303	EDW => 101	HVE => 308
41U => 313	BTY => 251	EED => 142	HWD => 115
42U => 316	BUR => 82	EEO => 240	IFP => 29
43U => 316	BVU => 251	EGE => 229	IGM => 44
44A => 57	BWC => 80	EIK => 230	INW => 67
44U => 322	BXK => 28	EKA => 104	IPL => 119
49X => 88	CAG => 220	EKO => 254	ITR => 215
66V => 302	CAO => 280	ELY => 254	IWA => 55
67L => 263	CCB => 202	EMT => 103	IYK => 120
69V => 310	CCR => 95	ENV => 326	IZA => 186
74V => 321	CDC => 305	FAT => 109	JAQ => 120
94E => 298	CEC => 97	FCH => 108	KIC => 122
99V => 221	CEZ => 220	FCS => 216	KNB => 312
9V7 => 229	CFT => 31	FFZ => 49	L17 => 191
A26 => 69	CGZ => 30	FHU => 37	L53 => 126
AAT => 70	CHD => 30	FLG => 36	LAA => 238
ABQ => 275	CIC => 89	FLX => 255	LAM => 291
ACV => 72	CLR => 85	FMM => 231	LAS => 260
AEG => 276	CMA => 85	FMN => 284	LAX => 130
AEJ => 215	CMR => 66	FNL => 231	LGB => 128
AHC => 70	CNM => 279	FOM => 307	LGF => 44
AIB => 242	CNO => 91	FOT => 107	LGU => 312
AJO => 96	CNY => 315	FSU => 284	LHM => 124

LHX	=>	238	OAR	=>	133	SCK	=>	190	VEL	=>	325
LIC	=>	239	OGD	=>	317	SDL	=>	58	VGT	=>	262
LLR	=>	125	OKB	=>	147	SDM	=>	174	VIS	=>	206
LMO	=>	240	OLS	=>	50	SEE	=>	177	VNY	=>	204
LOL	=>	263	ONM	=>	299	SEZ	=>	59	WHP	=>	131
LPC	=>	127	ONT	=>	148	SFO	=>	178	WJF	=>	123
LRU	=>	290	OVE	=>	149	SGU	=>	321	WLW	=>	208
LSB	=>	291	OXR	=>	150	SIY	=>	140	WMC	=>	273
LSN	=>	131	P01	=>	27	SJC	=>	179	WVI	=>	207
LSV	=>	265	PAN	=>	51	SJN	=>	57	ZUN	=>	301
LUF	=>	45	PAO	=>	154	SKX	=>	300			
LVK	=>	125	PGA	=>	50	SLC	=>	322			
LVS	=>	290	PHX	=>	54	SLI	=>	129			
LWL	=>	272	PMD	=>	151	SMF	=>	169			
LXV	=>	239	POC	=>	123	SMO	=>	185			
MAE	=>	132	PRB	=>	155	SMX	=>	184			
MCC	=>	167	PRC	=>	56	SNA	=>	182			
MCE	=>	135	PRZ	=>	293	SNS	=>	170			
MER	=>	135	PSO	=>	242	SOW	=>	60			
MEV	=>	264	PSP	=>	153	SPZ	=>	271			
MHR	=>	170	PTV	=>	158	SQL	=>	173			
MHV	=>	139	PUB	=>	243	SRR	=>	296			
MIT	=>	187	PUC	=>	320	STK	=>	246			
MLF	=>	314	PVF	=>	156	STS	=>	186			
MMH	=>	132	PVU	=>	320	SUU	=>	195			
MOD	=>	137	RAL	=>	165	SVC	=>	298			
MPI	=>	133	RBL	=>	160	SVE	=>	191			
MRY	=>	140	RDD	=>	161	SXU	=>	297			
MTJ	=>	241	REI	=>	161	SZP	=>	185			
MVI	=>	241	RHV	=>	180	T42	=>	166			
MYF	=>	175	RIF	=>	321	TAD	=>	247			
MYV	=>	134	RIL	=>	244	TCC	=>	301			
MZJ	=>	47	RIR	=>	166	TCS	=>	300			
N86	=>	270	RIU	=>	159	TCY	=>	194			
NFG	=>	86	RIV	=>	163	TEX	=>	247			
NFL	=>	256	RNM	=>	159	TLR	=>	198			
NID	=>	90	RNO	=>	270	TNP	=>	200			
NJK	=>	102	ROW	=>	295	TOA	=>	193			
NKX	=>	136	RQE	=>	67	TPH	=>	272			
NLC	=>	124	RTN	=>	294	TRK	=>	198			
NRS	=>	119	RTS	=>	269	TRM	=>	152			
NSI	=>	181	RYN	=>	63	TSP	=>	192			
NTD	=>	157	SAC	=>	168	TUS	=>	64			
NUC	=>	174	SAD	=>	57	TVL	=>	189			
NUQ	=>	138	SAF	=>	296	TVY	=>	325			
NXP	=>	201	SAN	=>	176	TYL	=>	61			
NYL	=>	68	SAS	=>	172	UDD	=>	152			
NZY	=>	144	SBA	=>	183	UKI	=>	201			
O20	=>	126	SBD	=>	173	VBG	=>	203			
O46	=>	207	SBP	=>	180	VCB	=>	202			
OAK	=>	146	SBS	=>	246	VCV	=>	205			

GENERAL INFORMATION

This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the National Aeronautical Charting Office, FAA, Department of Transportation, Silver Spring, Maryland 20910. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: <http://nfdc.faa.gov/portal/airportchanges.do>

FAA, Aeronautical Information Services, ATO-R, Rm. 626
800 Independence Ave., SW
Washington, DC 20591
Telephone 1-866-295-8236
Fax 202-267-5322
Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

	Airport Information	Airspace Information*
Effective Date	Cut-off date	Cut-off date
22 Oct 09	9 Sep 09	20 Aug 09
17 Dec 09	4 Nov 09	15 Oct 09
11 Feb 10	30 Dec 09	10 Dec 09
8 Apr 10	24 Feb 10	4 Feb 10
3 Jun 10	21 Apr 10	1 Apr 10
29 Jul 10	16 Jun 10	27 May 10

*Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Charting Office, ATO-W
SSMC-4 Sta. #2335
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our web site at www.naco.faa.gov.
See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Charting Office
Distribution Division, ATO-W
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at www.naco.faa.gov
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized FAA Chart Agent

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertical line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

TABLE OF CONTENTS

General Information.....	Inside Front Cover
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
Arizona	22
California	62
Colorado	200
Nevada	238
New Mexico.....	260
Utah	287
City/Military Airport Cross Reference	310
Seaplane Landing Areas	311
Special Notices.....	312
Regulatory Notices	332
FAA and National Weather Service	
Telephone Numbers	333
Key to Aviation Weather Reports	334
Air Traffic Facilities Telephone Numbers	336
Air Route Traffic Control Centers	338
Flight Service Station Communication Frequencies	340
Flight Standards District Offices.....	343
Routes/Waypoints	
Low Altitude Directional Routes	344
High Altitude Preferred Routes.....	345
High Altitude Directional Routes	350
Q-Routes.....	351
Tower Enroute Control Routes	354
RNAV Routing Pitch and Catch Points	366
VFR Waypoints.....	377
VOR Receiver Check	385
Parachute Jumping Areas	390
Aeronautical Chart Bulletins	395
Supplemental Communication Reference	408
Airport Diagrams	416
National Weather Service (NWS) Upper Air Observing Stations	552
Enroute Flight Advisory Service (EFAS)	Inside Back Cover

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

AAF	Army Air Field	byd	beyond
AB	Airbase	C	Commercial Circuit (Telephone)
abv	above	CGAF	Coast Guard Air Facility
ACC	Air Combat Command; Area Control Center	CGAS	Coast Guard Air Station
acft	aircraft	CIV	Civil
ADCC	Air Defense Control Center	clsd	closed
AER	approach end rwy	comd	command
AFB	Air Force Base	CONUS	Continental United States
AFHP	Air Force Heliport	CSTMS	Customs
afld	airfield	ctc	contact
AFOD	US Army Flight Operations Detachment	ctl	control
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	dalgt	daylight
AFSS	Automated Flight Service Station	Dec	December
AG	Agriculture	DIAP	DoD Instrument Approach Procedure
A-GEAR	Arresting Gear	DoD	Department of Defense
AGL	above ground level	DSN	Defense Switching Network (Telephone)
AHP	Army heliport	dspld	displaced
ALS	Approach Light System	durn	duration
alt	altitude	eff	effective
AMC	Air Mobility Command	emerg	emergency
ANGS	Air National Guard Station	EOR	End of Runway
apch	approach	ETA	Estimated Time of Arrival
Apr	April	ETD	Estimated Time of Departure
APU	Auxiliary Power Unit	exc	except
ARB	Air Reserve Base	extd	extend
arpt	airport	FBO	fixed-base operator
ARS	Air Reserve Station	Feb	February
AS	Air Station	fld	field
ASDE-X	Airport Surface Detection Equipment—Model X	FLIP	Flight Information Publication
ASU	Aircraft Starting Unit	flt	flight
ATC	Air Traffic Control	flw	follow
Aug	August	Fri	Friday
AUW	All Up Weight (gross weight)	FSS	Flight Service Station
avbl	available	GA	glide angle
bcn	beacon	GCA	Ground Controlled Approach
blo	below	GS	glide slope
		haz	hazard
		HQ	Headquarters

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

hr	hour	npi	non precision instrument
IAP	Instrument Approach Procedure	NS ABTMT	Noise Abatement
ICAO	International Civil Aviation Organization	NSTD	nonstandard
IFR	Instrument Flight Rules	ntc	notice
ILS	Instrument Landing System	obsn	observation
IM	Inner Marker	Oct	October
IMG	Immigration	OLF	Outlying Field
incr	increase	opr	operate, operator, operational
indef	indefinite	ops	operations
ints	intensity	OTS	out of service
invo	in the vicinity of	ovrn	overrun
IMC	Instrument Meteorological Conditions	PAEW	personnel and equipment working
Jan	January	pat	pattern
JASU	Jet Aircraft Starting Unit	p-line	power line
JOAP	Joint Oil Analysis Program	PMSV	Pilot-to-Metro Service
JOSAC	Joint Operational Support Airlift Center	POL	Petrol, Oils and Lubricants
JRB	Joint Reserve Base	PPR	prior permission required
Jul	July	PRM	Precision Runway Monitoring
Jun	June	PTD	Pilot to Dispatcher
Kt	Knots	RAMCC	Regional Air Movement Control Center
LAA	Local Airport Advisory	req	request
LAHSO	Land and Hold Short Operations	rgt tfc	right traffic
lbs	pounds	RON	Remain Overnight
ldg	landing	rqr	require
lgt	lighted	rstd	restricted
lgts	lights	RSRS	reduced same runway separation
LMM	Compass locator at Middle Marker ILS	rw	runway
LOC	Localizer	Sat	Saturday
LOM	Compass locator at Outer Marker ILS	SELF	Strategic Expeditionary Landing Field
ltd	limited	Sep	September
MACC	Military Area Control Center	SFA	Single Frequency Approach
Mar	March	sfc	surface
MCAF	Marine Corps Air Facility	SFRA	Special Flight Rules Area
MCALF	Marine Corps Auxiliary Landing Field	SOAP	Spectrometric Oil Analysis Program
MCAS	Marine Corps Air Station	SOF	Supervisor of Flying
MCB	Marine Corps Base	SPB	Seaplane Base
med	medium	SR	sunrise
METRO	Pilot-to-Metro voice call	SS	sunset
Mil	military	std	standard
min	minute	Sun	Sunday
MLS	Microwave Landing System	svc	service
MM	Middle Marker of ILS	tfc	traffic
Mon	Monday	thld	threshold
MP	Maintenance Period	Thu	Thursday
MSL	mean sea level	tkf	take-off
MSAW	minimum safe altitude warning	tmp	temporary
NAAS	Naval Auxiliary Air Station	tran	transient
NADC	Naval Air Development Center	Tue	Tuesday
NADEP	Naval Air Depot	twr	tower
NAEC	Naval Air Engineering Center	twy	taxiway
NAES	Naval Air Engineering Station	UC	Under Construction
NAF	Naval Air Facility	USA	United States Army
NALCO	Naval Air Logistics Control Office	USAF	United States Air Force
NALO	Navy Air Logistics Office	USCG	United States Coast Guard
NALF	Naval Auxiliary Landing Field	USN	United States Navy
NAS	Naval Air Station	V	Defense Switching Network (telephone, formerly AUTOVON)
NAWC	Naval Air Warfare Center	VFR	Visual Flight Rules
NAWS	Naval Air Weapons Station	VIP	Very Important Person
ngt	night	VMC	Visual Meteorological Conditions
NOLF	Naval Outlying Field	Wed	Wednesday
Nov	November	wx	weather

DIRECTORY LEGEND

SAMPLE

① CITY NAME
 ② AIRPORT NAME (ALTERNATE NAME) (LTS) (KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20' JACKSONVILLE
 ③ 200 B S4 FUEL 100 OX 1 TPA-1000(800) AOE Class IV, ARFF Index A NOTAM FILE ORL Not insp. COPTER
 ④ ⑤ ⑥ ⑦ ⑧ ⑨ H-46, L-19C IAP, DIAP, AD

⑩ RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
 S-90, D-160, DT-300 PCN 80 R/B/W/T HIRL CL
 RWY 18: LDIN. MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
 Thld displcd 300'. Trees. Rgt tfc. 0.3% up.
 RWY 36: ALSF1. 0.4% down.
 RWY 09-27: H6000X150 (ASPH) MIRL
 RWY 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T

⑪ LAND AND HOLD SHORT OPERATIONS
 LANDING HOLD SHORT POINT DIST AVBL
 RWY 18 09-27 6500
 RWY 36 09-27 5400

⑫ RUNWAY DECLARED DISTANCE INFORMATION
 RWY 18: TORA-12004 TODA-12704 ASDA-11704 LDA-11504
 RWY 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704

⑬ ARRESTING GEAR/SYSTEM
 RWY 18 → HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
 BAK-14 BAK-12 (B) (1087') HOOK E5 (74' OVRN) ← RWY 36

⑭ MILITARY SERVICE: A-GEAR E-5 connected on dep end, disconnected on
 apch end. JASU 3(AM32A-60) 2(A/M32A-86)

⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

⑳ FUEL J8(Mil) (NC-100, A) FLUID W SP PRESAIR LOX
 OIL O-128 TRAN ALERT Avbl 1300-0200Z†, svc limited weekends.

㉑ AIRPORT REMARKS: Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute
 Jumping. Deer invov arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service
 (ADCUS) avbl.

㉒ MILITARY REMARKS: ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15
 minutes prior to ldg and after dep. Limited tran parking.

㉓ WEATHER DATA SOURCES: AWOS-1 120.3 (202) 426-8000. LLWAS.

㉔ COMMUNICATIONS: SFA ATIS 127.25 273.5 (202) 426-8003 UNICOM 122.95 PTD 372.2
 NAME FSS (ORL) on arpt. 123.65 122.65 122.2
 NAME RCO 112.2T 112.1R (NAME RADIO)
 (R) NAME APP/DEP CON 128.35 257.725 (1200-0400Z†)
 TOWER 119.65 255.6 (1200-0400Z†) GND CON 121.7 GCO 135.075 (ORLANDO CLNC) CLNC DEL 125.55
 NAME COMD POST (GERONIMO) 311.0 321.4 6761 PMSV METRO 239.8 NAME OPS 257.5


㉕ AIRSPACE: CLASS B See VFR Terminal Area Chart.

㉖ RADIO AIDS TO NAVIGATION: NOTAM FILE ORL. VHF/DF ctc FSS.
 (H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
 (H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
 HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
 ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
 ASR/PAR (1200-0400Z†)

㉗ COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

㉘ HELIPAD H1: H100X75 (ASPH)
 HELIPAD H2: H60X60 (ASPH)
 HELIPOINT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.

㉙ 187 TPA 1000(813)
 WATERWAY 15-33: 5000X425 (WATER)
 SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of
 arpt not visible from twr and are required to ctc twr.



All bearings and radials are magnetic unless otherwise specified.
 All mileages are nautical unless otherwise noted.
 All times are Coordinated Universal Time (UTC) except as noted.
 All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.
 The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).

10

SKETCH LEGEND

RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane,	
Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways ..	

MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions ..	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

VORTAC ...		VOR	
VOR/DME ..		NDB	
TACAN		NDB/DME	

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g. (A1) Negative symbology, e.g., (A1) (V) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 ..	
(A1) Approach Lighting System ALSF-1 ..	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALSR and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(+/-) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar ..	
(F) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Navalds, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	N	Navy
AF	US Air Force	NAF	Naval Air Facility
ANG	Air National Guard	NAS	Naval Air Station
AR	US Army Reserve	NASA	National Air and Space Administration
ARNG	US Army National Guard	P	US Civil Airport Wherein Permit Covers
CG	US Coast Guard		Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

⑦ GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

⑧ CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER.

⑨ INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAM

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5-4-5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city and airport name.

⑩ AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

⑪ ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

⑫ ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

⑬ SERVICING—CIVIL

S1: Minor airframe repairs.	S5: Major airframe repairs.
S2: Minor airframe and minor powerplant repairs.	S6: Minor airframe and major powerplant repairs.
S3: Major airframe and minor powerplant repairs.	S7: Major powerplant repairs.
S4: Major airframe and major powerplant repairs.	S8: Minor powerplant repairs.

⑭ FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	J4 (JP4)	(JP-4 military specification) FP** minus 58° C.
100LL	100LL gasoline (low lead) (Blue)	J5 (JP5)	(JP-5 military specification) Kerosene with FS-11, FP** minus 46°C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J8 (JP8)	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47°C.
A	Jet A, Kerosene, without FS-II*, FP** minus 40° C.	J8+100	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47°C, with-fuel additive package that improves thermo stability characteristics of JP-8.
A+	Jet A, Kerosene, with FS-II*, FP** minus 40°C.	J	(Jet Fuel Type Unknown)
A1	Jet A-1, Kerosene, without FS-II*, FP** minus 47°C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1+	Jet A-1, Kerosene with FS-II*, FP** minus 47° C.		
B	Jet B, Wide-cut, turbine fuel without FS-II*, FP** minus 50° C.		

*(Fuel System Icing Inhibitor)

**(Freeze Point)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

⑮ OXYGEN—CIVIL

OX 1 High Pressure	OX 3 High Pressure—Replacement Bottles
OX 2 Low Pressure	OX 4 Low Pressure—Replacement Bottles

⑯ TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

17 AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

US Customs Air and Sea Ports, Inspectors and Agents

Northeast Sector (New England and Atlantic States—ME to MD) 407-975-1740

Southeast Sector (Atlantic States—DC, WV, VA to FL) 407-975-1780

Central Sector (Interior of the US, including Gulf states—MS, AL, LA) 407-975-1760

Southwest East Sector (OK and eastern TX) 407-975-1840

Southwest West Sector (Western TX, NM and AZ) 407-975-1820

Pacific Sector (WA, OR, CA, HI and AK) 407-975-1800

18 CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

14 CFR PART 139 CERTIFICATED AIRPORTS
AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

14 CFR—PART 139 CERTIFICATED AIRPORTS

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Airport Index	Required No. Vehicles	Aircraft Length	Scheduled Departures	Agent + Water for Foam
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126' ----- ≥126', <159'	≥5 ----- <5	Index A + 1500 gal H ₂ O
C	2 or 3	≥126', <159' ----- ≥159', <200'	≥5 ----- <5	Index A + 3000 gal H ₂ O
D	3	≥159', <200' ----- >200'	 ----- <5	Index A + 4000 gal H ₂ O
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

19 NOTAM SERVICE

All public use landing areas are provided NOTAM "D" (distant dissemination) and NOTAM "L" (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. "NOTAM FILE IAD". See AIM, Basic Flight Information and

ATC Procedures for detailed description of NOTAM's. Current NOTAMs are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMs are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.jcs.mil.

20 FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

21 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as STOL, Ultralight, or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND LENGTH

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(PSP)—Pierced steel plank
(ASPH)—Asphalt	(MATS)—Pierced steel planking, landing mats, membranes	(RFSC)—Rubberized friction seal coat
(CONC)—Concrete	(PEM)—Part concrete, part asphalt	(TURF)—Turf
(DIRT)—Dirt	(PFC)—Porous friction courses	(TRTD)—Treated
(GRVD)—Grooved		(WC)—Wire combed

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TDT	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
 - R — Rigid
 - F — Flexible
- (3) The pavement subgrade category:
 - A — High
 - B — Medium
 - C — Low
 - D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
 - W — High, no limit
 - X — Medium, limited to 217 psi
 - Y — Low, limited to 145 psi
 - Z — Very low, limited to 73 psi
- (5) Pavement evaluation method:
 - T — Technical evaluation
 - U — By experience of aircraft using the pavement

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.

LIRL—Low Intensity Runway Lights.

MIRL—Medium Intensity Runway Lights.

HIRL—High Intensity Runway Lights.

RAIL—Runway Alignment Indicator Lights.

REIL—Runway End Identifier Lights.

CL—Centerline Lights.

TDZL—Touchdown Zone Lights.

ODALS—Omni Directional Approach Lighting System.

AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.

LDIN—Lead-In Lighting System.

MALS—Medium Intensity Approach Lighting System.

MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.

MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.

SALS—Short Approach Lighting System.

SALSF—Short Approach Lighting System with Sequenced Flashing Lights.

SSALS—Simplified Short Approach Lighting System.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.

ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.

ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.

SF—Sequenced Flashing Lights.

OLS—Optical Landing System.

WAVE—OFF.

NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on which they are tenants.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIL	APAP on left side of runway	PNIR	APAP on right side of runway
PAPI—Precision Approach Path Indicator			
P2L	2-identical light units placed on left side of runway	P4L	4-identical light units placed on left side of runway
P2R	2-identical light units placed on right side of runway	P4R	4-identical light units placed on right side of runway
PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.			
PSIL	PVASI on left side of runway	PSIR	PVASI on right side of runway
SAVASI—Simplified Abbreviated Visual Approach Slope Indicator			
S2L	2-box SAVASI on left side of runway	S2R	2-box SAVASI on right side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

TRIL	TRCV on left side of runway	TRIR	TRCV on right side of runway
VASI—Visual Approach Slope Indicator			
V2L	2-box VASI on left side of runway	V6L	6-box VASI on left side of runway
V2R	2-box VASI on right side of runway	V6R	6-box VASI on right side of runway
V4L	4-box VASI on left side of runway	V12	12-box VASI on both sides of runway
V4R	4-box VASI on right side of runway	V16	16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07–25, MALSR Rwy 07, and VASI Rwy 07—122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, "Basic Flight Information and ATC Procedures," for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"—Right traffic indicates right turns should be made on landing and takeoff for specified runway end.

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off.

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Military Service.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

<u>TYPE</u>	<u>DESCRIPTION</u>
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 MILITARY SERVICE

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24 JET AIRCRAFT STARTING UNITS (JASU)

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw

MD-4	AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire
AIR STARTING UNITS	
AM32-95	150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
AM32A-95	150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
LASS	150 +/- 5 lb/min @ 49 +/- 2 psia
MA-1A	82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
MC-1	15 cfm, 3500 psia
MC-1A	15 cfm, 3500 psia
MC-2A	15 cfm, 200 psia
MC-11	8,000 cu in cap, 4000 psig, 15 cfm
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
AGPU	AC: 115/200v, 400 cycle, 3 phase, 30 kw gen DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level
AM32A-60*	AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw
AM32A-60A	AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
AM32A-60B*	AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.	
USN JASU	
ELECTRICAL STARTING UNITS:	
NC-8A/A1	DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
NC-10A/A1/B/C	DC: 750 amp constant, 1000 amp intermittent, 28v; AC: 90 kva, 115/200v, 3 phase, 400 Hz.
AIR STARTING UNITS:	
GTC-85/GTE-85	120 lbs/min @ 45 psi.
MSU-200NAV/A/U47A-5	204 lbs/min @ 56 psia.
WELLS AIR START SYSTEM	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
NCPP-105/RCPT	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.
JASU (ARMY)	
59B2-1B	28v, 7.5 kw, 280 amp.
OTHER JASU	
ELECTRICAL STARTING UNITS (DND):	
CE12	AC 115/200v, 140 kva, 400 Hz, 3 phase
CE13	AC 115/200v, 60 kva, 400 Hz, 3 phase
CE14	AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
CE15	DC 22-35v, 500 amp continuous 1100 amp intermittent
CE16	DC 22-35v, 500 amp continuous 1100 amp intermittent soft start
AIR STARTING UNITS (DND):	
CA2	ASA 45.5 psig, 116.4 lb/min
COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)	
CEA1	AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp AIR 112.5 lb/min, 47 psig
ELECTRICAL STARTING UNITS (OTHER)	
C-26	28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
C-26-B, C-26-C	28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
E3	DC 28v/10kw
AIR STARTING UNITS (OTHER):	
A4	40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
MA-1	150 Air HP, 115 lb/min 50 psia
MA-2	250 Air HP, 150 lb/min 75 psia
CARTRIDGE:	
MXU-4A	USAF

(25) FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports button.

See legend item 14 for fuel code and description.

(26) SUPPORTING FLUIDS AND SYSTEMS—MILITARY**CODE**

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
ORXB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

(27) OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

(28) TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

29 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

30 MILITARY REMARKS

Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

31 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence (future enhancement).

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWRS—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers. SAWRS—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

32 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on aprt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available.

FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation. (See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- b. 122.2 is assigned as a common enroute frequency.
- c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- d. 122.1 is the primary receive-only frequency at VOR's.
- e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remote facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol **Ⓡ** indicates radar approach control.


TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

VHF radio to contact the appropriate ATC facility or six "key clicks" to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol  indicates radar departure control.

CLNC DEL—Clearance Delivery.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as "Wx obsn svc 1900-0000Z+" or "other times" may be used when no specific time is given. PMSV facilities manned by forecasters are considered "Full Service". PMSV facilities manned by weather observers are listed as "Limited Service".

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter "X" indicate frequency available on request.

AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times.

Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc "times" other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700' or 1200' AGL. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS G, with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS D svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS E svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv.

NOTE: AIRSPACE SVC "TIMES" INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700' AGL (shown as magenta vignette on sectional charts) and 1200' AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700'/1200' AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
ISMLS _____	Interim Standard Microwave Landing System.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MLS _____	Microwave Landing System.
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING

MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL
500	108.10	18X	568	109.45	31Y	636	114.15	88Y
502	108.30	20X	570	109.55	32Y	638	114.25	89Y
504	108.50	22X	572	109.65	33Y	640	114.35	90Y
506	108.70	24X	574	109.75	34Y	642	114.45	91Y
508	108.90	26X	576	109.85	35Y	644	114.55	92Y
510	109.10	28X	578	109.95	36Y	646	114.65	93Y
512	109.30	30X	580	110.05	37Y	648	114.75	94Y
514	109.50	32X	582	110.15	38Y	650	114.85	95Y
516	109.70	34X	584	110.25	39Y	652	114.95	96Y
518	109.90	36X	586	110.35	40Y	654	115.05	97Y
520	110.10	38X	588	110.45	41Y	656	115.15	98Y
522	110.30	40X	590	110.55	42Y	658	115.25	99Y
524	110.50	42X	592	110.65	43Y	660	115.35	100Y
526	110.70	44X	594	110.75	44Y	662	115.45	101Y
528	110.90	46X	596	110.85	45Y	664	115.55	102Y
530	111.10	48X	598	110.95	46Y	666	115.65	103Y
532	111.30	50X	600	111.05	47Y	668	115.75	104Y
534	111.50	52X	602	111.15	48Y	670	115.85	105Y
536	111.70	54X	604	111.25	49Y	672	115.95	106Y
538	111.90	56X	606	111.35	50Y	674	116.05	107Y
540	108.05	17Y	608	111.45	51Y	676	116.15	108Y
542	108.15	18Y	610	111.55	52Y	678	116.25	109Y
544	108.25	19Y	612	111.65	53Y	680	116.35	110Y
546	108.35	20Y	614	111.75	54Y	682	116.45	111Y
548	108.45	21Y	616	111.85	55Y	684	116.55	112Y
550	108.55	22Y	618	111.95	56Y	686	116.65	113Y
552	108.65	23Y	620	113.35	80Y	688	116.75	114Y
554	108.75	24Y	622	113.45	81Y	690	116.85	115Y
556	108.85	25Y	624	113.55	82Y	692	116.95	116Y
558	108.95	26Y	626	113.65	83Y	694	117.05	117Y
560	109.05	27Y	628	113.75	84Y	696	117.15	118Y
562	109.15	28Y	630	113.85	85Y	698	117.25	119Y
564	109.25	29Y	632	113.95	86Y			
566	109.35	30Y	634	114.05	87Y			

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
2X	134.5	-	19Y	108.25	544	25X	108.80	-
2Y	134.55	-	20X	108.30	502	25Y	108.85	556
11X	135.4	-	20Y	108.35	546	26X	108.90	508
11Y	135.45	-	21X	108.40	-	26Y	108.95	558
12X	135.5	-	21Y	108.45	548	27X	109.00	-
12Y	135.55	-	22X	108.50	504	27Y	109.05	560
17X	108.00	-	22Y	108.55	550	28X	109.10	510
17Y	108.05	540	23X	108.60	-	28Y	109.15	562
18X	108.10	500	23Y	108.65	552	29X	109.20	-
18Y	108.15	542	24X	108.70	506	29Y	109.25	564
19X	108.20	-	24Y	108.75	554	30X	109.30	512

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
30Y	109.35	566	63X	133.60	-	95Y	114.85	650
31X	109.40	-	63Y	133.65	-	96X	114.90	-
31Y	109.45	568	64X	133.70	-	96Y	114.95	652
32X	109.50	514	64Y	133.75	-	97X	115.00	-
32Y	109.55	570	65X	133.80	-	97Y	115.05	654
33X	109.60	-	65Y	133.85	-	98X	115.10	-
33Y	109.65	572	66X	133.90	-	98Y	115.15	656
34X	109.70	516	66Y	133.95	-	99X	115.20	-
34Y	109.75	574	67X	134.00	-	99Y	115.25	658
35X	109.80	-	67Y	134.05	-	100X	115.30	-
35Y	109.85	576	68X	134.10	-	100Y	115.35	660
36X	109.90	518	68Y	134.15	-	101X	115.40	-
36Y	109.95	578	69X	134.20	-	101Y	115.45	662
37X	110.00	-	69Y	134.25	-	102X	115.50	-
37Y	110.05	580	70X	112.30	-	102Y	115.55	664
38X	110.10	520	70Y	112.35	-	103X	115.60	-
38Y	110.15	582	71X	112.40	-	103Y	115.65	666
39X	110.20	-	71Y	112.45	-	104X	115.70	-
39Y	110.25	584	72X	112.50	-	104Y	115.75	668
40X	110.30	522	72Y	112.55	-	105X	115.80	-
40Y	110.35	586	73X	112.60	-	105Y	115.85	670
41X	110.40	-	73Y	112.65	-	106X	115.90	-
41Y	110.45	588	74X	112.70	-	106Y	115.95	672
42X	110.50	524	74Y	112.75	-	107X	116.00	-
42Y	110.55	590	75X	112.80	-	107Y	116.05	674
43X	110.60	-	75Y	112.85	-	108X	116.10	-
43Y	110.65	592	76X	112.90	-	108Y	116.15	676
44X	110.70	526	76Y	112.95	-	109X	116.20	-
44Y	110.75	594	77X	113.00	-	109Y	116.25	678
45X	110.80	-	77Y	113.05	-	110X	116.30	-
45Y	110.85	596	78X	113.10	-	110Y	116.35	680
46X	110.90	528	78Y	113.15	-	111X	116.40	-
46Y	110.95	598	79X	113.20	-	111Y	116.45	682
47X	111.00	-	79Y	113.25	-	112X	116.50	-
47Y	111.05	600	80X	113.30	-	112Y	116.55	684
48X	111.10	530	80Y	113.35	620	113X	116.60	-
48Y	111.15	602	81X	113.40	-	113Y	116.65	686
49X	111.20	-	81Y	113.45	622	114X	116.70	-
49Y	111.25	604	82X	113.50	-	114Y	116.75	688
50X	111.30	532	82Y	113.55	624	115X	116.80	-
50Y	111.35	606	83X	113.60	-	115Y	116.85	690
51X	111.40	-	83Y	113.65	626	116X	116.90	-
51Y	111.45	608	84X	113.70	-	116Y	116.95	692
52X	111.50	534	84Y	113.75	628	117X	117.00	-
52Y	111.55	610	85X	113.80	-	117Y	117.05	694
53X	111.60	-	85Y	113.85	630	118X	117.10	-
53Y	111.65	612	86X	113.90	-	118Y	117.15	696
54X	111.70	536	86Y	113.95	632	119X	117.20	-
54Y	111.75	614	87X	114.00	-	119Y	117.25	698
55X	111.80	-	87Y	114.05	634	120X	117.30	-
55Y	111.85	616	88X	114.10	-	120Y	117.35	-
56X	111.90	538	88Y	114.15	636	121X	117.40	-
56Y	111.95	618	89X	114.20	-	121Y	117.45	-
57X	112.00	-	89Y	114.25	638	122X	117.50	-
57Y	112.05	-	90X	114.30	-	122Y	117.55	-
58X	112.10	-	90Y	114.35	640	123X	117.60	-
58Y	112.15	-	91X	114.40	-	123Y	117.65	-
59X	112.20	-	91Y	114.45	642	124X	117.70	-
59Y	112.25	-	92X	114.50	-	124Y	117.75	-
60X	133.30	-	92Y	114.55	644	125X	117.80	-
60Y	133.35	-	93X	114.60	-	125Y	117.85	-
61X	133.40	-	93Y	114.65	646	126X	117.90	-
61Y	133.45	-	94X	114.70	-	126Y	117.95	-
62X	133.50	-	94Y	114.75	648			
62Y	133.55	-	95X	114.80	-			

(35) COMM/NAV/WEATHER REMARKS:

These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

AJO

ERIC MARCUS MUNI (P01) 5 N UTC-7 N32°27.17' W112°51.69'PHOENIX
L-5B


1458 B NOTAM FILE PRC

RWY 12-30: H3800X60 (ASPH) S-12 MIRL**RWY 12:** PAPI(P2L) TCH 40'.**RWY 30:** PAPI(P2L) TCH 40'.

AIRPORT REMARKS: Unattended. Mountains in all quadrants. 4' dike 1340' from thld Rwy 30. Rwy 12-30 asph and grvl stopway 1400' NW end, 1065' stopway SE end, asph broken up and brush growing on stopways. Heavy military jet traffic in vicinity of airport. MIRL Rwy 12-30, PAPI Rwy 12 and Rwy 30 preset low ints SS-SR, to increase ints ACTIVATE—CTAF. NOTE: See Special Notices—Restricted Area R-2305, Gila Bend, Arizona Transit Information.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE GBN.

GILA BEND (H) VORTAC 116.6 GBN Chan 113 N32°57.38' W112°40.46' 183° 31.6 NM to fld. 790/14E.

**AVI SUQUILLA** (See PARKER)**BAGDAD** (E51) 2 NE UTC-7 N34°35.75' W113°10.21'PHOENIX
L-8F


4183 B NOTAM FILE PRC

RWY 05-23: H4575X60 (ASPH) S-4**RWY 05:** Thld dsplcd 120'. Brush.**RWY 23:** Thld dsplcd 120'. Ground.

AIRPORT REMARKS: Unattended. Be alert deer on rwy. Bushes 6'-10' high along SE side of Rwy 05-23. Arpt located on mesa. Unusual air currents invof arpt, especially AER 23. 7' fuel tank 500' SW of Rwy 23 and 129' right of rwy centerline. Rotating bcn OTS indef.

COMMUNICATIONS: CTAF 122.9**RCO 122.5** (PRESCOTT RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

DRAKE (H) VORTACW 114.1 DRK Chan 88 N34°42.15' W112°28.82' 246° 34.7 NM to fld. 4963/14E.

**BARD** N32°46.09' W114°36.17' NOTAM FILE SAN.PHOENIX
H-41, L-5A**(H) VORTAC** 116.8 BZA Chan 115 167° 6.7 NM to Yuma MCAS—Yuma Intl. 130/14E.

VORTAC unusable:

280°-300° byd 27 NM blo 3,600'

BENSON MUNI (E95) 3 NW UTC-7 N31°59.98' W110°21.47'PHOENIX
L-5C3829 B S2 **FUEL** 100LL, JET A NOTAM FILE PRC**RWY 10-28:** H4000X75 (ASPH) S-12.5 MIRL**RWY 10:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Hill. **RWY 28:** REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended continuously. Rwy 10 has four 15' ditches both sides of rwy ends and west half of rwy with headwalls 130' south of centerline. ACTIVATE MIRL Rwy 10-28, PAPI Rwy 10 and Rwy 28—122.8.

WEATHER DATA SOURCES: AWOS-3 118.475 (520) 586-4409.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:**

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 089° 29 NM to fld. 2672/12E.
HIWAS.

BISBEE DOUGLAS INTL (See DOUGLAS BISBEE)

BISBEE MUNI (P04) 5 SE UTC-7 N31°21.84' W109°52.99'
 4780 B S2 FUEL 100LL TPA-5780(1000) NOTAM FILE PRC
 RWY 17-35: H5929X60 (ASPH) S-12 MIRL
 RWY 17: PAPI(P2L). Brush. RWY 35: PAPI(P2L). Brush.
 RWY 02-20: 2650X110 (DIRT)
 RWY 20: Brush.

PHOENIX
 H-4J, L-5C

AIRPORT REMARKS: Attended 1500-0000Z. Scattered weeds in twy near end of Rwy 35. For MIRL Rwy 17-35 key 122.8 3 times.

COMMUNICATIONS: CTAF/UNICOM 122.8

BISBEE RCO 122.4 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DUG. VHF/DF ctc FSS. VHF/DF OTS indef.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' 233° 15.8 NM to fld. 4160/13E.

BUCKEYE MUNI (BXX) 6 NW UTC-7 N33°25.23' W112°41.17'
 1033 B S2 FUEL 100LL, JET A TPA-2009(976) NOTAM FILE PRC
 RWY 17-35: H5500X75 (ASPH) S-12.5 MIRL

PHOENIX
 H-4I, L-5B, A

RWY 17: PAPI(P2L)-GA 3.1° TCH 40'. Rgt tfc.

RWY 35: PAPI(P4L)-GA 3.0°. Fence.

AIRPORT REMARKS: Attended Mon-Thu 1400-0100Z. 100LL 24 hrs self svc JET A avbl Mon-Thu 1400-0100Z. Parachute Jumping. Wildlife on and invof arpt. Low level jet tfc vicinity of arpt. ACTIVATE MIRL Rwy 17-35-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.625 (623) 386-7627.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 110.6T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

(L) VORTAC 110.6 BXX Chan 43 N33°27.21' W112°49.48'
 092° 7.2 NM to fld. 1060/14E.

VOR portion unusable:


060°-075° byd 28 NM blo 4,000'

230°-260° byd 35 NM blo 5,000'

280°-320° byd 35 NM blo 7,000'

320°-020° byd 37 NM blo 6,000'

DME unusable 020°-072° byd 28 NM blo 8,000'

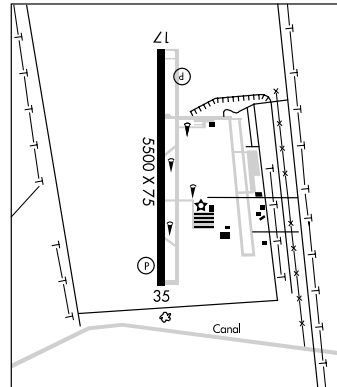

BULLHEAD CITY

EAGLE AIRPARK (A09) 12S UTC-7 N34°53.29' W114°37.00'

PHOENIX
 L-7E

485 B S2 FUEL 100LL, JET A OX 4 NOTAM FILE PRC

RWY 17-35: H4800X50 (ASPH)

RWY 17: Thld dsplcd 600'. Bldg. Rgt tfc.

RWY 35: Thld dsplcd 150'. Road.

AIRPORT REMARKS: Attended 1500-2300Z. Parachute Jumping. Extensive agricultural spraying ops invof arpt. Rwy 17 and Rwy 35 dsplcd thld arrows NSTD size and type.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96' W114°28.45' 301° 10.2 NM to fld. 620/15E.

HIWAS.

LAUGHLIN/BULLHEAD INTL (IFP) 1 N UTC-7 N35°09.36' W114°33.57'

PHOENIX

701 B S6 FUEL 100LL, JET A OX 1, 2 TPA—See Remarks Class I, ARFF Index A
 NOTAM FILE IFP

H-41, L-7E
 IAP, AD

RWY 16-34: H7500X150 (ASPH) S-75, D-200, DT-400 MIRL 1.0% up S

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Pole. Rgt tfc.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Thld dsplcd 500'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 16: TORA-7000 TODA-7000 ASDA-7000 LDA-7500

RWY 34: TORA-7500 TODA-7500 ASDA-7500 LDA-7000

AIRPORT REMARKS: Attended continuously. For services and fuel 1300-0700Z ctc frequency 122.85, between 0700-1300Z services and fuel not avbl. Mountains NW, NE, E and SE. TPA for light acft 1700(999), TPA for high performance acft 2200(1499).
 ACTIVATE MIRL Rwy 16-34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.825 (928) 754-4462. Plus precipitation.

COMMUNICATIONS: CTAF 123.9

Ⓡ **LOS ANGELES CENTER APP/DEP CON** 134.65

L.A. CENTER CLNC DEL 118.25 (when twr clsd)


BULLHEAD TOWER 123.9 (1500-0100Z) **GND CON** 118.25

AIRSPACE: CLASS D svc 1500-0100Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96'

W114°28.45' 335° 23.7 NM to fld. 620/15E. **HIWAS.**

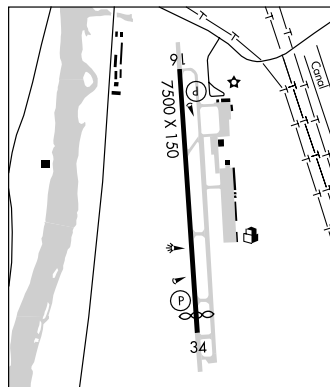**SUN VALLEY** (A2Ø) 7S UTC-7 N35°00.34' W114°33.90'

PHOENIX

725 S2 FUEL 100LL NOTAM FILE PRC Not insp.

L-7E

RWY 18-36: H3700X42 (ASPH) LIRL

RWY 18: Road. **RWY 36:** VASI(V2L). Rgt tfc.

AIRPORT REMARKS: Attended 1400-0100Z. Glider ops on west side of rwy. Shallow ditch 25' in length located 40' right of Rwy 36.


ACTIVATE LIRL Rwy 18-36 and VASI Rwy 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.975

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96'

W114°28.45' 328° 15.0 NM to fld. 620/15E. **HIWAS.**



CASA GRANDE MUNI (CGZ) 5 N UTC-7 N32°57.29' W111°46.01'

1464 B S4 FUEL 100LL, JET A TPA-2502(1038) NOTAM FILE CGZ

RWY 05-23: H5200X100 (ASPH) S-18.5, D-65, ST-82 MIRL 0.3% up NE

RWY 05: MALSR. VASI(V2R)-GA 3.0° TCH 41'. Road.

RWY 23: VASI(V2L)-GA 3.0° TCH 38'. Road. Rgt tfc.

AIRPORT REMARKS: Attended 1430-0030Z. Self service fueling avbl. Parachute Jumping. Service road within primary surface. Holdlines on all twys connecting to the rwy are set at 280' from rwy centerline. Acft taxiing on Twy B be alert to passing acft holding on the connecting twys. ACTIVATE MALSR Rwy 05-CTAF.

WEATHER DATA SOURCES: AWOS-3 132.175 (520) 836-3392.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **ALBUQUERQUE CENTER APP/DEP CON 125.4****RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**STANFIELD (H) VORTAC** 114.8 TFD Chan 95 N32°53.15'


W111°54.52' 048° 8.3 NM to fld. 1316/12E.

ILS 111.15 I-CGZ Rwy 05. ILS monitored Mon-Fri 1500-0000Z and Sat 1700-1900Z. GS unusable for couple apch blo 1625' MSL.

PHOENIX

H-41, L-5B, A

IAP

**CHANDLER****CHANDLER MUNI** (CHD) 3 SE UTC-7 N33°16.15' W111°48.67'

1243 B S4 FUEL 100LL, JET A OX 3, 4 TPA-2200(957) NOTAM FILE CHD

RWY 04R-22L: H4870X75 (ASPH) S-30 MIRL

RWY 04R: REIL. PAPI(P4L)-GA 3.0° TCH 37'. Rgt tfc.

RWY 22L: REIL. PAPI(P4L)-GA 3.0° TCH 42'.

RWY 04L-22R: H4401X75 (ASPH) S-30 MIRL

RWY 04L: PAPI(P4L)-GA 3.5° TCH 40'. Tree.

RWY 22R: PAPI(P4L)-GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1200-0000Z, Sat-Sun 1200-2230Z. Large birds soar all year. Wildlife occasionally crossing rwys and twys. Antenna 85' AGL located ¼ mile north of Rwy 22R. P-line mono-poles running N to S approximately 1.5 miles W of arpt, height 135' AGL. No obstruction lighting on structures. P-line mono-poles running E to W approximately 1 mile S of arpt, height 135' AGL. Aerobatic practice areas approximately 5 miles SE of arpt from surface to 3500' AGL. Hot air balloon ops 1 mile W of arpt. Avoid overflight of high school 2 NM SW of arpt. Rwy 22L REIL OTS indef. When twr clsd MIRL Rwy 04R-22L and Rwy 04L-22R, PAPI Rwy 04R, Rwy 22L, Rwy 04L and Rwy 22R, REIL Rwy 04R and Rwy 22L and twy lgts on until 0500Z, after 0500Z ACTIVATE-126.1.

WEATHER DATA SOURCES: AWOS-3 128.325 when twr clsd. (480) 814-9952.

COMMUNICATIONS: CTAF 126.1 ATIS 128.325 UNICOM 122.95® **PHOENIX APP/DEP CON 123.7****TOWER** 133.1 Arr S&E, Dep Rwy 04R-22L 126.1 Arr N&W, Dep Rwy 04L-22R. (1300-0400Z) **GND CON** 124.4**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' 243° 8.3 NM to fld. 1370/13E. HIWAS.


NDB (MHW) 407 CHD N33°15.99' W111°48.47' at fld. NOTAM FILE PRC. Unusable 020°-070° byd 15 NM.

• • • • •
HELIPAD H1: H100X100 (CONC)

PHOENIX

L-5B, A

IAP, AD

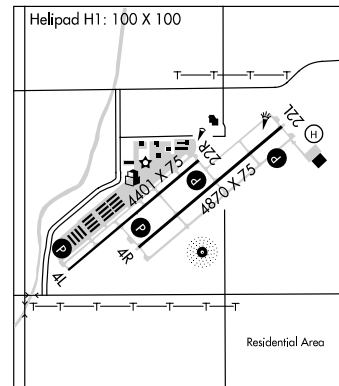

STELLAR AIRPARK (P19) 3 W UTC-7 N33°17.93' W111°54.93'

PHOENIX

1177 B S2 FUEL 100LL TPA-2000(823) NOTAM FILE PRC

L-5B, A

RWY 17-35: H3913X60 (ASPH) MIRL

IAP

RWY 17: REIL. VASI(V4L)—GA 3.0° TCH 25'. Tree.


RWY 35: REIL. Thld dspcd 208'.

AIRPORT REMARKS: Unattended. For fuel and tiedown information ctc FBO at (480) 961-9050. Be alert to numerous no-radio aircraft invof arpt. Training acft touch and go landing prohibited.

Helicopter training prohibited. Commercial and student training ops by permit only. Practice instrument approaches in VFR conditions not authorized. Calm wind Rwy 17. Parallel twy west of Rwy 17-35 restricted; homeowners use only, all other traffic use parallel twy east of Rwy 17/35. Avoid over flight of noise sensitive areas west of Rwy 17-35 and north of arpt. Flood irrigation between rwy and twy with standing water up to 1' depth on irregular schedule. ACTIVATE MIRL Rwy 17-35—CTAF. Ldg fee charged for all commercial ops.

COMMUNICATIONS: CTAF 122.9⑧ **PHOENIX APP/DEP CON** 123.7**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N33°25.98'

W111°58.21' 149° 8.5 NM to fld. 1182/12E. HIWAS.

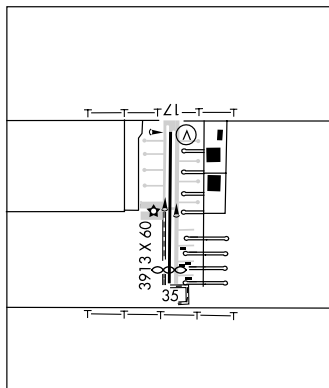**CHINLE MUNI** (E91) 3 SW UTC-7 N36°06.65' W109°34.53'

DENVER

5547 B NOTAM FILE PRC

H-41, L-8H

RWY 18-36: H6900X60 (ASPH) S-12.5 MIRL

RWY 18: PAPI(P2L).

RWY 36: PAPI(P2L).

AIRPORT REMARKS: Unattended. Call Navajo Hospital Security at 928-283-2842 to start generator for beacon and rwy lgtg at night and during inclement weather. Drive time to arpt is 10 minutes.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE FMN.**GALLUP (H) VORTAC** 115.1 GUP Chan 98 N35°28.56' W108°52.36' 304° 51.2 NM to fld. 7053/14E.**CIBECUE** (Z95) 4 SE UTC-7 N34°00.20' W110°26.65'

PHOENIX

5037 NOTAM FILE PRC

RWY 07-25: 4200X100 (GRVL)

RWY 25: Road.

AIRPORT REMARKS: Unattended. Daytime use only. Firefighting aircraft invof arpt April-September. Mountain Ridges N and E of arpt. Small hills either side of Rwy 07 and S side of Rwy 25. Preferred landing Rwy 07 and txf Rwy 25.

COMMUNICATIONS: CTAF 122.9**CLIFTON/MORENCI****GREENLEE CO** (CFT) 8 SE UTC-7 N32°57.42' W109°12.67'

PHOENIX

3798 B NOTAM FILE PRC

L-5D

RWY 07-25: H4978X75 (ASPH) S-21 MIRL

RWY 07: PAPI(P2L).


RWY 25: PAPI(P2L).

AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 07-25—CTAF.

PAPI Rwy 07 and Rwy 25 opr continuously.

WEATHER DATA SOURCES: AWOS-3 119.05 (928) 687-1116.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE ABQ.**SILVER CITY (L) VORTAC** 110.8 SVC Chan 45 N32°38.26'

W108°09.66' 277° 56.4 NM to fld. 5420/13E.

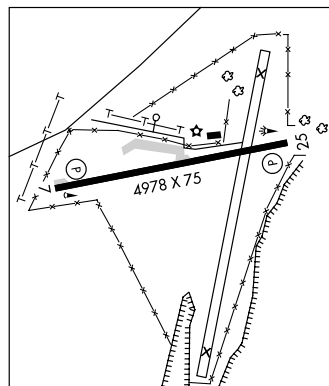

COCHISE CO (See WILLCOX)**COCHISE COLLEGE** (See DOUGLAS)**COLORADO CITY MUNI** (AZC) 3 SW UTC-7 N36°57.60' W113°00.83'

4874 B S4 FUEL 100LL, JET A OX 3 TPA-5722(848) NOTAM FILE PRC

RWY 11-29: H6300X75 (ASPH) S-30 MIRL

RWY 11: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 02-20: H5099X60 (ASPH) S-12.5 MIRL 0.7% up NE

AIRPORT REMARKS: Attended Mon-Sat 1600-0100Z. 2000' mountains north and northeast of arpt. ACTIVATE MIRL Rwy 11-29, PAPI Rwy 11 and Rwy 29 and REIL Rwy 11 and Rwy 29—CTAF.


WEATHER DATA SOURCES: AWOS-3 118.375 (928) 875-8045.**COMMUNICATIONS:** CTAF/UNICOM 122.7⑧ **LOS ANGELES CENTER APP/DEP CON 124.2****RADIO AIDS TO NAVIGATION:** NOTAM FILE CDC.

ST GEORGE (T) VORW/DME 109.8 OZN Chan 35 N37°05.28'

W113°35.51' 090° 28.8 NM to fld. 2901/15E.

NDB (MHW) 403 AZC N36°57.59' W113°00.55' at fld.

NOTAM FILE PRC. Unusable 330°-100° byd 15 NM blo 9,200'.

LAS VEGAS**H-4I, L-9C****IAP****COOLIDGE MUNI** (P08) 5 SE UTC-7 N32°56.16' W111°25.59'

1574 B FUEL 100LL, JET A TPA-2574(1000) NOTAM FILE PRC

RWY 05-23: H5528X150 (ASPH) S-80, D-115, DT-210 MIRL 0.5% up NE

RWY 05: VASI(V2L)—GA 3.0° TCH 25'. Thld dsplcd 50'. Tree.

RWY 23: VASI(V2L)—GA 3.0° TCH 28'. Rgt tfc.

RWY 17-35: H3861X75 (ASPH) S-17

RWY 17: Brush. Rgt tfc.


RWY 35: Brush.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Self fueling with credit card. Parachute Jumping. Drop zone located northeast Rwy 35. Aerobatic box located .5 NM east of arpt surface to 4500' AGL. Livestock on and infov arpt. Rwy 17-35 has several large cracks. Large military transports in vicinity of arpt. Rwy 05-23 reflectors used to mark runway. ACTIVATE MIRL Rwy 05-23—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.075**ALBUQUERQUE CENTER APP/DEP CON 125.4****RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

STANFIELD (H) VORTAC 114.8 TFD Chan 95 N32°53.15'

W111°54.52' 071° 24.5 NM to fld. 1316/12E.

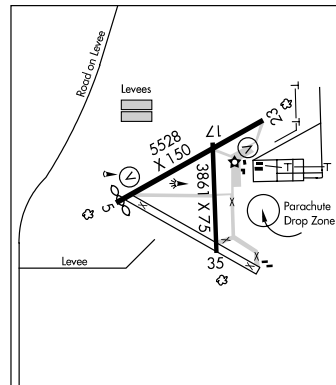PHOENIX**H-4I, L-5C, A****IAP**

COTTONWOOD (P52) 1 SW UTC-7 N34°43.80' W112°02.11'
 3550 B S2 **FUEL** 100LL TPA—See Remarks NOTAM FILE PRC
RWY 14-32: H4250X75 (ASPH) S-4 MIRL

RWY 14: REIL. PAPI(2PL). Brush.
RWY 32: REIL. PAPI(2PL)—GA 3.0°. Brush. Rgt tfc.


AIRPORT REMARKS: Attended 1500-0000Z. For arpt attendant call 928-300-9584. Fuel avbl 24 hrs with major credit card. Emergency phone 928-634-4246. To contact FBO after hrs call 928-634-5517 or 928-300-8331/9584. Parachute Jumping. Hang gliders invof arpt. No touch and go 30 minutes before SS until 30 minutes after dawn. Acft departing Rwy 14 maintain heading for 1 NM byd departure end and 500' AGL prior to turning. Departing Rwy 32 maintain rwy heading for .6 NM and 500' AGL prior to turning. Check CTAF for local flight training restrictions. Rwy 32 designated calm wind rwy. TPA helicopter 4050(500), single 4350(800), multi 4550(1000), turbine 5050(1500). **ACTIVATE MIRL** Rwy 14-32, PAPI Rwy 14 and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

DRAKE (H) VORTACW 114.1 DRK Chan 88 N34°42.15' W112°28.82' 072° 22.1 NM to fld. 4963/14E.



PHOENIX

L-8F

DAVIS MONTHAN AFB (DMA)(KDMA) AF 2 SW UTC-7 N32°09.99' W110°52.99'

2704 B TPA—See Remarks NOTAM FILE DMA Not insp.

RWY 12-30: H13643X200 (PEM) PCN 75/R/C/W/T HIRL

RWY 12: REIL. PAPI(P4L). 0.8% up. **RWY 30:** ALSF1. PAPI(P4L). Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 12 HOOK BAK-12A(B) (EOR) HOOK BAK-12A(B) (1200')

HOOK BAK-12A(B) (1198') HOOK BAK-12A(B) (EOR) RWY 30

MILITARY SERVICE: LGT All rwy thld lgt gated. **A-GEAR** All BAK 12A extended. **FUEL** J8. Transient acft can expect up to 2 hr delay for refuel. **FLUID** SP PRESAIR LHGX LOX OIL O-148-156 JOAP; W-72 hr prior notice rqr

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remark. **RSTD** PPR all acft, ctc Base OPS DSN

228-4507/4315, C520-228-4507/4315. No Vertical and Short Take-off and Landing aircraft apch ldg. Airfield clsd 1300-2100Z (except to active scrambles) last Sat monthly. Transient acft are allowed 1 apch to a full stop, between 1430Z and official SS, or if Davis-Monthan is not the final destination, may execute 1 apch and dep the Davis-Monthan pat. For multiple apch or apch outside those hrs. 355 OG/CC approval rqr. Reg approval 24 hrs in advance through Davis-Monthan base ops. All acft inbound with DV code 6 or higher and/or space A passenger ctc PTD at least 30 min prior to arrival to confirm block time. **CAUTION** Coyotes, burrowing owls and javelinas found occasionally on both sides of rwy. **TFC PAT** TPA—Conventional 3700(996), overhead 5000(2296) until 4 DME then 4200(1496). No overhead tfc pattern authorized except to permanent base assigned acft SS-SR. Maximum speed in overhead pat is 300 Kts Indicated Airspeed. Do not exceed 3700' until dep end of rwy. Hi alt wx balloon released 5 mile final Rwy 12 at 1100Z and 2300Z daily. **NS ABTMT** Air Combat Command quiet hour policy in eff 0530-1300Z. Max performance climbs not authorized. Discontinue afterburner as soon as safely possible. Heavy acft expect Rwy 12 dep unless precluded by acft limitations. **MISC** First 2700' of Rwy 12 and first 2445' of Rwy 30 are concrete. Mid 8500' of Rwy 12-30 is asphalt. Standard USAF reduced same rwy separation applied exc 6000' between C130 acft. ATC personnel will notify wx of change as part of Cooperative Weather Watch (CWW). Cooperative Weather Watch will include but is not ltd to twr and sector visibility and significant pilot report information to be included in the obsn/terminal or alternate forecast. Primary wx sensor is FMQ-19 producing automated obsn. Base wx avbl 24hr during duty week, clsd weekend and federal hol, DSN 228-6014/3254, fax DSN 228-3255. Wx briefings avbl 24hr from 25 OWS at DSN 228-6598/6599, 2 hr notice rqr for timely brief. FMQ-19 automated wx obsn system avbl 24 hr may be accessed thru DSN 228-0487 C520-228-0487. All transient aircrews shall store all classified materials at Wing Command Post (building 2300).

COMMUNICATIONS: SFA ATIS 270.1 (1300-0530Z) PTD 372.2

⑧ **TUSCON APP/DEP CON** 119.4 318.1 (Rwy 12 286°-089°, Rwy 30 066°-274°) 125.1 269.55 (Rwy 12 090°-285°, Rwy 30 275°-065°)

TOWER 118.85 253.5 **GND CON** 121.8 275.8 **CLNC DEL** 121.8 275.8

COMD POST (RAYMOND 8) 381.3 **PMSV METRO** 239.8 Alternate PMSV METRO LUF 267.4

AIRSPACE: CLASS C svc continuous ctc **APP CON.**

RADIO AIDS TO NAVIGATION: NOTAM FILE DMA.

(L) **TACAN** Chan 123 DMA (117.6) N32°09.60' W110°52.85' at fld. 2663/12E. No NOTAM MP Wed 1200-1400Z. Unusable 060°-090° byd 25 NM blo 17000' 330°-030° byd 25 NM blo 17000'

ILS 109.3 I-DMA Rwy 30. Back course unusable. No NOTAM MP Tue, Thu 1400-1600Z.

PAR No NOTAM MP 1100-1300Z. Weekdays 1900-0500Z or termination of A10 flying (contact scheduling for times at DSN-228-5777).

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

DOUGLAS**COCHISE COLLEGE** (P03) 7 W UTC-7 N31°22.27' W109°41.42'

4124 B FUEL 100LL NOTAM FILE PRC


RWY 05-23: H5303X72 (ASPH) LIRL

RWY 05: PAPI(P4L)—GA 3.0°. Road.

RWY 23: PAPI(P4L)—GA 3.0°. Thld displcd 500'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1345-0030Z. Unmanned aerial vehicle operating on and in vicinity of arpt.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE DUG.**DOUGLAS (L) VORTACW** 108.8 DUG Chan 25 N31°28.36'

W109°36.12' 204° 7.6 NM to fld. 4160/13E.

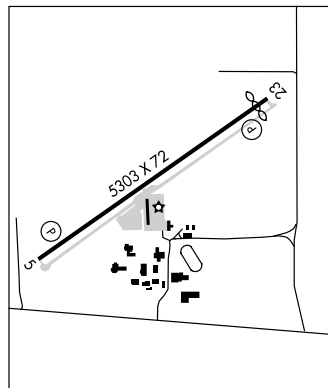PHOENIX
H-4J, L-5D**DOUGLAS MUNI** (DGL) 2 E UTC-7 N31°20.56' W109°30.39'

4173 B S2 FUEL 100LL, JET A AOE NOTAM FILE PRC

RWY 03-21: H5760X75 (ASPH) MIRL

RWY 03: PAPI(P4L)—GA 3.0° TCH 40'. Road. Rgt tfc.

RWY 21: PAPI(P4L)—GA 4.0° TCH 50'.

RWY 18-36: 4095X100 (DIRT)

RWY 18: Bush.

RWY 36: Rgt tfc.


AIRPORT REMARKS: Attended Mon-Fri 1400-0100Z, 24 hr 100LL avbl with major credit card. For service after hours call 520-227-0969. Rwy 21 50' twr 1350' from thld 550' left lgtd. Mountains 1½ miles east. Rwy 18-36 brush on both sides 70' from centerline full length of rwy. Rwy 18-36 surface rough and rutted. Rwy 18-36 +3' bump 300' from Rwy 18 thld. Rwy 21 PAPI OTS indef.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO** 122.6 (PRESCOTT RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE DUG.**(L) VORTACW** 108.8 DUG Chan 25 N31°28.36'

W109°36.12' 135° 9.2 NM to fld. 4160/13E.

DME unusable:

045°-065° beyond 26 NM below 10,000'

065°-095° beyond 28 NM below 9,500'

PHOENIX
H-4J, L-5D

355°-010° beyond 35 NM below 11,300'

DOUGLAS BISBEE**BISBEE DOUGLAS INTL** (DUG) 8 NW UTC-7 N31°28.14' W109°36.22'

PHOENIX

4154 B S2 FUEL 100LL, JET A AOE NOTAM FILE DUG

H-4J, L-5D

RWY 17-35: H7311X100 (ASPH-RFSC) S-30, D-160, ST-175, DT-250 MIRL 0.6% up N

IAP

RWY 17: VASI(V2L).

RWY 08-26: H5000X75 (ASPH) S-12.5 MIRL 0.6% up E

RWY 08: Brush.

AIRPORT REMARKS: Attended 1430-2330Z. Fuel svc fee Mon-Fri

0300-1430Z, all day Sat-Sun, phone 520-508-3606 or

520-227-3369. Rwy 08-26 VFR ops only, daylight use only. Rwy

17-35 rfsc 100' wide. ACTIVATE MIRL Rwy 17-35 and VASI Rwy

17—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS 119.275 (520) 364-7208.**COMMUNICATIONS:** CTAF/UNICOM 123.0


BISBEE RCO 122.4 (PRESCOTT RADIO)

DOUGLAS RCO 122.6 (PRESCOTT RADIO)

AIRSPACE: CLASS E svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE DUG.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36'

W109°36.12' at fld. 4160/13E.

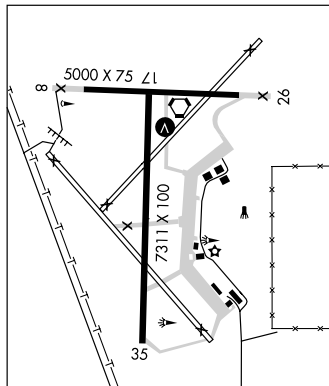**DRAGOO** N31°35.14' W110°20.66' NOTAM FILE FHU.

PHOENIX

NDB (MHW) 410 DAO at Sierra Vista Muni-Libby AAF. Unmonitored when twr closed.

L-5C

DRAKE N34°42.15' W112°28.82' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 114.1 DRK Chan 88 120° 4.2 NM to Ernest A. Love Fld. 4963/14E.

H-4I, L-8F

VORTAC unusable.

055°-080°beyond 29 NM below 9,300'

125°-140°beyond 35 NM below 8,500'

140°-160°beyond 30 NM below 9,500'

160°-175°beyond 35 NM below 9,500'

175°-185°beyond 30 NM below 9,500'

185°-195°beyond 23 NM below 9,100'

195°-220°beyond 13 NM below 9,100'

220°-235°beyond 25 NM below 9,100'

265°-275°beyond 30 NM below 8,800'

EAGLE AIRPARK (See BULLHEAD CITY)**ELOY MUNI** (E60) 3 NW UTC-7 N32°48.40' W111°35.22'

PHOENIX

1513 B FUEL 100LL, JET A TPA-2313(800) NOTAM FILE PRC

L-5B, A

RWY 02-20: H3900X75 (ASPH) MIRL

RWY 02: REIL. VASI(V2L). Tree.

RWY 20: REIL. VASI(V2L). Rgt t/c.

AIRPORT REMARKS: Attended 1400-2300Z. Self-fueling avbl. Parachute

Jumping. Seasonal crop dusting operations. Apch from W and do

not overfly arpt, extremely heavy parachute jumping activity over E

side of arpt SR-SS. When wind 10 knots or less dep Rwy 02 and

land Rwy 20. Rotating bcn OTS indef. REIL Rwy 02 and Rwy 20

OTS indef. VASI Rwy 02 and Rwy 20 OTS indef. ACTIVATE MIRL


Rwy 02-20—CTAF. VASI Rwy 02 and Rwy 20 and REIL Rwy 02 and

Rwy 20 opr continuously.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

STANFIELD (H) VORTAC 114.8 TFD Chan 95 N32°53.15'

W111°54.52' 094° 16.9 NM to fld. 1316/12E.

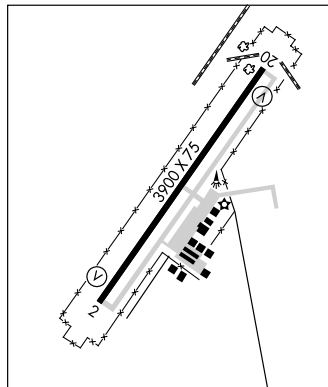**ERIC MARCUS MUNI** (See AJO)**ERNEST A. LOVE FLD** (See PRESCOTT)**ESTRELLA SAILPORT** (See MARICOPA)

FALCON FLD (See MESA)**FLAGSTAFF PULLIAM** (FLG) 4 S UTC-7 N35°08.42' W111°40.16'**PHOENIX**7014 B S4 **FUEL** 100LL, JET A OX 2 TPA—See Remarks Class I, ARFF Index A
NOTAM FILE FLGH-41, L-86
IAP, AD**Rwy 03-21:** H8800X150 (ASPH-PFC) S-30, D-95, ST-120, DT-140 HIRL**Rwy 03:** VASI(V4L)—GA 3.0° TCH 42'.**Rwy 21:** MALS. PAPI(P4L)—GA 3.0° TCH 51'. Thld dsplcd 1800'.**RUNWAY DECLARED DISTANCE INFORMATION****Rwy 03:** TORA-8800 TODA-8800 ASDA-8800 LDA-8800**Rwy 21:** TORA-8800 TODA-8800 ASDA-8800 LDA-7000**AIRPORT REMARKS:** Attended 1300-0600Z. Fuel self-service 24 hrs.

Rwy 03-21 windshear and turbulence at both ends of rwy when surface winds exceed 10 knots. CLOSED to air carrier ops with more than 30 passenger seats except 24 hr PPR 928-556-1234.

Snow removal equipment may be on rwy. Equipment has 2-way radio and monitors frequency 134.55 when twr clsd. Arpt may be CLOSED during snow removal. For current snow removal equipment activity etc 134.55. Calm wind conditions use Rwy 21.

Noise Abatement: Avoid overflight of village 3 miles south.

TPA-8003(989) Conventional acft, 7503(489) Helicopter,

8503(1489) High Performance. When twr closed ACTIVATE HIRL

Rwy 03-21 and MALS Rwy 21—CTAF. VASI Rwy 03 and PAPI Rwy 21 opr continuously.


WEATHER DATA SOURCES: ASOS (928) 779-2439.**COMMUNICATIONS:** CTAF 134.55 ATIS 125.8 UNICOM 122.95**RCO** 123.65R 113.85T (PRESCOTT RADIO)**KAYENTA RCO** 122.45 (PRESCOTT RADIO)**MINGUS MOUNTAIN RCO** 122.3 (PRESCOTT RADIO)® **ALBUQUERQUE CENTER APP/DEP CON** 124.5**TOWER** 134.55 (April 1-Sep 30 1300-0400Z Oct 1-Mar 31 1400-0200Z) **GND CON** 121.9**AIRSPACE:** CLASS D svc Apr 1-Sep 30 1300-0400Z Oct 1-Mar 31 1400-0200Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE FLG.(H) **VOR/DME** 113.85 FLG Chan 85(Y) N35°08.83' W111°40.45' at fid. 7026/14E.

DME unusable:

230°-255° byd 20 NM blo 15,000'

VOR/DME unusable:

335°-030° byd 19 NM blo 24,000'

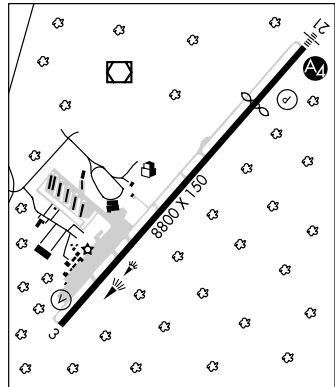ILS 110.5 I-FLG Rwy 21. Glideslope unusable byd 5° left and right of LOC course. LOC unusable inside of FLG 0.8 DME**FLYING J RANCH** (See PIMA)**FORT HUACHUCA** N31°35.13' W110°20.34' NOTAM FILE FHU.**PHOENIX**(T) **TACAN** Chan 53 ARH (111.6) at Sierra Vista Muni—Libby AAF. 4659/12E. Unmonitored when twr clsd, no NOTAM MP 1st Wed of month 1500-2300Z. TACAN unusable 105°-250° byd 10 NM, 250°-300° byd 20 NM.

H-41, L-5C

FORT HUACHUCA—SIERRA VISTA**SIERRA VISTA MUNI—LIBBY AAF** (FORT HUACHUCA) (FHU)(KFHU) CIV/MIL 3 N UTC-7**PHOENIX**
H-4J, L-5C
IAP, DIAP, AD

N31°35.31' W110°20.66'

4719 B FUEL 100, JET A TPA—See Remarks Class III, ARFF Index A NOTAM FILE FHU

RWY 08-26: H12001X150 (CONC) S-70, D-200, DT-400, DDT-700

PCN 54 R/B/W/T HIRL 1.0% up W

RWY 08: PAPI(P4L)—GA 3.0° TCH 26'.**RWY 26:** PAPI(P4L)—GA 3.0° Rgt tfc.**RWY 12-30:** H5366X100 (ASPH-CONC) S-46, D-106, DT-137,

DDT-172 PCN 24 F/A/W/T MIRL

RWY 12: PAPI(P4L)—GA 3.0° TCH 51'.**RWY 30:** PAPI(P2R)—GA 3.0° TCH 51' Rgt tfc.**RWY 03-21:** H4285X75 (ASPH-CONC) PCN 22 F/A/W/T

2.0% up SW MIRL

RWY 03: Thld displcd 1253'.**RWY 21:** Rgt tfc.**MILITARY SERVICES:** FUEL J8 (NC-100, A). Petrol, oils and lubricants avbl

Mon-Fri 1330-0100Z, exc holidays, other times 24 hr prior

notice. DSN 879-2860/62. Petrol, oils and lubricants svc require

crew member attend to specify fuel/oil requirement. Fuel limited

to 6000 gallons. **TRAN ALERT** Tran acft, ctc Libby ATC or Base OPS

to coordinate parking.

AIRPORT REMARKS: Attended Mon-Sun 1400-0000Z. Fuel available

1400-0000Z 7 days/week, after hrs call 520-803-6439 (svc

fee). Joint use civil-military arpt; extensive military jet ops weekdays. Bird hazard invof all rwy on tkfs and

apchs. Deer on and invof all rwy and twys especially at night. When Class D airspace in effect unmanned aerial

vehicles opr surface to 7000' MSL. Bird hazard exists all rwy. Expect windshear on apch to all rwy. Civilian

acft PPR to enter military ramp. Non scheduled arriving acft requiring assistance, ctc GOC 533-2291/2292.

TPA—fixed wing acft north and rotary wing south traffic pattern, altitude fixed wing reciprocating 5700(981),

rotary wing 5500(781), fixed wing turboprop/jet 6200(1481). Twy G and Twy J limited to single wheel acft

maximum 33,000 lbs, Twy K limited to single wheel acft maximum 50,000 lbs. Twy D and acft apron on NW side

limited to dual wheels acft maximum 100,000 lbs. Circling not authorized South of Rwy 08 and Rwy 30.

ACTIVATE MIRL Rwy 03-21 and Rwy 12-30, HIRL Rwy 08-26, PAPI Rwy 08, Rwy 26, Rwy 12, Rwy 30 and

Perimeter lgt H1—CTAF.

MILITARY REMARKS: Opr Mon-Fri 1000-2359Z, except holidays, other times 72 hr PPR DSN 879-2860/2862,C520-538-2860/2862. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** 24 hr PPR for all transient military

acft. Civilian acft PPR to enter military ramp. Twy G and Twy J limited to single wheel acft maximum 33,000 lbs,

Twy K limited to single wheel acft maximum 50,000 lbs. Circling not authorized South of Rwy 08 and Rwy 30.

CAUTION Expect wind shear on apch to all rwy; arpt SW wind may not be representative of wind on final apch.

When Class D airspace in effect unmanned aerial vehicles (UAV) operate sfc to 7000' MSL. Extensive military jet

ops weekdays. **CSTMS/AG/IMG** Avbl with 72 hr prior notice for US military or DoD contract acft only. **MISC** All

transient and remain overnight acft using mil side must sign in at base ops prior to dep flight line. 72 hr PPR for

use of assault strip located 5 NM NE. Non-scheduled arriving acft require assistance call EOC 533-2291/2292.

All acft using military transient parking sign in at base ops prior to leaving flight line. Wx observation/forecast


Mon-Fri 1400-0600Z, except holidays, ASOS other times. Libby wx avbl on 122.95. Remote briefing svc avbl

25th operational weather squadron Davis-Monthan AFB DSN 228-6598/6599/6588, call

C520-228-6598/6599/6588, and C1-877-451-8367, ext 1, or HTTPS://25OWS.DM.AF.MIL. A Libby Base

OPS opr Mon-Fri 1400-2359Z, except holidays other times 72 hr PPR. DSN 879-2860/2862,

C520-538-2860/2862.

WEATHER DATA SOURCES: ASOS 119.675 (520) 459-7316**COMMUNICATIONS:** CTAF 124.95 ATIS 134.75 265.7 UNICOM 122.95① **LIBBY AAF GCA APP/DEP CON** 127.05 254.35 (FNU 1400-0600Z) other times ctc① **ALBUQUERQUE CENTER APP/DEP CON** 134.45 327.15**LIBBY TOWER** 124.95 284.75 (Mon-Fri 1400-0600Z) other times ctc ALBUQUERQUE CENTER.**GND CON** 121.7 268.7**LIBBY OPS** 122.95**AIRSPACE:** CLASS D svc Mon-Fri 1400-0600Z, or other times by advanced NOTAM, other times Class G.**CONTINUED ON NEXT PAGE**

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE FHU.

LIBBY (T) VOR 113.6 FHU N31°35.38' W110°21.30' at fld. Unmonitored when twr clsd. No NOTAM MP 2nd Tue of month 1500–1900Z.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' 268° 38.7 NM to fld. 4160/13E. NOTAM FILE DUG.

FORT HUACHUCA (T) TACAN Chan 53 ARH (111.6) N31°35.13' W110°20.34' at fld. 4659/12E. Unmonitored when twr clsd. No NOTAM MP 1st Wed of month 1500–2300Z.

DRAGOO NDB (MHW) 410 DAO N31°35.14' W110°20.66' at fld. Unmonitored when twr clsd.

ILS 109.9 I-FHU Rwy 26. Class IE. Unmonitored when twr clsd. No NOTAM MP 3rd Thu of month 1500–2300Z.

ASR/PAR (Mon-Fri 1400–0600Z except holidays)

COMM/NAV/WEATHER REMARKS: For emergency, freq 121.5 monitored when twr clsd. USAF weather forecast avbl 1200–0300Z from Davis Monthan AFB. Radar see Terminal FLIP for Radar Minima.

• • • • •

HELIPAD H1: H40X40 (ASPH)

HELIPAD REMARKS: ACTIVATE perimeter lgts Helipad H1—CTAF.

GILA BEND AF AUX (GBN) N32°53.25' W112°43.19' NOTAM FILE GBN.

PHOENIX

AIRSPACE: CLASS D opr during range periods only. Closed holidays. Other times class G.

H-41, L-5B, A

GILA BEND MUNI (E63) 2 E UTC-7 N32°57.61' W112°40.42'

PHOENIX

789 B TPA—1589(800) NOTAM FILE PRC

H-41, L-5B, A

RWY 04-22: H5200X75 (ASPH) S-12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

RWY 22: PAPI(P2L)—GA 3.0° TCH 40'. Tree.


AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 04-22—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 116.6T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE GBN.

(H) VORTAC 116.6 GBN Chan 113 N32°57.38' W112°40.46' at fld. 790/14E.

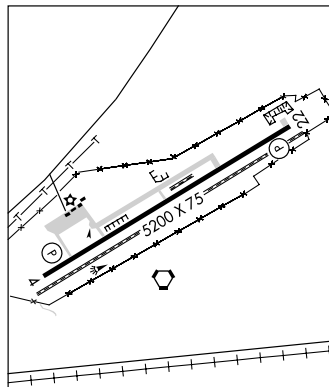

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE FHU.

LIBBY (T) VOR 113.6 FHU N31°35.38' W110°21.30' at fld. Unmonitored when twr clsd. No NOTAM MP 2nd Tue of month 1500–1900Z.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' 268° 38.7 NM to fld. 4160/13E. NOTAM FILE DUG.

FORT HUACHUCA (T) TACAN Chan 53 ARH (111.6) N31°35.13' W110°20.34' at fld. 4659/12E. Unmonitored when twr clsd. No NOTAM MP 1st Wed of month 1500–2300Z.

DRAGOO NDB (MHW) 410 DAO N31°35.14' W110°20.66' at fld. Unmonitored when twr clsd.

ILS 109.9 I-FHU Rwy 26. Class IE. Unmonitored when twr clsd. No NOTAM MP 3rd Thu of month 1500–2300Z.

ASR/PAR (Mon-Fri 1400–0600Z except holidays)

COMM/NAV/WEATHER REMARKS: For emergency, freq 121.5 monitored when twr clsd. USAF weather forecast avbl 1200–0300Z from Davis Monthan AFB. Radar see Terminal FLIP for Radar Minima.

• • • • •

HELIPAD H1: H40X40 (ASPH)

HELIPAD REMARKS: ACTIVATE perimeter lgts Helipad H1—CTAF.

GILA BEND AF AUX (GBN) N32°53.25' W112°43.19' NOTAM FILE GBN.

PHOENIX

AIRSPACE: CLASS D opr during range periods only. Closed holidays. Other times class G.

H-41, L-5B, A

GILA BEND MUNI (E63) 2 E UTC-7 N32°57.61' W112°40.42'

PHOENIX

789 B TPA—1589(800) NOTAM FILE PRC

H-41, L-5B, A

RWY 04-22: H5200X75 (ASPH) S-12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

RWY 22: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 04-22—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 116.6T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE GBN.

(H) VORTAC 116.6 GBN Chan 113 N32°57.38'

W112°40.46' at fld. 790/14E.

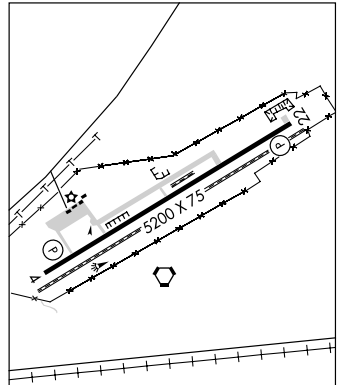

GLENDALE MUNI (GEU) 6 W UTC-7 N33°31.62' W112°17.71'

1071 B S4 FUEL 100, 100LL, JET A OX 2 TPA—See Remarks NOTAM FILE GEU

RWY 01-19: H7150X100 (ASPH) S-40, D-60 MIRL 0.4% up NE

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 38'. Thld dsplcd 701'.

Road. Rgt tfc.

RWY 19: REIL. PAPI(P2L)—GA 3.0° TCH 62'. Thld dsplcd 1001'.

Fence.

AIRPORT REMARKS: Attended continuously. Fuel avbl 1400-0400Z, fee other hrs. CAUTION: Heavy military jet tfc 5 miles west. Coyotes and birds on arpt. Bird activity invof arpt. High tension p-lines ¼ mile west parallel to rwy unmarked and unlighted. Touch and go ldg permitted between 1400-0500Z only. Avoid noise sensitive areas north and southeast of arpt. Rwy 01 preferred for noise abatement. Ctc arpt manager for additional noise abatement procedures. TPA—2101(1030), 1701(630) helicopter/ultralights, 2601(1530), high performance. West side helicopter pattern not avbl SS-SR. When twr clsd ACTIVATE MIRL Rwy 01-19, PAPI Rwy 01 and Rwy 19, REIL Rwy 01 and Rwy 19—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.425 (623) 877-8609.**COMMUNICATIONS:** CTAF 121.0 ATIS 119.425 UNICOM 122.95

PHOENIX RCO 122.6 122.2 (PRESCOTT RADIO)


Ⓡ LUKE APP/DEP CON 118.15 Mon-Thu 1330-0530Z, Fri 1330-0130Z, closed weekends and holidays, other times ctc

Ⓡ PHOENIX APP/DEP CON 120.7

TOWER 121.0 (Mon-Fri 1300-0330Z, Sat-Sun 1400-0200Z) GND CON 118.0

AIRSPACE: CLASS D svc Mon-Fri 1300-0330Z, Sat-Sun 1400-0200Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 277° 17.3 NM to fld.
1182/12E. HIWAS.

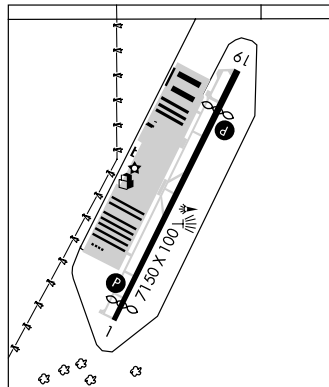COMM/NAV/WEATHER REMARKS: Emergency frequency 121.5 not monitored by twr.

PHOENIX

H-41, L-5B, A
IAP, AD**GLOBE** N33°16.97' W110°49.76' NOTAM FILE PRC.

RCO 122.3 (PRESCOTT RADIO)

PHOENIX

L-5C

GLOBE**SAN CARLOS APACHE** (P13) 7 SE UTC-7 N33°21.19' W110°40.04'

3261 B TPA—4261(1000) NOTAM FILE PRC

RWY 09-27: H6500X100 (ASPH-PFC) S-60 MIRL 1.2% up W

RWY 09: REIL. PAPI (P2L)—GA 3.15° TCH 40'.

RWY 27: REIL. PAPI (P2L)—GA 3.15° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Unattended. All rwy hold and twy exit signs OTS indefinitely. ACTIVATE MIRL Rwy 09-27—CTAF, PAPI Rwy 09 and Rwy 27 opr continuously.


WEATHER DATA SOURCES: AWOS-3 120.075 (928) 475-5560.**COMMUNICATIONS:** CTAF/UNICOM 122.8

GLOBE RCO 122.3 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19'
W111°39.09' 073° 49.6 NM to fld. 1370/13E. HIWAS.

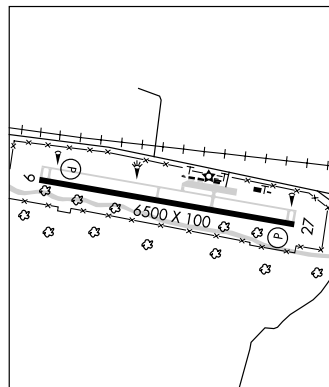

PHOENIX

H-41, L-5C
IAP

GOODYEAR

PHOENIX GOODYEAR (GYR) 1 SW UTC-7 N33°25.42' W112°22.47'
 968 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE GYR
RWY 03-21: H8500X150 (ASPH) S-75, D-200, DT-270 MIRL

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 45'. 0.3% up.

RWY 21: REIL. PAPI(P2L)—GA 3.5° TCH 45'. Thld dspcd 2100'.
 Building. Rgt tfc.

AIRPORT REMARKS: Attended 1300-0400Z. E-W power lines 100 feet
 AGL ½ mile S approach end Rwy 03 unmarked and unlighted some
 NSTD marking. Numerous large acft parked approximately 500' W
 of Rwy 03-21. Mountains SE at 6 miles to 4500'. Military jet tfc 5
 miles west of arpt. Acft departing Rwy 03 assigned right
 crosswind climb straight ahead to Litchfield Road or passing
 1032' AGL before starting right turn. Noise abatement in effect
 ctc 602-273-4300. Noise sensitive neighborhood 1-3 miles
 NNE-NE of arpt. TPA -1968(1000) light acft and non-turbo jets;
 2468(1500) heavy acft and turbo jets; 1468(500) helicopters. For
 MIRL Rwy 03-21 or REIL Rwy 03 and Rwy 21 during dalgt hrs ctc
 twr or arpt on 623-932-4550. After SS MIRL Rwy 03-21 are on.
 PAPI Rwy 03 and Rwy 21 opr continuously, REIL Rwy 03 and Rwy
 21 turned off when twr clsd. Fee for all charters; travel clubs and
 certain revenue producing acft.

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 120.1 ATIS 118.35 UNICOM 122.95

PHOENIX RCO 122.6 122.2 (PRESCOTT RADIO)

Ⓡ **LUKE APP/DEP CON** 125.45 Mon-Thu 1330-0530Z, Fri 1330-0130Z, closed weekends and holidays, other times
 contact

Ⓡ **PHOENIX APP/DEP CON** 120.7

GOODYEAR TOWER 120.1 (1300-0400Z) **GND CON** 121.7


AIRSPACE: CLASS D svc 1300-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

BUCKEYE (L) VORTAC 110.6 **BXK** Chan 43 N33°27.21' W112°49.48' 080° 22.7 NM to fld. 1060/14E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.

PHOENIX
 H-41, L-5B, A
 IAP, AD

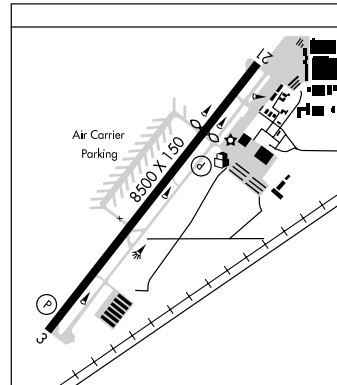

GRAND CANYON**GRAND CANYON NATL PARK**

(GCN) 6 S UTC-7 N35°57.14' W112°08.82'

LAS VEGAS

6609 B S6 FUEL 100LL, JET A OX 4 ARFF Index—See Remarks NOTAM FILE GCN H-41, L-8G

RWY 03-21: H8999X150 (ASPH-GRVD) S-88, D-108, DT-160 MIRL IAP, AD

RWY 03: MALS. 0.7% up.

RWY 21: REIL. VASI(V4L)—GA 3.0° TCH 52'. Rgt tfc. 1.0% down.

AIRPORT REMARKS: Attended Oct 1-May 31 1400-0200Z, Jun 1-Sep 30 1300-0300Z. Fuel avbl 24 hrs call 928-638-7117. Condors invof arpt. Class II, ARFF Index A. Index A CLOSED to unscheduled air carrier ops with more than 30 passenger seats except 24 hr PPR, call arpt manager 928-638-2446. ARFF Index B avbl with 24 hr PPR, call arpt manager 928-638-2446. Heavy volume of Air Taxi flights vicinity of Grand Canyon. Overnight parking fee and commercial ldg fee. When twr clsd ACTIVATE MIRL Rwy 03-21 and MALS Rwy 03—CTAF. Note: See Special Notices—Grand Canyon Special Flight Rules Area.

WEATHER DATA SOURCES: ASOS 124.3 (928) 638-0672. (ASOS frequency 124.3 not avbl. Thunderstorm reporting not avbl when twr clsd.)

COMMUNICATIONS: CTAF 119.0 ATIS 124.3 UNICOM 122.95

RCO 123.65 (PRESCOTT RADIO)

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

L.A. CENTER APP/DEP CON 124.85

CANYON TOWER 119.0 (Jun 1-Sep 30 1300-0300Z, Oct 1-May 31 1400-0200Z) GND CON 121.9


AIRSPACE: CLASS D svc Jun 1-Sep 30 1300-0300Z, Oct 1-May 31 1400-0200Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE GCN.

(L) VORW/DME 113.1 GCN Chan 78 N35°57.62' W112°08.76' at fld. 6668/15E.

VOR unusable 065°-115° byd 35 NM blo 14500'.

DME unusable 350°-035° byd 35 NM blo 14500'. 035°-115° byd 25 NM blo 14500'.

ILS 108.9 I-GCN Rwy 03. Class IA. Unmonitored when twr clsd.

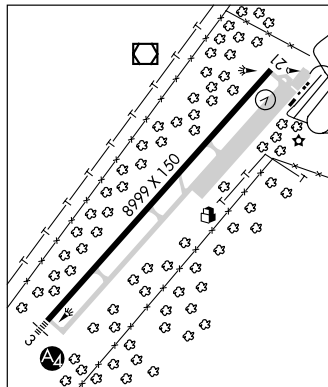**VALLE** (40G) 25 S UTC-7 N35°39.04' W112°08.88'

PHOENIX

5999 B S2 FUEL 100LL, JET A NOTAM FILE 40G L-8G

RWY 01-19: H4199X45 (ASPH) MIRL IAP

RWY 01: PVASI(PSIL) (NSTD)

RWY 19: PVASI (PSIL) (NSTD)

AIRPORT REMARKS: Attended 1400-0030Z. Unattended Christmas.


Wildlife on and invof arpt. ACTIVATE MIRL Rwy 01-19, PVASI Rwy 01 and Rwy 19—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

L.A. CENTER APP/DEP CON 124.85

RADIO AIDS TO NAVIGATION: NOTAM FILE GCN.

GRAND CANYON (L) VORW/DME 113.1 GCN Chan 78 N35°57.62' W112°08.76' 165° 18.6 NM to fld. 6668/15E.

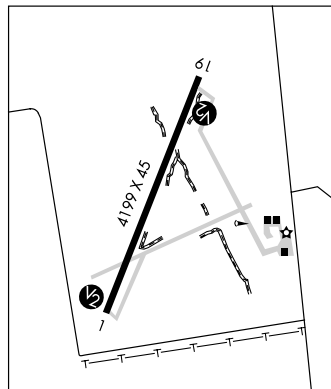**GRAND CANYON BAR TEN AIRSTRIP** (See WHITMORE)**GRAND CANYON CAVERNS** (See PEACH SPRINGS)**GRAND CANYON WEST** (See PEACH SPRINGS)**GREENLEE CO** (See CLIFTON-MORENCI)**H. A. CLARK MEM FLD** (See WILLIAMS)

HOLBROOK MUNI (P14) 3 NE UTC-7 N34°56.43' W110°08.29'

PHOENIX
H-4J, L-8G

5262 B FUEL 100LL NOTAM FILE PRC

RWY 03-21: H6698X75 (ASPH-AFSC) S-12 MIRL

RWY 03: REIL. PAPI(P2L). Thld dspcd 800'. Road.

RWY 21: REIL. PAPI(P2L).

RWY 11-29: 3200X120 (GRVL-DIRT)

RWY 11: Fence.

RWY 29: Pole.

AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z. For arpt attendant after hrs call 928-524-7832 or 928-241-0288. Rwy 11-29 soft dirt rwy, for condition of surface call 520-524-7832 or 928-241-0288. ACTIVATE MIRL Rwy 03-21, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.675

COMMUNICATIONS: CTAF/UNICOM 122.8


WINSLOW RCO 122.6 (PRESCOTT RADIO)

KAYENTA RCO 122.45 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE INW.

WINSLOW (H) VORTACW 112.6 INW Chan 73 N35°03.70'

W110°47.70' 088° 33.2 NM to fld. 4910/14E. HIWAS.



KAYENTA (ØV7) 2 SE UTC-7 N36°42.90' W110°13.92'

DENVER
H-4J, L-8H

5710 B FUEL JET A NOTAM FILE PRC

RWY 05-23: H7140X75 (ASPH) S-12.5 MIRL

RWY 05: Pole. RWY 23: PVASI(P SIL)—GA 3.0°.

AIRPORT REMARKS: Unattended. Numerous cracks and ruts on rwy and twy. Rwy 05-23 4' brush within primary surface, plants growing through rwy and twy surface. Rwy rutted, numerous cracks, loose material, grass in cracks, longitudinal grade anomalies (dips). Unrestricted access to rwy from highway. Rwy 23 PVASI OTS indef.

COMMUNICATIONS: CTAF 122.9

RCO 122.45 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.

PAGE (L) VORW/DME 117.6 PGA Chan 123 N36°55.86' W111°26.85' 089° 60.0 NM to fld. 4277/13E.

HIWAS.

KEARNY (E67) 1 S UTC-7 N33°02.83' W110°54.54'

PHOENIX
L-5C

1833 S4 FUEL 100LL OX 2 NOTAM FILE PRC

RWY 08-26: H3400X60 (CONC) S-12.5

RWY 08: Thld dspcd 195'. Tree.

RWY 26: Thld dspcd 200'. Tree.

AIRPORT REMARKS: Unattended. 100LL avbl for emerg only. Birds, wildlife, military ops invof arpt. No lighting on arpt, night ops not recommended. Expect turbulence on Rwy 26 apch with wind from N and on dep Rwy 26. Fence 270' L/R off Rwy 26 end. Calm wind use Rwy 08, rapidly rising terrain all quadrants except SE quadrant. Fence 240' L/R off Rwy 08 end. Ditch both sides Rwy 08 end, 60' L/R of centerline with 6' drops. For noise abatement avoid schools and homes. Contact FBO 520-363-5175. Medical helicopter base 1 NM NW.

COMMUNICATIONS: CTAF/UNICOM 122.95

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' 099° 40.4 NM to fld.

1370/13E. HIWAS

KINGMAN (IGM) 8 NE UTC-7 N35°15.57' W113°56.28'

3449 B S4 FUEL 100LL, JET A, TPA-4249(800) Class III, ARFF Index A.

NOTAM FILE IGM

RWY 03-21: H6827X150 (ASPH) S-45, D-85, ST-108, DT-125, DDT-265 MIRL

RWY 03: REIL.PAPI(P4L)—GA 3.0°.

RWY 21: REIL. PAPI(P4L)—GA 3.0°.

RWY 17-35: H6725X75 (ASPH) S-22, D-60 MIRL 1.3% up S

RWY 17: PAPI(P2L)—GA 3.0° TCH 38'.

RWY 35: PAPI(P2L)—GA 3.0° TCH 48'.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Parachute Jumping.

Scheduled air carrier ops with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt management. Call arpt manager 928-757-2134.

Ultralight and model airplane activity SW of arpt. Rwy 21 calm wind rwy. ACTIVATE MIRL Rwy 03-21 and Rwy 17-35, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21 and twy lights—CTAF. MIRL Rwy 17-35 preset low ints only.

WEATHER DATA SOURCES: ASOS 119.275 (928) 692-8104.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 108.8T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE IGM.


(L) VOR/DME 108.8 IGM Chan 25 N35°15.63'

W113°56.05' at fld. 3410/15E.

VOR/DME unusable:

030°-120° byd 20 NM blo 10,500'

120°-190° byd 15 NM blo 17,500'

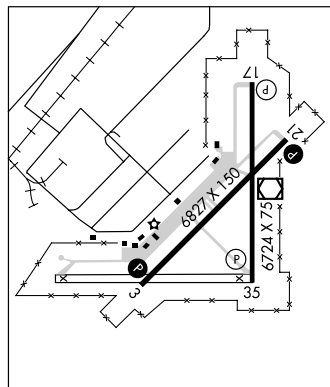

190°-240° byd 30 NM blo 7,500'

240°-315° byd 30 NM blo 17,500'

LAGUNA AAF (YUMA PROVING GROUND) (LGF) A 12 NE UTC-7 N32°51.60' W114°23.80'

433 B TPA—See Remarks NOTAM FILE LGF Not insp.

RWY 18-36: H6118X150 (ASPH) PCN 56 F/B/W/T MIRL 0.8% up N

RWY 18: PAPI(P2L)—GA 3.0° TCH 37'. **RWY 36:** PAPI(P2L)—GA 3.0° TCH 46'. Rgt ttc.

RWY 06-24: H6000X100 (ASPH) PCN 68 F/B/W/T 1.0% up NE

RWY 06: Rgt ttc.

MILITARY SERVICE: LGT ACTIVATE MIRL and PAPI Rwy 18-36—121.8 JASU 1(MD-3) 1(59B2-1B) FUEL J8, 100LL, Petrol, Oils and Lubricants avbl Mon-Fri 1430-0000Z; clsd holidays. Petrol, oils and lubricants avbl with 24 hr PPR for tran acft. Contract fuel -AVCARD only. **TRAN ALERT** Limited maintenance svc avbl.

MILITARY REMARKS: Opr Mon-Fri 1300-0000Z, CLOSED holidays. **RSTD** Restricted area 4 NM E of airfield. Official business only. Overflight of housing area 3 NM SW of airfield is prohibited. 24 hr PPR for tran acft, telephone DSN 899-2241, C928-328-2241/2014. C-130 and larger acft are prohibited from making U-turns on rwy unless rqr for emergency or congestion and must be approved by Base OPS. No ops permitted when afld clsd.

CAUTION Intense opr on Cibola Range 1 NM N of airfield. Intense parachute drop opr vicinity 5 NM of airfield year round. Wildlife hazard, wild horses and burrow may be on airfield, use extreme caution during night opr. **TFC PAT** TPA-1911(1478) fixed wing, 1111(678) rotary wing. **MISC** Late arrival ctc Base Ops DSN 899-2014/2241, C928-328-2014/2241, and after duty hours call C928-920-1928. Rental car avbl thru Base OPS.

WEATHER DATA SOURCES: AWOS-3 128.225 (928) 328-5238.

COMMUNICATIONS: CTAF 126.2 242.175

YUMA APP CON 124.7 374.8 YUMA DEP CON 125.55 281.0

GND CON 121.8 229.4

RANGE 119.0 248.4 (Airfield advisory 126.2 242.175)

YUMA RCO 122.2 (PRESCOTT RADIO)

YUMA RCO 122.6 (SAN DIEGO RADIO)

AFLD ADVISORY 126.2 242.175

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

BARD (H) VORTAC 116.8 BZA Chan 115 N32°46.09' W114°36.17' 048° 11.8 NM to fld. 130/14E.

PHOENIX

H-41, L-8F

IAP

PHOENIX

H-41, L-5A

DIAP, AD

LAKE HAVASU CITY (HII) 6 N UTC-7 N34°34.27' W114°21.50'

PHOENIX

783 B S4 FUEL 100LL, JET A OX 2, 4 TPA—See Remarks ARFF Index—See Remarks
NOTAM FILE PRC

H-4I, L-7E
IAP

RWY 14-32: H8001X100 (ASPH) S-100 MIRL 0.4% up SE


RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Rgt tfc.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Hill.

AIRPORT REMARKS: Attended 1500-0100Z. Power lines/towers and high terrain N/NE of arpt. Ultralight acft ops invof arpt from surface to 5000'. Class III, ARFF Index A. ARFF Index B avbl with PPR, etc arpt manager (928) 764-3330, Mon-Fri 1500-0000Z. UNICOM attended daily 1400-0100Z. Scheduled air carrier ops involving acft with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt management, and confirmation that ARFF svcs are avbl prior to ldg or tkf. Rwy 32 designated calm wind rwy. TPA 1803 (1020) light acft, 2303 (1520) high performance acft. Noise abatement—straight-in straight-out apch/dep prohibited. Enter pattern using 45° entry to downwind. Do not overfly residential communities S/SW of arpt. ACTIVATE MIRL Rwy 14-32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (928) 764-2317.**COMMUNICATIONS:** CTAF/UNICOM 122.7

L.A. CENTER APP/DEP CON 134.65

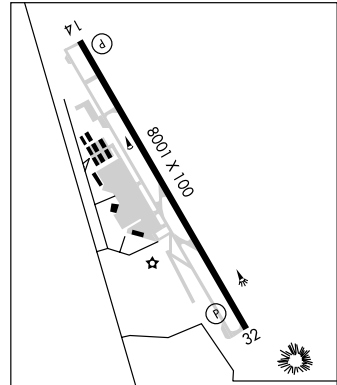RADIO AIDS TO NAVIGATION: NOTAM FILE EED.**NEEDLES (H) VORTAC** 115.2 EED Chan 99 N34°45.96' W114°28.45' 139° 13.0 NM to fld. 620/15E. **HIWAS.****LAUGHLIN/BULLHEAD INTL** (See BULLHEAD CITY)**LIBBY** N31°35.38' W110°21.30' NOTAM FILE FHU.

PHOENIX

(T) VOR 113.6 FHU at Sierra Vista Muni—Libby AAF. Unmonitored when twr clsd.

H-4I, L-5C

No NOTAM MP 2nd Tue of month 1500-1900Z. Unusable: 110°-225° byd 15 NM.**LUKE AFB** (LUF(KLUF) AF 7 W UTC-7 N33°32.10' W112°22.98'

PHOENIX

1085 B TPA—See Remarks NOTAM FILE LUF Not insp.

H-4I, L-5B, A

RWY 03L-21R: H10012X150 (ASPH) PCN 42 R/C/W/T HIRL

DIAP, AD

RWY 03L: PAPI(P4L)—GA 3.0° TCH 50'. RWY 21R: PAPI(P4L)—GA 3.0° TCH 47'. Rgt tfc.

RWY 03R-21L: H9904X150 (CONC) PCN 62 R/B/W/T HIRL

RWY 03R: ALSF1. PAPI(P4L)—GA 3.0° TCH 51'.

RWY 21L: ALSF1. PAPI(P4L)—GA 3.0° TCH 47'. Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 03L HOOK BAK-9(B) (22' OVRN) HOOK BAK-12A(B) (1444')

HOOK BAK-12A(B) (1519') HOOK BAK-9(B) (36' OVRN) RWY 21R

RWY 03R HOOK BAK-9(B) (50' OVRN) HOOK BAK-12A(B) (1413')

HOOK BAK-12A(B) (1453') HOOK BAK-9(B) (30' OVRN) RWY 21L

MILITARY SERVICES: LGT Rwy 21L ALSF1 NSTD. PAPI GS 3° with touchdown point approximately 945' past thld on all rwy. Rwy 03R-21 ILS and PAPI GS not coincidental all rwy thld lighting is gated. **A-GEAR** Rwy 03L-21R BAK-12A in raised position with 8 point tie-downs. Rwy 03R-21L dep end BAK-12A in raised position. Rwy 03R-21L apch end BAK-12A in raised position with 30 min prior notice. During extended single rwy opr, app and dep end BAK-12A in raised position for the open rwy. **JASU** 2(AM32A-60A) 2(MC-1A) **FUEL** J8 **FLUID** SP **PRESAIR** **LPOX** **LOX** **OIL** O-128 Packaged only, rqr hand transfer; 133-148-156 **SOAP** **TRAN ALERT** Ltd tran parking. Expect up to 4 hr svc delay. Follow me svc avbl on request. No fleet svc avbl. No F16 GE engine tran support avbl.

MILITARY REMARKS: Opr Mon-Thu 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays. See FLIP AP/1 Supplementary Arpt Remarks **RSTD** PPR all acft except Aero-Medical Evacuation mission, etc Base OPS DSN 896-7131, C623-856-7131/7132. Aerodrome official business only in support of LUKE AFB mission. Acft must adhere to PPR arrival block time +/- 30 min of scheduled ldg. Tran acft will make full stop ldg during local training period. Minimum 24 hr advance coordination for acft with gross weight of 135,000 lb or more. No local sorties will be flown out by tran acft. All acft larger than KC-135 PPR from afld manager prior to utilizing Rwy 03L-21R. AV-8 acft may not conduct hover ldg without specific permission of Luke Twr. All acft will file a flight plan prior to departure. No practice apch for civil acft at Luke AFB and auxiliary fld due to student training. Twy F closed until further notice. **CAUTION** Extensive student jet tfc. Pilots should use extreme caution when flying Rwy 03-21 final apch course due to VFR flyways. High potential for hydroplaning on both rwy during wet conditions. Instrument and VFR hold mark intersection on Twy Bravo at the intersection of Rwy 03R-21L.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

Apron lgt pole located 1200' SE from Rwy 03R-21L centerline, 456' and 676' from Rwy 21L thld and apron lgt pole located 1430' SW from Rwy 03R-21L centerline, 676' from Rwy 21L thld. Various 90' lgt poles located near fire training facility located 1358.3' from Rwy 21R centerline. **TFC PAT** Overhead 300 KIAS, 3000' until 5 DME then 2600'. Rwy 03R/L left tfc. Conventional 2100'. Rwy 03L/R left tfc with base leg position to avoid Phoenix-Goodyear Arpt Tfc Area 4 NM south. Rwy 21R/L rgt tfc with base leg outside housing area 1 NM east. **NS ABTMT** Extremely noise sensitive area 5 NM northeast. **MISC** First 3600' of Rwy 03L and first 1000' Rwy 21R is concrete mid 5400' asphalt. Four engine acft will if authorized, shut-down outboard engine prior to taxi after lgt. KC135 or larger acft expect back taxi procedure after lgt Rwy 21L/R. Classified storage for tran aircrews is no longer avbl at Afd Management Ops, please contact Command Post for storage at DSN 896-5600 or COMM (623) 856-5600.

WEATHER DATA SOURCES: ASOS (623) 856-4361.

COMMUNICATIONS: ATIS 134.925 269.9 PTD 372.2

APP/DEP 118.15 363.12 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

TOWER 119.1 379.9 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

GND CON 133.175 335.8 **CLNC DEL** 126.25 273.475

COMD POST (RAYMOND 18) 349.4 **PMSV METRO** 267.4 (Mon-Thru 1330-0530Z, Fri 1330-0130Z, clsd wkend and hol.

Trans acft wx briefing svc ctc 25 OWS, Davis Monthan AFB, DSN 228-6598/6599/6588. Augmented ASOS in use during afd hrs. ASOS observations avbl at DSN 896-4361 or C623-856-4361.

AIRSPACE: CLASS D svc Mon-Thru 1330-0530, Fri 1330-0130Z, closed weekends and holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION:

(L) **TACAN** Chan 77 LUF (113.0) N33°32.26'W112°22.91' at fld. 1108/13E. No-NOTAM MP Sun 1500-1900Z, Wed 1000-1300Z. Opr 1330-0530Z, monitor by Luke RAPCON during opr hr.

TACAN unusable:

130°-160°byd 29 NM blo 9,000'

235°-305° byd 38 NM

235°-305° byd 19 NM blo 8,000'

305°-320° byd 34 NM blo 8,000'

235°-305° byd 27 NM blo 12,000'

ILS 108.7 I-LUF Rwy 03R. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

ILS 110.9 I-EMJ Rwy 21L. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

MARANA

PINAL AIRPARK (MZJ) 7 NW UTC-7 N32°30.59' W111°19.52'

1893 B S4 **FUEL** 100LL, JET A OX 1, 2, 4 TPA—See Remarks NOTAM FILE MZJ

PHOENIX

H-41, L-5C

RWY 12-30: H6849X150 (ASPH) S-68, D-100, DT-150 MIRL

RWY 30: Rgt tfc.

AIRPORT REMARKS: Attended 1400-0030Z. For fuel and ground support services after hours and holidays 24 hour PPR call 520-682-4181 extension 5755. Parachute Jumping. Parachute Jump areas located west of Rwy 12-30. CAUTION: —10' open channel 1000' from Rwy 12 end. Numerous controlled vehicles crossing Rwy 12-30. Coyotes and other wild animals in vicinity of Rwy 12-30 during evening hours. Rwy 12 preferred calm wind rwy. Extensive military helicopter training 1400-0600Z except holidays. Extensive military and civil parachute training high and low levels all hours. Unicom monitored intermittently during normal business hours. TPA 3002(1109) fixed wing acft; 2602(709) rotary wing acft. Twy C clsd indef. Acft storage/overnight fee ctc 520-267-5631. PPR for transient acft to National Guard Complex/Silver Bell National Guard Heliport phone 520-616-5631. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.


WEATHER DATA SOURCES: AWOS-3 130.375 (520) 682-3519.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 308° 32.4 NM to fld. 2672/12E.

HIWAS.

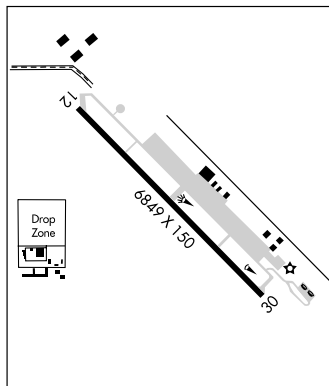

MARANA RGNL (See TUCSON)

CONTINUED FROM PRECEDING PAGE

Apron lgt pole located 1200' SE from Rwy 03R-21L centerline, 456' and 676' from Rwy 21L thld and apron lgt pole located 1430' SW from Rwy 03R-21L centerline, 676' from Rwy 21L thld. Various 90' lgt poles located near fire training facility located 1358.3' from Rwy 21R centerline. **TFC PAT** Overhead 300 KIAS, 3000' until 5 DME then 2600'. Rwy 03R/L left tfc. Conventional 2100'. Rwy 03L/R left tfc with base leg position to avoid Phoenix-Goodyear Arpt Tfc Area 4 NM south. Rwy 21R/L rgt tfc with base leg outside housing area 1 NM east. **NS ABTMT** Extremely noise sensitive area 5 NM northeast. **MISC** First 3600' of Rwy 03L and first 1000' Rwy 21R is concrete mid 5400' asphalt. Four engine acft will if authorized, shut-down outboard engine prior to taxi after lgt. KC135 or larger acft expect back taxi procedure after lgt Rwy 21L/R. Classified storage for tran aircrews is no longer avbl at Afd Management Ops, please contact Command Post for storage at DSN 896-5600 or COMM (623) 856-5600.

WEATHER DATA SOURCES: ASOS (623) 856-4361.

COMMUNICATIONS: ATIS 134.925 269.9 PTD 372.2

APP/DEP 118.15 363.12 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

TOWER 119.1 379.9 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

GND CON 133.175 335.8 **CLNC DEL** 126.25 273.475

COMD POST (RAYMOND 18) 349.4 **PMSV METRO** 267.4 (Mon-Thru 1330-0530Z, Fri 1330-0130Z, clsd wkend and hol.

Trans acft wx briefing svc ctc 25 OWS, Davis Monthan AFB, DSN 228-6598/6599/6588. Augmented ASOS in use during afd hrs. ASOS observations avbl at DSN 896-4361 or C623-856-4361.

AIRSPACE: CLASS D svc Mon-Thru 1330-0530, Fri 1330-0130Z, closed weekends and holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION:

(L) **TACAN** Chan 77 LUF (113.0) N33°32.26'W112°22.91' at fld. 1108/13E. No-NOTAM MP Sun 1500-1900Z, Wed 1000-1300Z. Opr 1330-0530Z, monitor by Luke RAPCON during opr hr.

TACAN unusable:

130°-160° byd 29 NM blo 9,000'

235°-305° byd 38 NM

235°-305° byd 19 NM blo 8,000'

305°-320° byd 34 NM blo 8,000'

235°-305° byd 27 NM blo 12,000'

ILS 108.7 I-LUF Rwy 03R. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

ILS 110.9 I-EMJ Rwy 21L. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

MARANA

PINAL AIRPARK (MZJ) 7 NW UTC-7 N32°30.59' W111°19.52'

1893 B S4 **FUEL** 100LL, JET A OX 1, 2, 4 TPA—See Remarks NOTAM FILE MZJ

PHOENIX

H-41, L-5C

RWY 12-30: H6849X150 (ASPH) S-68, D-100, DT-150 MIRL

RWY 30: Rgt tfc.

AIRPORT REMARKS: Attended 1400-0030Z. For fuel and ground support services after hours and holidays 24 hour PPR call 520-682-4181 extension 5755. Parachute Jumping. Parachute Jump areas located west of Rwy 12-30. CAUTION: —10' open channel 1000' from Rwy 12 end. Numerous controlled vehicles crossing Rwy 12-30. Coyotes and other wild animals in vicinity of Rwy 12-30 during evening hours. Rwy 12 preferred calm wind rwy. Extensive military helicopter training 1400-0600Z except holidays. Extensive military and civil parachute training high and low levels all hours. Unicom monitored intermittently during normal business hours. TPA 3002(1109) fixed wing acft; 2602(709) rotary wing acft. Twy C clsd indef. Acft storage/overnight fee ctc 520-267-5631. PPR for transient acft to National Guard Complex/Silver Bell National Guard Heliport phone 520-616-5631. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.


WEATHER DATA SOURCES: AWOS-3 130.375 (520) 682-3519.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 308° 32.4 NM to fld. 2672/12E.

HIWAS.

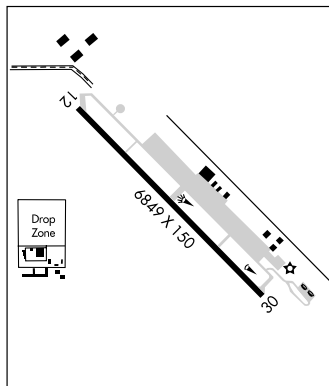

MARANA RGNL (See TUCSON)

MARBLE CANYON (L41) 1 SW UTC-7 N36°48.65' W111°38.67'

3603 NOTAM FILE PRC

RWY 03-21: H3715X35 (ASPH)

RWY 03: Ground. RWY 21: Tree.


AIRPORT REMARKS: Attended dalgt hours. Rwy 03 first 1000' rough and badly rutted. Rwy 03 has 6 inch ruts approximately 50' long 55'-60' from rwy end. Rwy 03 centerline only. Rwy 03 numbers, edge and thld markings missing. Rwy 21 centerline only. Rwy 21 numbers, edge and thld markings missing. No line of sight between rwy ends. Landing fee.

COMMUNICATIONS: CTAF 122.9

KAYENTA RCO 122.45 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.

PAGE (L) VORW/DME 117.6 PGA Chan 123 N36°55.86'
W111°26.85' 220° 11.9 NM to fld. 4277/13E. HIWAS.

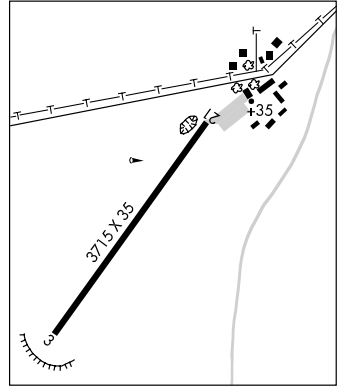

LAS VEGAS
L-8G

MARICOPA

ESTRELLA SAILPORT (E68) 6 W UTC-7 N33°05.12' W112°09.66'

1273 NOTAM FILE PRC

RWY 07-25: 3740X20 (DIRT)

RWY 07: Brush. RWY 25: Brush.

RWY 06R-24L: H2520X30 (ASPH)

RWY 06R: Rgt tfc.

RWY 06C-24C: 1995X25 (DIRT)

RWY 06C: Brush. Rgt tfc. RWY 24C: Brush.

RWY 06L-24R: 1910X25 (DIRT)

RWY 06L: Tree. Rgt tfc.

AIRPORT REMARKS: Attended Mo-Fri 1800Z-dusk, Sat and Sun 1600Z-dusk. Parachute Jumping. Arpt CLOSED at ngt. All acft PPR due to heavy glider activity cte (520) 568-2318. Hills NW, W, SW. Powered aircraft pattern is S of runways; glider pattern is N of runways. Powered aircraft are requested to use rwy not in use by gliders. Powered acft be alert for heavy glider t/c operating without communication within 5 NM of Estrella Sailport. An aerobatic box is active from 1600-0100Z, one square mile around the PXR194023. Heavy no-radio activity. Paved rwy for t/c only.

COMMUNICATIONS: CTAF 122.9

PHOENIX

MEADVIEW

PEARCE FERRY (L25) 3 N UTC-7 N36°05.59' W114°02.80'

2941 NOTAM FILE PRC

RWY 01-19: 2900X110 (DIRT)

RWY 01: Rgt tfc.

AIRPORT REMARKS: Unattended. Use extreme care wild livestock on and in vicinity of arpt. Signs 1050' from Rwy 01, 90' left; 200' from Rwy 19, 110' left. Rwy 01-19 E 15' and W 40' of rwy width, full length of rwy are rough with loose gravel. Rwy 01-19 550' stopway S of Rwy 01 covered with large loose rocks and low vegetation. Scattered +5' bushes along the E and W side of Rwy 01-19. Rwy 01-19 center 50' clear of vegetation. Gravel apron area located west side of Rwy 19 near apch end.

COMMUNICATIONS: CTAF 122.9

LAS VEGAS

MESA**FALCON FLD** (FFZ) 5 NE UTC-7 N33°27.65' W111°43.70'**PHOENIX**1394 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE FFZ
RWY 04R-22L: H5101X100 (ASPH) S-38, D-60, DT-90 MIRL 0.6% up NEH-41, L-5B, A
IAP, AD

RWY 04R: REIL. PAPI(P2L)—GA 3.0°. Road.

RWY 22L: REIL. PAPI(P2L)—GA 4.0°. Tree. Rgt tfc.


RWY 04L-22R: H3799X75 (ASPH) S-12.5 MIRL 0.5% up NE

RWY 04L: PAPI(P2L)—GA 3.0°. Pole.

RWY 22R: PAPI(P2L)—GA 4.0°. Road. Rgt tfc.

AIRPORT REMARKS: Attended continuously. For svc ctc FBO on 122.950 (480-832-2582) or 129.025 (480-641-5000). Coyotes invof rws and twys. Turbulent conditions may be encountered blo 500' AGL near gnd test site 1.5 miles north of arpt. Rising terrain NE of arpt. Extensive fixed wing and rotorcraft flight training activity. Do not mistake Boeing heliport 1 mile north for a rwy. TPA—2400 (1006) for light acft, 2900 (1506) for large and turbine-powered acft, 1900 (506) for rotorcraft. Terminal apron area limited to 30,000 pounds gross weight single wheel or 50,000 pounds gross weight dual wheel by arpt manager. Voluntary noise abatement procedures in effect. For noise abatement procedures call 480-644-2444 between Mon-Thu 1400-0100Z. Noise sensitive areas all quadrants. When twr clsd MIRL Rwy 04R-22L and twy lgts preset low ints, to increase ints ACTIVATE—CTAF.

MIRL Rwy 04L-22R unavailable when twr clsd. For REIL Rwy 04R and Rwy 22L ctc twr.

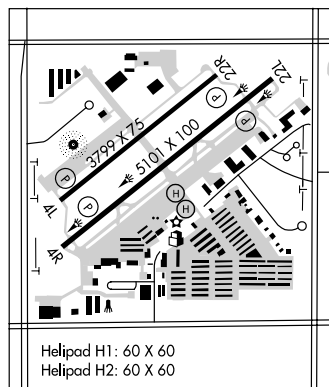WEATHER DATA SOURCES: LAWRS.**COMMUNICATIONS:** CTAF 124.6 ATIS 118.25 (480) 641-9378. UNICOM 122.95® **PHOENIX APP/DEP CON** 120.7**TOWER** 124.6 (1300-0400Z) **GND CON** 121.3**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N33°25.98' W111°58.21' 070° 12.3 NM to fld.
1182/12E. HIWAS.**NDB (MHW)** 281 FFZ N33°27.71' W111°43.99' at fld. Unusable 315°-110° byd 20 NM blo 8,700'.**COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not available at twr.• • • • •
HELIPAD H1: H60X60 (ASPH) S-30**HELIPAD H2:** H60X60 (ASPH) S-30**HELIPORT REMARKS:** Gross weight pavement strength 10,000 pounds.**MINGUS MOUNTAIN** N34°42.13' W112°07.03'**PHOENIX**

RC0 122.3 (PRESCOTT RADIO)

H-41, L-8F

MOUNT LEMMON N32°24.50' W110°43.46'**PHOENIX**

RC0 122.4 (PRESCOTT RADIO)

L-5C

NOGALES INTL (OLS) 7 NE UTC-7 N31°25.06' W110°50.87'

3955 B S4 FUEL 100LL, JET A AOE NOTAM FILE OLS

RWY 03-21: H7199X90 (ASPH) S-21 MIRL 1.6% up NE

RWY 03: PAPI(P4L)—GA 3.0° TCH 68'.

RWY 21: PAPI(P4L)—GA 4.0° TCH 17'. Thld dspcd 910'. Hill.

AIRPORT REMARKS: Attended 1400-0200Z. Straight-in apchs not recommended. Gross weight S-21 for center 90', remainder of rwy width is S-7. Rwy 03 is CLOSED to touch and go landing. Rwy 21 designated calm wind rwy. ACTIVATE MIRL Rwy 03-21—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS 121.125 (520) 287-9332.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.4 (PRESCOTT RADIO)

TUCSON APP/DEP CON 125.1

RADIO AIDS TO NAVIGATION: NOTAM FILE OLS.

(L) VORW/DME 108.2 OLS Chan 19 N31°24.90' W110°50.93' at fld. 3870/12E.

VOR/DME unusable:

330°-355° beyond 30 NM below 13,500'

030°-080° beyond 25 NM below 17,900'


NDB (HW) 394 ENZ N31°25.28' W110°50.79' at fld.

Unusable:

080°-270° byd 5 NM

COMM/NAV/WEATHER REMARKS: Call Prescott Radio on 122.4 to close all flight plans.

HELIPAD HI: H97X97 (CONC)

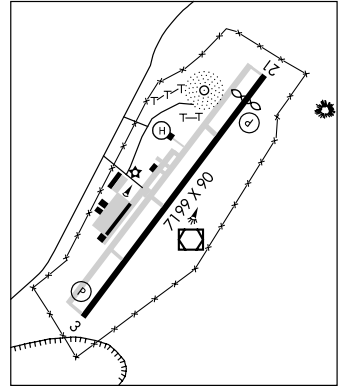

330°-080° byd 25 NM

PHOENIX

H-41, L-5C

IAP

PAGE MUNI (PGA) 1 E UTC-7 N36°55.57' W111°26.90'

4316 B S4 FUEL 100LL, JET A OX 1, 2 Class III, ARFF Index A NOTAM FILE PGA

RWY 15-33: H5950X150 (ASPH) S-65, D-90, ST-114, DT-190 MIRL 1.2% up S

RWY 15: REIL. VASI(V2L)—GA 3.0° TCH 52'.

RWY 33: REIL. VASI(V2L)—GA 3.0° TCH 30'. Rgt tfc.

RWY 07-25: H2201X100 (ASPH) D-12.5

RWY 07: Thld dspcd 588'. RWY 25: Rgt tfc.

AIRPORT REMARKS: Attended dalgt hours. For fuel after hours ctc 928-660-1060 or 928-645-5356. CLOSED to air carrier ops with more than 30 passenger seats except 24 hr prior permission call arpt manager 928-645-8861. ARFF avbl 5-7 minutes without prior permission. Use Rwy 07-25 only during high winds. Overnight parking fee. ACTIVATE MIRL Rwy 15-33 and REIL Rwy 15 and Rwy 33—CTAF. VASI Rwy 15 and Rwy 33 opr continuously.

WEATHER DATA SOURCES: ASOS 120.625 (928) 645-1228. HIWAS 117.6 PGA.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.6 (PRESCOTT RADIO)

KAYENTA RCO 122.45 (PRESCOTT RADIO)

DENVER CENTER APP/DEP CON 127.55

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.


(L) VORW/DME 117.6 PGA Chan 123 N36°55.86' W111°26.85' at fld. 4277/13E. HIWAS.

VOR/DME unusable:

105°-230° byd 30 NM blo 11,000'

230°-245° byd 30 NM blo 12,000'

COMM/NAV/WEATHER REMARKS: UNICOM ADZY avbl 122.8 SR to SS only.



LAS VEGAS

H-41, L-8G, 9C

IAP

PARKER

AVI SUQUILLA (P2Ø) 1 E UTC-7 N34°09.04' W114°16.27'

452 B S4 FUEL 100LL, JET A TPA-1252(800) NOTAM FILE PRC

RWY 01-19: H4780X75 (ASPH) S-20 MIRL

RWY 01: Rgt tfc. Pole.

RWY 19: PAPI(P2L)—GA 3.0° TCH 21'. Tree.

AIRPORT REMARKS: Attended 1500-0500Z. Service fee for fuel when arpt is unattended. Rwy 01-19 be alert to exposed MIRL concrete bases both sides of rwy. Drainage ditch traverses rwy safety area 130' from rwy end. Minimum altitude over Colorado River 1500' AGL. Twy S from midfield to west side of rwy clse indef.

ACTIVATE MIRL Rwy 01-19 and twy lgtS—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.725

L.A. CENTER APP/DEP CON 128.15


RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARKER (H) VORTAC 117.9 PKE Chan 126 N34°06.12' W114°40.93' 067° 20.7 NM to fld. 1000/15E.

PHOENIX

L-5A

IAP



PAYSON (PAN) 1 W UTC-7 N34°15.41' W111°20.36'

5157 B S2 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE PRC

RWY 06-24: H5500X75 (ASPH) S-40, D-50, DT-100 MIRL 0.3% up E

RWY 06: Tree. RWY 24: PAPI(P2L). Rgt tfc.

AIRPORT REMARKS: Attended 1500-0000Z. For fuel after hours call 928-802-2460 pager. 7 inch ruts adjacent rwy and twy safety areas. Rwy 24 calm wind rwy. Departure noise abatement procedures in effect, turn north 30° for 2 NM. Avoid arrival/departure over town below 1,000'. TPA—Prop engine 6200 (1043), jet/multi-engine and large engine 6700 (1543), helicopters 5700 (543). Overnight parking fee. MIRL preset low ints to increase ints ACTIVATE—CTAF. PAPI Rwy 24 opr continuously.

WEATHER DATA SOURCES: AWOS-3 119.325 (928) 472-4260.

COMMUNICATIONS: CTAF/UNICOM 122.8

ALBUQUERQUE CENTER APP DEP CON 132.9

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE INW.


WINSLOW (H) VORTACW 112.6 INW Chan 73 N35°03.70'

W110°47.70' 195° 55.2 NM to fld. 4910/14E. HIWAS.

.....

HELIPAD H1: H50X50 (CONC)

HELIPORT REMARKS: Helipad H1 surrounded on 3 sides by 4' fence.



PHOENIX

H-41, L-5C, 8G

IAP

PEACH SPRINGS

GRAND CANYON CAVERNS (L37) 9 E UTC-7 N35°31.62' W113°14.85'

5386 NOTAM FILE PRC

RWY 05-23: 5100X45 (GRVL)

RWY 05: Fence. RWY 23: Fence.

AIRPORT REMARKS: Attended dalgt hours. Elk on and invof arpt. Prairie dog holes within 5' of rwy edge full length.

Rwy 05-23 2-3' brush within 10' of rwy edge full length.

COMMUNICATIONS: CTAF/UNICOM 122.8

PHOENIX

GRAND CANYON WEST (1G4) 60 NW UTC-7 N35°59.42' W113°48.99'

LAS VEGAS

4825 Class III, ARFF Index A NOTAM FILE PRC

H-41, L-8F, A

RWY 17-35: H5058X60 (ASPH)

RWY 17: Rgt tfc.

RWY 35: Road.

AIRPORT REMARKS: Attended dalgt hrs. Use extreme care due to large volume of high-speed fixed wing and rotary wing tfc in and around vicinity of the arpt. Arpt not avbl for ngt ops. Due to high commercial fixed wing and helicopter tfc volume no practice touch and go ops. Recommend using Rwy 35 for departures and Rwy 17 for ldgs. Ldg fee.

WEATHER DATA SOURCES: HIWAS 112.0 PGS.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PEACH SPRINGS (H) VORTACW** 112.0 PGS Chan 57 N35°37.48' W113°32.68' 314° 25.6 NM to fld.

4760/15E. HIWAS.

PEACH SPRINGS N35°37.48' W113°32.67' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 112.0 PGS Chan 57 207° 29.4 NM to Kingman. 4760/15E. HIWAS.

H-41, L-8F

RCO 122.25 (PRESCOTT RADIO)

PEARCE FERRY (See MEADVIEW)

PEORIA
PLEASANT VALLEY (P48) 0N UTC-7 N33°48.04' W112°15.04'

PHOENIX

1580 FUEL 100LL NOTAM FILE PRC

RWY 05C-23C: 4200X100 (DIRT)

RWY 05C: Thld dsplcd 490'. Road. Rgt tfc.

RWY 23C: Thld dsplcd 200'. Road.

RWY 05L-23R: 4200X100 (DIRT)

RWY 05L: Thld dsplcd 480'. Road.

RWY 23R: Thld dsplcd 63'. Road. Rgt tfc.

RWY 05R-23L: 4200X100 (DIRT)

RWY 05R: Thld dsplcd 580'. Road. Rgt tfc.

RWY 23L: Thld dsplcd 240'. Road.

RWY 14-32: 2400X100 (DIRT)

RWY 14: Thld dsplcd 200'. Rgt tfc.

RWY 32: Thld dsplcd 300'. Road.

AIRPORT REMARKS: Attended 1600-0000Z. Aerobatic activity on and invof arpt. Extensive glider and ultralight activity on and invof arpt. Powered acft preferred Rwy 23R-05L. Rwy 23C, Rwy 23R and Rwy 23L +24' P-line marked with balls across thlds. Bldg and parked acft located 120' South of Rwy 05R-23L approximately midpoint. Rwy separations do not meet minimum standards, simultaneous ops not authorized on any two rwys. Shallow underground gas pipelines located 240' from end of runway 23L, 23C, and 23R. Dsplcd thlds on all rwys marked with white chalk and small white tires. Ctc FBO on 122.9.

COMMUNICATIONS: CTAF 122.9

PHOENIX N33°25.98' W111°58.21' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 115.6 PXR Chan 103 260° 2.1 NM to Phoenix Sky Harbor Intl. 1182/12E. HIWAS. H-41, L-5B, A

VORTAC unusable:

360°-015° byd 33 NM blo 11,000'

345°-034° byd 20 NM blo 8,000'

345°-034° byd 10 NM blo 6,000'

185°-190° byd 30 NM blo 8,000'

090°-100° byd 15 NM blo 8,000'

185°-190° byd 38 NM blo 9,000'

190°-230° byd 20 NM blo 10,000'

015°-034° byd 33 NM blo 10,000'

VOR unusable:

345°-360° byd 33 NM blo 10,000'

DME unusable:

345°-360° byd 33 NM blo 11,000'

RCO 122.6 122.2 (PRESCOTT RADIO)

PHOENIX GOODYEAR (See GOODYEAR)

PHOENIX**PHOENIX DEER VALLEY** (DVT) 15 N UTC-7 N33°41.30' W112°04.95'**PHOENIX**

1478 B S4 FUEL 100LL, JET A OX 1, 3 TPA—See Remarks NOTAM FILE DVT

H-41, L-5B, A
IAP, AD**RWY 07R-25L:** H8197X100 (ASPH) S-20, D-91, DT-255 MIRL**RWY 07R:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 898'.

Tree. Rgt tfc. 0.5% up.

RWY 25L: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 917'.


Road.

0.4% down.

RWY 07L-25R: H4508X75 (ASPH) S-70 D-117 MIRL 0.5% up E**RWY 07L:** REIL. PAPI(P2L)—GA 4.0° TCH 53'. Tree.**RWY 25R:** REIL. PAPI(P2L)—GA 3.5° TCH 47'. Hill. Rgt tfc.**AIRPORT REMARKS:** Attended 1300-0400Z. Fuel avbl 24/7. Lgtd hills

NE, E, SE and W. Flocks of birds and wildlife on and invof arpt.

Hot air balloon ops N, NE and NW of arpt. Rwy 07L-25R is designated training rwy. Aerobatic practice area approximately 8½ miles northwest of the Deer Valley Arpt from the surface to 6000' MSL. Parallel taxiway north is in close proximity to Rwy 07L-25R. MIRL, PAPI and REIL Rwy 07R-25L and Rwy 07L-25R on when twr clsd. Fee for all charters; travel clubs and certain revenue producing acft. TPA-2500(1022) single engine and 3000(1522) multi engine.

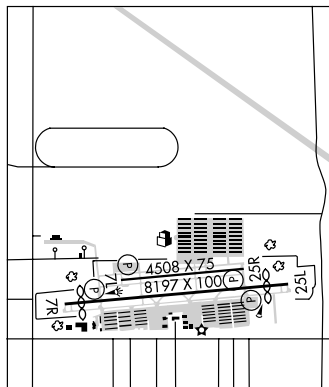WEATHER DATA SOURCES: ASOS (623) 587-7764.**COMMUNICATIONS:** CTAF 118.4 ATIS 126.5**PHOENIX RCO** 122.6 122.2 (PRESCOTT RADIO)® **PHOENIX APP/DEP CON** 120.7**DEER VALLEY TOWER** 118.4 (Rwy 07R-25L) 120.2 (Rwy 07L-25R) (1300-0400Z) **GND CON** 121.8**CLNC DEL** 123.9**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N33°25.98' W111°58.21' 328° 16.3 NM to fld.
1182/12E. HIWAS.**COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not available at twr.**PHOENIX RGNL** (A39) 28 SSE UTC-7 N32°59.51' W111°55.04'**PHOENIX**

1300E NOTAM FILE PRC

H-2F, L-5B, A

RWY 03-21: H5000X50 (ASPH)**RWY 03:** Tree. **RWY 21:** Tree.**AIRPORT REMARKS:** Unattended. Large transverse cracks 3-6" wide 100-200' spacing entire rwy length. 45' p-line 2 miles south southwest and 2 miles northeast of arpt. Antenna estimated to be approximately 200'-300' or more AGL, approximately 3 miles west northwest from west boundary of Phoenix Rgnl Arpt.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:****PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N32°59.50' W111°55.23' 162° 26.6 NM to fld.
1182/12E. HIWAS

PHOENIX SKY HARBOR INTL (PHX) 3 E UTC-7 N33°26.06' W112°00.70'

PHOENIX

1135 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks

H-41, L-5B, A

LRA Class I, ARFF Index D NOTAM FILE PHX

IAP, AD

RWY 08-26: H11489X150 (CONC-GRVD) S-30, D-170, ST-175, DT-280, DDT-620 HIRL

RWY 08: MALSF. PAPI(P4L)—GA 3.0° TCH 71'. Thld displcd 898'. Building.

RWY 26: REIL. PAPI(P4L)—GA 3.0° TCH 70'. Road. Rgt tfc.

RWY 07L-25R: H10300X150 (CONC-GRVD) S-30, D-200, ST-175, DT-400, DDT-620 HIRL

RWY 07L: MALSR. PAPI(P4L)—GA 3.0° TCH 73'. Pole. Rgt tfc.

RWY 25R: PAPI(P4L)—GA 3.0° TCH 55'. Antenna.

RWY 07R-25L: H7800X150 (CONC-GRVD) S-30, D-200, ST-175, DT-400, DDT-620 HIRL

RWY 07R: MALSR. PAPI(P4L)—GA 3.0° TCH 57'.

RWY 25L: MALSR. PAPI(P4L)—GA 3.0° TCH 49'. Antenna.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-11489 TODA-11489 ASDA-11489 LDA-10591

RWY 26: TORA-11489 TODA-11489 ASDA-11489 LDA-11489

AIRPORT REMARKS: Attended continuously. Bird activity within 10 miles of arpt up to 10,000' MSL. PAEW invof Terminals 2, 3 and 4.

Training by civil turbojet acft prohibited except PPR. No

experimental flight or ground demonstration without written approval of aviation director phone 602-273-2072.

ASDE-X Surveillance System in use: Pilots should operate transponders with Mode C on all twys and rwys.

TPA—2135(1000) lgt acft and non-turbo jets; 2635(1500) heavy acft and turbojets. Noise abatement procedures are in effect at all times contact 602-273-4300 for more information. Acft engine run-up for maintenance prohibited exc PPR. Ctc duty supervisory (602) 273-2008. No engine runs on arpt between 0600-1200Z. Rwy 07L touchdown and Rwy 25R rollout rwy visual range avbl. Twy R and portions of Twy S and Twy T directly bto the twr are non-visible areas from the twr. Phoenix Twr unable to provide ATC services to acft while on Twr R, and portions of Twy S and Twy T. Twy A between Twy A1 and Twy A10 rstd to acft wingspan 125' or less. Twy D rstd to acft wingspan 171' or less. Twy D between intersections Twy D8 and Twy D9 rstd to acft with wingspan 135' or less. Landing fee. Overnight parking fee. Fee for all charters, travel clubs and certain revenue producing aircraft. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (602) 231-8557. TDWR.

COMMUNICATIONS: D-ATIS 127.575

RCO 122.6 122.2 (PRESCOTT RADIO)

- ① **APP/DEP CON** 124.1 (119°-138° 7500'-14,500') (192°-263° 7500'-12,500') 119.2 (319°-057° 7500' and abv) 120.7 (319°-057° blo 7500') 123.7 (119°-138° blo 7500') (139°-191° blo 8500') 124.9 (058°-118° blo 10,500') 126.8 (058°-118° 10,500' and abv) (119°-138° abv 14,500') (139°-191° 8500' and above) (192°-263° abv 12,500')

TOWER 118.7 (Rwy 08-26) 120.9 (Rwy 07R-25L and Rwy 07L-25R) **GND CON** 119.75 (North) 132.55 (South)

CLNC DEL 118.1

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 260° 2.1 NM to fld.

1182/12E. HIWAS.

ILS/DME 111.75 I-SYQ Chan 54(Y) Rwy 08. Class IT. LOC back course unusable.

ILS/DME 111.75 I-CWJ Chan 54(Y) Rwy 26. Class IB. LOC back course unusable.


ILS/DME 110.75 I-AHA Chan 44 (Y) Rwy 07R. Class IB. DME also serves RJG ILS Rwy 25L.

ILS/DME 111.5 I-PHX Chan 52 Rwy 07L. Class IA. LOC front course unusable byd 15° left and rgt of centerline. LOC unusable within 0.3 NM of rwy thld.

ILS/DME 110.75 I-RJG Chan 44 (Y) Rwy 25L. Class IE. LOC unusable byd 25° left and right of course. DME unusable 0.6 NM inbound (Phoenix Sky Harbor Intl ILS apch only). DME also serves AHA ILS Rwy 07R.

HELIPAD H1: H60X60 (CONC)

HELIPORT REMARKS: Helipad H1 weight bearing capacity 12,000 lbs gross weight.

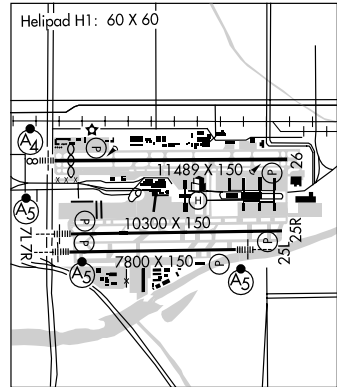

PHOENIX-MESA GATEWAY

(IWA) 9 E UTC-7 N33°18.47' W111°39.33'

PHOENIX

1382 B S1 FUEL 100LL, JET A OX 3, 4 TPA—See Remarks Class I, ARFF Index C
 NOTAM FILE IWA

H-41, L-5B, A
 IAP, AD

RWY 12R-30L: H10401X150 (CONC) S-55, D-95, ST-120, DT-185, DDT-550 MIRL

RWY 12R: Rgt tfc. 0.3% up.

RWY 30L: 0.3% down.

RWY 12C-30C: H10201X150 (CONC-ASPH) S-55, D-95, ST-120, DT-185, DDT-550 HIRL

RWY 12C: PAPI(P4L)—GA 3.0° TCH 50'. 0.3% up.

RWY 30C: PAPI(P4L)—GA 3.00° TCH 41'. 0.3% down.

RWY 12L-30R: H9301X150 (CONC) S-75, D-210, ST-175, DT-590, DDT-850 HIRL

RWY 12L: REIL. PAPI(P4L)—GA 3.0° TCH 74'. 0.3% up.

RWY 30R: REIL. PAPI(P4L)—GA 3.0°. TCH 75'. Rgt tfc. 0.3% down.

AIRPORT REMARKS: Attended continuously. Fuel avbl 24 hrs contact 480-988-7770 or 129.875. Be alert for crop dusting activity at or below 2000' MSL 3 miles west of the apch end of Rwy 12R. Be alert for crop dusting activity at or below 2000' MSL between 2 and 3 miles on apch for Rwy 30R, Rwy 30L and Rwy 30C.

Occasional wildlife invof arpt. Rwy 12C first 1000' conc, Rwy 30C first 3500' conc, remaining center portion asph. All VFR transitions ctc twr on 124.75. Large/heavy acft taxi with inboard engines only. Twy W rstd to acft with wing span less than 118'.

Twy Y rstd to acft with wing span less than 79'. 7' chain link fence on southern portion of middle ramp.

Voluntary noise abatement procedures in effect. Avoid low overflight of noise sensitive areas surrounding arpt.

For noise abatement information ctc arpt 480-988-7637 between 1300-0500Z or 480-988-7700 between 0500-1300Z. TPA—Fixed Wing 2600(1218), Jet 3100(1718), Rotorcraft 2100(718). No ldg fee for U.S.

Government owned, non-revenue and flight training acft up to 35,000 lbs. For REIL Rwy 12L and Rwy 30R ctc twr.

WEATHER DATA SOURCES: AWOS-3 133.5 (480) 988-9428. HIWAS 113.3 IWA.

COMMUNICATIONS: CTAF 120.6 ATIS 133.5

® PHOENIX APP/DEP CON 124.9

GATEWAY TOWER 118.8 (Helicopter) 120.6 (West) 124.75 (East) 1300-0400Z GND CON 128.25


CLNC DEL 135.05

AIRSPACE: CLASS D svc 1300-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' at fld. 1370/13E. HIWAS.

ILS 110.15 I-IWA Rwy 30C. Class IE. LOC unusable byd 25° left of course. Back course unusable.

**PIMA****FLYING J RANCH**

(E37) 4 SW UTC-7 N32°50.87' W109°52.90'

PHOENIX

3114 NOTAM FILE PRC

RWY 18-36: 2950X45 (DIRT)

RWY 18: Brush. RWY 36: Brush.

RWY 07-25: 1650X48 (DIRT)

AIRPORT REMARKS: Attended continuously. Rwy 18-36 28' power pole 67' west of rwy 700' north of Rwy 36 thld. Rwy 18-36 north 800' extremely rough, rutted and has large rocks. Drop-offs on sides of both rwys and ends. Rwy 18-36 4'-6' brush in primary surface, both sides. Rwy 18-36 south 540' 45' wide, north 240' 80' wide. Arpt gate access code 1229.

COMMUNICATIONS: CTAF 122.9

PINAL AIRPARK

(See MARANA)

PLEASANT VALLEY (See PEORIA)**POLACCA** (P10) 3 SW UTC-7 N35°47.50' W110°25.40'**DENVER**

5573 TPA-6398(825) NOTAM FILE PRC

L-86**RWY 04-22:** H4200X50 (ASPH) LIRL**RWY 04:** Brush. **RWY 22:** Brush.

AIRPORT REMARKS: Unattended. Rwy 04-22 in poor condition, has numerous cracks and holes. Rwy 04-22 has 1-3' brush 45' from centerline both sides full length of rwy. Road crossing rwy. Wash in safety zone. This arpt underlies a Military Operations Area (MOA). Pilots need to be aware of all restrictions and check for any NOTAMS in advance of flying through the MOA.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:****TUBA CITY (H) VORTAC** 113.5 TBC Chan 82 N36°07.28' W111°16.18' 100° 45.7 NM to fld. 4960/15E.**PRESCOTT****ERNEST A. LOVE FLD** (PRC) 7 N UTC-7 N34°39.27' W112°25.18'**PHOENIX**

5045 B S4 FUEL 100LL, JET A TPA-See Remarks Class I, ARFF Index A

H-41, L-8F

NOTAM FILE PRC


IAP, AD**RWY 03R-21L:** H7616X150 (ASPH-PFC) S-63, D-80, ST-101, DT-100 MIRL 1.0% up SW**RWY 03R:** REIL. PAPI(P4L)-GA 4.0° TCH 45'. Thld dsplcd 788'.

Road. Rgt tfc.

RWY 21L: MALSR. REIL. PAPI(P4L)-GA 3.0° TCH 45'. Rgt tfc.**RWY 03L-21R:** H4848X60 (ASPH) S-12.5 MIRL 0.8% up SW**RWY 03L:** PAPI(P2L)-GA 3.0° TCH 40'. Thld dsplcd 811'.**RWY 21R:** PAPI(P2L)-GA 3.0° TCH 40'. Rgt tfc.**RWY 12-30:** H4408X75 (ASPH) S-12.5 MIRL 0.6% up SE**RWY 12:** REIL. PAPI(P2L)-GA 3.0° TCH 48'. Thld dsplcd 150'.**RWY 30:** REIL. PAPI(P2L)-GA 3.0° TCH 40'.**LAND AND HOLD SHORT OPERATIONS**

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 21L	12-30	5150

AIRPORT REMARKS: Attended 1100-0700Z. Fuel avbl 1400-0400Z call 928-443-9333. After hrs avbl per advance request. Rwy 03L-21R CLOSED 0500-1300Z. Wildlife invof rws and twys. Acft departing Rwy 21L continue rwy heading until across highway and make immediate left turn. 20' drop off 300' from apch end Rwy 12. Rwy 21L designated calm wind rwy. Twy D1 restricted to acft 12,500 pounds or less. Overnight parking fee. Ldg fee for tran commercial acft 12,500 lbs or greater based upon maximum certificated ldg weight. TPA for light acft all rws 6045(1000). TPA for large acft, all turbo prop/jet and high performance acft all rws 6545(1500). Voluntary noise abatement procedures in effect-ctc arpt opr 928-771-1150. After 0500Z ACTIVATE MIRL Rwy 03R-21L-CTAF. ACTIVATE MIRL Rwy 12-30 frequency 128.75. NOTE: See Special Notices-Extensive Flight Training in the vicinity of Ernest A. Love Field, Prescott, AZ.

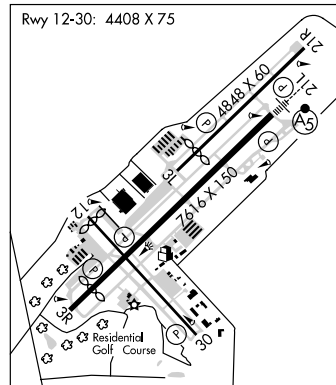WEATHER DATA SOURCES: ASOS (928)717-1287.**COMMUNICATIONS:** CTAF 125.3 ATIS 127.2 UNICOM 122.95**PRESCOTT RCO** 122.4 122.2 (PRESCOTT RADIO)**ALBUQUERQUE CENTER APP/DEP CON** 128.45**PRESCOTT TOWER** 125.3 (1300-0500Z) **GND CON** 121.7**AIRSPACE:** CLASS D svc (1300-0500Z) other times Class E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**DRAKE (H) VORTACW** 114.1 DRK Chan 88 N34°42.15' W112°28.82' 120° 4.2 NM to fld. 4963/14E.**ILS/DME** 108.5 I-PRC Chan 22 Rwy 21L. Class IA. **ILS/DME** unmonitored 0500-1300Z.**COMM/NAV/WEATHER REMARKS:** Ctc Prescott Radio for airport advisory service on 125.3 when twr is clsd.**ROBLES** N32°04.44' W111°21.62' NOTAM FILE PRC.**PHOENIX****NDB (MHW)** 220 RBJ 070° 10.2 NM to Ryan Fld.**L-5C****ROLLE AIRFIELD** (See SAN LUIS)**RYAN FLD** (See TUCSON)

SAFFORD RGNL (SAD) 3 E UTC-7 N32°51.20' W109°38.11'

PHOENIX

3179 B S2 FUEL 100LL, JET A, A1+ TPA-4179(1000) NOTAM FILE SAD

H-4J, L-5C
IAP

RWY 12-30: H6006X100 (ASPH) S-33 MIRL

RWY 12: PAPI(P2L)—GA 3.0° TCH 37'. Fence.

RWY 30: PAPI(P2L)—GA 3.0° TCH 36'.

RWY 08-26: H4800X75 (ASPH) S-23 MIRL 0.4% up E

RWY 08: PAPI(P2L). Fence. RWY 26: PAPI(P2L).

AIRPORT REMARKS: Attended Mon-Sat 1430-0030Z and Sun

1430-2230Z. Fuel avbl after hrs contact (928) 552-0543. Traffic
involvement agriculture strip 1 mile SW of arpt.

WEATHER DATA SOURCES: ASOS 124.175 (928) 428-5178.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 134.45


RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

SAN SIMON (H) VORTACW 115.4 SSO Chan 101 N32°16.16'

W109°15.79' 319° 39.7 NM to fld. 3600/13E. HIWAS.

• • • • •

HELIPAD H1: H72X72 (CONC) MIRL

**ST JOHNS INDUSTRIAL AIR PARK** (SJN) 1 N UTC-7 N34°31.11' W109°22.73'

PHOENIX

5737 B S2 FUEL 100LL, JET A, MOGAS TPA-6736(1000) NOTAM FILE SJN

H-4J, L-8H
IAP

RWY 14-32: H5322X75 (ASPH) S-90 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Pole.

RWY 32: REIL. PAPI(P2R)—GA 3.0° TCH 40'. Thld dsplcd 92'. Pole.

RWY 03-21: H3400X60 (ASPH) S-55 MIRL

RWY 03: Thld dsplcd 190'. Tree.

AIRPORT REMARKS: Attended 1400-0000Z. Rwy 03 200' gravel clear

area on S end of rwy. Twy parallel to Rwy 14-32 has reflectors
entire length of twy on both sides. Rwy 32 calm wind rwy.

WEATHER DATA SOURCES: ASOS 134.225 (928) 337-3061.

COMMUNICATIONS: CTAF/UNICOM 122.8


RCO 122.1R 112.3T (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

(H) VORTAC 112.3 SJN Chan 70 N34°25.44' W109°08.61'

284° 13.0 NM to fld. 6840/12E.

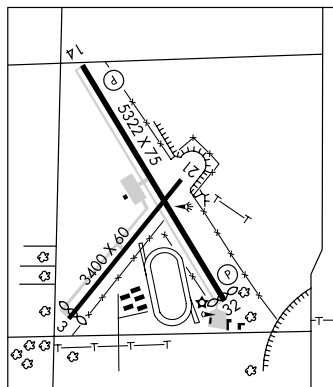**SAN CARLOS APACHE** (See GLOBE)**SAN LUIS****ROLLE AIRFIELD** (44A) 5 ENE UTC-7 N32°30.98' W114°41.90'

PHOENIX

163 NOTAM FILE PRC

RWY 17-35: H2800X60 (ASPH)

AIRPORT REMARKS: Unattended. Arpt unlgtd-frequent ngmt military flights conducted. Arpt fenced and

locked-inaccessible from ground. For access cto arpt manager 928-726-5882. Oil treated area surrounding
existing paved rwy is heavily rutted. Mil ops require prior permission. Call 928-726-5882 ext 156.

COMMUNICATIONS: CTAF 122.9

SAN MANUEL (E77) 2 NW UTC-7 N32°38.19' W110°38.84'

PHOENIX

3274 FUEL 100LL NOTAM FILE PRC

L-5C

RWY 11-29: H4200X75 (ASPH) S-12


RWY 29: Rgt t/c.

AIRPORT REMARKS: Unattended. Airport CLOSED 0300-1300Z daily.

Self svc fuel with credit card. Livestock on and invof arpt. Rwy 11 has 6' gully 300' from thld. Rwy 29 has 6' sloped drop off 90' right of centerline 165' from thld extending out to 325' from thld.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE TUS.**TUCSON (H) VORTACW** 116.0 TUS Chan 107 N32°05.71'

W110°54.89' 011° 35.1 NM to fld. 2672/12E. HIWAS.

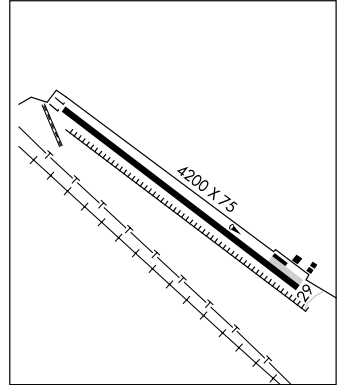**SAN SIMON** N32°16.16' W109°15.79' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 115.4 SSO Chan 101 319° 39.7 NM to Safford Rgnl. 3600/13E. HIWAS.

H-4J, L-5D

VORTAC unusable:

020°-050°beyond 30 NM below 8000'

150°-190°beyond 28 NM below 11,300'

190°-220°beyond 30 NM below 9000'

235°-250°beyond 30 NM below 9900'

350°-360°beyond 30 NM below 8000'.

SCOTTSDALE (SDL) 9 N UTC-7 N33°37.37' W111°54.63'

PHOENIX

1510 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE SDL

H-4I, L-5B, A

RWY 03-21: H8249X100 (ASPH) S-45, D-75, ST-95 MIRL

IAP, AD


RWY 03: REIL. PAPI(P2L)—GA 4.0° TCH 36'. Thld dsplcd 739'.

Road. 0.7% up.

RWY 21: REIL. PAPI(P2L)—GA 4.0° TCH 45'. Thld dsplcd 400'. Tree.

Rgt t/c. 0.9% down.

AIRPORT REMARKS: Attended 1200-0500Z. Coyotes occasionally crossing Rwy 03-21 and twys. Hawks invof Rwy 03-21. All military acft provide 24 hr advance notice prior to arrival, call arpt ops 480-312-8478. Rwy 03-21 and Twys A and B designed for acft with wingspan of 79' or less. Twy C limited to acft with wingspan less than 63 ft. Rwy 03-21 200' blast pad both ends. Access gates to industrial airpark limited to acft with wingspan less than 63 ft. Rwy 03-21 limited to acft not exceeding 75,000 pounds certificated maximum tkf weight dual wheel, 45,000 pounds certificated maximum tkf weight single wheel. Transient ldg fee for acft 12,500 pounds or greater (Based on maximum certificated tkf weight.) Transient overnight parking fee. U.S. Customs user fee arpt. Touch and go ldg permitted between 1300-0430Z only. No midfield departures on Rwy 03 or Rwy 21. Voluntary noise abatement curfew 0500-1300Z. Extremely noise sensitive areas all quadrants. For noise abatement information call 480-312-8478. No maintenance runups between 0500-1400Z. Rwy 03 preferred for calm wind and noise abatement. TPA-prop 2500(990) Jet 3000(1490) Helicopter 2000(490). When twr clsd ACTIVATE MIRL Rwy 03-21, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21—CTAF.

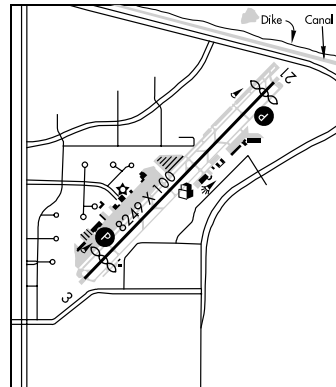**WEATHER DATA SOURCES:** ASOS (480) 483-3049. LAWRS.**COMMUNICATIONS:** CTAF 119.9 ATIS 118.6 (480) 998-5144.**PHOENIX RCO** 122.6 122.2 (PRESCOTT RADIO)® **PHOENIX APP/DEP CON** 120.7**TOWER** 119.9 (1300-0400Z) **GND CON** 121.6 **CLNC DEL** 124.8**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N33°25.98' W111°58.21' 003° 11.8 NM to fld.

1182/12E. HIWAS.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

SEDONA (SEZ) 2 SW UTC-7 N34°50.92' W111°47.31'

4830 B S2 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE SEZ

RWY 03-21: H5132X100 (ASPH) S-15, D-30 MIRL 1.8% up NE

RWY 03: REIL. PAPI(P4L)—GA 3.5° TCH 46'.

RWY 21: REIL. PAPI(P4L)—GA 3.5° TCH 46'.

AIRPORT REMARKS: Attended May-Sep 1400-0100Z, Oct-Apr 1500-000Z. Turbulence may be experienced in/ovf arpt. When Idg Rwy 21, during strong southwest wind conditions, strong down drafts are very probable northeast of apch end of Rwy 21. Helicopter ops restricted to helipads adjacent to twy intersection A7 SW main terminal building. Helicopter operating from private helipads S and W of Rwy 03-21. No touch and go Idgs noise sensitive area. Noise sensitive area avoid scenic flights bto 6500' MSL. Overnight transient fee for all users. Landing fee for turbine acft without fuel purchase. TPA—prop 6003(1173) Jet 7003(2173). ACTIVATE MIRL Rwy 03-21, REIL Rwy 03 and REIL Rwy 21—CTAF. PAPI Rwy 03 and PAPI Rwy 21 opr continuously.

WEATHER DATA SOURCES: AWOS-2 118.525 (928) 282-1993.

COMMUNICATIONS: CTAF/UNICOM 123.0


MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

® ALBUQUERQUE APP/DEP CON 124.5

RADIO AIDS TO NAVIGATION: NOTAM FILE FLG.

FLAGSTAFF (H) VOR/DME 113.85 FLG Chan 85(Y) N35°08.83' W111°40.45' 184° 18.8 NM to fld.
7026/14E.

.....
HELIPAD H1: H50X50 (CONC)

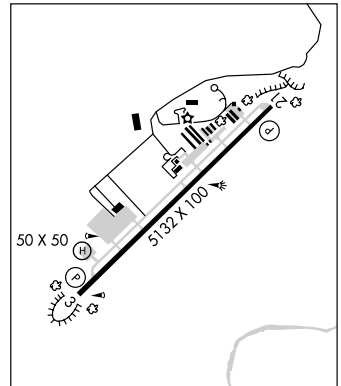

PHOENIX

H-41, L-86

IAP

SELIGMAN (P23) 1 NW UTC-7 N35°20.10' W112°53.18'

5235 B NOTAM FILE PRC

RWY 04-22: H4800X75 (ASPH) MIRL

RWY 04: REIL. PAPI(P2L)—GA 3.0°. Fence.

RWY 22: REIL. PAPI(P2L)—GA 3.0°. Rgt tfc.

AIRPORT REMARKS: Unattended. Drainage channel both sides full length of Rwy 04-22, varies in width and depth.

Drainage channel 65' wide, 4-10' deep located 200-265' from AER 22. ACTIVATE MIRL Rwy 04-22 REIL Rwy 04 and Rwy 22 7-clicks—CTAF. PAPI Rwy 04 and Rwy 22 opr dalgt hrs, at night ACTIVATED on CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PEACH SPRINGS (H) VORTACW 112.0 PGS Chan 57 N35°37.48' W113°32.67' 103° 36.6 NM to fld.
4760/15E. HIWAS.

SELLS (E78) 2 NW UTC-7 N31°55.96' W111°53.66'

2409 NOTAM FILE PRC

RWY 04-22: H5830X60 (ASPH) S-12.5


RWY 04: Trees. RWY 22: Trees.

AIRPORT REMARKS: Unattended. Rwy 04-22 width 60' in some areas narrower due to bushes growing thru pavement. Livestock on and in/ovf arpt. Rwy 04-22 15' to 18' trees and brush in primary sfc entire length of rwy. Rwy 04-22 3' ditches along rwy edges. Rwy 04-22 marked with 6" yellow centerline stripe only, markings faded. No rwy numbers.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 247° 50.9 NM to fld. 2672/12E. HIWAS.

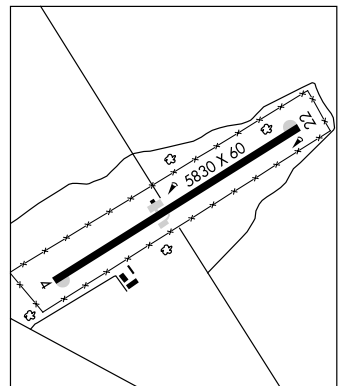

PHOENIX

H-41, L-5B

SHOW LOW RGNL (SOW) 2 E UTC-7 N34°15.93' W110°00.34'

PHOENIX

6415 B S2 FUEL 100LL, JET A TPA-7215(800) Class III, ARFF Index A
NOTAM FILE SOW

H-41, L-5C, 8G
IAP

RWY 06-24: H7200X100 (ASPH) S-35 D-60 MIRL

RWY 06: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Thld dsplcd 700'. Pole.

RWY 24: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 750'. Rgt tfc.

RWY 03-21: H3937X60 (ASPH) 0.3% up SW

RWY 03: Rgt tfc.

AIRPORT REMARKS: Attended Apr-Sep 1300-0300Z, Oct-Mar 1400-0200Z. Self-service fuel avbl 24/7. Military tfc invof arpt. Simultaneous ops Rwy 21 and Rwy 24 prohibited. Rwy 06-24 and Rwy 03-21 not connected by pavement at AER 21. Overnight transient fees and commercial opr ldg fees applicable. ACTIVATE MIRL Rwy 06-24-123.0.

WEATHER DATA SOURCES: AWOS-3 118.075 (928) 532-0379.


COMMUNICATIONS: CTAF/UNICOM 123.0

ALBUQUERQUE CENTER APP/DEP CON 132.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'
W109°08.61' 246° 43.9 NM to fld. 6840/12E.

NDB (MHW) 206 SOW N34°16.04' W110°00.49' at fld. NOTAM FILE SOW.

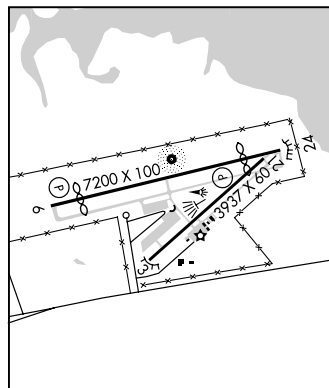**SIERRA VISTA MUNI-LIBBY AAF** (See FORT HUACHUCA-SIERRA VISTA)**SPRINGERVILLE MUNI** (D68) 1 W UTC-7 N34°07.77' W109°18.65'

PHOENIX

7055 B FUEL 100LL, JET A NOTAM FILE PRC

H-41, L-5D
IAP

RWY 03-21: H8422X75 (ASPH) S-30 MIRL

RWY 03: PAPI(P2L)—GA 4.0° TCH 35'. Fence. 0.4% down.

RWY 21: PAPI(P2L)—GA 3.0° TCH 35'. Fence. Rgt tfc. 0.6% up.

RWY 11-29: H4603X60 (ASPH) MIRL

RWY 11: PAPI (P2L)—GA 3.0° TCH 35'.

RWY 29: PAPI (P2L)—GA 3.0° TCH 35'.

AIRPORT REMARKS: Attended Oct-May 1500-0000Z, Jun-Sep 1400-0100Z. For fuel after hrs call 928-245-0151. Wildlife on and invof arpt. ACTIVATE MIRL Rwy 03-21 and Rwy 11-29-CTAF. PAPIs Rwy 03, Rwy 21, and Rwy 11, Rwy 29 on during daylight hrs, after dusk ACTIVATE-CTAF.


WEATHER DATA SOURCES: AWOS-3 119.65 (928) 333-5716.

COMMUNICATIONS: CTAF/UNICOM 122.8

® **ALBUQUERQUE CENTER APP/DEP CON** 132.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'
W109°08.61' 193° 19.5 NM to fld. 6840/12E.

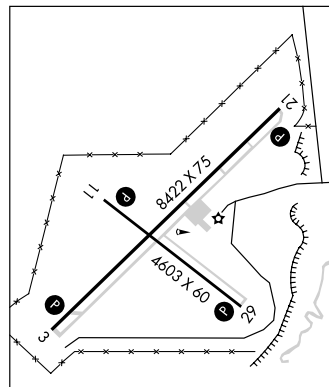**STANFIELD** N32°53.15' W111°54.52' NOTAM FILE PRC.

PHOENIX

(H) VORTAC 114.8 TFD Chan 95 048° 8.3 NM to Casa Grande Muni. 1316/12E.

H-41, L-5B, A

RCO 122.1R 114.8T (PRESCOTT RADIO)

STELLAR AIRPARK (See CHANDLER)**SUN VALLEY** (See BULLHEAD CITY)

SUPERIOR MUNI (E81) 2 SW UTC-7 N33°16.67' W111°07.62'

PHOENIX

2646 NOTAM FILE PRC

RWY 04-22: 3250X75 (GRVL)

RWY 04: Brush.

RWY 22: Tree.

AIRPORT REMARKS: Unattended. Emerg phone 520-689-5254 (Police). Arpt manager recommends ldg uphill to the NE. Rwy 04-22 loose gravel, large rocks and 1-2' weeds on rwy sfc. Rwy 04-22 has brush and trees to a height of 12' on both sides of rwy. Mountain 4375' MSL located 9000' W of Rwy 04. Livestock on and invof arpt.

Obstructions brush NE rwy, terrain and smelter stacks NE, hills and mountain SSW through SW of arpt.

COMMUNICATIONS: CTAF/UNICOM 122.95

TAYLOR (TYL) 2 SW UTC-7 N34°27.16' W110°06.90'

PHOENIX

5823 B S2 **FUEL** 100LL NOTAM FILE PRC

H-4J, L-86

RWY 03-21: H7000X75 (ASPH) MIRL 1.5% up SW

IAP

RWY 03: REIL. PAPI(P2L)-GA 4.0° TCH 36'. Pole.

RWY 21: REIL. PAPI(P2L)-GA 3.0° TCH 20'.

AIRPORT REMARKS: Attended Mon-Fri daltg hrs. +75' trees 450' east of rwy centerline. Arpt bcn not visible ENE to ESE due to trees. For FBO ctc 928-536-4811. Trees and brush in primary surface NW side of rwy 130'-250' from centerline. Rwy 03 right side REIL OTS indef. Rwy 21 REIL OTS indef. ACTIVATE MIRL Rwy 03-21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.075 (928) 536-2609.


COMMUNICATIONS: CTAF/UNICOM 122.7

® **ALBUQUERQUE CENTER APP/DEP CON** 132.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 260° 48.2 NM to fld. 6840/12E.



TEMPLE BAR (U30) 1 SW UTC-7 N36°01.23' W114°20.10'

LAS VEGAS

1549 NOTAM FILE PRC

L-7E

RWY 18-36: H3500X50 (ASPH) S-10

RWY 18: Rgt t/c.

RWY 36: P-line.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. Be alert for loose rock on north turn-a-round. Be alert to pavement washed out to a depth of 6-8 inches under east tiedown cable. Rwy 18-36 20' berm 180' west along full length of rwy. Rwy 18-36 grass growing through numerous cracks east 10' of rwy. Ldg is recommended uphill to the S. Do not use tie down area as parallel twy, back taxi on rwy.


COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BOULDER CITY (H) VORTACW 116.7 BLD Chan 114 N35°59.75'

W114°51.82' 072° 25.8 NM to fld. 3650/15E. HIWAS.

COMM/NAV/WEATHER REMARKS: Call 122.8 for transportation.

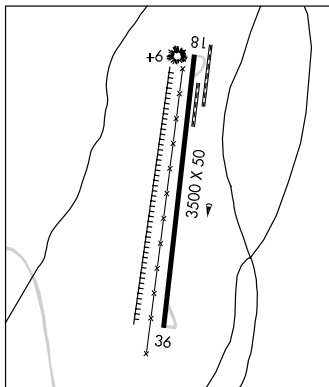

TOMBSTONE MUNI (P29) 3 SE UTC-7 N31°40.28' W110°01.29'

PHOENIX

4743 NOTAM FILE PRC

L-5C

RWY 06-24: H4430X60 (ASPH)

RWY 06: Brush.

RWY 24: Brush.

AIRPORT REMARKS: Unattended. Numerous trees and bushes between 1 and 15' in height within primary surface. Rwy 06-24 has 2-4' vegetation along both sides of rwy.

COMMUNICATIONS: CTAF 122.9

TUBA CITY (T03) 5W UTC-7 N36°05.56' W111°22.99'

LAS VEGAS

4513 B NOTAM FILE PRC

H-41, L-86

RWY 15-33: H6230X75 (ASPH) S-12.5 MIRL

RWY 15: PAPI(P2L)—GA 3.0° TCH 40'. Thld dspcd 1520'. Hill.

RWY 33: PAPI(P2L)—GA 3.0° TCH 40'. Brush.


AIRPORT REMARKS: Unattended. Rwy 15-33 very uneven and cracked rwy pavement first 1520' when ldg to south. Rwy 15-33 S half of rwy centerline missing. Livestock on airport. PAPI Rwy 15 OTS indef. For gate entry call Indian Health Svc, Tuba City 928-283-2827.

COMMUNICATIONS: CTAF 122.9

RCO 122.05R 113.5T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

(H) VORTAC 113.5 TBC Chan 82 N36°07.28' W111°16.18' 238° 5.8 NM to fld. 4960/15E.

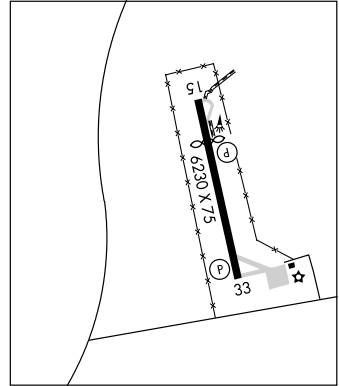

TUCSON

MARANA RGNL (AVQ) 15 NW UTC-7 N32°24.57' W111°13.10'

PHOENIX

2031 B S3 **FUEL** 100LL, JET A OX 3 NOTAM FILE PRC

H-41, L-5C

RWY 12-30: H6901X100 (ASPH) S-75, D-100, ST-160, DT-300 MIRL 0.3% up SE.

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 44'.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road. Rgt tfc.

RWY 03-21: H3892X75 (ASPH) S-75, D-100, ST-135, DT-150 MIRL

RWY 03: PAPI(P2L)—GA 3.0° TCH 53'. Thld dspcd 494'. Rgt tfc.

RWY 21: PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1400-0030Z. Fuel avbl after hrs call 520-730-4318. Parachute Jumping. Aerobatic activities 3 miles SE and 6 miles SW of arpt, surface -5000' MSL dalgt hours indefinitely. Extensive parachute training high and low levels all hours NW quadrant of arpt. Helicopters are not authorized to land at the self fuel island. All helicopters must land at the helipad at the SE side of the field. Rwy 12 calm wind rwy. ACTIVATE MIRL Rwy 03-21 and Rwy 12-30, REIL Rwy 12 and Rwy 30—CTAF. PAPI Rwy 03, Rwy 21, Rwy 12 and Rwy 30 opr continuously. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.

WEATHER DATA SOURCES: AWOS-3 118.375 (520) 682-4104.

COMMUNICATIONS: CTAF/UNICOM 123.0


(R) TUCSON APP/DEP CON 119.4

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 309° 24.3 NM to fld. 2672/12E.

HIWAS.

NDB (HW) 245 AVQ N32°24.71' W111°12.94' at fld. NOTAM FILE PRC.

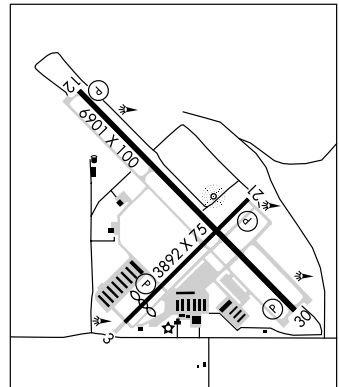

RYAN FLD (RYN) 10 SW UTC-7 N32°08.53' W111°10.48'

2417 B S4 **FUEL** 100LL, JET A TPA-3217(800) NOTAM FILE PRC

RWY 06R-24L: H5500X75 (ASPH) S-12.5, D-30 MRL

RWY 06R: REIL. **RWY 24L:** VASI(V4L)—GA 3.0° TCH 26'.

RWY 06L-24R: H4900X75 (ASPH) S-12.5, D-30

RWY 06L: Tree.

RWY 15-33: H4000X75 (ASPH) 0.8% up S

RWY 15: Tree.

AIRPORT REMARKS: Attended 1430-2230Z. Self svc fuel avbl 24 hrs.

Rwy 06L-24R CLOSED between SS-SR. Rwy 15-33 CLOSED between SS-SR. Frequent practice of ILS approaches to Rwy 06R. Rwy 06R and Rwy 06L preferential rwy up to 10 knot tailwind.

Afternoon winds usually favor Rwy 24L and Rwy 24R. Use landing lights in pattern. When twr clsd ACTIVATE MRL Rwy 06R-24L—CTAF. VASI Rwy 24L opr continuously. REIL Rwy 06R opr dalgt hrs only. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.

WEATHER DATA SOURCES: AWOS-3 133.35 (520) 578-0269. HIWAS 116.0 TUS.

COMMUNICATIONS: CTAF 125.8

® **TUCSON APP/DEP CON** 128.5

TOWER 125.8 120.35 Arr N. (1300-0300Z) **GND CON** 118.2

AIRSPACE: CLASS D svc 1300-0300Z other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 270° 13.5 NM to fld. 2672/12E.

HIWAS.

NDB (HW) 338 RYN N32°08.30' W111°09.69' at fld. NOTAM FILE PRC. Unmonitored. NDB unusable 025°-050° byd 25 NM blo 14,500'.

ILS 111.1 I-IVI Rwy 06R.

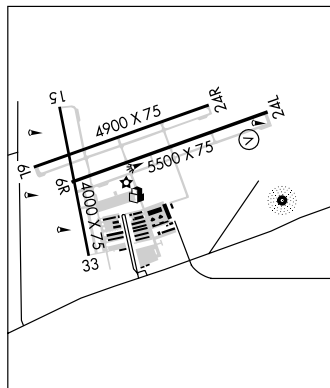

PHOENIX
H-41, L-5C
IAP, AD

TUCSON INTL (TUS) 6 S UTC-7 N32°06.97' W110°56.46'

2643 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks

AOE Class I, ARFF Index C NOTAM FILE TUS

RWY 11L-29R: H10996X150 (ASPH-GRVD) S-160, D-200, ST-175, DT-350, DDT-585 HIRL

RWY 11L: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. 0.7% up.

RWY 29R: REIL. PAPI (P4L)—GA 3.0° TCH 76'. Ground. 0.5% down.

RWY 11R-29L: H8408X75 (ASPH) S-120, D-140, ST-175, DT-220 MIRL

RWY 11R: PAPI(P4L)—GA 3.0°. Thld dspcd 1410'. Rgt tfc. 0.7% up.

RWY 29L: REIL. Pole. 0.6% down.

RWY 03-21: H7000X150 (ASPH-GRVD) S-105, D-137, ST-174, DT-230, DDT-500 MIRL

RWY 03: Thld dspcd 841'. Railroad. Arresting device.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 55'. Rgt tfc. Arresting device.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-7000 TODA-7000 ASDA-7000 LDA-6160

RWY 21: TORA-6000 TODA-7000 ASDA-6000 LDA-6000

ARRESTING GEAR/SYSTEM

RWY 03 ←E5 (403')

RWY 11L → BAK-12B (1220' OVRN)

BAK-14 BAK-12B(B) (1000')

BAK-14 BAK-12B(B) (1215') BAK-12B(B) (128'OVRN) **RWY 29R**

AIRPORT REMARKS: Attended continuously. Air carriers use Rwy 11L-29R. Rwy 11R-29L rstd to acft with wing span less than 73' and ldg speed less than 120 kt. Acft dep Rwy 11R required to attain at least 400'AGL prior to starting turn. No B-747 training except PPR; no flight training 0500-1300Z except PPR, call Flightline Office 520-573-8128. Rwy 11L-29R gross weight limit: DC-10-10 315,000 lbs, DC-10-30/40 400,000 lbs, L-1011-1 325,000 lbs, L-1011-100/200 340,000 lbs. Rwy 03-21 gross weight limit: DC-10-10 300,000 lbs DC-10-30/40 375,000 lbs, L-1011-01 310,000 lbs, L-1011-100/200 315,000 lbs. TPA-3443 (800) small acft, 4043 (1400) large/heavy turbojet acft. B-747 acft taxi with inboard engines only. Rwy 11L touchdown runway visual range avbl. Twy T-general aviation twy 30,000 lbs. or less. Twy C from Twy A5 to Twy A8 and from Twy A8 to Twy A13 clsd to fixed wing acft. Portions of Twy D not visible from twr due to hangars. REIL Rwy 29L and Rwy 29R dalgt hrs only. Ldg fee. Flight Notification Service (ADCUS) avbl. Note: See Special Notices—Glider and Aerobatic Operations Northwest of Tucson, Arizona.

WEATHER DATA SOURCES: ASOS (520) 889-7236. HIWAS 116.0 TUS. LLWAS.

COMMUNICATIONS: ATIS 123.8 (520) 741-1177 UNICOM 122.95

TUCSON RCO 122.2 (PRESCOTT RADIO)

MOUNT LEMMON RCO 122.4 (PRESCOTT RADIO)

Ⓡ **APP/DEP CON** 125.1 (Rwy 11 090°-285°) (Rwy 29 275°-065°) 119.4 (Rwy 11 286°-089°) (Rwy 29 066°-274°)

TOWER 118.3 119.0 **GND CON** 124.4 **CLNC DEL** 126.65

AIRSPACE: CLASS C svc ctc **APP CON**

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

(H) **VORTACW** 116.0 TUS Chan 107 N32°05.71' W110°54.89' 301° 1.8 NM to fld. 2672/12E. **HIWAS.**

VORTAC unusable:


050°-080° beyond 30 NM below 13,000'

350°-020° beyond 30 NM below 13,000'

DME unusable:

155°-165° byd 35 NM blo 13,000'.

ILS/DME 111.7 I-TUS Chan 54 Rwy 11L. LOC back course unusable byd 15 NM blo 7,200'. Back course unusable byd 10° right of course.

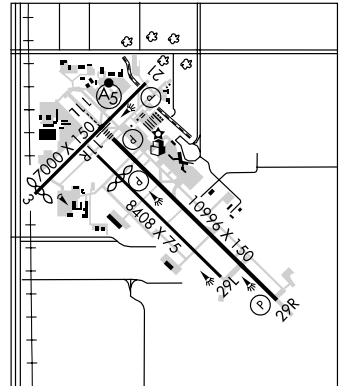

VALLE See (GRAND CANYON)

WHITERIVER (E24) 1 SW UTC-7 N33°48.64' W109°59.14'

PHOENIX

5153 B NOTAM FILE PRC

H-41, L-5C

RWY 01-19: H6350X75 (ASPH) S-16 MIRL

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 19: REIL. Thld dspcd 250'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 01: TORA-6100 TODA-6350 ASDA-6100 LDA-6100

RWY 19: TORA-6350 TODA-6350 ASDA-6350 LDA-6100

AIRPORT REMARKS: Attended April-Oct, Mon-Fri, 1400-0030Z and Nov-Mar, Mon-Fri 1500-2330Z. Watch for joggers on arpt. Mountains all quadrants. Heavy canyon winds. Heavy fire suppression work Mar-Oct.


COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 217° 55.8 NM to fld. 6840/12E.

COMM/NAV/WEATHER REMARKS: UNICOM monitored by USDOL during fire season only May-August.

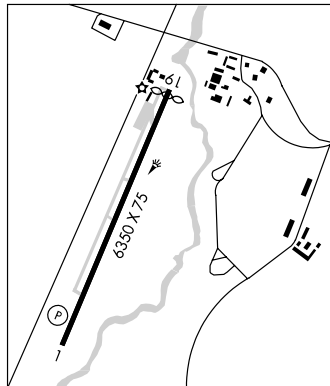

WHITMORE

GRAND CANYON BAR TEN AIRSTRIP (1Z1) 60 SE UTC-7 N36°15.39' W113°13.85'

LAS VEGAS

4100 FUEL JET A NOTAM FILE PRC

RWY 16-34: 4600X40 (DIRT)

RWY 16: Hill. **RWY 34:** Hill.

AIRPORT REMARKS: Attended May-Oct dalgt hrs. Nov-Apr unattended. For arpt information ctc arpt manager 435-628-4010. Watch for livestock on rwy. Rwy 16 first 2500' paved with chip seal. Ldg fee.

COMMUNICATIONS: CTAF 122.9

WICKENBURG MUNI (E25) 3 W UTC-7 N33°58.24' W112°47.71'

PHOENIX

2377 B S2 FUEL 100LL, JET A TPA-3377(1000) NOTAM FILE PRC

H-41, L-5B, 8F, A

RWY 05-23: H6100X75 (ASPH) S-16 MIRL 1.0% up SW

RWY 05: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Ground.

RWY 23: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended 1500-0000Z. After hrs ctc 928-684-4926. Self-fueling avbl 24 hrs. Jet A also avbl by truck. ACTIVATE MIRL Rwy 05-23 REIL Rwy 05, REIL Rwy 23 and twy lgts—CTAF. PAPI Rwy 05 and PAPI Rwy 23 on from dawn to dusk. ACTIVATE PAPI Rwy 05 and PAPI Rwy 23 dusk-dawn—CTAF.


WEATHER DATA SOURCES: AWOS-3 121.375 (928) 684-2487.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

BUCKEYE (L) VORTAC 110.6 BXX Chan 43 N33°27.21'

W112°49.48' 349° 31.0 NM to fld. 1060/14E.

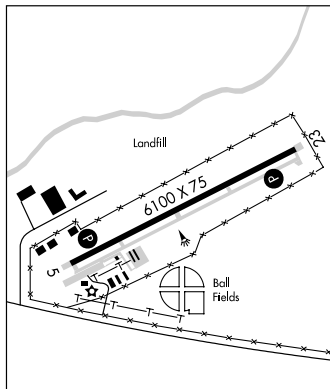

COCHISE CO

AIRPORT REMARKS: Attended 1500-0000Z, CLOSED holidays. Runway 21 two thld lgts broken, three runway lgts missing. Parallel twy to Rwy 03-21 in failed condition. Twy condition poor. Large cracks in apron. Preferred calm wind Rwy 21.

ALBUQUERQUE CENTER APP/DEP CON 134.45

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

VORTAC unusable:


220°-240° byd 25 NM blo 9.200'

VOR unusable:

205°–220° byd 30 NM blo 9,000'

DME unusable:

190°–220° byd 30 NM blo 9.000'

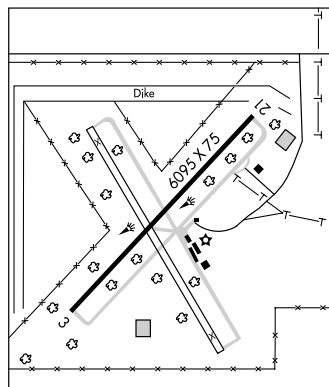

PHOENIX
H-4J, L-5C
IAP

H. A. CLARK MEM FLD

6680 B NOTAM FILE PRC

RWY 18-36: H5992X100 (ASPH) MIRL

RWY 18: REIL. PAPI(P2L)—GA 3.0 TCH 40'. Tree.

RWY 36: REIL. PAPI(P2L)—GA 3.0 TCH 40'. Rock.

AIRPORT REMARKS: Attended 1400–0200Z. Retro reflectors on parallel twy. ACTIVATE MIRL Rwy 18–36, PAPI Rwy 18 and Rwy 36, REIL Rwy 18 and Rwy 36—CTAF.


WEATHER DATA SOURCES: AWOS-3 121.125 (928) 635-1278.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE FLG.

FLAGSTAFF (H) VOR/DME 113.85 FLG Chan 85(Y) N35°08.83'
W111°40.45' 276° 27.3 NM to fld. 7026/14E.

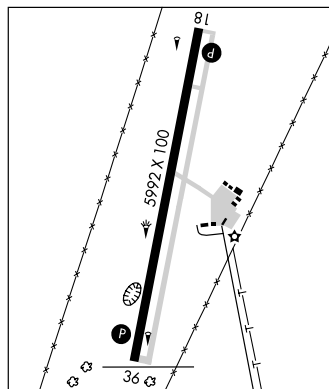

PHOENIX
H-4I, L-8F

WILLIE N33°18.19' W111°39.09' NOTAM FILE IWA.

(L) VORTACW 113.3 IWA Chan 80 at Phoenix-Mesa Gateway. 1370/13E. HIWAS.

VOR unusable:

320°–300° byd 20 NM blo 7.500'

300°–320° byd 25 NM blo 7.500'

DME unusable:

020°-055° byd 30 NM blo 12.000'.

PHOENIX
H-4I. L-5B

WINDOW ROCK (RQE) 1 S UTC-7 N35°39.12' W109°04.04'

6742 B NOTAM FILE RQE

RWY 02-20: H7000X75 (ASPH) S-30, D-45, DT-75 MIRL 0.6% up NE

RWY 02: REIL. PAPI(P2L)—GA 3.0° TCH 36'. Hill.

RWY 20: Trees. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Twys and ramp clsd to Gulf Stream acft 2, 3, 4, and 5. ACTIVATE MIRL Rwy 02-20 and REIL Rwy 02—CTAF.

WEATHER DATA SOURCES: ASOS 118.325 (928) 871-3421.**COMMUNICATIONS:** CTAF/UNICOM 122.8


KAYENTA RCO 122.45 (PRESCOTT RADIO)

① ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE GUP.

GALLUP (H) VORTAC 115.1 GUP Chan 98 N35°28.56'

W108°52.36' 304° 14.2 NM to fld. 7053/14E.

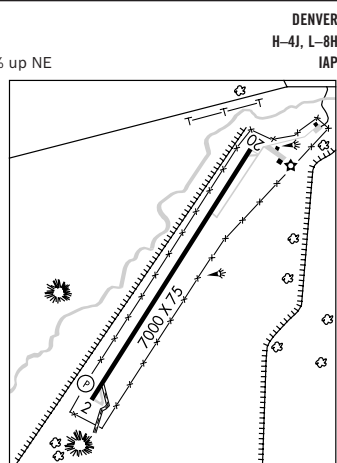

DENVER

H-41, L-8H

IAP

WINSLOW-LINDBERGH RGNL (INW) 1 W UTC-7 N35°01.32' W110°43.35'

4941 B S2 FUEL 100LL, JET A TPA-5941(1000) NOTAM FILE INW

RWY 04-22: H7499X150 (ASPH) S-50, D-80, ST-102, DT-125 MIRL 0.8% up SW

RWY 04: Pole.

RWY 22: REIL. VASI(V4L)—GA 3.0° TCH 26'. Thld dsplcd 1262'.

Poles.

RWY 11-29: H7100X150 (ASPH) S-60, D-70, ST-89, DT-110

MIRL 0.4% up NW

RWY 11: REIL. VASI(V4L)—GA 3.0° TCH 40'. Tree. Rgt tfc.

RWY 29: VASI(V4L)—GA 3.0° TCH 26'. Thld dsplcd 385'. Tower.

AIRPORT REMARKS: Attended 1400-0100Z. Rwy 11 end marked by NSTD painting and lighting. Dsplcd thlds Rwy 22 and Rwy 29 are marked by NSTD painting and lighting. Southwest corner of Forest Service ramp clsd. ACTIVATE MIRL Rwy 04-22 and Rwy 11-29, REIL Rwy 11 and Rwy 22—CTAF. VASI Rwy 22, Rwy 11 and Rwy 29 opr continuously. Landing fee for commercial aircraft. Overnight tiedown fee.

WEATHER DATA SOURCES: ASOS 118.875 (928) 289-0134. HIWAS 112.6 INW.


COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.6 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 124.5

AIRSPACE: CLASS E svc 1100-0600Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE INW.


(H) VORTACW 112.6 INW Chan 73 N35°03.70' W110°47.70' 110° 4.3 NM to fld. 4910/14E. HIWAS.

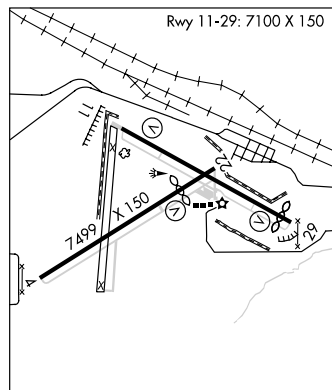

PHOENIX

H-41, L-8G

IAP

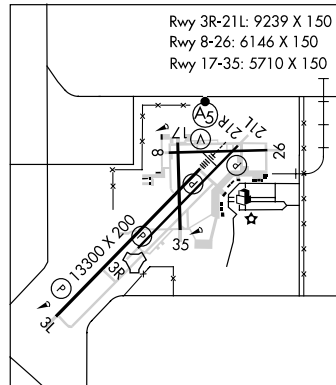YUMA MCAS—YUMA INTL (NYL)(KNYL) CIV/MIL 3 S UTC-7 N32°39.40' W114°36.36'**PHOENIX**213 B S2 FUEL 100, JET A OX 1, 2, 3, 4 TPA—See Remarks AOE Class I, ARFF Index A H-41, L-SA
NOTAM FILE NYL IAP, DIAP, AD**RWY 03L-21R:** H13300X200 (CONC) S-103, D-200, DT-400 PCN 72 R/B/W/T HIRL**RWY 03L:** PAPI(P4L). Rgt tfc. **RWY 21R:** MALSR. PAPI(P4L).**RWY 03R-21L:** H9239X150 (ASPH-CONC) S-162, D-200, DT-400
PCN 52 F/B/W/T HIRL**RWY 03R:** PAPI (P4L). Antenna. Rgt tfc.**RWY 21L:** PAPI(P4L). Road.**RWY 08-26:** H6146X150 (ASPH-CONC) S-63, D-137, DT-206 PCN
38 F/B/W/T HIRL**RWY 08:** Road. Rgt tfc. **RWY 26:** Road.**RWY 17-35:** H5710X150 (ASPH-CONC) S-72, D-171, DT-255 PCN
27 F/B/W/T HIRL**RWY 17:** VASI(V4L)—GA 3.0° TCH 40'. Tree. Rgt tfc.**RWY 35:** REIL. Brush.**ARRESTING GEAR/SYSTEM****RWY 03L** HOOK E28(B) (3495') **HOOK E28(B)** (1698') **RWY 21R****RWY 03R** HOOK E28(B) (2725') **HOOK E28(B)** (1675') **RWY 21L****MILITARY SERVICE:** JASU 1(NC-10) 1(NCPP-105) **FUEL** J5(Mil) Avbl on
request for shipbound acft. J8(MIL) (NC-100, A) (1330-0130Z,
other times 30 min prior notice, svc fee \$50, C928-726-1116)
(NC-100). **FLUID LOX** LHNT LPOX **OIL** O-156 **TRAN ALERT**Extremely limited tran svc/parking/ transportation, no maintenance mil acft. Local mil fit prohibited from tran
line Sat, Sun and holidays without specific approval Station Commander. Tran svc avbl Mon-Fri 1430-0530Z,
Sat 1500-2300Z, no tran svc Sun and holiday.**AIRPORT REMARKS:** Attended 1100-0800Z. Fuel on call 24 hours. CAUTION: Extensive jet training operations, exercise
increased vigilance. Heavy bird migration Nov thru Mar. Mandatory all general aviation and air carrier acft opr
VFR enter arpt tfc area at 1200' MSL when assigned Rwy 08-26 or Rwy 17-35. All acft avoid overflit Mexican
border 7 NM W of arpt. Tfc patterns for Rwys 03L/R and 21R/L overlap tfc patterns for Rwys 08-26 and 17-35.
TPA Rwys 08-26 and 17-35 1200(984). TPA Rwys 03L/R and 21R/L 1700(1484). TPA for civil turbo-jet acft
assigned Rwy 03L/R or 21R/L 1700(1487), initial altitude 3500' 6 NM, TPA helicopters 700(487). Helicopters
required to enter arpt tfc area at TPA—1200(987), then descend to 700' prior to all rwys. Mandatory all
departing general aviation and air carrier acft opr VFR fly rwy heading after departure and maintain 1200' MSL
until outside arpt tfc area unless otherwise approved by tower. Extensive military jet opr from 4000-3000' MSL
descending to 1700' MSL within 6 NM SW straight-in Rwys 03L/R and within 6 NM NE straight-in Rwy 21R/L.
Ambulances operating between 0500-1300Z needing ground access etc Civil Airport Authority C928-941-2396
or 376-5868. When twr clsd, ACTIVATE HIRL Rwy 08-26 and Rwy 17-35 and Twys A, A1, A2, B, C, L, and
Z—CTAF. Flight Notification Service (ADCUS) available. U.S. Customs port of entry contact 928-344-9572. Civil
arpt ops contact 928-726-5882 x 160.**MILITARY REMARKS:** Opr Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z, CLOSED holidays. See FLIP AP/1,
Supplementary Arpt Information. Military arpt ops-928-269-2325. RSTD Flt clnc manned during mil opr hr DSN
269-2326/2323/2077. C928-269-2326/2323/2077. PPR all transient acft, 24 hr prior notice. DSN
269-2445/2760, C928-269-2445/2760. AV8B vertical/short take-off and landing to Rwy 03-21 may have
priority Mon-Fri over military multiple practice apch.**COMMUNICATIONS:** CTAF 119.3 ATIS 118.8 273.2 (Mon-Fri 1430-0530Z, Sat 1500-2300Z, no Sun, no holiday.
Other times by NOTAM). **UNICOM** 122.95**YUMA RCD** 122.6 (SAN DIEGO RADIO)**YUMA RCD** 122.2 (PRESCOTT RADIO)① **APP CON** 124.7 **DEP CON** 125.55 281.0**TOWER** 119.3 382.8 361.2 (Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z. CLOSED holiday. **GND CON** 121.9 315.7**CLNC DEL** 118.0 336.4**COMD POST** 337.9 **PMSV METRO** 120.725 349.9**VFR ADVSY SVC** 124.7 (1400-0600Z, other times check NOTAMS).**AIRSPACE:** CLASS D svc (Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z. CLOSED holiday. Other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SAN.**BARD (H) VORTAC** 116.8 BZA Chan 115 N32°46.09' W114°36.17' 167° 6.7 NM to fld. 130/14E.**(L) TACAN** Chan 84 NYL (113.7) N32°38.81' W114°36.81' at fld. 193/14E.**ILS** 108.3 I-YUM Rwy 21R. Class IE. Localizer unusable byd 25° east and byd 25° west of localizer
course.**ASR/PAR****COMM/NAV/WEATHER REMARKS:** Radar see Terminal FLIP for Radar Minima.**YUMA PROVING GROUND** (See LAGUNA AAF)

ABETA N40°57.88' W124°05.92' NOTAM FILE ACV.

KLAMATH FALLS

NDB (LMM) 233 CV at Arcata.

L-21

Unusable: 005°-100° byd 10 NM

100°-155° byd 5 NM

155°-170° byd 10 NM

ADIN (A26) 1 SW UTC-8(-7DT) N41°11.19' W120°57.26'

KLAMATH FALLS

4229 TPA-5029(800) NOTAM FILE RIU

RWY 09-27: H2850X40 (ASPH) S-12**RWY 27:** Thld dsplcd 286'. Road.**AIRPORT REMARKS:** Unattended. Rwy 09-27 severe cracks in pavement.**COMMUNICATIONS:** CTAF 122.9**AGUA CALIENTE** (L54) 1 NE UTC-8(-7DT) N32°57.34' W116°17.66'

LOS ANGELES

1220 TPA-2020(800) NOTAM FILE SAN

RWY 11-29: H2500X60 (ASPH-ASFC) S-12**RWY 11:** Mountain.**RWY 29:** Rgt tfc.**AIRPORT REMARKS:** Unattended. Wind permitting, use of Rwy 29 for landing and Rwy 11 for dep recommended due to 460' hill ½ mile west of arpt. Rwy cracking with some pavement breakup adjacent to cracks.**COMMUNICATIONS:** CTAF 122.9**AGUA DULCE** (L70) 2 E UTC-8(-7DT) N34°30.15' W118°18.88'


LOS ANGELES

2660 **FUEL** 100LL TPA-3460(800) NOTAM FILE RAL

L-3E, 46, 7B

RWY 04-22: H4600X50 (ASPH)**RWY 04:** Thld dsplcd 580'. Building.**RWY 22:** Thld dsplcd 838'. Fence. Rgt tfc.**AIRPORT REMARKS:** Attended 1600-0200Z+. Arpt unattended Christmas Day, Thanksgiving Day and New Years Day. Fuel is self svc. Arpt CLOSED SS-SR. All night ops prohibited by local restrictions. Formation arr and dep prohibited. No touch and go lds. No aerobatics permitted. 10-25' wide ditch at 170' along SE edge of rwy. Avoid flying within 1000' of school approximately one mile SW. Rwy 04 dep avoid flying over homes 2000' NE of rwy end.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE PMD.**PALMDALE (H) VORTAC** 114.5 PMD Chan 92 N34°37.88'


W118°03.83' 223° 14.6 NM to fld. 2498/15E.

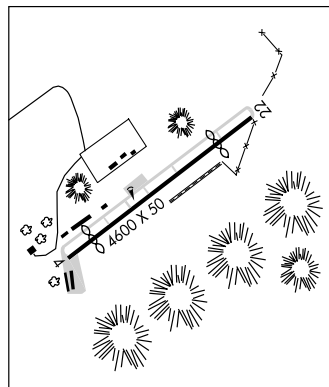**ALPINE CO** (See MARKLEEVILLE)

ALTURAS


ALTURAS MUNI (AAT) 1 W UTC-8(-7DT) N41°28.98' W120°33.92'
 4378 B S4 FUEL 100LL, JET A TPA-5378(1000) NOTAM FILE AAT
RWY 13-31: H4300X50 (ASPH) S-12 MIRL
RWY 13: Thld dsplcd 209'. Road. Rgt tfc.
RWY 31: REIL. VASI(V4L)-GA 3.0° TCH 28'. Railroad.
RWY 03-21: H3096X60 (ASPH) S-12 LIRL 0.4% up NE
RWY 03: REIL. VASI(V4L)-GA 3.0° TCH 28'. Thld dsplcd 241'.
 Railroad.
RWY 21: Thld dsplcd 328'. Tree. Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z+. Wildlife refuges to the SW,
 S, and SE present potential bird hazards to acft from Oct-April.
 Firefighting acft seasonal May-Oct. Arrivals Rwy 21 discouraged
 due to school on apch. No tkf Rwy 03 to NE except during adverse
 wind conditions. 150' minimum alt over houses. ACTIVATE MIRL
 Rwy 13-31; LIRL Rwy 03-21; VASI and REIL Rwy 03 and Rwy
 31-CTAF.
WEATHER DATA SOURCES: ASOS 124.175 (530) 233-5251.
COMMUNICATIONS: CTAF/UNICOM 122.8
 Ⓡ SEATTLE CENTER APP/DEP COM 127.6
RADIO AIDS TO NAVIGATION: NOTAM FILE LKV.
LAKEVIEW (H) VORTACW 112.0 LKV Chan 57 N42°29.57'
 W120°30.43' 163° 60.6 NM to fld. 7460/19E.
 HIWAS.

KLAMATH FALLS
 L-11A
 IAP

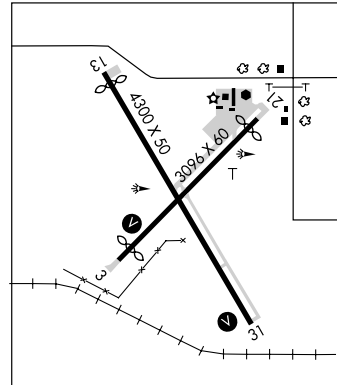

CALIFORNIA PINES (A24) 8 SW UTC-8(-7DT) N41°24.73' W120°41.04'
 4398 TPA-5198(800) NOTAM FILE RNO
RWY 05-23: H4250X45 (ASPH) S-12
RWY 23: Tree. Rgt tfc.
AIRPORT REMARKS: Unattended. Deer invof arpt. Firefighting acft invof
 arpt May-Oct. Vehicles opr invof arpt. Rwy 05-23 surface loose
 gravel, cracked pavement with eroded edges. First 750' of Rwy 23
 is 45' wide and remaining 4,000' is 50' wide.
COMMUNICATIONS: CTAF/UNICOM 123.0
RADIO AIDS TO NAVIGATION: NOTAM FILE LKV.
LAKEVIEW (H) VORTACW 112.0 LKV Chan 57 N42°29.57'
 W120°30.43' 168° 65.3 NM to fld. 7460/19E.
 HIWAS.

KLAMATH FALLS
 L-11A

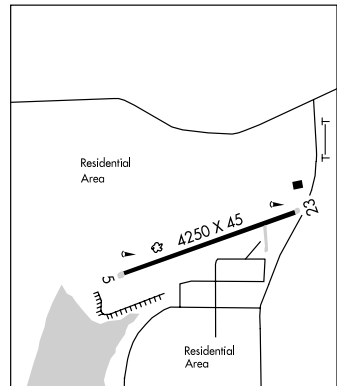

AMEDEE AAF (AHC) (KAHC) A 9N UTC-8(-7DT) N40°15.96' W120°09.04'
 4012 NOTAM FILE RNO
RWY 08-26: H10000X150 (ASPH) PCN 110 F/C/W/T LIRL
RWY 26: VASI. (V4L)
MILITARY SERVICE: LGT ACTIVATE Lgt by req 241.9. Rwy 08 and Rwy 26 portable lgts.
MILITARY REMARKS: Opr Mon-Fri 1600-0000Z+, exc holidays.
WEATHER DATA SOURCES: ASOS C530-827-4520 DSN 855-4520.
COMMUNICATIONS: CTAF 126.1
OAKLAND CENTER APP/DEP 128.8 285.5
RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.
 (T) VORW/DME 109.0 AHC Chan 27 N40°16.07' W120°09.12' at fld. 4006/17E.
 VOR/DME unusable 360°-040° byd 10 NM.
 VOR unusable 320°-360°.

KLAMATH FALLS
 H-3B, L-9A, 11A
 DIAP

ANDY McBETH (See KLAMATH GLEN)

ANGELS CAMP N38°01.40' W120°35.40'

RCO 122.3 (RANCHO MURIETA RADIO)

SAN FRANCISCO

H-3B, L-3B

ANGWIN**ANGWIN-PARRETT FLD** (203) 1 E UTC-8(-7DT) N38°34.80' W122°26.13'

SAN FRANCISCO

L-26, 3A

1848 S4 FUEL 100LL TPA-2698(850) NOTAM FILE OAK

RWY 16-34: H3217X50 (ASPH) LIRL


RWY 16: TRCV(TRIL). Tree.

RWY 34: TRCV(TRIR). Trees. Rgt tfc.

AIRPORT REMARKS: Attended Sun-Fri 1600-0100Z. ACTIVATE LIRL Rwy 16-34 and TRCV Rws 16 and 34-CTAF. NOTE: See Special Notice—Extensive Flight Training in vicinity of Angwin-Parrett Field Airport.

COMMUNICATIONS: CTAF/UNICOM 123.0**RADIO AIDS TO NAVIGATION:** NOTAM FILE APC.

SCAGGS ISLAND (L) VORTACW 112.1 SGD Chan 58 N38°10.76' W122°22.39' 336° 24.2 NM to fld. 10/17E.

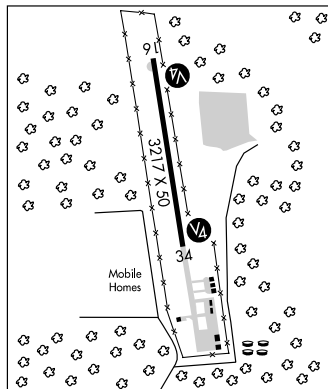**ANTELOPE MOUNTAIN** N41°36.60' W122°37.42'

RCO 122.4 (RANCHO MURIETA RADIO)

KLAMATH FALLS

L-1A

APPLE VALLEY (APV) 3 N UTC-8(-7DT) N34°34.52' W117°11.17'

LOS ANGELES

H-4H, L-4H, 7C

3062 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE RAL

RWY 18-36: H6498X150 (ASPH) S-70, D-90, DT-150 MIRL 1.5% up N

RWY 18: PAPI(P2L)—GA 3.5° TCH 49'. Hill.

RWY 36: PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 597'. Rgt tfc.

RWY 08-26: H4099X60 (ASPH) S-40, D-60, DT-100 0.4% up E

RWY 08: PAPI(P2L)—GA 3.0°. TCH 38'. P-line. Rgt tfc.

RWY 26: PAPI(P2L)—GA 3.0°. TCH 47'.

AIRPORT REMARKS: Attended 1430-0100Z. Parachute Jumping. For fuel call (760) 559-0616 or (760) 240-4686 from 1700-0200Z. Aerobatic training NW area of arpt. Rwy 08-26 CLOSED to acft over 12,500 pounds without PPR from arpt manager, call 760-247-2371. Rwy 08-26 CLOSED to ngt ops due to rapidly rising terrain E and W of rwy, W to 3890' within 1.5 NM and E to 3910' within 1.7 NM. Rwy 18-36 on apch to Rwy 36 cross Rwy 08-26. TPA Rwy 18-36 4062(1000), Rwy 08-26 3862(800). South ramp clsd except helicopters, 20' light poles 100' East and 100' West.


COMMUNICATIONS: CTAF/AUNICOM 122.8

BARSTOW RCO 122.3 (RIVERSIDE RADIO)

JOSHUA APP/DEP CON 124.55

RADIO AIDS TO NAVIGATION: NOTAM FILE DAG.

DAGGETT (L) VORTACW 113.2 DAG Chan 79 N34°57.75' W116°34.69' 218° 37.9 NM to fld. 1760/15E. HIWAS.

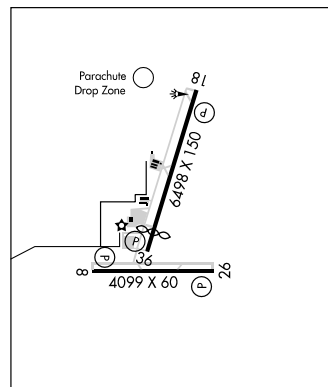

ARCATA/EUREKA

ARCATA (ACV) 7 N UTC-8(-7DT) N40°58.69' W124°06.52'

KLAMATH FALLS

221 B FUEL 100LL, JET A LRA Class I, ARFF Index A NOTAM FILE ACV

H-3A, L-21

RWY 14-32: H6000X150 (ASPH-GRVD) S-60, D-155, ST-175, DT-280 HIRL CL 0.7% up SE IAP

RWY 14: REIL. VASI(V4L)—GA 2.8° TCH 51'. Thld dsplcd 797'. Rgt tfc.

RWY 32: REIL. MALS. TDZL. PAPI(P4L)—GA 3.0° TCH 46'. Tree.

RWY 01-19: H4499X150 (ASPH-GRVD) S-60, D-95, ST-121, DT-170 MIRL 0.5% up N

RWY 01: REIL. VASI(V4L)—GA 3.0° TCH 40'.

RWY 19: Trees. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 14: TORA-5998 TODA-5998 ASDA-5998 LDA-5198

RWY 32: TORA-5998 TODA-5998 ASDA-5198 LDA-5198

AIRPORT REMARKS: Attended Sun-Fri 1400-0700Z, Sat 1500-0200Z. Fuel avbl 0400-2400 local. CLOSED to unscheduled air carrier ops with more than 30 passenger seats except PPR call arpt manager 707-839-5402. ACTIVATE HIRL Rwy 14-32, REIL and VASI Rwy 14, MALS, TDZL, REIL, and PAPI Rwy 32—CTAF. MIRL 01-19, REIL and VASI Rwy 01 PPR ctc 707-496-1123 or 707-496-5566.

WEATHER DATA SOURCES: ASOS 118.525 (707) 839-7429.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.6 (OAKLAND RADIO)

SEATTLE CENTER APP/DEP CON 124.85

RADIO AIDS TO NAVIGATION: NOTAM FILE ACV.

(L) VOR/DME 110.2 ACV Chan 39 N40°58.89' W124°06.50' at fld. 193/17E.

VOR and DME unusable:

300°-330° byd 25 NM blo 8,000'.

DME unusable:

010°-015° byd 35 NM blo 8,500'

045°-070° byd 25 NM blo 11,000'

070°-130° byd 25 NM blo 10,000'.


ABETA NDB (LMM) 233 CV N40°57.87' W124°05.94' at fld.

Unusable: 005°-100° byd 10 NM

100°-155° byd 5 NM

155°-170° byd 10 NM

ILS/DME 109.5 I-ACV Chan 32 Rwy 32. Class IE. LMM ABETA NDB.

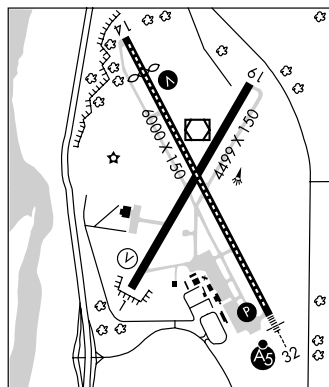

ARMITAGE FLD (See CHINA LAKE NAWS)

AUBURN MUNI (AUN) 3 N UTC-8(-7DT) N38°57.29' W121°04.90'

SAN FRANCISCO

1539 B S4 FUEL 80, 100LL, JET A TPA—See Remarks NOTAM FILE AUN

L-2G, 3A

RWY 07-25: H3700X75 (ASPH) S-30 MIRL 1.2% up E

IAP

RWY 07: PAPI(P2L)—GA 3.0°. Thld dsplcd 200'. Hill.

RWY 25: PAPI(P2L)—GA 3.0° TCH 34'. Hill.

AIRPORT REMARKS: Attended May-Sep 1600-0200Z, Oct-Apr 1600-0100Z. Fuel 80 and 100LL avbl 24 hrs, Jet A avbl only during arpt ops hrs. Ultralight activity on and invof arpt. TPA-2539(1000), helicopter TPA-2119(580), rgt tfc for Rwy 07. Noise abatement procedure for Rwy 25; after tkf speed and altitude permitting make 20° left turn at end of rwy to avoid mobile home park and convalescent hospital. Rwy 07 straight out dep is preferred dep route. ACTIVATE MIRL Rwy 07-25, PAPI Rwy 07 and Rwy 25—CTAF.


WEATHER DATA SOURCES: AWOS-3 119.375 (530) 888-8934.

COMMUNICATIONS: CTAF/UNICOM 122.7

® NORCAL APP/DEP CON 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

SQUAW VALLEY (L) VOR/DME 113.2 SWR Chan 79 N39°10.82' W120°16.18' 235° 40.3 NM to fld. 8850/16E. HIWAS.

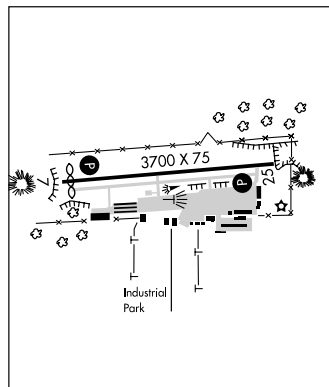

AVALON**CATALINA** (AVX) 6 NW UTC-8(-7DT) N33°24.30' W118°24.95'

1602 TPA-2602(1000) NOTAM FILE AVX

RWY 04-22: H3000X75 (ASPH) 1.8% up SW**RWY 22:** REIL. PVASI(PSIL)-GA 3.0° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended Apr 15-Oct 15 1600-0300Z, Oct 16-Apr 14 1600-0100Z. Arpt CLOSED for all opr other than during published attendance schedule hrs exc for emerg. Rwy 04-22 Limited by airport operator to 12,500 lbs. gross weight. Full stop ldg only. No intersection takeoff. For public use, approval required through UNICOM prior to takeoff or ldg. Ldg fee. Rwy 22 first 2000' slopes up; remainder level. Pilots cannot see aircraft on opposite ends of runway due to gradient. Rwy 04-22 surface rough with numerous potholes and soft spots. Potholes and loose pavement fragments on rwy. For weather call 1-800-255-8700. Rwy 04-22 NSTD MIRL, 2971' lgtd between thresholds only. Rwy 04-22 safety areas both ends, 1600'+ dropoffs to the sea. NSTD rwy lights for emerg use only call 310-510-0143. PSIL Rwy 22 opr during arpt opr hrs.


WEATHER DATA SOURCES: ASOS 120.675 (310) 510-9641.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **SOCAL APP/DEP CON** 127.4**RADIO AIDS TO NAVIGATION:** NOTAM FILE HHR.**SANTA CATALINA (L) VORTACW** 111.4 SXC Chan 51 N33°22.50' W118°25.20'

352° 1.8 NM to fld. 2090/15E.

LOS ANGELES

L-3E, 4G

IAP

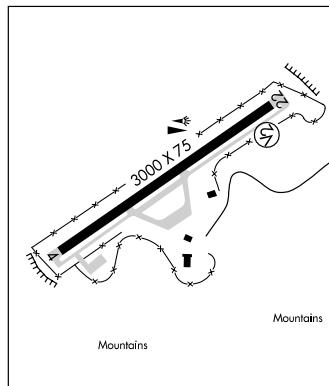**AVENAL** N35°38.82' W119°58.72' NOTAM FILE RIU.**(H) VORTACW** 117.1 AVE Chan 118 079° 14.4 NM to Lost Hills-Kern Co. 710/16E.

LOS ANGELES

H-4G, L-3C, 7A

BAKER (Ø02) 2 NW UTC-8(-7DT) N35°17.18' W116°04.91'

922 B TPA-1922(1000) NOTAM FILE RAL

RWY 15-33: H3157X50 (ASPH) MIRL**RWY 33:** P-line. Rgt tfc.


AIRPORT REMARKS: Unattended. Mountain ½ mile W of arpt. Pavement has cracks and loose rocks. ACTIVATE MIRL Rwy 15-33-CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DAG.**DAGGETT (L) VORTACW** 113.2 DAG Chan 79 N34°57.75'

W116°34.69' 036° 31.2 NM to fld. 1760/15E. HIWAS.

LOS ANGELES

L-7D

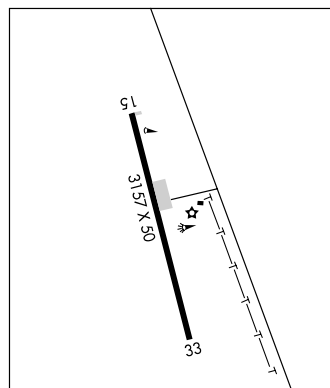

BAKERSFIELD

BAKERSFIELD MUNI (L45) 3 S UTC-8(-7DT) N35°19.49' W118°59.76'

LOS ANGELES

378 B S4 FUEL 100LL TPA-1178(800) NOTAM FILE RIU

L-3D, 7B

RWY 16-34: H4000X75 (ASPH) S-20 MIRL

IAP

RWY 16: Road. Rgt tfc.

RWY 34: PAPI(P2L)—GA 4.0° TCH 54'. P-line.

AIRPORT REMARKS: Attended 1500-0100Z†. 100' pole line ½ mile south of arpt.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.45 (RANCHO MURIETA RADIO)


Ⓡ BAKERSFIELD APP/DEP CON 126.45 (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 127.1 (0700-1400Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07'

W119°05.84' 139° 10.8 NM to fld. 548/14E. HIWAS.

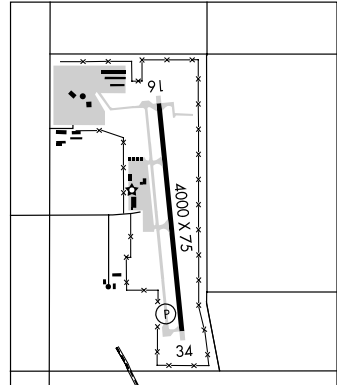

MEADOWS FLD (BFL) 3 NW UTC-8(-7DT) N35°26.03' W119°03.46'

LOS ANGELES

510 B S4 FUEL 100, 100LL, JET A OX 2 ARFF Index—See Remarks NOTAM FILE BFL H-46, L-3D, 7B

RWY 12L-30R: H10855X150 (ASPH-GRVD) S-110, D-200, ST-175, DT-500, DDT-850 HIRL CL IAP, AD

RWY 12L: VASI(V4L)—GA 3.0° TCH 52'. 0.4% down.

RWY 30R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 64'. Thld dsplcd 3426'. Rgt tfc. 0.3% up.

RWY 12R-30L: H7703X100 (ASPH) S-18 MIRL 0.3% up NW

RWY 12R: PAPI(P4L)—GA 3.0° TCH 25'. Rgt tfc.

RWY 30L: PAPI(P4L)—GA 3.0° TCH 25'. Thld dsplcd 3382'. Tree.

AIRPORT REMARKS: Attended continuously. Rwy 12R-30L CLOSED when twr clsd. Right base ops for Rwy 30R establish wings level on final apch no lower than 300' AGL. Noise sensitive areas S and E of arpt recommended turbojet training hrs weekdays 1600-0600Z†, weekends 2000-0600Z† no more than ten practice approaches per hour. Class I, ARFF Index B. Index C ARFF avbl. Centerline lgts Rwy 30R. RVR touchdown, midfield, rollout Rwy 30R avbl. When twr clsd ACTIVATE HIRL Rwy 12L-30R, PAPI and MALSR Rwy 30R—CTAF. PAPI Rwy 12R and PAPI Rwy 30L opr continuously.

WEATHER DATA SOURCES: ASOS (661) 393-3766.

COMMUNICATIONS: CTAF 118.1 ATIS 118.6 (661) 399-9425

UNICOM 122.95

BAKERSFIELD RCO 122.45 (RANCHO MURIETA RADIO)

BAKERSFIELD APP CON 118.9 (N) 118.8 (S) (1400-0700Z†)

BAKERSFIELD DEP CON 126.45 (N,S) (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 127.1 (0700-1400Z†)

BAKERSFIELD TOWER 118.1 (1400-0700Z†) GND CON 121.7


AIRSPACE: CLASS D svc 1400-0700Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07' W119°05.84' 133° 3.6 NM to fld. 548/14E.

HIWAS.

ILS/DME 111.9 I-BFL Chan 56 Rwy 30R. ILS unmonitored when twr clsd.

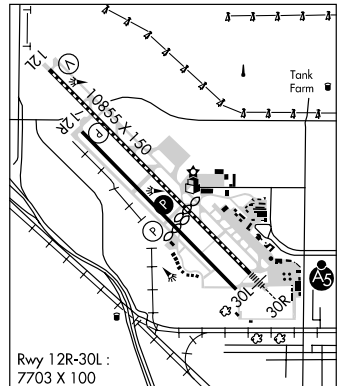

BANNING MUNI (BNG) 1 SE UTC-8(-7DT) N33°55.36' W116°51.03'

LOS ANGELES

2219 B FUEL 100LL TPA-3219(1000) NOTAM FILE RAL

H-4H, L-4H

RWY 08-26: H5200X150 (ASPH) S-12.5 MIRL

RWY 08: Pole.

RWY 26: PAPI(P2L)—GA 3.5°. Thld dsplcd 230'. Rgt tfe.


AIRPORT REMARKS: Attended 1600-0100Z+. For arpt attendant call 951-922-3320. No intersection tkfs to the W. Rwy 08-26 no straight-in ldgs. ACTIVATE MIRL Rwy 08-26—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'

W117°31.80' 074° 33.9 NM to fld. 1432/15E.



BARD N32°46.09' W114°36.17' NOTAM FILE SAN.

PHOENIX

(H) **VORTAC** 116.8 BZA Chan 115 167° 6.7 NM to Yuma MCAS-Yuma Intl. 130/14E.

H-4I, L-5A

VORTAC unusable 280°-300° byd 27 NM blo 3,600'.

RCO 122.1R 116.8T (SAN DIEGO RADIO)

BARSTOW N34°50.93' W117°02.75'

LOS ANGELES

RCO 122.3 (RIVERSIDE RADIO)

L-7C

BARSTOW-DAGGETT (See DAGGETT)

BEALE AFB (BAB)(KBAB) AF 6 E UTC-8(-7DT) N39°08.17' W121°26.19' **SAN FRANCISCO**
 113 B TPA—See Remarks NOTAM FILE BAB Not insp. **H-38, L-26, 3A**
RWY 15-33: H12000X300 (CONC-GRVD) PCN 76 R/B/W/T HIRL **DIAP, AD**
RWY 15: ALSF1. PAPI(P4L). **RWY 33:** ALSF1. PAPI(P4L).
MILITARY SERVICE: JASU (AM32A-60A) (A/M32A-86) 7(MC-1A) (MC-2A) **FUEL J8 FLUID W SP LPOX LOX**
OIL 0-128-133-148 **TRAN ALERT** Svc avbl Mon-Fri 1500-0000Z except federal holidays. Acft that arrive after 2300Z will not be svc until next duty day. Fleet svc avbl, 24 hr prior notice rqr.
MILITARY REMARKS: Opr Mon-Thu 1500-0600Z, Fri 1500-0200Z, CLOSED weekends and holidays. See FLIP AP/1 Supplementary Arpt Remark. **RSTD** PPR 24 hr prior notice, ctc Base OPS DSN 368-2002/9120, C530-634-2002/9120. Issued PPR valid 1 hr +/- ETA, early/late arr/dep must be re-coordinated. Ctc Command Post DSN 368-5700 for acft practice apch approval. No transient acft practice apch Mon-Fri 1400-0200Z, other times transient acft can expect local training to receive priority. Transient acft with PPR number authorized single apch to full stop ldg. Limited parking avbl. Twy M rstd to daytime VFR ops only. **CAUTION:** Beale AFB is located on a major migratory bird flyway. Security fence and lgts located less than 200' fm Twy F centerline. Runway 300' wide marked at 150'. Full 300' width useable. **TFC PAT TPA**—Rectangular pattern 1100 (987), overhead pattern 2100 (1987). Fighter type acft fly rgt tfc Rwy 15. **CSTMS/AG/IMG** 24 hr prior notice rqr for Customs and Agriculture. **MISC** Transient acft expect progressive taxi. No COMSEC material avbl. Transient aircrew should plan to arrive with appropriate COMSEC to complete entire mission. **AFRC** 940th Command Post, DSN 368-1901, C530-634-1901.
COMMUNICATIONS: ATIS 273.5 (Opr during Wing ops) **PTD** 140.875 372.2 (140.875 for use only within 16.2 NM, 15,000' or blo)
(R) NORCAL APP/DEP CON 125.4 259.1
TOWER 119.4 276.15 (Mon-Thu 1500-0600Z, Fri 1500-0200Z. clsd weekends and holidays.)
GND CON 121.6 257.75
WING COMMAND POST 321.0 311.0 (321.0 Inbound acft ctc Command Post 35 min prior ETA with intentions.)
940th COMMAND POST (TAHOE CON) 256.025 **PMSV METRO** 239.8 (Full svc avbl during hrs of scheduled ops, limited svc other times.) PMSV svc avbl only when Wx Flight on duty. Wx obsn avbl 24 hr via auto obsn system; wx flight on duty during normal wing flying hr or forecast severe wx DSN 386-9134, C530-634-9134. During Wx Flight closures remote briefing svc avbl from 25 Op Wx Squadron DSN 228-6598/6599/6588. When auto obsn system inoperable, obstruction from 325°-060°, 080°-220° and 245°-280° may impact prevailing visibility." **SOF** 138.5 240.225
AIRSPACE: CLASS C continuous ctc **APP CON.**
RADIO AIDS TO NAVIGATION: NOTAM FILE BAB.
(H) TACAN Chan 23 BAB (108.6) N39°08.09' W121°26.44' at fld. 90/16E. No NOTAM MP Thu 1200-1800Z.
ILS 109.5 I-BAB Rwy 15. No NOTAM MP Tue 1200-1800Z. RADAR or DME rqr Rwy 15.
ILS 109.5 I-MIZ Rwy 33. No NOTAM MP Tue 1200-1800Z. DME rqr Rwy 33.
ASR/PAR PAR Tue-Thu 1800-2200Z. PAR No NOTAM MP Mon-Fri 1500-1730Z.

BECCA N33°45.40' W118°04.64' NOTAM FILE LGB. **LOS ANGELES**
NDB (LOM) 233 LG 301° 5.2 NM to Long Beach (Daugherty Fld). Unmonitored 0745-1415Z **COPTER**
 (when LGB twr clsd). **L-3E, 4G, A**

BECKWORTH

NERVINO (002) 1 E UTC-8(-7DT) N39°49.11' W120°21.17'
 4900 B S4 **FUEL** 100LL TPA-5900(1000) NOTAM FILE RNO
RWY 07-25: H4651X75 (ASPH) S-12 MIRL

SAN FRANCISCO
 L-9A, 11A
 IAP


RWY 07: Road. Rgt tfc.
RWY 25: PAPI(P2L)—GA 3.5° TCH 50'. Fence.
AIRPORT REMARKS: Attended 1600-0300Z†. ACTIVATE MIRL Rwy 07-25—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ **RENO APP/DEP CON** 126.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

MUSTANG (H) VORTACW 117.9 FMG Chan 126 N39°31.88'
 W119°39.37' 282° 36.6 NM to fld. 5949/16E.

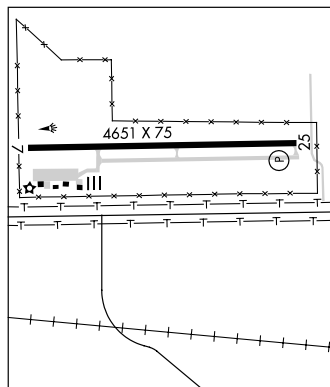

BENTON FLD (See REDDING)

BERMUDA DUNES (See PALM SPRINGS)

BIEBER

SOUTHARD FLD (055) 2 NE UTC-8(-7DT) N41°08.37' W121°07.48'

KLAMATH FALLS
 L-11A

4158 B NOTAM FILE RIU
RWY 04-22: H2980X35 (ASPH) S-12.5 LIRL
RWY 04: Trees. **RWY 22:** Thld displcd 500'. Road.

AIRPORT REMARKS: Unattended. Rwy 04-22 faded rwy numbers, no centerline, no thld marking. 04-22 lateral cracks full length of rwy surface. Rwy 04-22 thld lgts at both ends are 360° green. ACTIVATE LIRL Rwy 04-22—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RDD.

REDDING (T) VOR/DME 108.4 RDD Chan 21 N40°30.27' W122°17.50' 036° 65.4 NM to fld. 490/18E.

BIG BEAR CITY (L35) 0 W UTC-8(-7DT) N34°15.83' W116°51.36'
 6752 B S4 **FUEL** 100LL, JET A TPA-7952(1200) NOTAM FILE RAL

LOS ANGELES
 H-4H, L-4H, L-3C
 IAP

RWY 08-26: H5850X75 (ASPH) S-12.5 MIRL
RWY 08: PAPI(P2L)—GA 4.0° TCH 26'. Thld displcd 370'. Rgt tfc.
RWY 26: PAPI(P2L)—GA 4.0° TCH 26'. Thld displcd 600'. Trees.

AIRPORT REMARKS: Attended 1600-0100Z†. Jet A fuel avbl 1600-0000Z†, self service after hrs. 100LL avbl 24 hr self service. Mountains all quadrants; peak hazard lgts SE, S, & NW. Extreme noise sensitive area; practice noise abatement procedures. Noise abatement procedures: Avoid overflying of high school 1 mile east at all times. On takeoff make 10° left turn at end of rwy to avoid housing to east and elementary school to west of arpt. ACTIVATE MIRL Rwy 08-26—CTAF. PAPI Rwy 08 and PAPI Rwy 26 opr continuously.


WEATHER DATA SOURCES: AWOS-3 135.925 (909)585-4033.

COMMUNICATIONS: CTAF/UNICOM 122.725

L.A. CENTER APP/DEP CON 126.35

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'
 W117°31.80' 043° 39.4 NM to fld. 1432/15E.

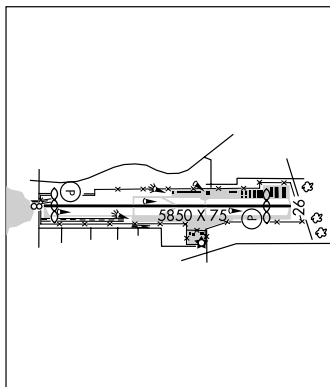

BIG SUR N36°10.88' W121°38.53' NOTAM FILE OAK.

SAN FRANCISCO
 H-46, L-3C

(L) **VORTACW** 114.0 BSR Chan 87 104° 22.7 NM to Tusi AHP (Hunter Liggett). 4085/16E.

DME portion unusable 320°-085° byd 35 NM blo 9,000'

BISHOP

EASTERN SIERRA RGNL

(BIH) 2 E UTC-8(-7DT) N37°22.39' W118°21.82'
 4124 B S4 FUEL 100LL, JET A OX 2 TPA-5124(1000) NOTAM FILE BIH
 RWY 12-30: H7498X100 (ASPH-PFC) S-70, D-110, ST-139, DT-200 HIRL 0.3% up NW
 RWY 12: VASI(V2L)-GA 3.0° TCH 48'. Trees.
 RWY 30: VASI(V2L)-GA 3.5° TCH 55'. Tree.
 RWY 16-34: H5600X100 (ASPH-PFC) S-100, D-140, ST-175, DT-240 HIRL
 RWY 16: VASI(V2L)-GA 3.0° TCH 39'.
 RWY 34: VASI(V2L)-GA 3.0° TCH 39'. Trees.
 RWY 07-25: H5567X100 (ASPH) S-40, D-56, DT-98
 MIRL 0.4% up W
 RWY 07: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1530-0200Z, Sat-Sun 1500-0100Z. Hang glider activity invof arpt. Due to high apch minimums pilots may need an IFR alternate even though weather is forecast to be higher than 2000'-3. No straight-in apchs; no intersection departures; left traffic pattern all rwys; helicopter tfc apch arpt from the W boundary. VASI Rwy 16, VASI Rwy 30 and VASI Rwy 34 unusable byd 1 NM. ACTIVATE MIRL Rwy 07-25, HIRL Rwy 12-30 and 16-34, VASI Rws 12, 30, 16 and 34-CTAF.

WEATHER DATA SOURCES: ASOS 119.025 (760) 872-2658.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.6 (RIVERSIDE RADIO)

OAKLAND CENTER APP/DEP CON 125.75

RADIO AIDS TO NAVIGATION: NOTAM FILE BIH.


BISHOP (T) VORW/DME 109.6 BIH Chan 33 N37°22.62' W118°21.99' at fld. 4120/15E.

LDA/DME 109.1 I-BIH Chan 28 Rwy 16. LOC/DME unusable byd 14.5 NM blo 8,600'.

.....

HELIPAD H1: H40X40 (ASPH)

HELIPAD H2: H100X100 (ASPH)

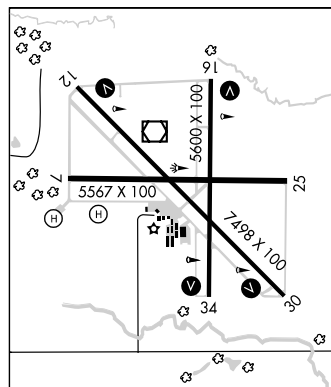

SAN FRANCISCO

H-3B, L-9A

IAP

BISHOP N37°22.62' W118°21.99' NOTAM FILE BIH.

(T) VORW/DME 109.6 BIH Chan 33 at Eastern Sierra Rgnl. 4120/15E.

VOR/DME unusable 360°-105° byd 18 NM.

SAN FRANCISCO

H-3B, L-9A

BLACK METAL PEAK N34°18.55' W114°09.92'

RCO 122.55 (PRESCOTT RADIO)

PHOENIX

L-5A

BLUE CANYON-NYACK (See EMIGRANT GAP)

BLYTHE (BLH) 6 W UTC-8(-7DT) N33°37.15' W114°43.01'
 399 B S4 FUEL 100LL, JET A TPA-1199(800) NOTAM FILE BLH
RWY 08-26: H6543X150 (ASPH) S-80, D-160, ST-175, DT-300 MIRL
RWY 26: VASI(V4L)—GA 3.0° TCH 42'.
RWY 17-35: H5800X100 (ASPH) S-52, D-76, ST-100, DT-135
 MIRL

RWY 17: VASI(V4L)—GA 3.0° TCH 40'.

RWY 35: VASI(V4L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1500-0100Z. Acft over 12,500 pounds avoid housing area 1.5 NM SW below 2000'. Final apch Rwy 35 be established 2 NM from touchdown. Departure from Rwy 17 make climbing left turn soon as safety permits. Use wide tfc pattern for Rwy 26 and Rwy 35. Power plant 1 mile east of arpt producing thermal plumes; avoid low altitude direct overflight of the power plant. ACTIVATE MIRL Rwy 17-35 and Rwy 08-26 and VASI Rwy 17, Rwy 35, and Rwy 26—CTAF.

WEATHER DATA SOURCES: ASOS 120.175 (760) 922-3000.

COMMUNICATIONS: CTAF/AUNICOM 122.8

RCO 122.4 (RIVERSIDE RADIO)

L.A. CENTER APP/DEP CON 128.15

RADIO AIDS TO NAVIGATION: NOTAM FILE BLH.

(H) VORTACW 117.4 BLH Chan 121 N33°35.76'

W114°45.67' 044° 2.6 NM to fld. 410/14E. HIWAS.


VOR unusable:

280°-295° byd 30 NM blo 7,000'

295°-325° byd 15 NM blo 12,000'

DME unusable:

280°-335° byd 15 NM blo 14,000'

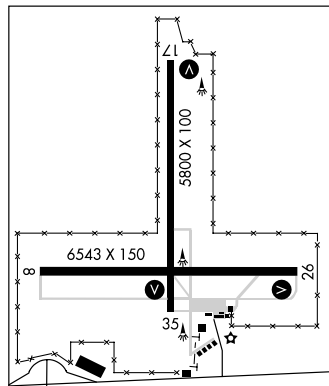

325°-018° byd 30 NM blo 7,000'

335°-018° byd 15 NM blo 8,000'

BOB HOPE (See BURBANK)

BOING N32°44.40' W117°12.95' NOTAM FILE SAN.

NDB (LMM) 245 AN 092° 1.4 NM to San Diego Intl. SHUTDOWN.

LOS ANGELES

BOONVILLE (D83) 1 NW UTC-8(-7DT) N39°00.84' W123°22.91'

371 TPA-1171(800) NOTAM FILE OAK

RWY 13-31: H3240X50 (ASPH) S-30

RWY 13: Thld dsplcd 460'. Trees.

RWY 31: Thld dsplcd 256'. Hill, Rgt tfc.

AIRPORT REMARKS: Unattended. Ditch SW side of Rwy 13-31. Back taxi on rwy, do not mistake county road for twy. Pavement gross weight strength estimated by arpt manager 12,500 pounds.

COMMUNICATIONS: CTAF/UNICOM 122.7


RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19'

W123°16.45' 229° 5.6 NM to fld. 2980/16E. HIWAS.

SAN FRANCISCO

L-26

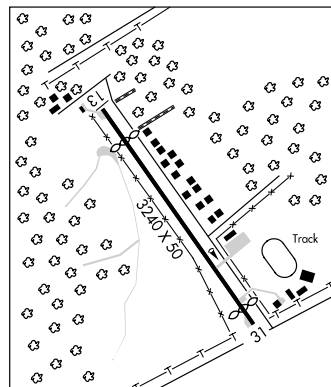

BORREGO SPRINGS

BORREGO VALLEY (L08) 3 E UTC-8(-7DT) N33°15.54' W116°19.26'

LOS ANGELES

H-4H, L-4I

IAP

520 B FUEL 100LL TPA-1520(1000) NOTAM FILE SAN

RWY 08-26: H5011X75 (ASPH) S-30, D-54, DT-90 MIRL

RWY 08: PAPI(P2L)-GA 3.0° TCH 42'. Road. Rgt tfc.

RWY 26: PAPI(P2L)-GA 3.0° TCH 42'.

AIRPORT REMARKS: Attended 1600-0000Z†. Be aware of frequent changes in wind direction. Do not overfly elementary school SW of arpt. Aerobatic activity N side of arpt during dalgt hours from surface to 5000'. 140' tower 1600' N of Rwy 08. Rwy 08 has 400' blast pad byd end of runway. During hot weather heavy acft park on concrete pads. All acft tfc patterns to S. ACTIVATE MIRL Rwy 08-26; PAPI Rwy 08 and Rwy 26 and Twy lgts-CTAF.

WEATHER DATA SOURCES: AWOS-1 126.575 (760) 767-3308.

COMMUNICATIONS: CTAF/UNICOM 122.8


LOS ANGELES CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

JULIAN (L) VORTAC 114.0 JLI Chan 87 N33°08.43'

W116°35.16' 047° 15.1 NM to fld. 5560/15E. HIWAS.

COMM/NAV/WEATHER REMARKS: UNICOM staffed 1600-0000Z†.

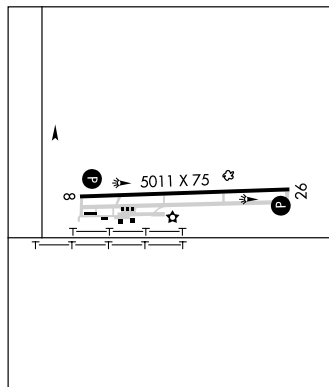

BORREGO VALLEY (See BORREGO SPRINGS)

BRACKETT FLD (See LA VERNE)

BRAWLEY MUNI (BWC) 1 NE UTC-8(-7DT) N32°59.58' W115°31.01'

LOS ANGELES

L-4I

IAP

-128 B S4 FUEL 100LL TPA-See Remarks NOTAM FILE SAN Not insp.

RWY 08-26: H4402X60 (ASPH) S-20 MIRL

RWY 08: VASI(V2L)-GA 3.2° TCH 25'. Thld dsplcd 394'. Railroad.

RWY 26: VASI(V2L)-GA 3.0° TCH 24'. Thld dsplcd 395'. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. For fuel use cardlock-24/7. TPA-672(800) conventional acft; 1072(1200) jet acft. ACTIVATE MIRL Rwy 08-26 and twy lights-CTAF.


COMMUNICATIONS: CTAF 122.9

L.A. CENTER APP/DEP 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE IPL.

IMPERIAL (H) VORTAC 115.9 IPL Chan 106 N32°44.93'

W115°30.52' 344° 14.6 NM to fld. -20/14E.

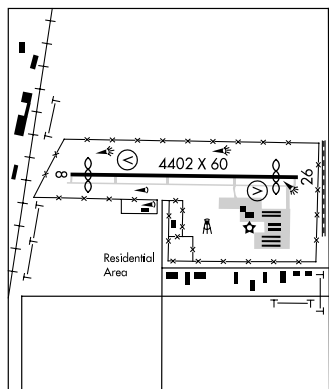

BRIDGE BAY RESORT SPB (See REDDING)

BRIDGEPORT**BRYANT FLD** (O57) 0 NE UTC-8(-7DT) N38°15.85' W119°13.36'

SAN FRANCISCO

6468 B FUEL 100 TPA-7168(700) NOTAM FILE RAL

L-9A

RWY 16-34: H4239X60 (ASPH) S-30 MIRL


RWY 16: Rgt tfe. RWY 34: Thld dspcd 389'. Fence.

AIRPORT REMARKS: Unattended. For fuel call 760-932-7153. Rotating bcn located ¼ mile E of the aprt on top of hill. Birds tend to congregate at N end of rwy. ACTIVATE MIRL Rwy 16-34-122.8.

WEATHER DATA SOURCES: AWOS-3 122.9 (617) 262-3825. OTS indef.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.

MINA (H) VORTAC 115.1 MVA Chan 98 N38°33.92'

W118°01.97' 236° 58.9 NM to fld. 7860/17E. HIWAS.

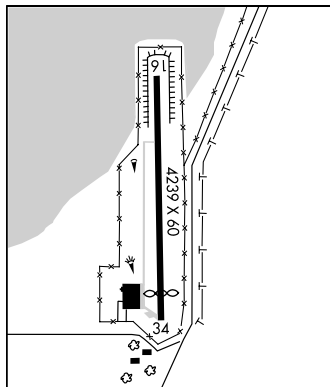**BRIJ** N37°34.33' W122°15.59' NOTAM FILE SFO.

SAN FRANCISCO

NDB (LOM) 379 SF 282° 6.2 NM to San Francisco Intl. Unusable 160°-195° byd 6 NM

A

BROWN FLD MUNI (See SAN DIEGO)**BROWNSVILLE** (F25) 2 SW UTC-8(-7DT) N39°27.31' W121°17.50'

SAN FRANCISCO

2120 TPA-2920(800) NOTAM FILE RIU

RWY 06-24: H2326X20 (ASPH-CONC)

RWY 06: Rgt tfe. RWY 24: Tree.

AIRPORT REMARKS: Unattended. Landings, full length, no mid field turn around, ground soft when wet. Rwy 06-24 pavement narrow, grvl edges are soft when wet. Trees surround aprt on North, South, and East. Steep drop-off to West. Terrain rises 850' abv rwy elevation 4,000' East of rwy end.

COMMUNICATIONS: CTAF 122.9**BRYANT FLD** (See BRIDGEPORT)**BUCHANAN FLD** (See CONCORD)

BURBANK

BOB HOPE (BUR) 3 NW UTC-8(-7DT) N34°12.03' W118°21.52'

LOS ANGELES

778 B S4 FUEL 100LL, JET A, MOGAS OX 1, 3 LRA Class I, ARFF Index C NOTAM FILE BUR COPTER

RWY 15-33: H6885X150 (ASPH-GRVD) S-30, D-180, ST-175, DT-300 MIRL

H-4H, L-3E, 4G, 7B, A

1.2% up NW

IAP, AD

RWY 15: REIL. VASI(V4L)—GA 3.25° TCH 42'. Thld dsplcd 909'. Railroad. Rgt tfc.

RWY 33: REIL. PAPI(P4L)—GA 3.2° TCH 61'. Thld dsplcd 350'. Pole.

RWY 08-26: H5802X150 (ASPH-GRVD) S-30, D-180, ST-175, DT-300 HIRL 0.5% up W

RWY 08: MALSR. PAPI(P4L)—GA 3.0° TCH 75'. Road. Rgt tfc.

RWY 26: REIL. Pole.


LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 15	08-26	4250

ARRESTING GEAR/SYSTEM

RWY 08: EMAS 170'X350'

AIRPORT REMARKS: Attended continuously. Rwy 08 CLOSED tkf multiengine over 12,500 lbs. Hang glider activity between 5 and 10 NM N of arpt 6000' AGL SR-SS. Bird activity N end Rwy 15-33 and W end Rwy 08-26. Helicopter and fixed wing acft operating 2503' MSL (1500 AGL) and below at Whiteman Arpt 5 miles NW. Turbulent conditions near arpt at times of high winds from N and E. Downdrafts/wind shear may occur at liftoff or final. Helicopter arrivals restricted to Rwy 08-26 and Rwy 15-33. Auto-coupled apchs not authorized blo 977' MSL 0.42 NM to AER. Rwy 15 VASI unusable byd 5° of centerline. Rwy 08 runway visual range touchdown. 8' blast fence 260' from departure end of Rwy 26. 14' blast fence 256' from departure end of Rwy 08. 14' blast fence 35' from departure end of Rwy 15. 14' blast fence 93' from departure end of Rwy 33. Twy A restricted to acft with wingspan of 171' or less. Twy G restricted to acft with wingspan of 95 ft or less. Twy B restricted to acft with wingspan of 79' or less beginning 300' north of Twy D and continuing north. Nstd blue twy centerline along the west end of Twy Delta used to bypass the ILS critical area when directed by twr. No general aviation acft parking at terminal ramp. Restrictions and fines effective 0600-1500Z† for stage 2 jets, certain props, run-ups and flight training activities, call 818-840-8840 before operating. Pilots should call ahead for arpt noise rules 818-840-8840.

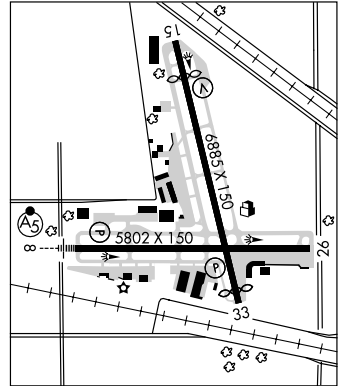

WEATHER DATA SOURCES: ASOS (818) 841-1384. LAWRS.

COMMUNICATIONS: D-ATIS 134.5 (818) 843-6633 135.125 (Arr via FIM/PMD VORTAC only.) **UNICOM** 122.95

BURBANK RCO 122.35 (HAWTHORNE RADIO)

® **SOCAL APP/DEP CON** 135.05 (BUR 050°-150°), 134.2 (VNY 160°-280°), 124.6 (S between BUR 150°-VNY 160°), 120.4 (VNY 280°-BUR 050°)

TOWER 118.7 (HELICOPTERS) 132.325 **GND CON** 123.9 **CLNC DEL** 118.0

AIRSPACE: CLASS C svc ctc **APP CON**

RADIO AIDS TO NAVIGATION: NOTAM FILE VNY.

VAN NUYS (L) VORW/DME 113.1 VNY Chan 78 N34°13.41' W118°29.50' 087° 6.8 NM to fld. 812/15E.

VINEE NDB (LMM) 253 UR N34°11.90' W118°22.67' at fld.

ILS 109.5 I-BUR Rwy 08. Class IA. LMM VINEE NDB. Localizer unusable LMM inbound.

BUTTE VALLEY (See DORRIS)

BUTTONWILLOW**ELK HILLS—BUTTONWILLOW** (L62) 3 S UTC-8(-7DT) N35°21.21' W119°28.78'

LOS ANGELES


L-3D, 7B

326 TPA—1126(800) NOTAM FILE RIU

RWY 11-29: H3260X50 (ASPH) S-10

RWY 11: Rgt tfc.

AIRPORT REMARKS: Unattended. Arpt CLOSED to night ops. Radio controlled model acft below 800' AGL invof arpt. Crop dusting ops prohibited except by PPR arpt manager 661-391-1800.

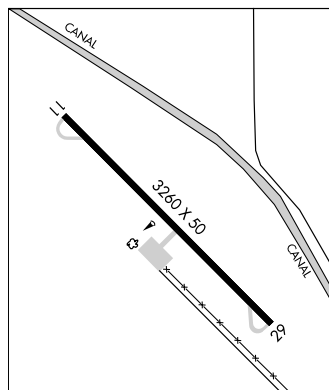COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BFL.**SHAFTER (H) VORTACW** 115.4 EHF Chan 101 N35°29.07'W119°05.84' 233° 20.3 NM to fld. 548/14E. **HIWAS.****BYRON** (C83) 2 S UTC-8(-7DT) N37°49.71' W121°37.55'

SAN FRANCISCO

L-2F, 3B

IAP

79 B FUEL 100LL NOTAM FILE OAK

RWY 12-30: H4500X100 (ASPH) S-29.5 MIRL 0.4% up NW

RWY 12: Pole.

RWY 30: REIL. PAPI(P2L)—GA 3.5° TCH 25'. Hill. Rgt tfc.

RWY 05-23: H3000X75 (ASPH) S-29.5 MIRL 1.0% up SW


RWY 05: Rgt tfc.

RWY 23: PAPI(P2L)—GA 3.5° TCH 25'.

AIRPORT REMARKS: Attended 1600-0200Z+. Fuel avbl 24 hrs by credit card. Parachute Jumping. Ultralight and sailplane activity on and invof arpt. Rising terrain with numerous windmills on ridges west of arpt. 100' twr 5100' from Rwy 23. 200' twr 5600' from Rwy 05. Hangar apron and tiedown apron 12,500 pounds maximum. Rwy 30 calm wind rwy. **ACTIVATE MIRL** Rwy 12-30 and Rwy 05-23 and REIL Rwy 30—CTAF.


WEATHER DATA SOURCES: AWOS-3 123.775 (925) 634-0906.**COMMUNICATIONS:** CTAF/UNICOM 123.05® **NORCAL APP/DEP CON** 123.85**RADIO AIDS TO NAVIGATION:** NOTAM FILE SCK.**MODESTO (H) VOR/DME** 114.6 MOD Chan 93 N37°37.64'

W120°57.47' 274° 34 NM to fld. 90/17E.

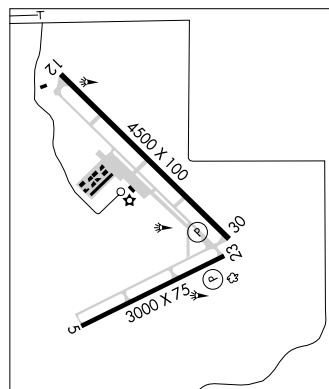**CABLE** (See UPLAND)**CALAVERAS CO—MAURY RASMUSSEN FLD** (See SAN ANDREAS)


CALEXICO INTL (CXL) 1 W UTC-8(-7DT) N32°40.17' W115°30.80'
 04 B FUEL 100LL, JET A TPA—See Remarks AOE NOTAM FILE SAN
 RWY 08-26: H4679X75 (ASPH) S-30 MIRL
 RWY 08: VASI(V2L)—GA 3.0° TCH 33'. P-line.
 RWY 26: VASI(V2L)—GA 3.4° TCH 39'. Thld dsplcd 163'. Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z†. Rwy 08-26 ground drop-off on east end of rwy and north of east acft parking area. TPA—804(800) conventional acft, 1204(1200) jet acft. Flight Notification Service (ADCUS) available.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE IPL.
IMPERIAL (H) VORTAC 115.9 IPL Chan 106 N32°44.93' W115°30.52' 169° 4.8 NM to fld. -20/14E.
COMM/NAV/WEATHER REMARKS: UNICOM unmonitored 1600-0100Z†.

LOS ANGELES
L-41

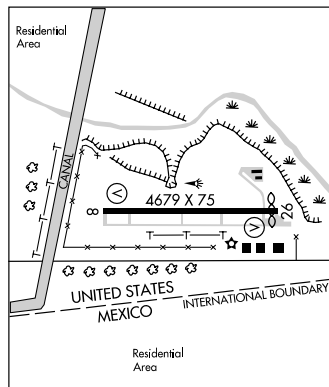

CALIFORNIA CITY MUNI (L71) 2 NW UTC-8(-7DT) N35°09.08' W118°01.00'
 2454 B S2 FUEL 80, 100LL, JET A OX 4 TPA—3454(1000) NOTAM FILE RAL
 RWY 06-24: H6027X60 (ASPH) S-26 MIRL 0.9% up SW
 RWY 24: Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z†. Parachute Jumping. Rwy 06-24 PAEW adjacent rwy 1500-2300Z†. Extensive glider traffic and sky diving activity daily. Two dirt glider ldg strips 2000'X150' and 1600'X150' are constructed 325' S of Rwy 06-24 centerline. East ldg strip paved 1000'X30'. ACTIVATE MIRL Rwy 06-24—CTAF.
WEATHER DATA SOURCES: AWOS-1 120.875
COMMUNICATIONS: CTAF/UNICOM 122.7
 (R) JOSHUA APP/DEP CON 133.65
RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.
EDWARDS (L) VORTAC 116.4 EDW Chan 111 N34°58.94' W117°43.96' 291° 17.3 NM to fld. 2354/15E.

LOS ANGELES
H-4H, L-7C
IAP

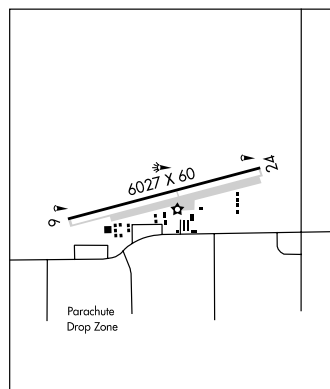

CALIFORNIA PINES (See ALTURAS)

CALIPATRIA**CLIFF HATFIELD MEM** (CLR) 1 NW UTC-8(-7DT) N33°07.88' W115°31.28'**PHOENIX**


-182 TPA-618(800) NOTAM FILE SAN

L-41**RWY 08-26:** H3423X50 (ASPH) S-12**IAP****RWY 08:** Thld dspcd 120'. Road.**RWY 26:** Thld dspcd 229'. Road. Rgt tfc.

AIRPORT REMARKS: Unattended. Lgt'd flagpole 800' SE of arpt, pole on S side of Rwy 08-26 at E end. Ultralight activity on and invof arpt. Parallel taxiway clsd indefinitely.

COMMUNICATIONS: CTAF 122.9® **L.A. CENTER APP/DEP CON 128.6****RADIO AIDS TO NAVIGATION:** NOTAM FILE IPL.

IMPERIAL (H) VORTAC 115.9 IPL Chan 106 N32°44.93'
W115°30.52' 344° 22.9 NM to fld. -20/14E.

**CAMARILLO** (CMA) 3 W UTC-8(-7DT) N34°12.83' W119°05.66'**LOS ANGELES**77 B S4 **FUEL** 100LL, JET A TPA-See Remarks NOTAM FILE CMA**COPTER****RWY 08-26:** H6013X150 (ASPH-CONC-RFSC) S-50, D-80, ST-102, DT-125 MIRL**H-4G, L-3E, 4G, 7B****RWY 08:** REIL. PAPI(P2L)-GA 3.0° TCH 48'. Rgt tfc.**IAP, AD****RWY 26:** REIL. PAPI(P2L)-GA 3.0° TCH 48'.


AIRPORT REMARKS: Attended continuously. Fuel available 24 hours self serve. Parachute Jumping. CAUTION: High performance military acft ops invof arpt. Mountain 1173' MSL, beginning 5 miles from east end Rwy 26. Mountain 1814' MSL 5 miles to east-southeast of AER 26. Numerous flocks of geese in vicinity of arpt. Wildlife on and invof arpt. No formation tkts or ldgs. No tkfs btn 0800-1300Z† (without prior permission). NSTD object free area east end of Twy F, impaired wing clnc, for acft with wingspan of 56' to 80'. Upon arrival ctc FBO or arpt ops 805-388-4202 for assistance. Landing fee for acft over 12,500 lbs. Noise sensitive all quadrants practice noise abatement/fly quiet/procedures. Ultralight activity SW quadrant of arpt. No ldgs, taxiing or tkfs on chevroned area east of Rwy 26 thld. TPA-877(800) single engine, 1077(1000) multiengine and jets. When twr clsd ACTIVATE MIRL Rwy 08-26 and REIL Rwy 08 and Rwy 26-CTAF.

WEATHER DATA SOURCES: ASOS (805) 384-9294.**COMMUNICATIONS:** CTAF 128.2 ATIS 126.025 (805) 484-3351.® **POINT MUGU APP/DEP CON 124.7 (1500-0700Z†)****L.A. CENTER APP/DEP CON 135.5** other times ctc **POINT MUGU CLNC DEL 120.75 (0500-0700Z†)****TOWER 128.2 (1500-0500Z†) GND CON 121.8 CLNC DEL 121.8****AIRSPACE:** CLASS D svc 1500-0500Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CMA.**(L) VORW/DME 115.8 CMA** Chan 105 N34°12.75' W119°05.66' at fld. 62/15E.

VOR/DME unusable:

301°-045°

046°-245° byd 20 NM blo 14,000'



276°-300° byd 20 NM blo 14,000'

CAMERON AIRPARK (See CAMERON PARK)

CAMERON PARK

CAMERON AIRPARK (O61) 0 N UTC-8(-7DT) N38°41.04' W120°59.25'

SAN FRANCISCO
L-26, 3A

1286 S4 FUEL 100LL TPA-2300(1014) NOTAM FILE RIU
RWY 13-31: H4051X50 (ASPH) S-12.5 MIRL

RWY 13: Thld dsplcd 193'. Tree


RWY 31: PVASI(PSIL)-GA 6.0° TCH 18'. Thld dsplcd 1509'. Tree.

AIRPORT REMARKS: Attended 1600-0100Z+. Migratory geese invof arpt. 1597' hill unlgtd .5 NM southeast of arpt. For noise abatement procedures call arpt manager 530-676-8316. Rwy 13-31 restricted to use by acft with less than a maximum certificated gross weight of 12,500 pounds and wingspan less than 50'. Helicopter parking not authorized. Rwy 13-31 west side 60' gates in perimeter fencing to provide access to residential area for residents and invited guests. ACTIVATE MIRL Rwy 13-31-CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

HANGTOWN (L) VOR/DME 115.5 HNW Chan 102 N38°43.48'
W120°44.96' 241° 11.5 NM to fld. 2583/17E.

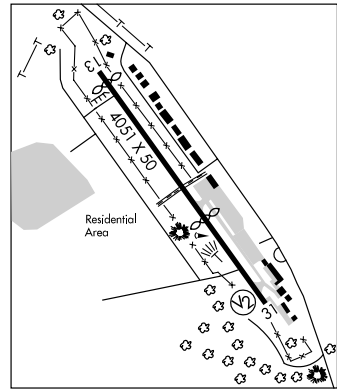

CAMP PENDLETON MCAS (MUNN FLD) (NFG)(KNFG) MC 6 N UTC-8(-7DT)
N33°18.07' W117°21.31'

LOS ANGELES
H-4H, L-4H
DIAP, AD

78 B TPA-See Remarks NOTAM FILE NFG Not insp.

RWY 03-21: H6005X200 (ASPH) PCN 80 F/C/W/T HIRL

RWY 03: PAPI(P4R)-GA 3.38° TCH 58'.

RWY 21: SALSF. PAPI(P4L)-GA 3.5° TCH 52'. Rgt tfc.

MILITARY SERVICE: JASU NC-8/NC-10 prior arrangement rqr with MCAS OPS DSN 365-4562/4563 C760-725-4562/4563. **FUEL J5.** **TRAN ALERT** Ltd tran svc, no maintenance, hangar or tie-down parking avbl. Tran crews responsible for cold refueling of their own acft.

MILITARY REMARKS: Opr Mon and Fri 1600-0100Z+, Tue-Thu 1600-0700Z (DT 1500-0700Z), CLOSED Sat, Sun and holidays. Frequent opr hr modifications, check NOTAM. MCAS Fit Clnr manned 1 hr prior opr hr DSN 365-8016/3804, C760-725-8016/3804. High density tfc in Class D Airspace 1900-2300Z+, tenant acft have priority for local pattern opr. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** PPR 24 hr prior notice except for hot refueling or pattern work, MCAS OPS DSN 365-4562/4563, C760-725-4562/4563, Mon-Fri 1600-0100Z+. Ltd ramp space, acft PPR strictly enforced for all passengers, parts, cargo and tran acft. Heavy Fixed Wing acft (C5, C141, C17) ctc MCAS OPS concerning weight bearing capacity. Heavy acft, full stop ldg only. For use of MCB Range Facilities (LZ/DZ/CAL Site/vertical and short take-off and landing aircraft, etc.) ctc MCB Range CON schedule DSN 365-4219/3510, C760-725-4219/3510. **CAUTION** Numerous hazards to flt/gnd opr. Extensive VFR tfc in Class D Airspace. **TFC PAT** TPA-Fixed Wing 1100(1022), Rotary/Wing 600(522), rising terrain all quadrants to 3200'. All acft use ldg lgt in tfc pattern after SS and in IMC. **NS ABTMT** Avoid overfit MCB Ranch House located 2000' NE apch end Rwy 21. **MISC** Wx opr 24 hr DSN 365-3327, C760-725-3327.

COMMUNICATIONS: ATIS 267.6 (Mon and Fri 1600-0100Z+, Tue-Thu 1600-0700Z (DT 1500-0700Z), clsd Sat, Sun and holidays.)

Ⓡ **SOCAL APP/DEP CON** 127.3 323.0

TOWER 128.775 340.2 382.2 (Mon and Fri 1600-0100Z+, Tue-Thu 1600-0700Z (DT 1500-0700Z), clsd Sat, Sun and holidays.) **GND CON** 128.775 360.2 **CLNC DEL** 126.2 340.2 **RADAR** 128.45 236.3

PMVS METRO 342.4 (opr 24 hr. Wx forecast avbl 2 hr prior notice) **BASE OPS** 265.0

MCB RANGE CON (LONG RIFLE) 123.2 301.9

AIRSPACE: CLASS D svc Mon and Fri 1600-0100Z+, Tue-Thu 1600-0700Z (DT 1500-0700Z) except Sat, Sun and holidays other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE CRQ.

OCEANSIDE (H) VORTAC 115.3 OCN Chan 100 N33°14.44' W117°25.06' 026° 4.8 NM to fld. 53/15E.

(T) **TACAN** Chan 55 NFG (111.8) N33°16.48' W117°23.18' 032° 2.2 NM to fld. 558/13E. NOTAM FILE NFG. Unmonitored when arpt clsd. No NOTAM MP Fri 2100-0100Z+.

ASR/PAR (Mon and Fri 1600-0100Z+, Tue-Thu 1600-0700Z (DT 1500-0700Z), clsd Sat, Sun and holidays.)

COMM/NAV/WEATHER REMARKS: Radar See Terminal FLIP for Radar Minima.


CARLSBAD**McCLELLAN-PALOMAR**

(CRQ) 3 SE UTC-8(-7DT) N33°07.70' W117°16.81'

LOS ANGELES

331 B S4 FUEL 100LL JET A OX 3, 4 TPA—See Remarks Class I, ARFF Index A
NOTAM FILE CRQL-4H
IAP, AD**RWY 06-24:** H4897X150 (ASPH-PFC) S-60, D-80, ST-102, ST-102, DT-110 HIRL**RWY 06:** PAPI(P4L)—GA 3.0° TCH 35'. Thld displcd 297'.**RWY 24:** MALSR. REIL. PAPI(P4L)—GA 3.2° TCH 54'. Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 06:** TORA-4897 TODA-4897 ASDA-4897 LDA-4600**RWY 24:** TORA-4897 TODA-4897 ASDA-4897 LDA-4897

AIRPORT REMARKS: Attended 1500-0600Z†. Rwy 24 hard to see two hrs prior to SS. Do not mistake S twy as rwy. Extensive bird activity in vicinity especially in spring. P-lines 2 miles W & SW. CLOSED to air carrier ops with more than 9 passenger seats from 0630Z† to 1400Z† except by PPR call arpt manager 760-431-4646. PPR for all military acft call arpt manager 760-431-4646. TPA—1003(672) helicopters, 1503(1172) small acft, 2003(1672) large acft. Rwy 06-24 south VFR tfc pattern clsd 0600-1500Z†. No jet acft training due to noise abatement and traffic congestion. Multiple apchs by large acft (including large helicopters) not authorized. All acft multiple practice apch and ldgs discourage 0600-1500Z†. Voluntary curfew, jets 0600-1500Z†, props 0800-1400Z†, emerg, lifeguard and law enforcement excepted. RVR touchdown Rwy 24 avbl. Rwy 24 is calm wind rwy. Arpt has noise abatement procedures ctc arpt manager 760-431-4646. Request jets fly the ILS apch. Voluntary jet curfew 0600-1500Z†. North side ramp limited to 12,500 lbs. Limited transient tie down space on public ramp. When twr clsd ACTIVATE HIRL Rwy 06-24, PAPI Rwy 06 and Rwy 24, REIL Rwy 24, MALSR Rwy 24—CTAF. User fee: U.S. Customs User Fee Arpt, ctc 877-848-7766.

**WEATHER DATA SOURCES:** ASOS (760) 930-0864. LAWRS.**COMMUNICATIONS:** CTAF 118.6 ATIS 120.15 (760) 438-2117**OCEANSIDE RCO** 122.1R 115.3T (SAN DIEGO RADIO)① **SOCAL APP/DEP CON** 127.3**TOWER** 118.6 (1500-0600Z†) **GND CON** 121.8 **CLNC DEL** 134.85**AIRSPACE:** CLASS D svc 1500-0600Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CRQ.**OCEANSIDE (H) VORTAC** 115.3 OCN Chan 100 N33°14.44' W117°25.06' 119° 9.7 NM to fld. 53/15E.

ILS 108.7 I-CRQ Rwy 24. Unmonitored when twr clsd. Coupled apch not avbl blo 760'.

CASTLE (See MERCED)**CATALINA** (See AVALON)**CEDARVILLE**

(059) 2 N UTC-8(-7DT) N41°33.22' W120°09.94'

KLAMATH FALLS

4623 B FUEL 100LL TPA—5623(1000) NOTAM FILE RNO

L-11A


RWY 01-19: H4415X50 (ASPH) S-12.5 MIRL**RWY 01:** Thld displcd 120'. Road. **RWY 19:** Pole.**AIRPORT REMARKS:** Attended 1600-0100Z†. ACTIVATE MIRL Rwy

01-19—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE LKV.**LAKEVIEW (H) VORTACW** 112.0 LKV Chan 57 N42°29.57'

W120°30.43' 146° 58.4 NM to fld. 7460/19E.

HIWAS.



CHANDLER N36°43.44' W119°50.02' NOTAM FILE FCH.
NDB (HW) 344 FCH at Fresno Chandler Executive. Unmonitored.
 NDB unusable 200°–230° byd 40 NM blo 8,500'.

SAN FRANCISCO
 L–3C, 9A

CHARLES M. SCHULZ–SONOMA CO (See SANTA ROSA)

CHEMEHUEVI VALLEY (49X) 4N UTC–8(–7DT) N34°31.74' W114°25.93'

PHOENIX
 H–4I, L–5A, 7E

631 B NOTAM FILE RAL


RWY 16–34: H5000X75 (ASPH) S–12 MIRL

AIRPORT REMARKS: Unattended. Rwy 16–34 cracks in rwy surface and rwy edges failing. ACTIVATE MIRL Rwy 16–34—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96'
 W114°28.45' 157° 14.3 NM to fld. 620/15E. **HIWAS.**

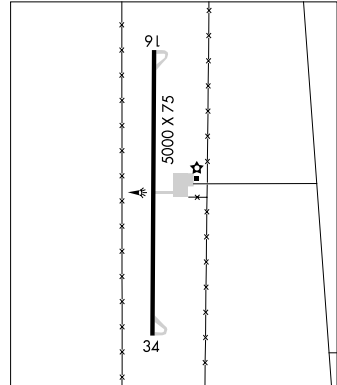

CHESTER

ROGERS FLD (OØ5) 2 SW UTC–8(–7DT) N40°16.94' W121°14.47'
 4528 B S4 **FUEL** 100LL, JET A TPA—5528(1000) NOTAM FILE RIU

KLAMATH FALLS
 H–3B, L–2H, 11A

RWY 05–23: 5320X120 (GRVL) S–12

RWY 05: Trees. **RWY 23:** Tree.

RWY 16–34: H5000X100 (ASPH) S–60, D–110 MIRL

RWY 16: PAPI(P2L)—GA 3.0°. Trees. Road.


RWY 34: PAPI(P2L)—GA 3.0° TCH 32'. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1600Z†–dusk. Rwy 05–23 CLOSED winters. PAEW on and invof arpt. Rwy 05 end marked with painted tires. ACTIVATE MIRL Rwy 16–34 and PAPI Rwy 16 and 34—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RBL.

RED BLUFF (H) VORTACW 115.7 RBL Chan 104 N40°05.93'
 W122°14.18' 058° 47.1 NM to fld. 322/18E. **HIWAS.**

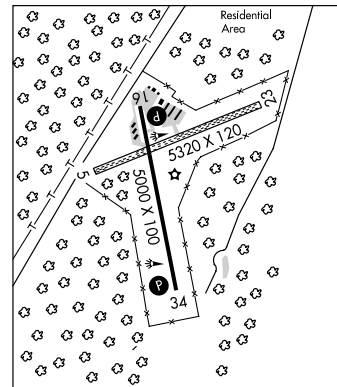

CHICO**CHICO MUNI** (CIC) 4 N UTC-8(-7DT) N39°47.72' W121°51.51'

240 B S4 FUEL 100LL, JET A TPA—See Remarks Class III, ARFF Index A

SAN FRANCISCO

H-3B, L-26/H

IAP, AD

NOTAM FILE CIC

RWY 13L-31R: H6724X150 (ASPH-GRVD) S-63, D-100, ST-127, ST-127, DT-170

HIRL 0.5% up NW

RWY 13L: MALSR. PAPI(P2L)—GA 3.0° TCH 52'. Rgt tfc.**RWY 31R:** REIL. VASI(V4L)—GA 3.0° TCH 50'.**RWY 13R-31L:** H3000X60 (ASPH) S-25 0.4% up NW**RWY 13R:** Rgt tfc.

AIRPORT REMARKS: Attended 1500-0300Z±. For fuel after hrs call 530-588-4888. Scheduled air carrier ops involving acft with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt management and confirmation that ARFF svcs are avbl prior to ldg or tkof, call 530-895-4911. For jet/heavy acft opr E of fld TPA-1740(1500), for light acft opr W and E of fld TPA-1240(1000). Rwy 13R-31L is part of an asph pad 3000'X1500'. When twr clsd ACTIVATE HIRL Rwy 13L-31R, VASI Rwy 31R and MALSR and PAPI Rwy 13L-121.0.

WEATHER DATA SOURCES: AWOS-3 119.675 (530) 879-3850. LAWRS.**COMMUNICATIONS:** CTAF 121.0 UNICOM 122.95

RCO 122.1R 109.8T (RANCHO MURIETA RADIO)

® **OAKLAND CENTER APP/DEP CON** 132.2**TOWER** 121.0 (1500-0300Z±) **GND CON** 121.9**AIRSPACE:** CLASS D svc 1500-0300Z± other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CIC.


(T) VOR/DME 109.8 CIC Chan 35 N39°47.39' W121°50.83' at fld. 215/16E.

ILS 111.3 I-CIC Rwy 13L. Class IE.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

.....

HELIPAD H1: 64X64 (CONC) S-35



CHINA LAKE NAWs (ARMITAGE FLD) (NID) NAS 3 NW UTC-8(-7DT)

LOS ANGELES

N35°41.13' W117°41.52'

H-4H, L-7C

2283 B NOTAM FILE NID

Not insp.

DIAP, AD

RWY 03-21: H9993X150 (PEM) PCN 54 R/C/W/T MIRL

RWY 21: OLS. 0.8% up.

RWY 14-32: H9013X150 (PEM) PCN 64 R/C/W/T HIRL

RWY 14: OLS. RWY 32: OLS.

RWY 08-26: H7702X150 (PEM) PCN 76 R/C/W/T MIRL 0.5% up SW

RWY 08: PAPI(P4L)—GA 3.0° TCH 50'. RWY 26: OLS. PAPI(P4L)—GA 3.0° TCH 50'.

ARRESTING GEAR/SYSTEM

RWY 03 HOOK E28 (B) (2669')

HOOK E28 (B) (3384') RWY 21

RWY 14 HOOK E28 (B) (1501')

HOOK E28 (B) (1201') RWY 32

RWY 08 HOOK E28 (B) (2713')

MILITARY SERVICE: LGT All rwys marked 150' wide, lgtd 200' wide. **A-GEAR** E-28 (B) Rwy 08-26 normal derigged 15 minutes notice rqr to rig. **JASU** 3(GTC-85) 5(NC-10A1) 1(NC-10B) 1(NC-10C), (AM32A-108), 4 (A/M47A-4), 4 (MSU-200). **FUEL** J8 Avbl Mon-Thu 1400-0700Z†, alternate Thu-Fri 1400-0400Z†, Sun 2200-0500Z†. Clsd Sun preceeding a Mon hol and alternate Fri. **FLUID**-SP PRESAIR LHGX LOX Avbl Mon-Fri 1400-2300Z†, clsd alternate Fri-Sat-Sun-hol. **OXRB**. **OIL** O-133-156. **TRAN ALERT** Expect svc delay. Ltd tran svc avbl Mon-Fri 1530-0030Z†.

MILITARY REMARKS: Opr Mon-Fri 1430-0630Z† CLOSED alternate Fri and first working/non-holiday Mon of month. Sat-Sun opr by PPR/local use only. See FLIP AP/1, Fit Haz R2508 and China Lake NAWs Supplementary Arpt Remarks. **RSTD** PPR DSN 437-5475. All PPR issued weekdays only 1430-0630Z†. PPR civil acft official business. Arpt subject to no notice closure. **CAUTION** Bird hazard near golf course, within Class D Airspace Oct-Apr. **TFC PAT** Reduced rwy separation standards in effect USN/USMC acft. **NS ABTMT** Dep avoid overflight China Lake and city of Ridgecrest 2 NM SSE.

CSTMS/AG/IMG Customs not avbl. Acft entering from foreign countries must clear Customs prior arrival.**MISC** Tran acft to/from China Lake NID must ctc R2508 Complex Control Board for schedule/brief prior to obtaining a PPR. Ltd passenger svc avbl. Portions of apch end Rwy 26 and adjacent twy not visible from twr.**COMMUNICATIONS:** ATIS 322.375® **JOSHUA APP/DEP CON** 133.65 348.7**TOWER** 120.15 340.2 (Mon-Fri 1430-0630Z†, clsd alternate Fri and first working/non-holiday Mon of month.

Sat-Sun opr by PPR/local use only.)

GND CON 360.2 **CLNC DEL** 274.7**PMSV METRO** 343.15 (Mon-Fri 1300-0700Z†, clsd alternate Fri.)**VFR ADVISORY SVC** 133.65 126.55 127.5 291.6 348.7 (Provided to all pilots opr within adjacent R2508. Ctc Joshua APP CON.)**AIRSPACE: CLASS D** svc Mon-Fri 1430-0630Z†, except alternate Fri and first working/non-holiday Mon of month.

Sat-Sun opr by PPR/local use only.

RADIO AIDS TO NAVIGATION: NOTAM FILE NID.(L) **TACAN** Chan 53 NID (111.6) N35°41.28' W117°41.43' at fld. 2272/14E. Unmonitored when twr clsd. Opr 1430-0630Z†.**TACAN** azimuth and DME unusable:

072°-112° byd 30 NM

192°-322° byd 27 NM

132°-192° byd 35 NM

357°-037° byd 25 NM

CHINO (CNO) 3 SE UTC-8(-7DT) N33°58.49' W117°38.19'

LOS ANGELES

650 B S4 FUEL 100LL, JET A OX 2 TPA—See Remarks NOTAM FILE CNO

COPTER

RWY 08R-26L: H7000X150 (ASPH-GRVD) S-75, D-150, ST-175, DT-215 MIRL

H-4H, L-3E, 4H, A

RWY 08R: PAPI(P4L)—GA 3.0° TCH 50'. Rgt tfc.

RWY 26L: PAPI(P4L)—GA 3.0° TCH 50'. Trees.

IAP, AD

RWY 03-21: H4919X150 (ASPH) S-21, D-130, ST-165, DDT-50

MIRL CL 0.8% up NE

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 08L-26R: H4858X150 (ASPH) S-12 HIRL 0.4% up W

RWY 08L: Trees. Rgt tfc.

RWY 26R: PAPI(P4L)—GA 3.0° TCH 51'. Trees.

AIRPORT REMARKS: Attended continuously. Self-svc fuel avbl 24 hrs.

Birds and wildlife on and invof arpt. Radio controlled acft activity

blo 400' AGL 2.5 NM south of arpt. Twy J clsd to acft with

wingspan greater than 49'. TPA—1400(750), Twin engine

TPA—2000(1350). When twr clsd MIRL Rwy 03-21, HIRL Rwy


08L-26R and MIRL Rwy 08R-26L are turned on. PAPI Rwy 26R,

Rwy 08R, Rwy 26L, Rwy 03 and Rwy 21, and REIL Rwy 03 and Rwy

21 opr continuously.

WEATHER DATA SOURCES: ASOS (909) 393-5823. LAWRS.**COMMUNICATIONS:** CTAF 118.5 ATIS 125.85 (909)-393-5365

UNICOM 122.95

® **SOCAL APP/DEP CON** 135.4**TOWER** 118.5 (1500-0500Z±) **GND CON** 121.6**AIRSPACE:** CLASS D svc 1500-0500Z± other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE RAL.**PARADISE (H) VORTAC** 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 287° 6.3 NM to fld. 1432/15E.**RIVERSIDE (T) VOR** 112.4 RAL N33°57.31' W117°26.99' 263° 9.4 NM to fld.**ILS** 111.5 I-CNO Rwy 26R. ILS unmonitored when twr clsd.**CHIRIACO SUMMIT** (L77) 1 NE UTC-8(-7DT) N33°39.89' W115°42.60'

LOS ANGELES

1713 TPA—2713(1000) NOTAM FILE RAL

L-41

RWY 06-24: H4600X50 (ASPH) S-6

RWY 06: Brush.

RWY 24: Brush.


AIRPORT REMARKS: Unattended. Rwy 06-24 55'X4600' rwy resurfaced

center of 200'X6000' asph strip. Pilots visibility is limited to

1400' from either end of Rwy 06-24.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE TRM.**THERMAL (H) VORTAC** 116.2 TRM Chan 109 N33°37.69'

W116°09.61' 071° 22.7 NM to fld. -87/13E.



CHOWCHILLA (206) 1 SE UTC-8(-7DT) N37°06.80' W120°14.82'

SAN FRANCISCO

242 TPA-1242(1000) NOTAM FILE RIU

L-3B

RWY 12-30: H3250X60 (ASPH) S-12 MIRL

RWY 12: Antenna.

RWY 30: VASI(V2L)-GA 3.0° TCH 20'. Railroad. Rgt tfc.

AIRPORT REMARKS: Unattended. Apch to Rwy 12 +35' P-lines 1150' from thld on extended rwy centerline. VASI Rwy 30 OTS indef.


ACTIVATE MIRL Rwy 12-30-CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE FAT.

CLOVIS (H) VORTAC 112.9 CZQ Chan 76 N36°53.06'

W119°48.91' 289° 24.9 NM to fld. 360/15E.



CHUALAR N36°29.46' W121°28.50' NOTAM FILE SNS.

SAN FRANCISCO

NDB (MHW) 263 UAD 312° 12.1 NM to Salinas Muni.

L-3C

Unusable 360°-080° byd 10 NM, 135°-245° byd 10 NM.

CLIFF HATFIELD MEM (See CALIPATRIA)

CLOVERDALE MUNI (060) 3 SE UTC-8(-7DT) N38°46.56' W122°59.54'

SAN FRANCISCO

277 FUEL 100LL TPA-1277(1000) NOTAM FILE OAK Not insp.

L-26, 3A

RWY 14-32: H3147X60 (ASPH) S-12 MIRL

IAP

RWY 32: PAPI(P2L)-GA 3.5° TCH 15'. Thld dsplcd 501'. Brush. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z±. Parachute Jumping.

ACTIVATE MIRL Rwy 14-32 and PAPI Rwy 32-CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ OAKLAND CENTER APP/DEP CON 127.8

RADIO AIDS TO NAVIGATION: NOTAM FILE STS.

SANTA ROSA (L) VORW/DME 113.0 STS Chan 77 N38°30.49'

W122°48.63' 316° 18.2 NM to fld. 117/16E.

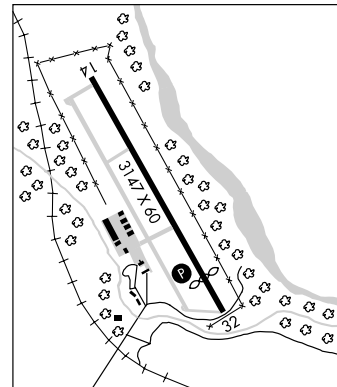

CLOVIS N36°53.06' W119°48.91' NOTAM FILE FAT.

SAN FRANCISCO

(H) VORTAC 112.9 CZQ Chan 76 129° 8 NM to Fresno Yosemite Intl. 360/15E.

H-3B, L-3C, 9A

COALINGA

HARRIS RANCH (308) 9 NE UTC-8(-7DT) N36°14.89' W120°14.31'

SAN FRANCISCO

470 FUEL 100LL NOTAM FILE RIU

RWY 14-32: H2820X30 (ASPH) S-30 LIRL

RWY 14: Pole. Rgt tfc. RWY 32: P-line.

AIRPORT REMARKS: Attended 1400-0300Z±. Fuel avbl 24 hours from service station 559-935-0717. Be alert electrical P-line 30' AGL two tenths mile S of arpt. No run-ups on apch end of Rwy 32. ACTIVATE LIRL Rwy 14-32 high intensity only-CTAF.

COMMUNICATIONS: CTAF 122.9

NEW COALINGA MUNI (C80) 3 E UTS-8(-7DT) N36°09.79'W120°17.63'

SAN FRANCISCO

H-46, L-3C

622 B FUEL 100LL TPA-1622(1000) NOTAM FILE RIU

RWY 12-30: H5000X100 (ASPH) S-30 MIRL

RWY 12: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 30: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 01-19: 2500X60 (ASPH-GRVL) S-12.5

RWY 19: Rgt tfc.


AIRPORT REMARKS: Attended irregularly. Rwy 01-19 avbl for daytime use only. Rwy 01-19 restricted by arpt management to acft under 6000 lbs single wheel. Rwy 01-19 surface oil treated. Rwy 01-19 is in poor condition, asphalt-gravel cracked in places with small potholes, rocks and loose gravel. ACTIVATE MIRL Rwy 12-30, Perimeter lgts Rwy H1, PAPI Rwy 12 and Rwy 30, REIL Rwy 12 and Rwy 30 on dusk -0800Z† after 0800Z†—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (559) 935-5960.**COMMUNICATIONS:** CTAF/UNICOM 122.7**RADIO AIDS TO NAVIGATION:** NOTAM FILE OAK.

PASO ROBLES (L) VORTACW 114.3 PRB Chan 90

N35°40.35'W120°37.60' 013° 33.6 NM to fld. 817/16E.

HIWAS

HELIPAD H1: H50X50 (ASPH)**HELIPORT REMARKS:** Helipad H1 perimeter lgts.**COLUMBIA** (022) 1 SW UTC-8(-7DT) N38°01.83'W120°24.87'

SAN FRANCISCO

L-3B

IAP

2118 B S4 FUEL 100LL, JET A OX 2, 4 TPA-3118(1000) NOTAM FILE RIU

RWY 17-35: H4670X75 (ASPH) S-30 MIRL 1.0% up N

RWY 17: REIL. VASI(V2L)—GA 4.55° TCH 55'. Thld dsplcd 597'.

Ground. Rgt tfc.

RWY 35: REIL. VASI(V2L)—GA 4.0° TCH 41'. Thld dsplcd 384'.

Trees.

RWY 11-29: 2600X100 (TURF)

RWY 11: Trees. Rgt tfc.

RWY 29: Trees.

AIRPORT REMARKS: Attended 1600-0100Z†. CAUTION: Rwy 11 departures prohibited due to conflict with main rwy. Varying wind direction and velocity may be encountered at mid point of Rwy 17-35 due to terrain features and wind flow patterns. Rwy 29 not recommended for use during winter months Nov through Mar. Turf twy north side of Rwy 11-29 not recommended for use Nov-Mar. Ultralight activity on arpt, southwest tfc pattern altitude 500' below standard arpt tfc pattern to Rwy 29. Ultralights to opr west of Rwy 35. All jet acft are requested to land Rwy 35 and depart Rwy 17 wind and weather permitting. Arpt has two rotating beacons, one on the arpt and one 6500' SE threshold Rwy 35. Forestry Air Tanker ops from arpt during summer fire season. Ldg fee for all commercial operators regardless of size and corporate acft over 12,500 pounds gross ldg weight. Avoid flights over Columbia State Park NE of arpt, and Highway 49 bridge 5 NM southwest of arpt and vicinity. Helicopter parking area 300' by 120' (3 positions). Rwy 35 VASI unusable byd 5° left and 5° right of rwy centerline. ACTIVATE MIRL Rwy 17-35 and REIL Rwy 17 and Rwy 35—CTAF. VASI Rwy 17 and Rwy 35 opr continuously.


WEATHER DATA SOURCES: AWOS-3 124.65 (209) 536-9384.**COMMUNICATIONS:** CTAF/UNICOM 122.975

NORCAL APP/DEP CON 123.7 (North) 125.1 (West)

OAKLAND CENTER APP/DEP CON 126.85 (East)

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48'W121°00.23' 078° 28.1 NM to fld. 260/17E.

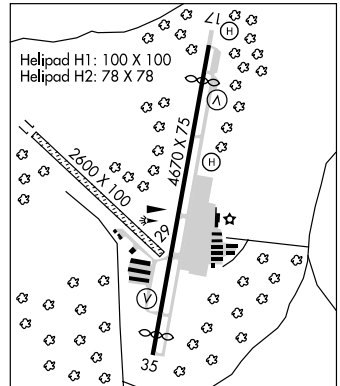HELIPAD H1: H100X100 (ASPH)**HELIPAD H2:** H78X78 (ASPH)

COLUSA CO (008) 3 S UTC-8(-7DT) N39°10.74' W121°59.60'

SAN FRANCISCO

50 B S4 FUEL 100LL TPA-850(800) NOTAM FILE RIU

L-26, 3A

RWY 13-31: H3035X60 (ASPH) S-10 MIRL

IAP

RWY 31: Road. Rgt tfc.

AIRPORT REMARKS: Attended dalgt hrs. For arpt attendant other hrs call 530-458-2393. CAUTION-Bldg 120' above ground level, 1000' West. Birds on and invof of arpt. ACTIVATE MIRL Rwy 13-31 CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ **OAKLAND CENTER APP/DEP CON** 132.2

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

WILLIAMS (L) VORTACW 114.4 ILA Chan 91 N39°04.27'

W122°01.64' 356° 6.7 NM to fld. 50/18E. **HIWAS.**

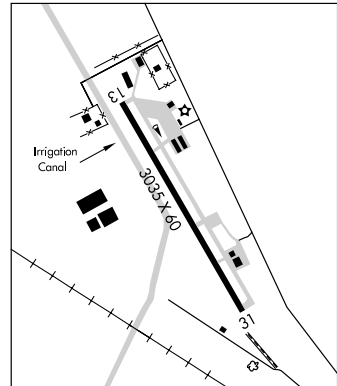

COMPTON/WOODLEY (CPM) 2 SW UTC-8(-7DT) N33°53.40' W118°14.62'

LOS ANGELES

97 B S4 FUEL 80, 100LL TPA-997(900) NOTAM FILE HHR

COPTER

RWY 07L-25R: H3322X60 (ASPH-AFSC) S-14.5

L-3E, 4G, A

RWY 07L: Thld dspld 734'. Street. Rgt tfc.

RWY 25R: Thld dspld 680'. Street.

RWY 07R-25L: H3322X60 (ASPH-AFSC) S-14.5 MIRL

RWY 07R: Thld dspld 734'. Street. Rgt tfc.

RWY 25L: REIL. PAPI(P2L)-GA 4.0° TCH 40'. Thld dspld 680'.

Street.

AIRPORT REMARKS: Attended continuously. Rwy 07L-25R CLOSED ngts indef, only VFR ops during day. No touch and go landings. Rwy 25L and Rwy 25R calm wind rwys. Req all tfc remain south of arpt. Avoid overflight of schools. Skid equipped helicopters are not permitted to touchdown on rwys. Helicopter ops rstd to the rwys and south aprons. ACTIVATE MIRL Rwy 07R-25L, PAPI, REIL, Rwy 25L and north and south parallel twys-CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.05


RADIO AIDS TO NAVIGATION: NOTAM FILE LAX.

LOS ANGELES (H) VORTACW 113.6 LAX Chan 83 N33°55.99'

W118°25.92' 090° 9.8 NM to fld. 182/15E.

NDB (MHW) 378 CPM N33°53.34' W118°14.84' at fld.

NOTAM FILE HHR. VFR only. NDB unmonitored.

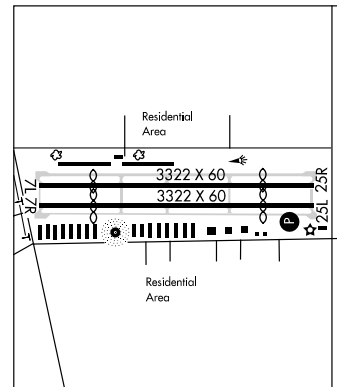

CONCORD N38°02.70' W122°02.71' NOTAM FILE CCR.

SAN FRANCISCO

(T) **VORW/DME** 117.0 CCR Chan 117 173° 3.4 NM to Buchanan Fld. 5/17E.

L-2F, 3A, A

VOR and DME unusable 090°-115° byd 10 NM blo 3,500'

CONCORD**BUCHANAN FLD** (CCR) 1 W UTC-8(-7DT) N37°59.38' W122°03.41'**SAN FRANCISCO**26 B S4 FUEL 100LL, JET A1 + OX 1, 2 TPA—See Remarks Class IV, ARFF Index A
NOTAM FILE CCRH-3A, L-2F, 3A, A
IAP, AD**RWY 01L-19R:** H5001X150 (ASPH-CONC-PFC) S-60, D-90, ST-114, DT-140 HIRL**RWY 01L:** REIL. VASI(V2L)—GA 4.0° TCH 67'. Tree.**RWY 19R:** MAL S. VASI(V2L)—GA 4.0° TCH 28'. Thld dsplcd 601'.

Pole. Rgt tfc.

RWY 14L-32R: H4602X150 (ASPH-CONC-PFC) S-60, D-90, ST-114, DT-140 MIRL**RWY 14L:** Thld dsplcd 300'. Road.**RWY 32R:** REIL. VASI(V4R)—GA 4.0° TCH 37'. Thld dsplcd 350'.

Tree. Rgt tfc.

RWY 14R-32L: H2799X75 (ASPH) S-12.5**RWY 14R:** Road. Rgt tfc.**RWY 32L:** Lgt.**RWY 01R-19L:** H2770X75 (ASPH) S-17**RWY 01R:** Tree. Rgt tfc.**RWY 19L:** Tree.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 01L:** TORA-4710 TODA-5010 ASDA-4410 LDA-4410**RWY 19R:** TORA-5010 TODA-5010 ASDA-5010 LDA-4410**RWY 14L:** TORA-4601 TODA-4601 ASDA-4001 LDA-3701**RWY 32R:** TORA-4601 TODA-5081 ASDA-4481 LDA-4131**AIRPORT REMARKS:** Attended continuously. Birds on and invof arpt,

heaviest concentration Nov-Mar and after rain storms. When twr

clsd Rwy 14L-32R, Rwy 14R-32L and Rwy 01R-19L CLOSED. Rwy 19R standard left tfc when twr closed.

CLOSED to air carrier ops with more than 30 passenger seats except PPR call arpt manager 925-646-5722.

+8' fence 110' byd Rwy 01L TODA distance of 5010' and +7' fence 210' byd Rwy 14L TODA distance of 4601'

along the extended rwy centerline. No training ops Mon-Fri 0600-1500Z, Sat, Sun and holidays


0600-1600Z. Noise sensitive area practice noise abatement (fly quiet) procedures. Arpt has noise abatement

procedures etc arpt manager prior to arrival 925-646-5722. TPA light acct—1026(1000), 1526(1500) acct

12,500 pounds and over and jets. Landing fee for commercial ops and tie down fee for overnight parking. REIL

Rwy 01L off when tower clsd. ACTIVATE MAL S Rwy 19R 0600-1400Z—119.7. VASI Rwy 01L, Rwy 19R and Rwy

32R opr continuously.


WEATHER DATA SOURCES: ASOS (925) 689-2077. LAWRS.**COMMUNICATIONS:** CTAF 119.7 ATIS 124.7 (925) 685-4567 UNICOM 122.95**TRAVIS APP/DEP CON** 119.9**CONCORD TOWER** 119.7 123.9 (1500-0600Z) **GND CON** 121.9 **CLNC DEL** 118.75**AIRSPACE:** CLASS D svc 1500-0600Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CCR.**CONCORD (T) VOR/DME** 117.0 CCR Chan 117 N38°02.70' W122°02.71' 172° 3.4 NM to fld. 5/17E.**KANAN NDB (LOM)** 335 CC N38°02.79' W122°02.01' 181° 3.6 NM to fld.**LDA** 108.5 I-CCR Rwy 19R. LOM KANAN NDB. Unmonitored when twr clsd.**CORCORAN** (CRO) 2 W UTC-8(-7DT) N36°06.16' W119°35.68'**SAN FRANCISCO**

197 FUEL 100LL, JET A TPA-1197(1000) NOTAM FILE RIU

L-3C, 9A

RWY 13-31: H3800X50 (ASPH) S-8 LIRL**RWY 13:** Thld dsplcd 620'. Road.**RWY 31:** Thld dsplcd 525'. Sign.**AIRPORT REMARKS:** Attended Mon-Fri 1600-0100Z. Rwy 13-31 dsplcd thld markings yellow. ACTIVATE LIRL Rwy 13-31—CTAF.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE VIS.**VISALIA (T) VOR/DME** 109.4 VIS Chan 31 N36°22.04'

W119°28.93' 183° 16.8 NM to fld. 260/16E.




CORNING MUNI (Ø04) 1 NE UTC-8(-7DT) N39°56.62' W122°10.27'
 292 B S4 FUEL 100LL TPA-1292(1000) NOTAM FILE RIU
 RWY 16-34: H2702X50 (ASPH) S-12 MIRL
 RWY 34: Poles. Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z±. Medical/firefighting/agricultural helicopters in vicinity of arpt. Ultralight activity on and in vicinity of arpt. Arpt rstd to acft less than 12,500 lbs maximum tkf weight or less. ACTIVATE MIRL Rwy 16-34-CTAF.
COMMUNICATIONS: CTAF/UNICOM 123.0

SAN FRANCISCO

CORONA MUNI (AJO) 3 NW UTC-8(-7DT) N33°53.86' W117°36.15'
 533 B S4 FUEL 100LL, JET A TPA-1533(1000) NOTAM FILE AJO
 RWY 07-25: H3200X60 (ASPH) S-12 MIRL 0.6% up E
 RWY 07: Thld dspcd 194'. Trees. Rgt tfc.
 RWY 25: REIL. VASI(V4L)-GA 4.0° TCH 31'. Thld dspcd 196'.
 Fence.
AIRPORT REMARKS: Attended Mon-Sat 1500-0100Z±. Crane 150' AGL 1 mile south of Rwy 07. Unlgt'd twr 828' MSL 3 miles E of arpt. Noise abatement procedures Rwy 25 straight-in apch not recommended. Avoid flying over houses on bluff at east end. No turns onto crosswind leg until acft is within 300' of recommended TPA. No intersection takeoffs. No touch and go ops on weekends and holidays. Fly over wash/creek. Rwy 07 requires a 15° right turn at departure end to follow wash/creek. ACTIVATE MIRL Rwy 07-25, VASI and REIL Rwy 25-CTAF.
WEATHER DATA SOURCES: ASOS 132.175 (951) 340-4764.
COMMUNICATIONS: CTAF/UNICOM 122.7
 (R) SOCIAL APP/DEP CON 135.4
RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.
 PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 236° 3.8 NM to fld. 1432/15E.

LOS ANGELES
 COPTER
 L-3E, 4H, A
 IAP

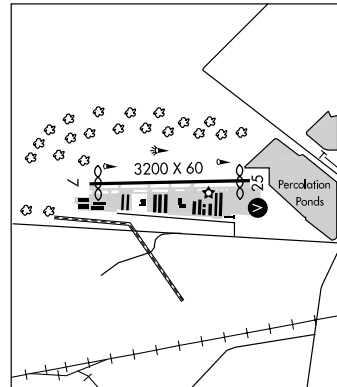

COYOTE N34°17.80' W116°09.44' NOTAM FILE RAL.
 (HA) TACAN Chan 63 NXP (133.6) at Twenty-nine Palms SELF. 2043/14E.
 TACAN azimuth and DME unusable:
 020°-070° byd 16 NM blo 7,500'
 130°-170° byd 16 NM blo 15,000'


SAN FRANCISCO
 H-4H, L-4I, 7D

290°-090° byd 21 NM blo 15,000'

COVELO

ROUND VALLEY (Ø09) 1 SW UTC-8(-7DT) N39°47.43' W123°15.98'
 1434 B FUEL 100LL TPA-2234(800) NOTAM FILE OAK
 RWY 10-28: H3670X55 (ASPH) S-30 MIRL
 RWY 10: Thld dspcd 210'. Hill.
 RWY 28: Thld dspcd 270'. Trees. Rgt tfc.
AIRPORT REMARKS: Unattended Arpt bcn OTS indef. For MIRL Rwy 10-28 key 122.8 5 times.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.
 MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19' W123°16.45' 344° 44.2 NM to fld. 2980/16E. HIWAS.

SAN FRANCISCO
 L-2H

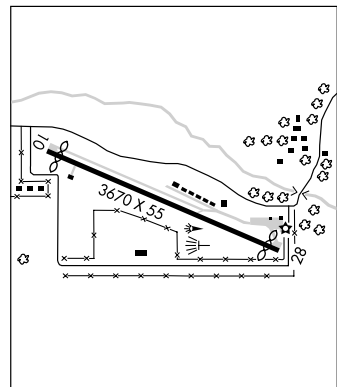

CRESCENT CITY**JACK McNAMARA FLD**

(CEC) 3 NW UTC-8(-7DT) N41°46.81' W124°14.19'

KLAMATH FALLS

61 B S2 FUEL 100LL, JET A TPA-1061(1000) Class III, ARFF Index A. NOTAM FILE CEC H-3A, L-2I
RWY 11-29: H5002X150 (ASPH) S-30, D-43 HIRL IAP

RWY 11: MALSR.

RWY 29: REIL. VASI(V4L)—GA 3.5° TCH 52'. Trees.

RWY 17-35: H5002X150 (ASPH) S-30, D-43 MIRL

RWY 17: REIL. Ground.

RWY 35: REIL. VASI(V4L)—GA 3.0° TCH 48'. Road.

AIRPORT REMARKS: Attended 1600-0200Z+. Other hours fixed-base operator rqr call out fee. Birds and deer on and in vicinity of arpt. A 150' lgtd twr 3300' west of Crescent City VORTAC. Occasional standing water on Rwy 17-35 and Rwy 29 runup area. Ridge lines of shifting sand dunes 30-50' AGL and 1000' off apch end Rwy 17. PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 707-464-7228 or 707-465-3804. Transient parking ramp estimated weight limit 20,000 lbs, FBO ramp estimated weight limit 60,000 lbs. ACTIVATE HIRL Rwy 11-29, MIRL Rwy 17-35 MALSR Rwy 11 and REIL Rwy 17, Rwy 35 and Rwy 29—CTAF.

WEATHER DATA SOURCES: ASOS 119.925 (707) 465-5458.**COMMUNICATIONS:** CTAF 122.8 UNICOM 122.8 (1600-0100Z+)


CRESCENT CITY RCO 122.3 (OAKLAND RADIO)

SEATTLE CENTER APP/DEP CON 124.85

AIRSPACE: CLASS E svc continuous.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CEC.

CRESCENT CITY (L) VORTACW 109.0 CEC Chan 27 N41°46.77' W124°14.45' at fld. 54/19E.

ILS 108.7 I-CEC Rwy 11. Class IA. LOC unusable within 0.3 NM from thld.

**CRESCENT CITY** N41°46.77' W124°14.45' NOTAM FILE CEC.

KLAMATH FALLS

(L) VORTACW 109.0 CEC Chan 27 at Jack McNamara Fld. 54/19E. H-3A, L-2I

DAGGETT**BARSTOW-DAGGETT**

(DAG) 4 E UTC-8(-7DT) N34°51.22' W116°47.20'

LOS ANGELES

1930 B FUEL 100LL, JET A TPA-2930(1000) NOTAM FILE DAG H-4H, L-7C

RWY 08-26: H6402X150 (ASPH) S-30, D-170, DT-320 MIRL 0.3% up W IAP, AD

RWY 04-22: H5123X100 (ASPH) S-30, D-105, DT-190 MIRL

0.3% up SW

RWY 04: P-line. RWY 22: VASI(V4R)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1430-0100Z+. PAEW invof Army ramp.

Extensive military helicopter tfc invof arpt. E-W twy parallel to Rwy 08-26 weight bearing capacity limited to single wheel acft 12,000 lbs. ACTIVATE MIRL Rwy 08-26 and Rwy 04-22—CTAF. VASI Rwy 22 ops continuously.

WEATHER DATA SOURCES: ASOS 132.175 (760) 254-3630. HIWAS 113.2 DAG.**COMMUNICATIONS:** CTAF/UNICOM 123.0


DAGGETT RCO 122.2 (RIVERSIDE RADIO)

L.A. CENTER APP/DEP CON 132.5

RADIO AIDS TO NAVIGATION: NOTAM FILE DAG.

DAGGETT (L) VORTACW 113.2 DAG Chan 79 N34°57.75'

W116°34.69' 223° 12.2 NM to fld. 1760/15E. HIWAS.

**DAGGETT** N34°57.75' W116°34.69' NOTAM FILE DAG.

LOS ANGELES

(L) VORTACW 113.2 DAG Chan 79 223° 12.2 NM to Barstow-Daggett. 1760/15E. HIWAS. H-4H, L-7D
RCO 122.2 (RIVERSIDE RADIO)

DAVIS

UNIVERSITY (EDU) 2 W UTC-8(-7DT) N38°31.89' W121°47.19'

SAN FRANCISCO

69 B S4 FUEL 100LL TPA-869(800) NOTAM FILE RIU

L-2G, 3A

RWY 17-35: H3176X50 (ASPH) S-12.5 MIRL (NSTD)

IAP

RWY 17: SAVASI(S2L)—GA 4.0° TCH 25'. Tree.

RWY 35: VASI(V2L)—GA 3.75° TCH 68'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z†. After hrs emerg University of California Davis police 530-752-1230. After hrs non-emerg University of California Davis police 530-752-1725. Fuel self-service avbl 24 hrs. 65' trees located S side of creek 1,257' from thld Rwy 35. Trees +40', west side of rwy near Rwy 17 thld. Rwy 17-35 NSTD MIRL 35' from edge of rwy. Noise abatement, noise sensitive area north of airport. For VASI Rwy 35 key 123.075 4 times. SAVASI Rwy 17 on 24 hrs.

WEATHER DATA SOURCES: AWOS-3 119.025 (530) 754-6839.


COMMUNICATIONS: CTAF/UNICOM 123.075

TRAVIS APP/DEP CON 126.6

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 279° 12.3 NM to fld. 10/17E. HIWAS.

TRAVIS (L) VORW 116.4 TZZ N38°20.65' W121°48.64' 349° 11.3 NM to fld. NOTAM FILE SUU. SHUTDOWN.

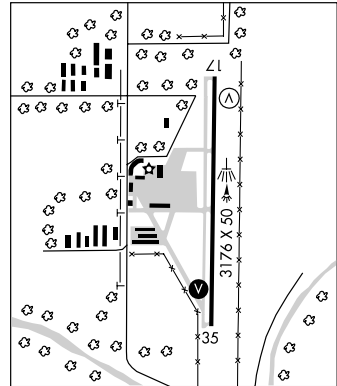

DAVIS/WOODLAND/WINTERS

YOLO CO (DWA) 6 NE UTC-8(-7DT) N38°34.76' W121°51.42'

SAN FRANCISCO

100 B S4 FUEL 100LL, JET A TPA-2000(1000) NOTAM FILE RIU

H-3A, L-2G, 3A

RWY 16-34: H6000X100 (ASPH) S-30, D-36 MIRL

IAP

RWY 16: PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 34: PAPI(P2L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended 1600-0100Z†. Arpt attendance sporadic during poor weather Oct 15 thru Mar 15. Fuel avbl 24 hrs. Parachute Jumping. Birds on and in/ovf arpt. Rwy 16-34 +40' to +120' trees and +40' p-lines unlighted; parallel rwy 550' W of rwy centerline. No touch and go ldg 0600-1400Z†. Limited stop and go ldfs 0600-1400Z†. No midfield tkfs. Rwy 34 calm wind rwy. Noise abatement. No dep turns bto 500' AGL or before arpt boundary roads 1/4 mile byd Rwy 16 and Rwy 34. Straight out dep for 2 miles before turn Rwy 16 and Rwy 34. Crosswind/downwind dep to W Rwy 16 and Rwy 34. MIRL Rwy 16-34 preset low ints, to increase ints and ACTIVATE PAPI Rwy 16 and Rwy 34—CTAF.


WEATHER DATA SOURCES: AWOS-3 125.775 (530) 750-2759.

COMMUNICATIONS: CTAF/UNICOM 123.0

TRAVIS APP/DEP CON 126.6

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 283° 16.5 NM to fld. 10/17E. HIWAS.



DEATH VALLEY NATIONAL PARK

FURNACE CREEK (L06) 1 NW UTC-8(-7DT) N36°27.63' W116°52.79'

LAS VEGAS

-210 B FUEL 100LL TPA-790(1000) NOTAM FILE RAL

L-9B

RWY 15-33: H3065X70 (ASPH) S-4 LIRL

RWY 15: Brush. Rgt tfc. RWY 33: Brush.

AIRPORT REMARKS: Unattended. For fuel ctc Furnace Creek Ranch 760-786-2343. Ditch 145' right of Rwy 33. Use only marked rwy. Arpt located 1 statute mile southwest of park headquarters. No tiedown ropes or chains avbl. Safety areas adjacent rwy clsd, stay on paved area only due to extremely soft dirt. ACTIVATE rotating bcn—CTAF, five (5) clicks on seven (7) clicks off.

COMMUNICATIONS: CTAF 122.9

RCO 122.2 (RIVERSIDE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BEATTY (H) VORTAC 114.7 BTY Chan 94 N36°48.04' W116°44.86' 181° 21.4 NM to fld. 2925/16E. HIWAS.

STOVEPIPE WELLS (L09) 1 W UTC-8(-7DT) N36°36.23' W117°09.55'

LAS VEGAS

25 TPA-825(800) NOTAM FILE RAL

L-9A

RWY 05-23: H3260X65 (ASPH)

RWY 23: Road. Rgt tfc.

AIRPORT REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

RADIO TO NAVIGATION: NOTAM FILE RNO.

BEATTY (H) VORTAC 114.7 BTY Chan 94 N36°48.04' W116°44.86' 223° 23.1 NM to fld. 2925/16E.

HIWAS.

DELANO MUNI (DLO) 2 SE UTC-8(-7DT) N35°44.74' W119°14.19'

LOS ANGELES

314 B S6 FUEL 80, 100LL TPA-1114(800) NOTAM FILE RIU

H-4G, L-3D, 7B

RWY 14-32: H5650X75 (ASPH) S-30 MIRL

IAP

RWY 14: REIL. PAPI(P2L)-GA 3.5° Thld dsplcd 1640'. Road. Rgt tfc.

RWY 32: REIL. PAPI(P2L)-GA 3.0°.

AIRPORT REMARKS: Attended 1600-0100Z+. After hrs emerg ctc Police Department 661-721-3377. Seasonal crop duster ops on arpt east of Rwy 14-32. MIRL Rwy 14-32 preset low ints dusk-dawn, to increase ints ACTIVATE-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.55 (661) 721-2668.

COMMUNICATIONS: CTAF/UNICOM 122.8


® BAKERSFIELD APP/DEP CON 118.9 (1400-0700Z+)

L.A. CENTER APP/DEP CON 127.1 (0700-1400Z+)

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07'

W119°05.84' 323° 17.1 NM to fld. 548/14E. HIWAS.

**DESERT CENTER** (L64) 5 NE UTC-8(-7DT) N33°44.86' W115°19.52'

LOS ANGELES

559 TPA-1559(1000) NOTAM FILE RAL

L-41, 5A

RWY 05-23: H4200X50 (ASPH) S-45, D-80, DT-140


AIRPORT REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BLH.

BLYTHE (H) VORTACW 117.4 BLH Chan 121 N33°35.76'

W114°45.67' 274° 29.7 NM to fld. 410/14E. HIWAS.

**DINSMORE** (D63) 1 E UTC-8(-7DT) N40°29.52' W123°35.89'

KLAMATH FALLS

2375 TPA-3275(900) NOTAM FILE OAK

RWY 09-27: H2510X48 (ASPH)

RWY 09: Thld dsplcd 80'. Trees. Rgt tfc.

RWY 27: Thld dsplcd 80'. Road.

AIRPORT REMARKS: Unattended. Day use only; CLOSED nghts. Mountains with high trees invov arpt.

COMMUNICATIONS: CTAF 122.9

DORRIS

BUTTE VALLEY (A32) 5 SW UTC-8(-7DT) N41°53.24' W121°58.54'

4243 B TPA-5043(800) NOTAM FILE RIU

RWY 16-34: H4300X60 (ASPH) S-30 MIRL

RWY 16: Road. **RWY 34:** Fence.


AIRPORT REMARKS: Unattended. Arpt rstd by arpt owner to acft with maximum certificated tkof weight of 12,500 lbs or less; call arpt manager 530-842-8295 for more information. ACTIVATE MIRL Rwy 16-34 key 122.9 5 times.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE LMT.

KLAMATH FALLS (H) VORTACW 115.9 LMT Chan 106 N42°09.19' W121°43.65' 198° 19.4 NM to fld. 4087/17E.
HIWAS.

KLAMATH FALLS
L-21



DUNSMUIR MUNI-MOTT (106) 3 N UTC-8(-7DT) N41°15.78' W122°16.33'

3258 TPA-4258(1000) NOTAM FILE RIU

RWY 14-32: H2700X60 (ASPH) S-12.5

RWY 14: Thld dspcd 345'. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Arpt CLOSED to night ops. Arpt surrounded by high mountains. Rising terrain unlighted obstacles north and east of rwy. Rwy 14 CLOSED for landing. Rwy 32 CLOSED for tkf.

COMMUNICATIONS: CTAF 122.9

KLAMATH FALLS

EASTERN SIERRA RGNL (See BISHOP)

ECKERT FIELD (See STRATHMORE)

EDWARDS AF AUX NORTH BASE (9L2) AF (NASA) 3 N UTC-8(-7DT)

N34°59.45' W117°51.79'

2299 NOTAM FILE EDW

RWY 06-24: H5998X150 (ASPH) AUW 250 PCN 48 F/A/W/T HIRL

RWY 24: PAPI(P4L)-GA 3.0°.

MILITARY REMARKS: Opr 1400-0600Z±, clsd weekends and holidays. **RSTD** PPR strictly enforced. Clsd to all transient acft without prior approval of 412 OG/CC. All turns will be made on concrete areas of rwy located at the apch end, departure end and mid-fld. If unable to exit a centerline twy, acft must proceed to departure end to initiate turn and exit mid-fld. Ltd to BE-20 type acft and smaller, 12,500 lbs or less. Due to rwy condition, all turns will occur on the concrete areas of the rwy located at the apch end, dep end, and mid-field. If unable to exit at center twy, acft must proceed to the dep end to initiate turn and exit mid-fld.

MISC Winds are estimated due to FMQ-13 wind sensors being accurate to within only +/- 4 Kt, issued estimated winds are for Main Base Rwy 04-22. ATC/Wx will not include/relay wind correction into forecast/phraseology. Therefore, aircrews will incorporate a +/- 4 Kt accuracy into their decision making process for flying opr. For HIRL Rwy 06-24 ctc twr. Rwy edge lgt positioned more than 10' from the edge of the usable rwy sfc.

COMMUNICATIONS:

Ⓡ **SPORT APP/DEP CON** 132.75 343.7 (Opr std time Mon-Fri 1500-0100Z weekends 25 rqr, opr dalgt time Mon-Fri 1400-0200Z weekends as rqr), other times ctc

Ⓡ **JOSHUA APP/DEP CON** 133.65 348.7

TOWER 120.7 318.1 353.6

RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.

EDWARDS (L) VORTAC 116.4 EDW Chan 11 N34°58.94' W117° 43.96' 261° 6.4 NM to fld. 2354/15E.

LOS ANGELES
H-4H, L-7C
DIAP

EDWARDS AFB (EDW)(KEDW) AF (NASA) 6 SW UTC-8(-7DT) N34°54.98' W117°51.75' **LOS ANGELES**
 2312 B NOTAM FILE EDW Not insp. **H-4H, L-7C**
RWY 04R-22L: H15024X300 (CONC) PCN 70 R/B/W/T HIRL **DIAP, AD**
RWY 04R: PAPI(P4L). **RWY 22L:** REIL. PAPI(P4L).
RWY 04L-22R: H12000X200 (ASPH) PCN 54 F/A/W/T
RWY 06-24: H8000X50 (CONC) PCN 6 R/D/W/T
ARRESTING GEAR/SYSTEM
RWY 04R HOOK BAK-12B(B) (1518') **HOOK BAK-12B(B) (1559') RWY 22L**
MILITARY SERVICE: LGT Rwy 04R, Rwy 22L, portable and flood lgts. ILS and PAPI not coincidental. **JASU** (MD-3) (MD-3M) 2(C-26) 8(AM32A-60) (MA-1A) (MC-1A) 2(MC-11). **FUEL** 2 hr refuel delay can be expected. 100 avbl thru prior arrangement with Aero Club only DSN 525-8321, C661-275-8321; J5, J8 can no longer refuel/defuel with J4. **FLUID SOAP** W SP PRESAIR LHOX LOX. **OIL** O-128-133-148
TRAN ALERT Svc avbl weekday 1400-0600Z, weekend 1400-0200Z, and holidays with 24 hr prior notice. Transportation svc avbl weekdays 1400-2330Z. Expect svc delay on weekends and holidays. Limited fleet svc avbl. No priority basis.
MILITARY REMARKS: Opr 1400-0600Z, CLOSED holiday and every third Sun for construction and maintenance. See FLIP AP/1, Flight Hazards and Supplementary Arpt Remarks. **RSTD** Official Business Only on weekends and holidays, PPR always. Ctc Base OPS DSN 527-2222/3571, C661-277-2222/3571 for PPR number. PPR and airspace briefing rqr for all acft (no exceptions), transient should be prior coordination in advance with airspace manager DSN 527-2446 or sport remote communication facility DSN 527-3928. All PPR rqr minimum 24 hr prior notice, no same day PPR avbl. PPR will not be issued more than 5 days prior to arrival. All PPR valid +/- 30 minutes PPR time. Telephone coordination rqr for PPR outside of block time. Practice apch to Edwards AFB main base rwy, North Base rwy and lake bed rwy prohibited when twr clsd. Contact NASA flight ops call 661-276-3213 except for PPR. Non-NASA registered acft must contact NASA to park on NASA ramp. South Base Rwy 06-24 CLOSED from official SS to official SR. South base Rwy 06-24 is ltd to light acft (12,500 lbs gross weight or less), no turbojets. Rwy 04L-22R daylight only ops. Cargo and passenger service-(1) cargo acft requiring support must arrive prior to 0200Z. Cargo and passenger service-(2) space A travel into Edwards AFB is not recommended due to limited services. Edwards AFB does not have a passenger terminal or base taxi for space A passengers. Prior transportation arrangements from the base are mandatory. No dining, lodging, or transportation services within walking distance. Main gate is 6 miles away and nearest civilian facilities (Lancaster, CA) are 35 miles away. **CAUTION** VFR initial flown 1215' N or rwy centerline due to steep straight-in simulated flame out and shuttle apch to rwy. Pay careful attention to acft alignment on final to preclude inadvertent ldg on S base Rwy 24. Numerous unmarked/unlgt'd obstructions surround arpt. Observer visibility restricted SW-N due building obstructing vision. Use caution for UAS arrivals/departures from Rwy 04L-22R, south base Rwy 06-24, north base Rwy 06-24, the Rogers/Rosamond Lakebed Runway complex and within R-2515. Contact ATC for UAS flight activities. **NS ABTMT** Rwy 22L and Rwy 22R: All IFR dep exc low performance acft (C12, T1, etc.) whose initial turn is SW-N, fly rwy heading until 12 DME before turning on course. **CSTMS/AG/IMG** Customs avbl to military acft only, 24 hr prior notice rqr. **MISC** Transient acft may expect IFR separation delays entering R-2508 Complex. Transient acft expect extensive refuel delays. Acft with Distinguished Visitor inbound ctc PTD 40 NM out. No COMSEC avbl; aircrew limited to own resources on arrival or in case of extensive delay. Multiple acft rqr 24 hr prior notice. UHF equipped acft must UHF (not VHF) in pattern. No RVR capabilities. Cargo acft requiring support must arrive prior to 0200Z. No space A passenger support available.
COMMUNICATIONS: ATIS 269.9 (1400-0600Z) **PTD** 372.2
(R) SPORT APP/DEP CON 132.75 343.7 (Opr std time Mon-Fri 1500-0100Z weekends as rqr, opr dalgt time Mon-Fri 1400-0200Z weekends as rqr), other times ctc
(R) JOSHUA APP/DEP CON 133.15 269.2 (E) 126.1 290.3 (S) 133.65 348.7 (W and N)
TOWER 120.7 318.1 353.6 (1400-0600Z, clsd holiday and every third Sun for construction and maintenance.)
GND CON 121.8 225.4
COMD POST (CONFORM) 304.0 **PMSV METRO** 342.4 (Full svc 1300-0600Z, clsd Federal holidays)
NASA 135.825 373.15
AIRSPACE: CLASS D svc 1400-0600Z, except holidays and every third Sun for construction and maintenance other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.
(L) VORTAC 116.4 EDW Chan 111 N34°58.94' W117°43.96' 223° 7.5 NM to fld. 2354/15E.
 TACAN unusable:
 090°-150° byd 15 NM.
COMM/NAV/WEATHER REMARKS: Ctc NASA Flight Ops point of contact C661-276-3213, except for PPR. After hours weather briefings/updates available from the 25 Operational Weather Squadron at DSN 228-6958/6599/6588 or toll free 877-451-8367 X1.

EL CENTRO NAF (NJK)(KNJK) NAF 6 NW UTC-8(-7DT) N32°49.75' W115°40.30' **LOS ANGELES**
 -42 B NOTAM FILE NJK Not insp. **H-4H, L-4I**
RWY 08-26: H9503X200 (PEM) PCN 62 R/C/W/T HIRL **DIAP, AD**
RWY 08: OLS. **RWY 26:** OLS.
RWY 12-30: H6824X200 (PEM) PCN 35 R/D/W/T HIRL
RWY 30: OLS.
ARRESTING GEAR/SYSTEM
RWY 08 HOOK E28 (1485') **HOOK E28 (1500') RWY 26**
RWY 12 HOOK E28 (1570') **HOOK E28 (1245') RWY 30**
MILITARY SERVICE: L6T Carrier deck lgt avbl Rwy 08-26 and Rwy 30. **JASU 1**(RCPT-105) 1(NC-8) (Wells Air Start System). **FUEL** J8. Tran pilots expect up to 2 hr delay without prior arrangement DSN 658-2425, C760-339-2425. Hot refueling avbl most acft Mon-Thu 1630-0430Z, Fri 1600-0200Z, Sat 1630-2300Z, CLOSED Sun and holidays. Hot refueling hrs subject to short notice change, refer to NOTAM. **FLUID** HPOX LOX. **OIL** O-128-156. **TRAN ALERT** No tran svc 0700-1500Z. Tran maintenance extremely ltd. Tran acft inbound with ordnance advise twr on initial ctc. Tran acft inbound with ordnance for hot refueling must safe their acft prior to hotitting, T-line cannot safety or pin tran acft. Ltd svc avbl for large passenger acft rqr 48 hr notice DSN 658-2655.
MILITARY REMARKS: Opr Mon-Thu 1500-0700Z, Fri 1500-0200Z, Sat 1500-2300Z, CLOSED Sun and holidays. See FLIP AP/1 Supplementary Arpt Remark. **RSTD** All acft and all acft that intend to RON rqr 72 hr PPR, DSN 658-2507/2601, C760-339-2507/2601 during scheduled field hrs. **CAUTION** Inbound acft use extreme caution to avoid R2510 located 5 NM NW due to Air/Ground weapons opr and parachute drops. Extreme mid-air potential due to high density VFR general aviation tfc and crop dusters in vicinity. Avoid Imperial Co arpt 4.5 NM E uncontrolled, blo 3000' AGL. Bird activity mid Dec to mid Mar SR-SS within the adjacent fld located E and W of the arpt. Parachuting Activities/Exercises are conducted on regular basis off NJK TACAN 170/10 or IPL VORTAC 240/12. **TFC** PAT Dense fld carrier ldg practice tfc all hr. Reduced rwy separation standard in effect USN/USMC acft. **NS ABTMT** Avoid overflight housing located SW of twr and fuel farm located immediately SW apch end Rwy 30. Avoid overflight town of El Centro approximately 5 NM E, blo 5000' AGL. Numerous cattle feed lots located thru-out area, avoid overflight at low altitude. **MISC** Acft inbound make initial ctc with twr 15 NM or sooner. Air Traffic Control Tower in non-radar environment with high volume of air tfc. Improved Fresnel lens OLS avbl Rwy 08 and Rwy 26.
COMMUNICATIONS: ATIS 269.275
TOWER 119.1 360.2 (Mon-Thu 1500-0700Z, Fri 1500-0200Z, Sat 1500-2300Z, CLOSED Sun and holidays.)
GND CON 121.9 254.35
CLNC DEL 340.2 **PMSV METRO** 348.3
AIRSPACE: CLASS D svc Mon-Thu 1500-0700Z, Fri 1500-0200Z, Sat 1500-02300Z, CLOSED Sun and holidays, other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE IPL.
IMPERIAL (H) VORTAC 115.9 IPL Chan 106 N32°44.93' W115°30.52' 286° 9.6 NM to fld. -20/14E.
(L) TACAN Chan 47 NJK (111.0) N32°49.91' W115°40.87' at fld. -49/13E. NOTAM FILE NJK. Monitored only during arpt opr hr.
TACAN azimuth and DME unusable:
 090°-095° byd 20 NM 260°-270° byd 30 NM
 095°-240° byd 10 NM 270°-360° byd 30 NM
 240°-260° byd 30 NM 360°-050° byd 25 NM

ELK GROVE (E27) 2 SE UTC-8(-7DT) N38°23.54' W121°19.85' **SAN FRANCISCO**
 54 TPA-1000(946) NOTAM FILE RIU
RWY 11-29: H2769X35 (ASPH) S-12 LIRL
RWY 11: Trees. **RWY 29:** Trees.
AIRPORT REMARKS: Unattended. Twys and taxilanes NSTD width. Land Rwy 29, depart Rwy 11. Rwy 29 safety area NSTD length. CLOSED to helicopter training. CLSD to touch and go lds and ultralights. Rwy 11, 45' p-line marked with orange balls 1140' from rwy thld; not lgtd for ngf ops. Name "SUNSET SKYRANCH" painted on Rwy 11-29 with white letters. ACTIVATE LIRL Rwy 11-29-122.9.
COMMUNICATIONS: CTAF 122.9
(R) NORCAL APP/DEP CON 125.25 (Southeast-Northwest) 127.4 (North-East)

ELK HILLS—BUTTONWILLOW (See BUTTONWILLOW)

ELLS FIELD—WILLITS MUNI (See WILLITS)

EL MONTE (EMT) 1 N UTC-8(-7DT) N34°05.16' W118°02.09'
 296 B S4 FUEL 100LL, JET A TPA-1296(1000) NOTAM FILE EMT
 RWY 01-19: H3995X75 (ASPH-AFSC) S-12.5 MIRL 0.4% up NE
 RWY 01: PAPI(P2L)—GA 4.57° TCH 64'. Thld dsplcd 290'. Pole.
 RWY 19: REIL: PAPI(P2R)—GA 4.5° TCH 37'. Thld dsplcd 641'.
 Pole. Rgt tfc.

LOS ANGELES
 COPTER
 L-3E, 4G, 7B, A
 IAP, AD

RUNWAY DECLARED DISTANCE INFORMATION

RWY 01: TORA-3504 TODA-3995 ASDA-3755 LDA-3465
 RWY 19: TORA-3995 TODA-3995 ASDA-3995 LDA-3354

AIRPORT REMARKS: Attended continuously. Heavy bird activity on and in/ovf arpt. Ltgd water twr 1 mile W-SW of arpt. Remain over paved channel on climbout to S and to N. When twr clsd ACTIVATE MIRL
 Rwy 01-19, REIL Rwy 19, and PAPI Rwy 01 and Rwy 19—CTAF.

COMMUNICATIONS: CTAF 121.2 ATIS 118.75 (626) 444-1107
 UNICOM 122.95

Ⓡ SOCAL APP/DEP CON 125.5

TOWER 121.2 (1600-0400Z+)

GND CON 125.9


AIRSPACE: CLASS D svc 1600-0400Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE POC.

POMONA (L) VORTAC 110.4 POM Chan 41 N34°04.70'
 W117°47.22' 257° 12.4 NM to fld. 1273/15E.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'
 W117°31.80' 277° 27.1 NM to fld. 1432/15E. NOTAM FILE RAL.

NDB (MHW) 359 EMT N34°05.30' W118°01.87' at fld. NOTAM FILE EMT.
 Unusable 280°-050° byd 15 NM.



EL NIDO N37°13.17' W120°24.01' NOTAM FILE MCE.
 (L) VOR/DME 114.2 HYP Chan 89 291° 6.7 NM to Merced Muni/Macready Fld. 183/15E.
 RCO 122.1R 114.2T (RANCHO MURIETA RADIO)

SAN FRANCISCO
 H-3B, L-3B


EL TORO N33°40.56' W117°43.87' NOTAM FILE RAL.
 (T) VORW/DME 117.2 ELB Chan 119 270° 6.9 NM to John Wayne Airport/Orange Co.
 VOR portion unusable:
 050°-070° byd 16 NM
 DME portion unusable: 026°-070° byd 16 NM, 105°-145° byd 16 NM, 325°-010° byd 16 NM.

LOS ANGELES
 COPTER
 L-3E, 4H, A

EMIGRANT GAP

BLUE CANYON-NYACK (BLU) 1 S UTC-8(-7DT) N39°16.50' W120°42.59'
 5284 B TPA-6284(1000) NOTAM FILE BLU
 RWY 15-33: H3300X50 (ASPH) S-12 MIRL
 RWY 15: Tree. RWY 33: Tree.
AIRPORT REMARKS: Unattended. Arpt CLOSED SS-SR. CLOSED winters due to snow. Do not attempt to land with snow on the rwy. No snow removal svcs are provided. Rotating bcn OTS indef. MIRL Rwy 15-33 OTS indef. ACTIVATE rotating bcn and MIRL Rwy 15-33—CTAF.
WEATHER DATA SOURCES: ASOS 120.075 (530) 389-2091.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.
 SQUAW VALLEY (L) VORW/DME 113.2 SWR Chan 79 N39°10.82' W120°16.18' 270° 21.3 NM to fld. 8850/16E. HIWAS.

SAN FRANCISCO
 L-3A



EUREKA N40°48.29' W124°07.05'
 RCO 122.35 (OAKLAND RADIO)

KLAMATH FALLS
 L-2H

EUREKA

EUREKA MUNI (O33) 2 W UTC-8(-7DT) N40°46.85' W124°12.74'
 20 TPA-820(800) LRA NOTAM FILE OAK
 RWY 16-34: H2700X60 (ASPH) S-10
 RWY 16: Rgt tfc.
AIRPORT REMARKS: Unattended. Day use only; CLOSED ngts. Ultralight activity on and invof arpt.
COMMUNICATIONS: CTAF 122.9


KLAMATH FALLS

KNEELAND (O19) 10 SE UTC-8(-7DT) N40°43.14' W123°55.63'
 2737 TPA-3537(800) NOTAM FILE OAK
 RWY 15-33: H2270X50 (ASPH) S-13
 RWY 15: Thld dsplcd 60'. Trees. RWY 33: Thld dsplcd 40'. Trees.
AIRPORT REMARKS: Unattended. Day use only; CLOSED ngts. 500' drop off 25' from Rwy 15 thld, 40' drop off 40' from Rwy 33 thld.
COMMUNICATIONS: CTAF 122.9

KLAMATH FALLS

MURRAY FLD (EKA) 3 E UTC-8(-7DT) N40°48.20' W124°06.77'
 07 B S4 FUEL 100LL TPA-807(800) NOTAM FILE OAK
 RWY 12-30: H3000X75 (ASPH) S-19 MIRL
 RWY 12: SAVASI(S2L)-GA 3.0° TCH 26'.
 RWY 30: VASI(V2L)-GA 4.0° TCH 26'. Rgt tfc.
AIRPORT REMARKS: Attended 1630-0130Z+. Deer occasionally on rwy.
 ACTIVATE MIRL Rwy 12-30, VASI Rwy 30 SAVASI Rwy 12-CTAF.
 Flight Notification Service (ADCUS) avbl.
COMMUNICATIONS: CTAF/UNICOM 122.7
 EUREKA RCO 122.35 (OAKLAND RADIO)
 Ⓡ SEATTLE CENTER APP/DEP CON 124.85
RADIO AIDS TO NAVIGATION: NOTAM FILE ACV.
 FORTUNA (L) VORTACW 114.0 FOT Chan 87 N40°40.28'
 W124°14.07' 016° 9.7 NM to fld, 386/19E.

KLAMATH FALLS
 L-2H
 IAP

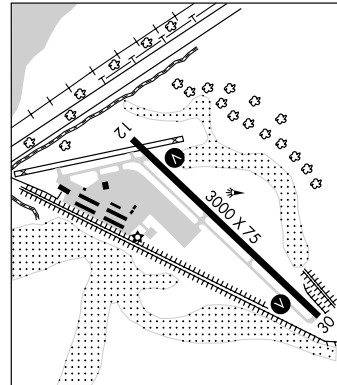

EXECC N38°26.99' W121°32.78' NOTAM FILE SAC.
 NDB (LOM) 356 SA 019° 4.5 NM to Sacramento Executive.

SAN FRANCISCO
 L-2F, 3A

EXETER (O63) 3 S UTC-8(-7DT) N36°14.55' W119°08.98'
 340 S4 TPA-1140(800) NOTAM FILE RIU
 RWY 13-31: 2800X40 (ASPH-TRTD)
 RWY 13: Thld dsplcd 400'. Trees. RWY 31: Thld dsplcd 200'. Road.
AIRPORT REMARKS: Attended dalgt hours. After hours call 559-562-2633 or 559-562-6433 or 559-786-7887. Rwy 13-31 CLOSED indef. Rwy 13 +10' road 80'-200' from rwy end 125' left 105' right. Rwy 31 +10' road 0'-100' from rwy end 40' left 125' right. Rwy 13-31 numbers only, dsplcd thld marked with white tires. Rwy 13 is not marked. Rwy 31 is not marked. Rwy 13-31 narrowest width is 50'. Rwy 13-31 severe alligator cracks, poor condition.
COMMUNICATIONS: CTAF 122.9

SAN FRANCISCO

FALLBROOK COMMUNITY AIRPARK (L18) 2 S UTC-8(-7DT) N33°21.25' W117°15.05'

LOS ANGELES

708 B S4 FUEL 100LL TPA—See Remarks NOTAM FILE SAN

L-4H

RWY 18-36: H2160X60 (ASPH-RFSC) S-12 MIRL 0.4% up NE

IAP

RWY 18: VASI(NSTD)—GA 4.0° TCH 20'.


RWY 36: Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z+. Helicopter/rotocraft fuel or parking unavbl. Military helicopters invof arpt. Administration bldg and fueling area west, hill east Part 77 obstruction. No safety area avbl due to abrupt drop-off each end of Rwy 18-36. Noise abatement: tcf climb straight ahead to 1200' MSL. Rwy 18 turn crosswind when abeam water tank 1.1 miles ESE of rwy. Rwy 18 extend downwind leg to allow ½ mile final apch. Fly downwind to east of high school. Recommended helicopter tcf pattern is to apch from and depart to the east at 492' AGL directly to the helicopter landing area located on the southeast corner of the airfield. Helicopter pad CLOSED to transient acft.

TPA—1708(1000). Helicopter/rotocraft traffic pattern 1208(500). Helicopters enter tcf pattern from east on 45° to downwind leg. Helicopter base leg is mid-field. Continue on final leg to southern end of transient ramp, just east of rwy for touch and go opr. Helicopter/rotocraft rstd to touch and go ops.

Hovers, skid landings and auto-rotations are not permitted. Acft over 12,000 pounds PPR, call arpt manager 760-723-8395.

Helicopters are to use the L as their pad. Rwy 36 blast pad marked with chevrons and unusable. Twy hold bars NSTD distance from rwy edge. Rwy 18 NSTD-VASI one box on left side of rwy. MIRL Rwy 18-36 med ints only avbl. ACTIVATE MIRL Rwy 18-36 and twy lgts—CTAF.

COMMUNICATIONS: CTAF/AUNICOM 123.05**SOCAL APP/DEP CON** 127.3**RADIO AIDS TO NAVIGATION:** NOTAM FILE CRQ.**OCEANSIDE (H) VORTAC** 115.3 OCN Chan 100 N33°14.44' W117°25.06' 036° 10.8 NM to fld. 90/15E.**COMM/NAV/WEATHER REMARKS:** Automated UNICOM—3 clicks for arpt advisory and weather, 4 clicks for radio check.**FALL RIVER MILLS** (089) 1 N UTC-8(-7DT) N41°01.13' W121°26.00'

KLAMATH FALLS

3323 B S4 FUEL 100LL TPA—4123(800) NOTAM FILE RIU

H-3B, L-2H, 11A

RWY 02-20: H5000X75 (ASPH) S-12.5 MIRL


AIRPORT REMARKS: Unattended. Parachute Jumping. Arpt CLOSED periodically winter months due to snow, call arpt manager 530-225-5661 for current conditions. Crop dusters working invof arpt Feb-Oct. ACTIVATE MIRL Rwy 02-20—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.4 (RANCHO MURIETA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RDD.**REDDING (T) VOR/DME** 108.4 RDD Chan 21 N40°30.27'

W122°17.50' 033° 49.8 NM to fld. 490/18E.



FAMOSO

POSO—KERN CO (L73) 4 E UTC—8(—7DT) N35°35.78' W119°07.70'

LOS ANGELES
L—3D, 7B

635 TPA—1435(800) NOTAM FILE RIU

RWY 16—34: H3000X60 (ASPH) S—6

RWY 16: Thld dsplcd 210'. Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED to ngt ops. Crop dusting ops prohibited except by PPR arpt manager 661—391—1800.


Radio control model acft blo 800' AGL invof arpt.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07'

W119°05.84' 333° 6.9 NM to fld. 548/14E. HIWAS.



FELLOWS N35°05.59' W119°51.94' NOTAM FILE RIU.

LOS ANGELES
H—4G, L—3D, 7A

(L) VORTAC 117.5 FLW Chan 122 120° 12.8 NM to New Cuyama. 3870/16E.

RCO 122.1R 117.5T (RANCHO MURIETA RADIO).

FILLMORE N34°21.40' W118°52.88' NOTAM FILE HHR.

LOS ANGELES
COPTER

(L) VORTAC 112.5 FIM Chan 72 216° 13.6 NM to Camarillo. 2200/15E.

VOR/DME unusable:

280°—315° byd 20 NM blo 11,000'

315°—360° byd 25 NM blo 14,000'

280°—315° byd 31 NM blo 14,000'

DME unusable:

265°—275° byd 15 NM

RCO 122.1R 112.5T (HAWTHORNE RADIO).

FIREBAUGH (F34) 1 W UTC—8(—7DT) N36°51.60' W120°27.87'

SAN FRANCISCO
L—3C
IAP

157 B TPA—1007(850) NOTAM FILE RIU

RWY 12—30: H3102X60 (ASPH) S—12 MIRL

RWY 12: Road. Rgt tfc.

RWY 30: VASI(V2L)—GA 3.0° TCH 29'. Road.

AIRPORT REMARKS: Unattended. Rwy 30 VASI OTS indef.

COMMUNICATIONS: CTAF 122.9

PANOCH RCO 122.1R 112.6T (RANCHO MURIETA RADIO)

® NORCAL APP/DEP CON 120.95

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

PANOCH (L) VORTAC 112.6 PXN Chan 73 N36°42.93' W120°46.72' 044° 17.4 NM to fld. 2060/16E.

FLABOB (See RIVERSIDE)

FOLSOM

FOLSOM LAKE SPB (C39) 1 N UTC—8(—7DT) N38°42'26" W121°08'00"

SAN FRANCISCO

466 FUEL MOGAS NOTAM FILE RIU

Not insp.

WATERWAY ALL-WAY: 1000X4000 (WATER)

SEAPLANE REMARKS: Unattended. For fuel call 916—933—1300 during dalgt hrs. Paraglider activity on lake up to 3000' above surface of lake. Pilots be aware of tow lines. P—lines S of main lake and along ridge 1000 yards from shoreline. Lake level varies from 350' to 466'. No lndg of seaplanes or ultralights when lake elevation is below 380'. Call Bureau of Reclamation for current lake elevation at 1—800—742—9474 ext 102. Stay 2000' away from all shorelines. Beachng of acft only on shoreline of peninsula and unoccupied areas. No beachng on day areas at Dyke 8, Beal's Point and Granite Bay.

COMMUNICATIONS: CTAF 122.9

FORT BIDWELL (A28) 1 N UTC-8(-7DT) N41°52.59' W120°08.81'

KLAMATH FALLS

4602 TPA-5402(800) NOTAM FILE RNO

RWY 16-34: 3660X50 (GRVL)

RWY 16: Road.

RWY 34: Brush.

AIRPORT REMARKS: Unattended. No snow removal. Rwy not regularly maintained, gravel and rocks up to 4 inch diameter on rwy. +4' fence, 120' East of rwy centerline for entire length of rwy.

COMMUNICATIONS: CTAF 122.9**FORT JONES****SCOTT VALLEY** (A30) 3 S UTC-8(-7DT) N41°33.47' W122°51.30'

KLAMATH FALLS

L-21

2728 B FUEL 100LL TPA-3528(800) NOTAM FILE RIU

RWY 16-34: H3700X50 (ASPH) S-12 MIRL


RWY 16: Tree. Rgt tfc.

RWY 34: Thld dsplcd 200'. Tree.

AIRPORT REMARKS: Unattended. Rwy 34 lgtd thld relocated 200' for ngt ops. 3500' of Rwy 16-34 usable at ngt. ACTIVATE MIRL Rwy 16-34-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RIU.**FORT JONES (L) VOR/DME** 109.6 FJS Chan 33 N41°26.98'

W122°48.39' 322° 6.8 NM to fld. 4900/19E. HIWAS.

**FORT JONES** N41°26.98' W122°48.39' NOTAM FILE RIU.

KLAMATH FALLS

L-21

(L) VOR/DME 109.6 FJS Chan 33 322° 6.8 NM to Scott Valley. 4900/19E. HIWAS.

VOR portion unusable:

080°-135° byd 9-19 NM blo 13,000'

200°-300° byd 8 NM blo 14,000'

080°-135° byd 19 NM

200°-300° byd 19 NM

DME unusable:

020°-060° byd 30 NM blo 12,000'

120°-180° byd 35 NM blo 12,000'

060°-120° byd 20 NM blo 16,000'

180°-290° byd 20 NM blo 16,000'

RCO 122.1R 109.6T (RANCHO MURIETA RADIO)

FORTUNA**ROHNERVILLE** (FOT) 3 SE UTC-8(-7DT) N40°33.24' W124°07.96'

KLAMATH FALLS

L-2H

393 B TPA-1193(800) NOTAM FILE OAK

RWY 11-29: H4005X100 (ASPH) S-30 MIRL 1.3% up SE

RWY 11: REIL. VASI(V4R)-GA 3.0° TCH 45'. Rgt tfc.

RWY 29: REIL.

AIRPORT REMARKS: Unattended. Deer invof runways. REIL Rwy 29 OTS indef. ACTIVATE MIRL Rwy 11-29-CTAF.

COMMUNICATIONS: CTAF 122.9

CRESCENT CITY RCO 122.3 (OAKLAND RADIO)

SEATTLE CENTER APP/DEP CON 124.85

RADIO AIDS TO NAVIGATION: NOTAM FILE ACV.**FORTUNA (L) VORTACW** 114.0 FOT Chan 87 N40°40.28' W124°14.07' 127° 8.4 NM to fld. 386/19E.**FORTUNA** N40°40.28' W124°14.07' NOTAM FILE OAK.

KLAMATH FALLS

H-3A, L-2H

(L) VORTACW 114.0 FOT Chan 87 015° 9.7 NM to Murray Fld. 386/19E.

VOR portion unusable:

060°-095° byd 35 NM blo 9,500'

280°-295° byd 20 NM all alts.

135°-175° byd 20 NM blo 6,500'

295°-350° byd 20 NM blo 3,000'.

DME portion unusable

050°-070° byd 35 NM blo 9500'

315°-325° byd 15 NM blo 5,500'

150°-200° byd 20 NM blo 5000'

FRANKLIN FIELD (F72) 4 SE UTC-8(-7DT) N38°18.24' W121°25.76'

SAN FRANCISCO

21 TPA-1021(1000) NOTAM FILE RIU

L-2F, 3A

RWY 18-36: H3240X60 (ASPH) S-30

RWY 18: Fence. **RWY 36:** Thld dsplcd 255'. Rgt tfc.

RWY 09-27: H3100X60 (ASPH) S-30

RWY 09: P-line. Rgt tfc. **RWY 27:** Thld dsplcd 70'. P-line.

AIRPORT REMARKS: Unattended. Ultralights activity invof arpt. Monitor 122.9 within 5 miles. Extensive student helicopter and fixed wing training in area. Conduct helicopter training N of Rwy 09 and W of Rwy 36. Avoid overflight of detention facility on E side of arpt except in emerg. Calm wind Rwy 18. All rwys limited to 15,000 lbs gross weight.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 128° 10.2 NM to fld. 10/17E. HIWAS.

FRAZIER LAKE AIRPARK (See HOLLISTER)

FREDRICK SHERMAN FLD (See SAN CLEMENTE ISLAND NALF)

FRENCH VALLEY (See MURRIETA/TEMECULA)

FRESNO

FRESNO CHANDLER EXECUTIVE (FCH) 2 W UTC-8(-7DT) N36°43.93' W119°49.22'

SAN FRANCISCO

279 B S2 FUEL 100LL NOTAM FILE FCH

L-3C, 9A

RWY 12-30: H3630X75 (ASPH) S-17 MIRL

IAP, AD

RWY 12: REIL. VASI(V2L). Thld dsplcd 418'. Road. Rgt tfc.

RWY 30: REIL. PAPI(P4R). Thld dsplcd 540'. Road.

AIRPORT REMARKS: Attended 1600-0100Z+. Numerous birds in vicinity of arpt. Rwy 30 calm wind rwy when wind reported by AWOS less than 5 knots. Practice landings and low apchs and touch and go ldg or stop-and-go ops authorized only between 1500-0600Z+. Rwy 12 practice landings and low apchs and touch and go ldg or stop-and-go ops not permitted due to noise sensitive residential areas SE of arpt. After tkf climb on rwy heading until passing 800' MSL, for safety and noise abatement initial climb out at best rate-of-climb recommended. Fee for acft over 12,500 pounds gross weight. ACTIVATE MIRL Rwy 12R-30L, REIL Rwy 12R and Rwy 30L and taxiway lgts-CTAF.

WEATHER DATA SOURCES: AWOS-3 135.225 (559) 488-1040.

COMMUNICATIONS: CTAF/UNICOM 123.0

® APP CON 119.0 119.6

® DEP CON 119.0


RADIO AIDS TO NAVIGATION: NOTAM FILE FAT.

CLOVIS (H) VORTAC 112.9 CZQ Chan 76 N36°53.06'

W119°48.91' 167° 9.1 NM to fld. 360/15E.

CHANDLER NDB (HW) 344 FCH N36°43.44' W119°50.02' at fld. NOTAM FILE FCH. Unmonitored.

NDB unusable 200°-230° beyond 40 NM blo 8500'.



FRESNO YOSEMITE INTL (FAT) 5 NE UTC-8(-7DT) N36°46.57' W119°43.09'

SAN FRANCISCO

336 B S4 FUEL 100, JET A OX 1, 3, 4 TPA—See Remarks LRA Class I, ARFF Index B H-3B, L-3C, 9A
NOTAM FILE FAT IAP, AD**RWY 11L-29R:** H9227X150 (ASPH-GRVD) S-70, D-170, ST-175, DT-250

HIRL CL

RWY 11L: REIL. PAPI(P4L)—GA 3.0° TCH 55'. Pole.**RWY 29R:** ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 75'. Thld dspcd 312'. Road. Rgt tfc.**RWY 11R-29L:** H7205X100 (ASPH) S-70, D-125, ST-159, DT-200
MIRL**RWY 11R:** REIL. Thld dspcd 1448'. Rgt tfc.**RWY 29L:** PAPI(P4L)—GA 3.0° TCH 44'.**ARRESTING GEAR/SYSTEM****RWY 11L** ← HOOK BAK-12A (107' OVRN)BAK-14 BAK-12B(B) (1310') **RWY 29R****RWY 11R** ← HOOK BAK-12A (222' OVRN)**AIRPORT REMARKS:** Attended continuously. Numerous birds invof arpt.

Possible wake turbulence or wind shear arrival to Rwy 29L or departure from Rwy 11R. Jet testing conducted at Air National Guard ramp located at SE corner of arpt. Fee for acft over 12,500 lbs. gross weight. Fresno Yosemite Intl is noise sensitive, noise abatement procedure in effect. No multiple apchs and ldgs 0600-1500Z† Mon thru Sat, 0200-1800Z† Sun. For Twy A, 40' wide, prior approval required acft over 60,000 pounds gross weight. No intersection departures to the NW except the intersection of Rwy 29R at Twy B2 or during single rwy operations. TPA-1303 (967) single engine aircraft; 1803 (1467) multi engine aircraft; 2303 (1967) turbojet; 803(467) helicopters. Rws 11L and 29R touchdown, midfield, rollout runway visual range avbl. Lgt'd rwy distance remaining markers south side of Rwy 11R-29L. lgt'd rwy distance remaining markers both sides of Rwy 11L-29R. Flight Notification Service (ADCUS) available.


0600-1500Z† Mon thru Sat, 0200-1800Z† Sun. For Twy A, 40' wide, prior approval required acft over 60,000 pounds gross weight. No intersection departures to the NW except the intersection of Rwy 29R at Twy B2 or during single rwy operations. TPA-1303 (967) single engine aircraft; 1803 (1467) multi engine aircraft; 2303 (1967) turbojet; 803(467) helicopters. Rws 11L and 29R touchdown, midfield, rollout runway visual range avbl. Lgt'd rwy distance remaining markers south side of Rwy 11R-29L. lgt'd rwy distance remaining markers both sides of Rwy 11L-29R. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (559) 255-3413.**COMMUNICATIONS:** ATIS 121.35 UNICOM 122.95

RCO 122.55 122.2 (RANCHO MURIETA RADIO)

⑧ **APP/DEP CON** 132.35 (091°-239°) 119.6 (240°-090°) 118.5 (S/SE VISALIA AREA)**TOWER** 118.2 **GND CON** 121.7 **CLNC DEL** 124.35**AIRSPACE:** CLASS C svc ctc **APP CON****RADIO AIDS TO NAVIGATION:** NOTAM FILE FAT.**CLOVIS (H) VORTAC** 112.9 CZQ Chan 76 N36°53.06' W119°48.91' 129° 8 NM to fld. 360/15E.**ILS/DME** 111.3 I-FAT Chan 50 Rwy 29R. Class IIIE. DME also serves Rwy 11L.**ILS/DME** 111.3 I-RPW Chan 50 Rwy 11L. Localizer unusable byd 27° each side of localizer course.

LOC only, DME also serves Rwy 29R.

• • • • •
TPA-803(467)**HELIPAD H1:** H70X70 (ASPH) S-60, D-110**SIERRA SKY PARK** (E79) 7 NW UTC-8(-7DT) N36°50.41' W119°52.16'

SAN FRANCISCO

321 TPA-1300(979) NOTAM FILE RIU

RWY 12-30: H2920X50 (ASPH) LIRL**RWY 12:** Thld dspcd 330'. Road. Rgt tfc.**RWY 30:** Thld dspcd 292'. Road.**AIRPORT REMARKS:** Unattended.**COMMUNICATIONS:** CTAF 122.9**FRIANT** N37°06.27' W119°35.73' NOTAM FILE RIU.

SAN FRANCISCO

(L) **VORTACW** 115.6 FRA Chan 103 180° 21.1 NM to Fresno Yosemite Intl. 2380/17E. HIWAS. H-3B, L-3C, 9A**FRICK** (See TWENTYNINE PALMS)

FULLERTON MUNI (FUL) 3 W UTC-8(-7DT) N33°52.32' W117°58.79'

LOS ANGELES

96 B S4 FUEL 100LL, JET A OX 1, 3 TPA-1100(1004) NOTAM FILE FUL

COPTER

RWY 06-24: H3121X75 (ASPH) S-12.5 MIRL 0.3% up E

L-3E, 4H, A

RWY 06: REIL. PVASI(PSIL)-GA 4.0° TCH 23'. Thld dspcd 427'. Tree.

IAP, AD

RWY 24: MALSR. REIL. VASI(V2L)-GA 4.0° TCH 33'. Thld dspcd 253'. Tree. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0600Z†. Lgt'd 750' tower 1.75 miles W of arpt on heading of 285° from arpt. Arpt has noise abatement procedures ctc arpt manager 714-738-6323. Rwy 06 calm wind rwy. For noise abatement Rwy 06 preferred for tkf, follow railroad tracks to E with no turns blo 1000'AGL. Rwy 24 departure climb to 700'AGL prior to turns. Portions of Twy A between intersection F and west end not visible from twr. When twr clsd ACTIVATE MIRL Rwy 06-24, REIL Rwy 06-24, PVASI Rwy 06, MALSR Rwy 24 and twy lgts-CTAF.

WEATHER DATA SOURCES: ASOS (714) 870-1372.

COMMUNICATIONS: CTAF 119.1 ATIS 125.05 (714) 870-6222

UNICOM 122.95

SANTA ANA RCO 122.45 (RIVERSIDE RADIO)

Ⓡ SOCIAL APP/DEP CON 124.65

TOWER 119.1 (1500-0500Z†) GND CON 121.8

AIRSPACE: CLASS D svc 1500-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.


SEAL BEACH (L) VORTACW 115.7 SLI Chan 104 N33°47.00' W118°03.29' 020° 6.5 NM to fld. 23/15E.
HIWAS.

ILS 108.9 I-FUL Chan 26 Rwy 24 LOC only. ILS unmonitored when twr clsd.

HELIPAD H1: H37X37 (CONC)

HELIPAD H2: H37X37 (CONC)

HELIPAD H3: H37X37 (CONC)

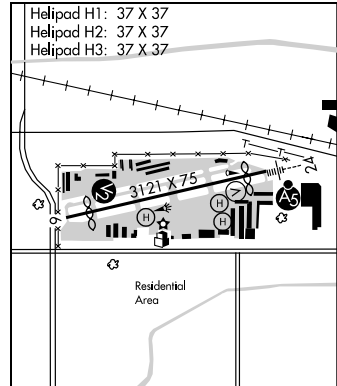

FURNACE CREEK (See DEATH VALLEY NATIONAL PARK)

GANSNER FLD (See QUINCY)

GARBERVILLE (O16) 2 SW UTC-8(-7DT) N40°05.14' W123°48.86'

KLAMATH FALLS

546 FUEL 100LL TPA-1546(1000) NOTAM FILE OAK

L-2H

RWY 18-36: H3050X75 (ASPH) S-30

RWY 18: Thld dspcd 80'. Hill. RWY 36: Ground. Rgt tfc. Trees.


AIRPORT REMARKS: Unattended. 100LL fuel avbl with credit card 24 hours. Day use only; CLOSED ngts. Terrain slopes up from the end of Rwy 36 approximately 12' before dropping off.

COMMUNICATIONS: CTAF 122.9

RCO 122.3 (OAKLAND RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE ACV.

FORTUNA (L) VORTACW 114.0 FOT Chan 87 N40°40.28' W124°14.07' 132° 40.1 NM to fld. 386/19E.

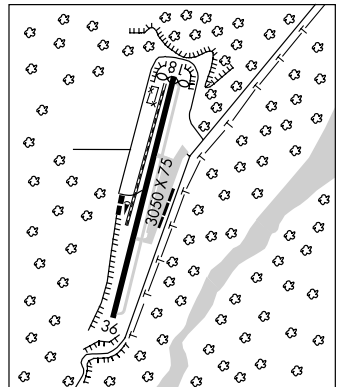

GASQUET**WARD FLD** (Ø09) 1 W UTC-8(-7DT) N41°50.74' W123°59.09'**KLAMATH FALLS**

356 TPA-1156(800) NOTAM FILE OAK

RWY 06-24: H2990X50 (ASPH) S-12**RWY 06:** Thld dsplcd 500'. Trees.**RWY 24:** Thld dsplcd 490'. Trees.**AIRPORT REMARKS:** Unattended. Arpt CLOSED SS-SR. No night op authorized. Arpt in canyon, high mountains and trees surrounds arpt, mountain flying experience strongly recommended. Private driveway to south of rwy penetrates clear space, driveway edge 88' from rwy centerline.**COMMUNICATIONS:** CTAF 122.9**GAVIOTA** N34°31.88' W120°05.47' NOTAM FILE HHR.**LOS ANGELES**(L) **VORTAC** 113.8 GVO Chan 85 277° 20.3 NM to Lompoc. 2616/16E.**H-4G, L-3D, 4F, 7A**

VORTAC unusable:

117°-137° byd 35 NM all altitudes

310°-095° byd 10 NM blo 8500'

360°-095° byd 20 NM blo 12,500'

GENERAL WM J. FOX AIRFIELD (See LANCASTER)**GEORGETOWN** (E36) 2 NW UTC-8(-7DT) N38°55.26' W120°51.89'**SAN FRANCISCO**2623 B S3 **FUELL** 100LL TPA-3423(800) NOTAM FILE RIU**RWY 16-34:** H2980X60 (ASPH) S-22 MIRL**RWY 16:** Trees. **RWY 34:** Trees.**AIRPORT REMARKS:** Attended 1600-0100Z+. ACTIVATE MIRL Rwy 16-34-CTAF.**COMMUNICATIONS:** CTAF/UNICOM 123.05**GILLESPIE FLD** (See SAN DIEGO (EL CAJON))**GNOSS FLD** (See NOVATO)**GOFFS** N35°07.87' W115°10.59' NOTAM FILE RAL.**LOS ANGELES**(L) **VORTAC** 114.4 GFS Chan 91 020° 22.9 NM to Searchlight, NV. 4000/15E.**H-4H, L-7E**

VORTAC unusable:

200°-235° beyond 30 NM below 8700'

290°-320° beyond 20 NM below 9500'

235°-260° beyond 25 NM below 7400'

320°-010° beyond 30 NM below 8500'

260°-290° beyond 25 NM below 8000'

RCO 122.05R 114.4T (RIVERSIDE RADIO)**GORMAN** N34°48.24' W118°51.68' NOTAM FILE RIU.**LOS ANGELES**(L) **VORTAC** 116.1 GMN Chan 108 081° 32.1 NM to General Wm. J. Fox Airfield.**H-4H, L-3D, 4G, 7B**

4920/16E.

VORTAC unusable:

190°-220° beyond 27 NM below 9500'

255°-280° beyond 20 NM below 10,500'

220°-255° beyond 8 NM below 13,000'

280°-300° beyond 15 NM below 8000'

220°-255° byd 10 NM

RCO 122.1R 116.1T (RANCHO MURIETA RADIO)

GRASS VALLEY

NEVADA CO AIR PARK (G00) 3 E UTC-8(-7DT) N39°13.44' W121°00.19'

SAN FRANCISCO

3152 B S4 FUEL 100LL JET A TPA-4152(1000) NOTAM FILE RIU

L-26, 3A

RWY 07-25: H4350X75 (ASPH) S-30 MIRL 1.9% up E

IAP, AD

RWY 07: REIL. VASI(V4L)—GA 3.0° TCH 40'. Trees.

RWY 25: REIL. VASI(V2L)—GA 3.5° TCH 37'. Pole.

AIRPORT REMARKS: Attended 1600-0100Z†, May-Oct 1600-0200Z†.

Rwy 07 CLOSED for tkf at ngt and Rwy 25 CLOSED for ldg at ngt.

Watch for air tankers July-Oct. Rwy 07-25 slopes downhill to west, recommend take off Rwy 25. Due to rwy gradient width and crosswinds use of Rwy 07-25 not recommended for student solo cross-country flights. E acft tiedown apron 12,500 pounds maximum. ACTIVATE MIRL Rwy 07-25, VASI Rwy 07 and Rwy 25—CTAF.

WEATHER DATA SOURCES: AWOS-3 121.325 (530) 273-0029.


COMMUNICATIONS: CTAF/UNICOM 122.725

NORCAL APP/DEP CON 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE MYV.

MARYSVILLE (T) VOR/DME 110.8 MYV Chan 45 N39°05.92'

W121°34.38' 058° 27.6 NM to fld. 60/16E.

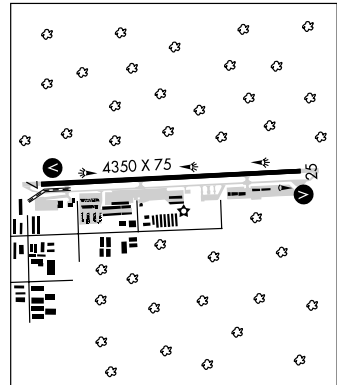

GRAVELLY VALLEY (See UPPER LAKE)

GROVELAND

PINE MOUNTAIN LAKE (E45) 3 NE UTC-8(-7DT) N37°51.70' W120°10.67'

SAN FRANCISCO

2930 B S4 FUEL 100LL TPA-3930(1000) NOTAM FILE RIU

L-3B

RWY 09-27: H3625X50 (ASPH) S-12 MIRL 1.1% up SE

IAP

RWY 09: VASI(V2L)—GA 4.5° TCH 16'. Trees.

RWY 27: PAPI(P2L)—GA 4.0° TCH 37'. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Fuel 24 hr self-service. Arpt advisories unavailable through UNICOM. Deer on and invof arpt at all times. Electrified 6' high frangible deer fence on both sides of rwy between rwy and twy. PAPI Rwy 27 unusable byd 7° left and right of centerline. ACTIVATE MIRL Rwy 09-27—CTAF. Fee for overnight parking. Transient parking avbl.

COMMUNICATIONS: CTAF 122.9

OAKLAND CENTER APP/DEP CON 121.25

RADIO AIDS TO NAVIGATION: NOTAM FILE MOD.

MODESTO (H) VOR/DME 114.6 MOD Chan 93 N37°37.64' W120°57.47' 052° 39.7 NM to fld. 90/17E.

GUADALUPE N34°57.14' W120°31.29' NOTAM FILE HHR.

LOS ANGELES

(T) VOR 111.0 GLJ 119° 4.5 NM to Santa Maria Pub/Capt G Allan Hancock Fld.

L-30, 4F, 7A

VOR unusable 300°-325° beyond 10 NM below 3000'.

RCO 122.1R 111.0T (HAWTHORNE RADIO).

GUALALA

OCEAN RIDGE (E55) 3 N UTC-8(-7DT) N38°48.10' W123°31.84'

SAN FRANCISCO

940 NOTAM FILE OAK

RWY 13-31: H2500X50 (ASPH) S-8 LIRL

RWY 13: Thld dsplcd 400'. Trees.

RWY 31: Thld dsplcd 300'. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Arpt avbl for use from 1400-0600Z† only, CLOSED all other hours. Deer frequently on rwy. Rwy 13-31 CLOSED at night. Rwy 13-31 CLOSED to jets and ultralights. Rwy 13-31 CLOSED to acft over 8,000 lbs. Rwy 13-31 CLOSED to touch and go landings. Rwy 13 +60-90' trees 0-200' from thld, 125' left and rgt, and Rwy 31 +60-90' trees 0-200' from thld, 125' left and rgt. Acft not visible from opposite ends of rwy due to downward sloping terrain from rwy midpoint south to rwy apch end of Rwy 31 (approximately 15' drop). Full stop landings only, intersection takeoffs prohibited. Rwy safety areas have protruding or depressed drainage areas. Safety area South end has 100+ ft dropoff. Rwy 13-31 undulated. Extreme turbulence in windy conditions. Calm wind Rwy 31. Rwy 13-31 NSTD dsplcd thld markings yellow. NSTD rwy lgts for emergency use only call 707-884-3573/3579.

COMMUNICATIONS: CTAF/UNICOM 122.8

GUSTINE (301) 2 E UTC-8(-7DT) N37°15.63' W120°57.86'**SAN FRANCISCO**

75 B FUEL 100LL TPA-875(800) NOTAM FILE RIU

L-2F, 3B

RWY 18-36: H3200X60 (ASPH) S-12 MIRL

RWY 18: Road.

AIRPORT REMARKS: Unattended. For fuel between 1600-0030Z† call 209-854-6471, after 0030Z† call

209-854-1010 and page Public Works. Bird activity invof arpt. Rwy 36 P-line not easily discernible from the air.

MIRL Rwy 18-36 preset low ints, to increase ints ACTIVATE CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE MOD.

MODESTO (H) VOR/DME 114.6 MOD Chan 93 N37°37.64' W120°57.47' 164° 22.0 NM to fld. 90/17E.

HAIGH FLD (See ORLAND)**HALF MOON BAY** (HAF) 5 NW UTC-8(-7DT) N37°30.81' W122°30.07'**SAN FRANCISCO**

66 B S4 FUEL 100LL TPA-999(933) NOTAM FILE OAK

H-3A, L-2F, 3B, A

RWY 12-30: H5000X150 (ASPH-CONC) S-30, D-200, DT-360 MIRL 0.7% up NW IAP

RWY 12: PAPI(P2L)—GA 3.0° TCH 24'. Thld displcd 763'. Trees.

RWY 30: REIL. PAPI(P2L)—GA 3.0° TCH 24'. Thld displcd 763'. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. Fuel avbl 24 hrs self service. Arpt noise sensitive areas NW through NE.

No straight-in apchs, departures climb to 433' AGL before turning. No intersection tkfs, stop and go landings, or

taxi back on rwy. Twys, aprons and tie-downs 12,500 lbs maximum. ACTIVATE MIRL Rwy 12-30, REIL Rwy 30,

PAPI Rwy 12 and PAPI Rwy 30-122.8.

WEATHER DATA SOURCES: AWOS-3 127.275 (650) 728-5649.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® NORCAL APP/DEP CON 135.1

RADIO AIDS TO NAVIGATION: NOTAM FILE SFO.

SAN FRANCISCO (L) VORW/DME 115.8 SFO Chan 105 N37°37.17' W122°22.43' 207° 8.8 NM to fld. 13/17E.

HALSEY FLD (See NORTH ISLAND NAS)**HANFORD MUNI** (HJO) 1 SE UTC-8(-7DT) N36°19.00' W119°37.66'**SAN FRANCISCO**

240 B S4 FUEL 100LL, JET A TPA-1240(1000) NOTAM FILE HJO

H-4G, L-3C, 9A

RWY 14-32: H5175X75 (ASPH) S-30, D-45 MIRL IAP

RWY 14: PAPI(P4R)—GA 3.5° TCH 40'. Road.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. Fuel self-svc avbl 24 hrs.

PAPI Rwy 14 unusable byd 1 NM. PAPI Rwy 32 unusable byd 2

NM. After dark ACTIVATE MIRL Rwy 14-32 and REIL Rwy 32, PAPI

Rwy 14 and Rwy 32-CTAF.


WEATHER DATA SOURCES: ASOS 134.75 (559) 585-8076.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® FRESNO APP/DEP CON 123.9

RADIO AIDS TO NAVIGATION: NOTAM FILE VIS.

VISALIA (T) VOR/DME 109.4 VIS Chan 31 N36°22.04'

W119°28.93' 231° 7.7 NM to fld. 260/16E.

**HANGTOWN** N38°43.48' W120°44.96' NOTAM FILE RIU.**SAN FRANCISCO**

(L) VOR/DME 115.5 HNW Chan 102 at Placerville. 2583/17E.

L-3A

VOR unusable:

200°-260° beyond 15NM below 9500'

320°-350° beyond 10NM below 6000'

320°-350° beyond 25NM below 14,500'

RCO 122.1R 115.5T (RANCHO MURIETA RADIO)

HAPPY CAMP (36S) 0 SW UTC-8(-7DT) N41°47.44' W123°23.34'

KLAMATH FALLS

1209 TPA-2209(1000) NOTAM FILE RIU

L-21

RWY 04-22: H3000X50 (ASPH) S-30

RWY 04: Tree. Rgt tfc. RWY 22: Trees.

AIRPORT REMARKS: Unattended. +35' trees 600' from 125' left through 125' right.


COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE CEC.

CRESCENT CITY (L) VORTACW 109.0 CEC Chan 27 N41°46.77'

W124°14.45' 070° 38.3 NM to fld. 54/19E.

• • • • •
HELIPAD H1: H180X80 (ASPH)



HARRIS RANCH (See COALINGA)

HAWTHORNE

JACK NORTROP FLD/HAWTHORNE MUNI (HHR) 1 E UTC-8(-7DT) N33°55.37' W118°20.11'

LOS ANGELES

66 B S4 FUEL 100LL, JET A OX 2, 3, 4 TPA-See Remarks NOTAM FILE HHR

COPTER

RWY 07-25: H4956X100 (CONC) S-30, D-45, DT-90 MIRL

L-3E, 4G, 7B, A

RWY 07: VASI(V2R)-GA 3.25° TCH 25'. Thld dsplcd 971'. Road. Rgt tfc.

IAP, AD

RWY 25: ODALS. REIL. VASI(V4R)-GA 3.5° TCH 25'. Thld dsplcd 463'. Pole.

AIRPORT REMARKS: Attended 1500-0400Z. 100LL fuel avbl 24 hrs self svc. Jet A fuel avbl 1300-0800Z daily, call 310-676-4673. Arpt CLOSED to acft with explosives. CAUTION: 8' blast fence AER 25. Numerous flocks of birds on and invof arpt. Helicopter flight training ops prohibited. Helicopter multiple approaches/traffic pattern ops prohibited. Touch and go landings, stop and go landings and low apch ops for all acft including helicopters limited to 1800-0100Z. No multi-engine simulated engine-out procedures authorized in tfc pat. No taxi-back ops Mon-Fri 0600-1600Z, Sat-Sun 0600-1800Z. TPA for lgt acft/helicopter 1100 (1034), turbine/high performance acft 1600 (1534). For noise abatement info ctc arpt engineer 310-349-1637 or 1636. North Twy designated non-movement area. Rwy 25 runup on South Twy 900' west of AER. When twr clsd ACTIVATE MIRL Rwy 07-25 and ODALS Rwy 25-CTAF.

WEATHER DATA SOURCES: ASOS (310) 973-8930

COMMUNICATIONS: CTAF 121.1 ATIS 118.4 (310) 675-7945

HAWTHORNE RCO 122.0 122.2 122.5 (HAWTHORNE RADIO)

Ⓡ SOCIAL APP CON 124.3 (146°-245°) 124.9 (069°-145°) 125.2 (246°-342°) 128.5 (343°-068°)

Ⓡ SOCIAL DEP CON 124.3


HAWTHORNE TOWER 121.1 (1400-0400Z) GND CON 125.1

AIRSPACE: CLASS D svc 1400-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAX.

LOS ANGELES (H) VORTACW 113.6 LAX Chan 83 N33°55.99' W118°25.92' 082° 4.9 NM to fld. 182/15E.

ILS 109.1 I-HHR Rwy 25. (LOC only). LOC unusable beyond 15° north of LOC course and from 0.8 NM inbound. ILS unmonitored when twr clsd.



HAYFORK (F62) 1 S UTC-8(-7DT) N40°32.82' W123°10.77'

2321 B S2 TPA-3321(1000) NOTAM FILE RIU

RWY 07-25: H4115X60 (ASPH) S-12.5 MIRL

RWY 07: Tree. RWY 25: Tree. Rgt tfc.

AIRPORT REMARKS: Unattended. High terrain all quadrants. Noise abatement procedures in effect N, NE and S of arpt. Intermittently closed winters due to snow. Ctc county transportation office for information 530-623-1365. ACTIVATE MIRL Rwy 07-25—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE ACV.

FORTUNA (L) VORTACW 114.0 FOT Chan 87 N40°40.28' W124°14.07' 079° 48.8 NM to fld. 386/19E.

KLAMATH FALLS

L-2H

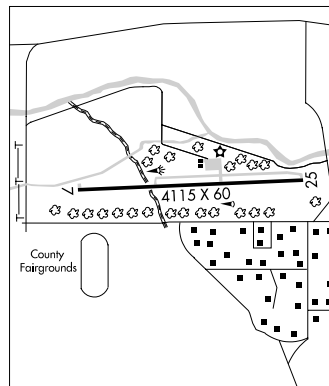

HAYWARD EXECUTIVE (HWD) 2 W UTC-8(-7DT) N37°39.54' W122°07.31'

52 B S4 FUEL 100LL, JET A OX 1, 3 TPA—See Remarks NOTAM FILE HWD

RWY 10R-28L: H5694X150 (ASPH) S-30, D-75, ST-95 MIRL 0.4% up E

RWY 10R: REIL. VASI(V4R)—GA 3.0° TCH 25'. Thld dsplcd 816'. Tree. Rgt tfc.

RWY 28L: REIL. VASI(V4L)—GA 4.0° TCH 35'. Thld dsplcd 676'.

RWY 10L-28R: H3107X75 (ASPH) S-13 MIRL 0.3% up SE.

RWY 10L: PAPI(P4L)—GA 3.0°. Tree.

RWY 28R: PAPI(P4L)—GA 3.0°. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z+. When tower clsd Rwy 10L-28R CLOSED. Flocks of birds feeding along the shoreline, creek areas and at the golf course to the north, on occasion may fly across various parts of the arpt. Noise abatement procedures in effect ctc arpt for noise rules on 510-293-8678. TPA-652(600) Rwy 10R-28L, 852(800) Rwy 10L-28R. Rwy 10R has ldg distance remaining signs (lgtd) north side of rwy. Rwy 28L has ldg distance remaining signs (lgtd) south side of rwy. When twr clsd MIRL Rwy 10R-28L preset low ints, to increase ints ACTIVATE—CTAF. When twr clsd VASI Rwy 10R and Rwy 28L opr dusk to dawn, PAPI Rwy 10L, PAPI Rwy 28R and REIL Rwy 10R and Rwy 28L unavailable.

WEATHER DATA SOURCES: ASOS (510) 786-3052.

COMMUNICATIONS: CTAF 120.2 ATIS 126.7 (510)786-3988

UNICOM 122.95

® NORCAL APP CON 124.4 125.35 134.5

® NORCAL DEP CON 124.4

TOWER 120.2 118.9 (1500-0500Z+) GND CON 121.4 CLNC DEL 128.05

AIRSPACE: CLASS D svc 1500-0500Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

OAKLAND (H) VORTACW 116.8 OAK Chan 115 N37°43.56' W122°13.42' 113° 6.3 NM to fld. 10/17E.

HIWAS.


ILS/DME 111.5 I-HWD Chan 52 Rwy 28L. LOC only. LOC unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: For IFR clearances or Class C airspace information ctc Oakland Twr 127.2.

SAN FRANCISCO

H-3A, L-2F, 3B, A

IAP, AD



• • • • •
HELIPAD H1: H110X110 (ASPH) MIRL

HEALDSBURG MUNI (HES) 3 NW UTC-8(-7DT) N38°39.16' W122°53.92'

SAN FRANCISCO

278 S4 FUEL 80,100 TPA-1278(1000) NOTAM FILE OAK

RWY 13-31: H2707X60 (ASPH) S-12.5 MIRL

RWY 13: Road. Rgt tfc.

RWY 31: Hill.

AIRPORT REMARKS: Attended 1600-0100Z+. Noise abatement, touch and go limited to 4 acft day. Rwy 31 downdrafts apch end. ACTIVATE MIRL Rwy 13-31-CTAF.

WEATHER DATA SOURCES: AWOS-A 122.8 (617) 262-3825. 3 clicks for weather. Plus visibility.

COMMUNICATIONS: CTAF/UNICOM 122.8

HECTOR N34°47.82' W116°27.78' NOTAM FILE RAL.

LOS ANGELES

(H) VORTAC 112.7 HEC Chan 74 267° 16.4 NM to Barstow-Daggett. 1853/15E.

H-4H, L-7D

VOR portion unusable:

340°-055° byd 15 NM blo 10,000'

340°-055° byd 28 NM blo 14,000'

055°-090° byd 25 NM blo 9,000'

090°-200° byd 18 NM blo 11,000'

090°-200° byd 30 NM blo 13,000'

200°-231° byd 25 NM blo 9,000°

200°-231° byd 32 NM blo 12,000'

231°-240° byd 30 NM blo 10,000'

240°-270° byd 28 NM blo 9,000'

DME portion unusable:

340°-055° byd 15 NM blo 10,000'

340°-055° byd 28 NM blo 14,000'

055°-090° byd 25 NM blo 9,500'

090°-200° byd 18 NM blo 11,000'

090°-200° byd 30 NM blo 13,000'

200°-231° byd 20 NM blo 15,000'

231°-240° byd 20 NM blo 11,000'

240°-270° byd 28 NM blo 9,000'

RCO 122.1R 112.7T (RIVERSIDE RADIO)

HEMET-RYAN (HMT) 3 SW UTC-8(-7DT) N33°44.04' W117°01.35'

LOS ANGELES

1512 B S4 FUEL 100LL, JET A TPA-2512(1000) NOTAM FILE RAL

COPTER

RWY 05-23: H4314X100 (ASPH) S-80, D-130 MIRL

L-4H

RWY 05: Tree. Rgt tfc.

RWY 23: PAPI(P2L)-GA 3.0° TCH 40'.

IAP

RWY 04-22: H2045X25 (ASPH)

RWY 22: Trees. Rgt tfc.

AIRPORT REMARKS: Attended dalgt hours. Fee for fuel after hours call 951-925-7618. Watch for United States Forest Service fire fighting acft. Air tanker activity May-Nov. Forest service firefighting acft frequently fly the conventional rectangular pattern with four 90° clearing turns entering the down wind leg abeam midpoint of rwy. All powered acft tfc patterns to S. Gliders operating N of arpt. Rwy 04-22 restricted for glider operations. ACTIVATE MIRL Rwy 05-23 and taxiway lights-CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (951) 925-6886.

COMMUNICATIONS: CTAF/UNICOM 123.0


Ⓡ MARCH APP/DEP CON 133.5 (1500-0700Z+) clsd holidays, other times ctc

Ⓡ SOCAL APP/DEP 134.0

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'

W117°31.80' 098° 27.7 NM to fld. 1432/15E.



HERLONG (H37) 2 W UTC-8(-7DT) N40°08.32' W120°10.80'**KLAMATH FALLS**

4055 TPA-4855(800) NOTAM FILE RNO


L-9A, 11A

RWY 06-24: H3260X40 (ASPH) S-4**RWY 06:** P-line.**RWY 24:** P-line.

AIRPORT REMARKS: Unattended. Rwy 06-24 has numerous cracks and loose rocks. Rwy 06-24 all rwy markings missing. +5' brush along northside, 45' from rwy centerline.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**MUSTANG (H) VORTACW** 117.9 FMG Chan 126 N39°31.88'

W119°39.37' 311° 43.7 NM to fld. 5949/16E.

**HESPERIA** (L26) 3 S UTC-8(-7DT) N34°22.62' W117°18.96'**LOS ANGELES**

3390 B FUEL 100LL TPA-4390(1000) NOTAM FILE RAL

L-4H, 7C

RWY 03-21: H3910X50 (ASPH) S-12 LIRL 0.5% up SW**RWY 03:** Thld dsplcd 300'. Tree. Rgt tfc.**RWY 21:** Thld dsplcd 550'. Road.

AIRPORT REMARKS: Unattended. Slight uphill grade to Rwy 21. Pilots should be aware of rising surrounding terrain to the south. Rwy 21 has a perimeter fence that separates Rwy 21 from road. Public road access to runway and taxiway in multiple locations. ACTIVATE LIRL Rwy 03-21 CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0**RADIO AIDS TO NAVIGATION:** NOTAM FILE RAL.**PARADISE (H) VORTAC** 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 006° 29.5 NM to fld. 1432/15E.**HOLLISTER****FRAZIER LAKE AIRPARK** (1C9) 8 NW UTC-8(-7DT) N36°57.20' W121°27.93'**SAN FRANCISCO**

151 NOTAM FILE OAK

RWY 05-23: 2500X100 (TURF) LIRL**RWY 05:** P-line.**RWY 23:** Rgt tfc.

AIRPORT REMARKS: Attended Sat-Sun 1600Z-sunset, Mon-Fri irregularly. CAUTION: Seaplane landing area (water channel) 200' south of adjacent/parallel grass runway. Berm and ditch adjacent to Rwy 05 apch and seaplane turn around. PAEW in vicinity of Rwy 05-23 every Tue during daigt hrs. No midfield takeoffs or back-taxi on Rwy 05-23. No practice txf and ldg Rwy 05-23 when wet or soft. Rwy 05-23 gross weight limited to 6700 pounds. ACTIVATE LIRL Rwy 05-23-CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.05**WATERWAY 05-23:** 3000X60 (WATER)**WATERWAY 05:** P-line.**WATERWAY 23:** Rgt tfc.

SEAPLANE REMARKS: Waterway 05-23 not marked, typical water depth 1.5'. Water depth noted as shallow as 1½' deep. Ramp & dock facilities available.

HOLLISTER MUNI (CVH) 3 N UTC-8(-7DT) N36°53.60' W121°24.62'
 230 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE OAK
RWY 13-31: H6350X100 (ASPH) S-30, D-45 MIRL 0.4% up SE
RWY 13: REIL. PAPI(P2L)—GA 3.0° TCH 40'.
RWY 31: REIL. PAPI(P2L)—GA 3.0° TCH 40'.
RWY 06-24: H3150X100 (ASPH) S-30, D-45 MIRL
RWY 06: Terrain.
RWY 24: REIL. VASI(V4L)—GA 3.8° TCH 26'. Road.

AIRPORT REMARKS: Attended 1600-0100Z†. Fuel avbl 24 hours credit card lock system. Parachute Jumping. Glider activity on and in/ov arpt. Model acft club conducting flight ops 3 miles west northwest of arpt heading of 290° from arpt surface to 500' AGL. Watch for fire fighting acft June-Oct. 2-3 inch cracks Rwy 13 thld and runup area. Rwy 06-24 and Rwy 13-31 have 50' asph shoulders both sides. TPA—1030(800), helicopters 730(500). Helicopters rgt tfc pattern. ACTIVATE MIRL Rwy 06-24 and Rwy 13-31, REIL Rwy 24, Rwy 13 and Rwy 31, VASI Rwy 24 and PAPI Rwy 13 and Rwy 31—CTAF.


WEATHER DATA SOURCES: AWOS-3 120.425 (831) 636-4394.

COMMUNICATIONS: CTAF/UNICOM 123.0

® NORCAL APP/DEP CON 124.525

RADIO AIDS TO NAVIGATION: NOTAM FILE SNS.

SALINAS (H) VORTACW 117.3 SNS Chan 120 N36°39.83' W121°36.19' 017° 16.6 NM to fld. 101/17E.
HIWAS.



SAN FRANCISCO
 H-3A, L-3B
 IAP


HOLTVILLE (L04) 5 NE UTC-8(-7DT) N32°50.70' W115°16.11'
 59 TPA—859(800) NOTAM FILE SAN
RWY 08-26: H6000X150 (CONC) S-30, D-50
RWY 08: P-line. **RWY 26:** Rgt tfc.

AIRPORT REMARKS: Unattended. Arpt CLOSED indefinitely. Rwy 08-26 CLOSED indef. Rwy 08-26 pavement buckled and cracked with vegetation growth and spalling. 1-2' holes in pavement, buckled section slabs up to 2'. Be alert frequent military training activity during dalgt hours and dark; includes tactical acft; helicopters; and parachuting; check local notams call 619-337-7792. Rwy 08-26 limited by arpt manager to 20,000 lbs single wheel gear, 40,000 lbs dual tandem wheel gear. Rwy 08-26 edge markings are 25' in from edge of pavement.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE IPL.

IMPERIAL (H) VORTAC 115.9 IPL Chan 106 N32°44.93' W115°30.52' 051° 13.4 NM to fld. -20/14E.



LOS ANGELES
 H-4H, L-4J, 5A

HOMELAND N33°46.58' W117°11.12' NOTAM FILE RAL.

(L) VOR 113.4 HDF 315° 7.3 NM to March ARB.
 VOR unusable: 360°-040° byd 20 NM blo 12,000'
 360°-040° byd 30 NM blo 15,500'
 170°-250° byd 10 NM
RCO 122.1R 113.4T (RIVERSIDE RADIO)

LOS ANGELES
 COPTER
 L-4H, A

HOOPA (O21) 1 SE UTC-8(-7DT) N41°02.49' W123°40.07'
 356 TPA—1156(800) NOTAM FILE OAK
RWY 14-32: H2325X50 (ASPH) S-10
RWY 14: Thld dsplcd 80'. Trees. Rgt tfc. **RWY 32:** Thld dsplcd 80'. Trees. Rgt tfc.
AIRPORT REMARKS: Unattended. Day use only; CLOSED ngts. Wind indicator obscured by trees.
COMMUNICATIONS: CTAF 122.9

KLAMATH FALLS

HUNTER LIGGETT (See TUSI AHP)**HYAMPOM** (H47) 1 NW UTC-8(-7DT) N40°37.54' W123°28.11'**KLAMATH FALLS**

1250 TPA-2050(800) NOTAM FILE OAK

RWY 14-32: H2980X60 (ASPH) S-12**RWY 14:** Trees. Rgt tfc.**RWY 32:** Thld dsplcd 700'. Trees.**AIRPORT REMARKS:** Unattended. Arpt CLOSED nights except for emergency medical use. High terrain all quadrants.

Intermittently closed winters due to snow. Ctc county transportation office for information 530-623-1365.

NSTD MIRL for emerg medical use only, public use not authorized.

COMMUNICATIONS: CTAF/UNICOM 122.8**IMPERIAL BEACH NOLF** (REAM FLD) (NRS) NAF 1 S UTC-8(-7DT)**LOS ANGELES**


N32°34.00' W117°07.00'

24 B NOTAM FILE NRS

Not insp.

L-4H**DIAP****RWY 09-27:** H4999X340 (PEM) S-55, T-72, ST-91 HIRL**RWY 27:** OLS.**RWY 08-26:** H2241X150 (CONC) S-32, T-51**MILITARY SERVICE: FUEL J5** (Mon-Thu 1900-0500Z, Fri 1800-0200Z).**MILITARY REMARKS:** Opr Mon-Thu 1600-0630Z (1500-0600Z DT) and Fri 1600-0200Z. CLOSED from 0200Z day prior until 1600Z day following government holiday; except pre-coordinated flt of opr necessity. Ctc NOLF ATC DSN 577-9414/9415 for opr inquiries. **RSTD** Official Business Only — PPR fixed wing acft, ctc NASNI ODO DSN 735-8233/8234, C619-545-8233/8234. Practice apch not authorized Rwy 09. **CAUTION** Extensive helicopter training. **MISC** Rwy 08-26 avbl for dalgt VFR helicopter use only.**WEATHER DATA SOURCES:** ASOS DSN 577-9890, (C619) 437-9890.**COMMUNICATIONS:** ATIS 276.2**(R) SOCAL APP/DEP CON** 125.15 317.55**TOWER** 120.65 239.25 (Mon-Thu 1600-0630Z (1500-0600Z DT) and Fri 1600-0200Z. Clsd from 0200Z day prior until 1600Z day following government holiday.) **GND CON** 285.575 **RADAR** 318.8**AIRSPACE: CLASS D** svc Mon-Thu 1600-0630Z (1500-0600Z DT) and Fri 1600-0200Z. Clsd from 0200Z day prior until 1600Z day following government holiday, other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE NRS.(L) **TACAN** Chan 29 NRS (109.2) N32°33.85' W117°06.58' at fld. 20/14E. Opr only during fld opr hr.

Unusable 225°-230°.

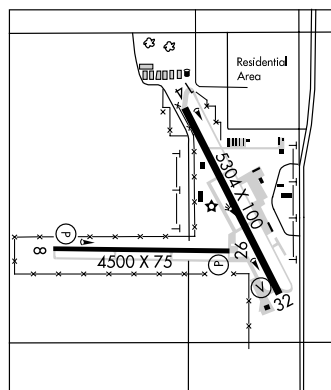PAR**COMM/NAV/WEATHER REMARKS:** Radar see Terminal FLIP for Radar Minima.**IMPERIAL CO** (IPL) 1 S UTC-8(-7DT) N32°50.05' W115°34.72'**LOS ANGELES**-54 B S4 **FUEL** 100LL, JET A TPA—See Remarks Class III, ARFF Index A. NOTAM FILE IPL **H-4H, L-4I****RWY 14-32:** H5304X100 (ASPH-PFC) S-60, D-80, ST-102, DT-130 MIRL**IAP****RWY 14:** Fence.**RWY 32:** VASI(V4L)—GA 3.0° TCH 47'. Road. Rgt tfc.**RWY 08-26:** H4500X75 (ASPH) S-50, D-50 MIRL**RWY 08:** PAPI(P2L)—GA 3.0° TCH 38'. P-line.**RWY 26:** PAPI(P4L)—GA 3.0° TCH 38'. Pole. Rgt tfc.**AIRPORT REMARKS:** Attended 1600-0100Z. For svc after hrs call 760-554-2471 fee charged. Avoid NAF El Centro tfc; acft depart Rwy 26 rgt turn—stay below 1000'; ctc NAF Twr 119.1 for advisory. Frequent high-speed military jet traffic transits Imperial Co traffic area westbound descending VFR to NAF El Centro. Avoid 2500' to 3500' MSL near Imperial Co. Contact NAF Twr 119.1 for Navy tfc advisory. Radio antenna +70' located on control twr at midfield Rwy 14-32 and 500' W rwy centerline. TPA—946(1000) conventional acft, 1446(1500) jet acft. Overnight tiedown fee. **ACTIVATE** MIRL Rwy 08-26 and 14-32—CTAF.**WEATHER DATA SOURCES:** ASOS 132.175 (760) 355-2851.**COMMUNICATIONS:** CTAF/UNICOM 122.7**RCO** 122.1R 115.9T (SAN DIEGO RADIO)**RCO** 122.5 (SAN DIEGO RADIO)**L.A. CENTER APP/DEP CON** 128.6**AIRSPACE: CLASS E** svc continuous.**RADIO AIDS TO NAVIGATION:** NOTAM FILE IPL.(H) **VORTAC** 115.9 IPL Chan 106 N32°44.93' W115°30.52' 311° 6.2 NM to fld. -20/14E.

INDEPENDENCE (207) 1 N UTC-8(-7DT) N36°48.98' W118°12.30'

SAN FRANCISCO

3908 TPA-4708(800) NOTAM FILE RAL

L-9A

RWY 14-32: H3533X60 (ASPH) S-20 MIRL

RWY 14: Fence. RWY 32: Trees. Rgt tfc.

RWY 05-23: 1498X30 (DIRT)

RWY 05: Road. RWY 23: Fence.

AIRPORT REMARKS: Unattended. Rwy 05-23 restricted can be used only during extreme crosswind conditions. Tfc pattern indicators for Rwy 14-32 only. Rwy 05-23 marked with an R on each end, no numbers or centerline markings. ACTIVATE MIRL Rwy 14-32-CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BIH.

BISHOP (T) VORW/DME 109.6 BIH Chan 33 N37°22.62' W118°21.99' 152° 34.5 NM to fld. 4120/15E.

INYOKERN (IYK) 1 NW UTC-8(-7DT) N35°39.52' W117°49.77'

LAS VEGAS

2457 B S2 FUEL 100LL, JET A TPA-3457(1000) Class III, ARFF Index A NOTAM FILE IYK H-4H, L-7C

RWY 15-33: H7100X75 (ASPH) S-24 MIRL 0.4% up NW

IAP

RWY 33: PAPI(P2L)-GA 3.3° TCH 40'.

RWY 02-20: H6275X75 (ASPH) S-30, D-50, DT-80

MIRL 0.4% up S

RWY 02: PAPI(P2L)-GA 3.3° TCH 40'.

RWY 20: VASI(V4L)-GA 3.0° TCH 35'. Thld dsplcd 320'. Rgt tfc.

RWY 10-28: H4150X75 (ASPH) S-24 MIRL 1.0% up W

Rwy 28: Thld dsplcd 103'.

AIRPORT REMARKS: Attended Mon-Fri 1500-0100Z±, Frequent glider ops on weekends. After 2200Z± callout fee for service call 760-382-3383. Monitor 122.8 in tfc pattern. ACTIVATE MIRL Rwy 02-20, Rwy 10-28, Rwy 15-33 and VASI Rwy 20-CTAF. PAPI Rwy 02 and Rwy 33 opr continuously.

COMMUNICATIONS: CTAF/AUNICOM 122.8


Ⓡ JOSHUA APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.

EDWARDS (L) VORTAC 116.4 EDW Chan 111 N34°58.94'

W117°43.96' 338° 40.8 NM to fld. 2354/15E.

COMM/NAV/WEATHER REMARKS: Automated UNICOM-3 clicks for arpt advisory and wx or dial 617-262-3825, 4 clicks for radio check.

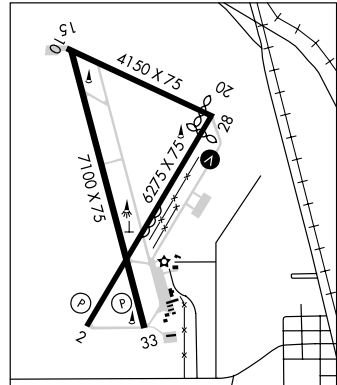

JACK McNAMARA FLD (See CRESCENT CITY)

JACK NORTHROP FLD/HAWTHORNE MUNI (See HAWTHORNE)

JACKSON

WESTOVER FIELD AMADOR CO (JAQ) 2 NW UTC-8(-7DT) N38°22.61' W120°47.64'

SAN FRANCISCO

1690 B S4 FUEL 100LL TPA-2690(1000) NOTAM FILE RIU

L-3A

RWY 01-19: H3401X60 (ASPH) 12.5 MIRL

IAP

RWY 01: REIL. VASI(V2L)-GA 3.0° TCH 28'. RWY 19: REIL. VASI(V2L)-GA 4.0° TCH 38'. Tree.

AIRPORT REMARKS: Attended 1700-0100Z±. Rwy 19 is the preferred rwy. ACTIVATE MIRL Rwy 01-19-122.8.

WEATHER DATA SOURCES: AWOS-3 121.125 (209) 257-1292.

COMMUNICATIONS: CTAF/UNICOM 123.075

Ⓡ NORCAL APP CON 125.1

Ⓡ NORCAL DEP CON 127.4

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48' W121°00.23' 012° 20.7 NM to fld. 260/17E.

JACQUELINE COCHRAN RGNL (See PALM SPRINGS)

JACUMBA (L78) 1 E UTC-8(-7DT) N32°36.95' W116°09.92' **LOS ANGELES**
 2844 TPA-3644(800) NOTAM FILE SAN
RWY 07-25: 2508X100 (GRVL) S-12
RWY 25: Mountains. Rgt tfc.
AIRPORT REMARKS: Unattended. Wind permitting, recommend land Rwy 07 and dep Rwy 25 due to 480' hill 1 mile east of arpt. International boundary loc 750' south of Rwy 07-25.
COMMUNICATIONS: CTAF 122.9

JOHN WAYNE AIRPORT/ORANGE CO (See SANTA ANA)

JOINT FORCES TRAINING BASE JFTB (See LOS ALAMITOS AAF)

JOSHUA TREE

ROY WILLIAMS (L80) 3 NE UTC-8(-7DT) N34°09.25' W116°15.13' **LOS ANGELES**
 2464 B **FUEL** 100LL TPA-3464(1000) NOTAM FILE RAL
RWY 06-24: H2493X50 (ASPH) LIRL (NSTD)
RWY 24: Thld dsplcd 177'.
RWY 12-30: 2355X100 (ASPH-DIRT)
RWY 12: Thld dsplcd 305'. Road. **RWY 30:** Thld dsplcd 630'. P-line.
AIRPORT REMARKS: Attended continuously. Rwy 06-24 loose rocks and sand on rwy. Arpt advisory mandatory for ngd ldg. Radio ctc recommended before ldg for advisory and altimeter setting. Unlgt'd mountains 2½ miles E 3070' and 3 miles S 3800'. Rwy 12-30 SE end 420' by 50' asph, remainder of rwy dirt. Rwy 12-30 rough surface with steep edges and abrupt transitions at asphalt/dirt section in center of rwy. Rwy 24 NSTD dsplcd thld markings are yellow. Lead-in arrows are missing. Rwy 12 non-standard markings on conc pad adjacent to rwy end. Rwy 30 non-standard number markings on pad left side of rwy 1000' from rwy end. Rwy 06-24 low density lgtg system. **ACTIVATE LIRL** Rwy 06-24 and rotating bcn-CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8

JOTLY N37°49.90' W121°08.12' NOTAM FILE SCK. **SAN FRANCISCO**
NDB (LOM) 271 SC 290° 6.1 NM to Stockton Metropolitan.

JULIAN N33°08.43' W116°35.16' NOTAM FILE SAN. **LOS ANGELES**
 (L) **VORTACW** 114.0 JLI Chan 87 047° 15.1 NM to Borrego Valley. 5560/15E. **HIWAS.** H-4H, L-4I
 RCO 123.65 (SAN DIEGO RADIO)

KANAN N38°02.79' W122°02.01' NOTAM FILE CCR. **SAN FRANCISCO**
NDB (LOM) 335 CC 181° 3.6 NM to Buchanan Fld.

KEARN N39°16.55' W123°14.43' NOTAM FILE UKI. **SAN FRANCISCO**
NDB (LOM) 371 UK 151° 9.2 NM to Ukiah Muni.

KERN VALLEY (See KERNVILLE)

KERNVILLE

KERN VALLEY (L05) 3S UTC-8(-7DT) N35°43.69' W118°25.18' **LOS ANGELES**
 2614 S2 TPA-3614(1000) NOTAM FILE RIU **L-3D, 7B**
RWY 17-35: H3500X50 (ASPH) S-12.5
RWY 17: Trees. Rgt tfc.
AIRPORT REMARKS: Attended dalgt hrs. No ngd ops. Fly-in campground on arpt.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE BFL
SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07' W119°05.84' 052° 36.2 NM to fld. 548/14E. **HIWAS.**

KING CITY

MESA DEL REY (KIC) 1 NE UTC-8(-7DT) N36°13.71' W121°07.28'

SAN FRANCISCO

370 B S4 FUEL 100LL JET A TPA-1170(800) NOTAM FILE OAK

L-3C

RWY 11-29: H4485X100 (ASPH) S-12 MIRL

RWY 11: Berm.

RWY 29: Road.


AIRPORT REMARKS: Attended 1600-0100Z†. Fuel avbl 24 hrs. Svc road within 50' of Rwy 29.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

BIG SUR (L) VORTACW 114.0 BSR Chan 87 N36°10.88'

W121°38.53' 067° 25.4 NM to fld. 4085/16E.



KINGDON AIRPARK (See LODI)

KLAMATH GLEN

ANDY McBETH (S51) 1 S UTC-8(-7DT) N41°30.72' W123°59.74'

KLAMATH FALLS

42 TPA-1042(1000) NOTAM FILE OAK

RWY 11-29: H2400X50 (ASPH) S-12

RWY 11: Brush. Rgt tfc.

RWY 29: Hill.

AIRPORT REMARKS: Unattended. High mountains and trees surround arpt, mountain flying experience strongly recommended.

COMMUNICATIONS: CTAF 122.9

KNEELAND (See EUREKA)

LAKE BERRYESSA SPB (See NAPA)

LAKE HUGHES N34°40.98' W118°34.62' NOTAM FILE HHR.

LOS ANGELES

(L) VORTACW 108.4 LHS Chan 21 359° 27.9 NM to Tehachapi Muni. 5790/15E.

L-3E, 4G, 7B

VOR unusable: 335°-350° blo 10,000'.

LAKE OROVILLE LANDING AREA SPB (See OROVILLE)

LAKEPORT

LAMPSON FLD (102) 3 S UTC-8(-7DT) N38°59.44' W122°54.04'

SAN FRANCISCO

1379 B S4 FUEL 100LL TPA-2178(800) NOTAM FILE OAK

L-2G

RWY 10-28: H3597X60 (ASPH) S-30 MIRL 0.3% up NW

IAP

RWY 10: Trees.

RWY 28: PAPI(P2L)-GA 4.0° TCH 40'. Thld displcd 85'. Road. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. ACTIVATE MIRL Rwy 10-28-CTAF.

WEATHER DATA SOURCES: AWOS-2 118.35 (707) 262-0380.

COMMUNICATIONS: CTAF/UNICOM 122.8

OAKLAND CENTER APP/DEP CON 127.8

RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19' W123°16.45' 086° 17.9 NM to fld. 2980/16E.

HIWAS.

LAKE TAHOE (See SOUTH LAKE TAHOE)

LAMPSON FLD (See LAKEPORT)

LANCASTER N34°44.47' W118°13.14'

LOS ANGELES

RCO 122.2 (RIVERSIDE RADIO)

L-3E, 4G, 7B

LANCASTER**GENERAL WM. J. FOX AIRFIELD** (WJF) 4 NW UTC-8(-7DT) N34°44.46' W118°13.12'

LOS ANGELES

2351 B S4 FUEL 100LL, JET A OX 2 TPA-3151(800) NOTAM FILE WJF

H-4H, L-3E, 4G, 7B

RWY 06-24: H7201X150 (ASPH-RFSC) S-50, D-68, ST-86, DT-117 MIRL

IAP, AD

RWY 06: REIL. PAPI(P4L)—GA 3.0° TCH 26'.

RWY 24: REIL. PAPI(P4L)—GA 3.0° TCH 26'. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Lgt radio towers 4 mi SE.

Numerous birds SE of arpt. PAEW adjacent ramp area btn fuel island and terminal bldg.

WEATHER DATA SOURCES: ASOS (661) 949-2840.**COMMUNICATIONS:** CTAF 120.3 ATIS 126.3

UNICOM 122.95

LANCASTER RCO 122.2 (RIVERSIDE RADIO)

Ⓡ JOSHUA APP/DEP CON 126.1

FOX TOWER 120.3 (1500-0500Z) GND CON 121.7


AIRSPACE: CLASS D svc 1500-0500Z other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PMD.

PALMDALE (H) VORTAC 114.5 PMD Chan 92 N34°37.88'

W118°03.83' 296° 10.1 NM to fld. 2498/15E.

NDB (MHW) 282 GWF N34°44.32' W118°13.01' at fld.

NOTAM FILE WJF. Unmonitored.

**LA VERNE****BRACKETT FLD** (POC) 1 SW UTC-8(-7DT) N34°05.50' W117°46.91'

LOS ANGELES

1011 B S4 FUEL 100LL, JET A OX 4 TPA-2011(1000) NOTAM FILE POC

COPTER

RWY 08R-26L: H4839X75 (ASPH) S-26 MIRL 0.9% up E

L-3E, 4H, 7C

RWY 08R: REIL. PAPI(P4L)—GA 3.76° TCH 30'. Hill. Rgt tfc.

IAP, AD

RWY 26L: REIL. PAPI(P4L)—GA 3.76° TCH 18'. Thld dsplcd 688'. Road.

RWY 08L-26R: H3661X75 (ASPH) S-12.5 0.9% up E

RWY 08L: Hill. RWY 26R: Road. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Rwy 08L-26R CLOSED

nights indefinitely. Birds and wildlife invof arpt. Rapidly rising

terrain 1 mile west-northwest of arpt. Noise abatement

procedures in effect ctc arpt manager 909-593-1395. PAPI Rwy

8R unusable byd 5° left of centerline.

WEATHER DATA SOURCES: LAWRs.**COMMUNICATIONS:** CTAF 118.2 ATIS 124.4 (909) 596-1523

UNICOM 122.95

Ⓡ SOCAL APP/DEP CON 125.5


TOWER 118.2 (1500-0500Z) GND CON 125.0

AIRSPACE: CLASS D svc 1500-0500Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE POC.

POMONA (L) VORTAC 110.4 POM Chan 41 N34°04.70'

W117°47.22' at fld. 1273/15E.

ILS 110.5 I-POC Rwy 26L.



HELIPAD H1: H50X50 (ASPH-CONC) LIRL

HELIPORT REMARKS: Pomona Police Department Heliport.**LEE VINING** (024) 1 E UTC-8(-7DT) N37°57.47' W119°06.35'

SAN FRANCISCO

6802 B TPA-7602(800) NOTAM FILE RAL

L-9A

RWY 16-34: H4090X50 (ASPH) S-30 LIRL


RWY 16: Thld dsplcd 100'. RWY 34: Thld dsplcd 200'. Rgt tfc.

AIRPORT REMARKS: Unattended. NSTD dsplcd thld markings are yellow. ACTIVATE LIRL Rwy 16-34—CTAF.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BIH.

BISHOP (T) VORW/DME 109.6 BIH Chan 33 N37°22.62' W118°21.99' 300° 49.5 NM to fld. 4120/15E.

LEMOORE NAS (REEVES FLD) (NLC) NAS 7 W UTC-8(-7DT) N36°19.98' W119°57.12' **SAN FRANCISCO**
 232 B NOTAM FILE NLC Not insp. **H-4G, L-3C**
RWY 14L-32R: H13500X200 (CONC) PCN 51 R/C/W/T HIRL **DIAP, AD**
RWY 14L: OLS. REIL. **RWY 32R:** OLS. REIL.
RWY 14R-32L: H13497X200 (CONC) PCN 56 R/C/W/T HIRL CL
RWY 14R: OLS. REIL. **RWY 32L:** ALSF2. SF. OLS. WAVE-OFF. REIL.
ARRESTING GEAR/SYSTEM
RWY 14L HOOK E28 (1849') **HOOK E28 (1756') RWY 32R**
RWY 14R HOOK E28 (1600') **HOOK E28 (3495') RWY 32L**
MILITARY SERVICE: L&T Precision Approach and Landing System unavbl weekends. Rotating bcn not opr when arpt clsd.
 Rwy 14L-32R and Rwy 14R-32L portable lgts. Carrier deck lgt Rwy 14L and Rwy 32L. **JASU 2(GTC-85)**
 2(NC-5) 2(NC-8) 1(NCNP-105) **FUEL J5 FLUID SP PRESAIR OXRB** (LOX avbl Mon-Fri 1600-0000Z± only.)
OIL 0-128-133-156 **TRAN ALERT** Ltd transient svc/maintenance avbl during arpt opr hr. High-speed fuel lanes
 not avbl to transient acft.
MILITARY REMARKS: Attended Mon-Thu 1600-0800Z±, Fri 1600-0200Z±, Sat 1800-0200Z±, Sun 2100-0500Z±. See
 FLIP AP/1 Supplementary Arpt Remark for holiday schedule. Field hrs subject to change via NOTAM. **RSTD** PPR
 DSN 949-1023, C559-998-1023 except AIREVAC. Civilian acft ldg permits required. Prior coordination or flight
 advisory required for AMC and scheduled airlifts. 24 hr prior notice required for acft with hazardous cargo.
CAUTION Bird hazard. High intensity jet opr 25 NM radius 0-15,000' Mon-Fri. Black top areas adjacent to twy and
 hanger for erosion control only, will not support acft. **TFC PAT** Heavy acft executing practice instrument apch
 limited to low apch. Reduced rwy separation standard in effect USN/USMC acft. **MISC** Prior coordination rqr for
 transient practice instrument apch DSN 949-1099, C559-998-1099. Data link frequency 323.5, TRN-28
 monitor system Chan 13.
WEATHER DATA SOURCES: AWOS-3 (C559) 998-2336.
COMMUNICATIONS: ATIS 121.575 267.6
 (R) **APP CON** 124.1 (N) 118.15 (S) 286.0
TOWER 128.3 340.2 (Rwy 14L, 32L) 360.2 (Rwy 14R, 32R) (Mon-Thu 1600-0800Z±, Fri 1600-0200Z±, Sat
 1800-0200Z±, Sun 2100-0500Z±) **GND CON** 121.65 305.2 **CLNC DEL** 124.1 380.8
 (R) **DEP CON** 118.15 318.8 (Rwy 14L/R) 124.1 318.8 (Rwy 32L/R)
BASE OPS 299.3 **PSMV METRO** 317.0 **MOA ADVISORY** 134.225 290.325
AIRSPACE: CLASS D svc Mon-Thu 1600-0800Z±, Fri 1600-0200Z±, Sat 1800-0200Z±, Sun 2100-0500Z± other
 times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE NLC.
 (H) **TACAN** Chan 80 NLC (113.3) N36°20.65' W119°57.98' at fld. 229/16E.
 TACAN azimuth unusable:
 180°-200° byd 6 NM blo 6,000' 180°-200° byd 25 NM blo 15,000'
 180°-200° byd 15 NM blo 10,000'
ASR/PAR
COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

LINCOLN RGNL/KARL HARDER FLD (LHM) 3 W UTC-8(-7DT) **SAN FRANCISCO**
 N38°54.55' W121°21.08' **H-3B, L-2G, 3A**
 121 B S4 **FUEL** 100LL, JET A TPA-1121(1000) NOTAM FILE RUI **IAP**
RWY 15-33: H6001X100 (ASPH) S-30, D-60 MIRL
RWY 15: MALSR. PAPI(P4L)-GA 3.0° TCH 44'. Tree.
RWY 33: PAPI(P4R)-GA 3.0° TCH 29'. Trees.
AIRPORT REMARKS: Attended Mon-Fri 1400-0230Z±. For Jet A and
 100LL fuel truck ctc (916) 257-4854, 1400-0230Z±. Self svc
 fuel avbl 24 hrs. Parachute Jumping. **ACTIVATE** MIRL Rwy 15-33,
 MALSR Rwy 15-CTAF. PAPI Rwy 15 and Rwy 33 turned on during
 dalgt hrs, after dark **ACTIVATE**-CTAF.
WEATHER DATA SOURCES: AWOS-3 124.25 (916) 645-0698.
COMMUNICATIONS: CTAF/UNICOM 123.0
 (R) **NORCAL APP/DEP CON** 125.4
RADIO AIDS TO NAVIGATION: NOTAM FILE MYV.
MARYSVILLE (T) VOR/DME 110.8 MYV Chan 45 N39°05.92'
 W121°34.38' 122° 15.4 NM to fld. 60/16E.
ILS/DME 108.75 I-LHM Chan 24(Y) Rwy 15. Class IT.
 ILS unmonitored.



LINDEN N38°04.48' W121°00.23' NOTAM FILE RIU.
(H) VORTAC 114.8 LIN Chan 95 285° 14.7 NM to Lodi. 260/17E.

SAN FRANCISCO
H-3B, L-2F, 3B

LITTLE RIVER (LLR) 3 SE UTC-8(-7DT) N39°15.72' W123°45.22'

SAN FRANCISCO
H-3A, L-2G

572 B FUEL 100LL TPA-1572(1000) NOTAM FILE OAK
RWY 11-29: H5249X100 (ASPH) S-60, D-200, DT-400 MIRL
RWY 11: Thld dsplcd 193'. Brush.

RWY 29: VASI(V4L)—GA 4.0° TCH 52'. Trees.

AIRPORT REMARKS: Attended Thu-Mon 1600-0100Z†. For arpt attendant ctc (707) 937-5129. ACTIVATE MIRL Rwy 11-29 and VASI Rwy 29—CTAF.


WEATHER DATA SOURCES: AWOS-3 122.7 (617) 262-3825

COMMUNICATIONS: CTAF/UNICOM 122.7

OAKLAND CENTER APP/DEP CON 132.2

RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19'
W123°16.45' 283° 25.6 NM to fld. 2980/16E. HIWAS.



LIVERMORE MUNI (LVK) 3 W UTC-8(-7DT) N37°41.60' W121°49.22'

SAN FRANCISCO
H-3A, L-2F, 3B, A
IAP, AD

400 B S4 FUEL 100LL, JET A OX 1, 3 TPA-1400(1000) NOTAM FILE LVK

RWY 07L-25R: H5253X100 (ASPH) S-45, D-60 MIRL 0.5% up E

RWY 07L: PAPI(P4R)—GA 4.0° TCH 32'. Tree.

RWY 25R: MALSR. VASI(V4L)—GA 3.0° TCH 48'. Trees. Rgt tfc.

RWY 07R-25L: H2699X75 (ASPH) S-12.5 0.6% up E

RWY 07R: Rgt tfc.

AIRPORT REMARKS: Attended 1600Z†-dusk. CAUTION—considerable bird activity on and in/ov arpt. Do not mistake parallel twy N of Rwy 25R-07L as rwy. Noise sensitive areas ¾mile East and 2 miles West of arpt. When twr clsd MIRL Rwy 07L-25R opr low intensity, to increase intensity ACTIVATE 118.1. ACTIVATE MALSR Rwy 25R and twy lgts when twr closed—118.1. PAPI Rwy 07L and VASI Rwy 25R opr continuously.

WEATHER DATA SOURCES: ASOS (925) 606-5412. LAWRS.

COMMUNICATIONS: CTAF 118.1 ATIS 119.65 (925) 447-9516

UNICOM 122.95

® NORCAL APP CON 123.85 (07R-25L, 07L-25R)

NORCAL DEP CON 123.85 (07R, 07L) 125.35 (25R, 25L)

TOWER 118.1 (1500-0500Z†) GND CON 121.6

AIRSPACE: CLASS D svc 1500-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE SCK.


MANTECA (H) VORTAC 116.0 ECA Chan 107 N37°50.02' W121°10.28' 238° 32.0 NM to fld. 48/17E. HIWAS.

REIGA NDB (MHW/LOM) 374 LV N37°41.53' W121°41.05'

255° 6.5 NM to fld. NOTAM FILE LVK.

ILS 110.5 I-LVK RWY 25R. LOM REIGA NDB. Unmonitored when tower clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at tower.

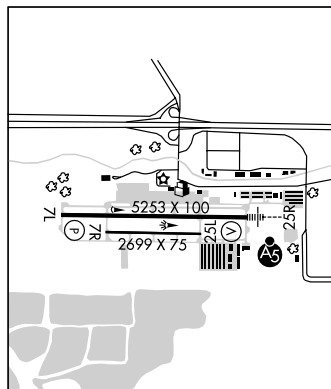

LODI

KINGDON AIRPARK (020) 4 SW UTC-8(-7DT) N38°05.50' W121°21.56'

SAN FRANCISCO

15 S4 FUEL 100LL TPA-815(800) NOTAM FILE RIU

L-2F, 3A

RWY 12-30: H3705X60 (ASPH) LIRL (NSTD)

RWY 12: Thld dspcd 295'. Fence. RWY 30: TRCV(TRIL)—GA 4.5° TCH 16'. Thld dspcd 490'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z. Helicopters not authorized. Rwy 12-30 NW 1000' rough surface. Acft parked 115' left of Rwy 30 centerline SE end of rwy prior to dspcd thld. Rwy 12-30 NSTD edge lights 40' from edge of rwy. Rwy 12 lighted thld relocated 295'; Rwy 30 lighted thld relocated 490' for ngt ops. 3215' of Rwy 12-30 usable at ngt. Rwy 12-30 markings extremely faded. Rwy 30 dspcd thld marked with thld bar only, no numbers, no centerline. For LIRL Rwy 12-30 key 122.8 5 times.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48' W121°00.23' 257° 16.9 NM to fld. 260/17E.

LODI (103) 4 N UTC-8(-7DT) N38°12.15' W121°16.15'

SAN FRANCISCO

60 B S4 FUEL 80, 100LL, JET A TPA-860(800) NOTAM FILE RIU

L-2F, 3A

RWY 08-26: H3735X42 (ASPH-TRTD) S-30 LIRL(NSTD)

IAP

RWY 08: Thld dspcd 615'. Pole.

RWY 26: Thld dspcd 476'. Pole. Rgt tfc.

RWY 12-30: H2073X26 (ASPH-GRVD) S-30

RWY 12: Thld dspcd 277'. Tree.

RWY 30: Thld dspcd 101'. Tree.

AIRPORT REMARKS: Attended 1700Z-dusk. Parachute Jumping. Automated credit card fuel system 24 hrs a day. Rwy 08-26 NSTD LIRL located 30' from pavement edge. EOR lights located at dspcd thld Rwy 26. Rwy 08 edge lgts extended approximately 400' W of thld.


COMMUNICATIONS: CTAF 122.9

Ⓡ NORCAL APP CON 125.1

Ⓡ NORCAL DEP CON 125.1 (Southbound) 125.25 (Northbound)

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48' W121°00.23' 285° 14.7 NM to fld. 260/17E.



LODI AIRPARK (L53) 3 SW UTC-8(-7DT) N38°05.05' W121°18.98'

SAN FRANCISCO

25 S2 FUEL 100LL TPA-825(800) NOTAM FILE RIU

RWY 07-25: 1875X22 (ASPH)

RWY 07: Road. RWY 25: Brush.

AIRPORT REMARKS: Attended Jan-Sep 1200-2300Z; Oct-Dec Mon-Fri 1400-2300Z. Ultralights prohibited. 380' apron extends east from end of Rwy 25.

COMMUNICATIONS: CTAF 122.9

LONG BEACH (DAUGHERTY FLD) (LGB) 3 NE UTC-8(-7DT) N33°49.06' W118°09.10' **LOS ANGELES**
 60 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LRA Class I, ARFF Index C NOTAM FILE LGB **COPTER**
RWY 12-30: H10000X200 (ASPH-GRVD) S-30, D-200, ST-175, DT-300 HIRL CL **H-4H, L-3E, 4G, A**
RWY 12: REIL. VASI(V4L)—GA 3.0° TCH 47'. Thld dsplcd 1350'. Fence. 0.4% down. **IAP, AD**
RWY 30: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 70'. Thld dsplcd 2000'. Tree. 0.3% up.
RWY 07L-25R: H6192X150 (ASPH-PFC) S-30, D-70, ST-89, DT-110 MIRL 0.3% up W
RWY 07L: Thld dsplcd 1305'. Pole.
RWY 25R: REIL. VASI(V4L)—GA 4.0° TCH 70'. Thld dsplcd 531'. Road. Rgt tfc.
RWY 07R-25L: H5423X150 (ASPH) S-30, D-75, ST-95 HIRL 0.4% up W
RWY 07R: Tower. Rgt tfc. **RWY 25L:** REIL. PAPI(P4L)—GA 4.0° TCH 38'. Trees.
RWY 16R-34L: H4470X75 (ASPH) S-12.5
RWY 16R: VASI(V4L)—GA 4.0° TCH 36'. Thld dsplcd 310'. Fence. Rgt tfc. **RWY 34L:** Road.
RWY 16L-34R: H4267X75 (ASPH) S-12.5
RWY 16L: Thld dsplcd 415'. Fence. **RWY 34R:** Thld dsplcd 292'. Road. Rgt tfc.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 12	16L-34R	4100
RWY 25R	12-30	3400
RWY 30	07L-25R	850

RUNWAY DECLARED DISTANCE INFORMATION

RWY 30: TORA-10000 TODA-10000 ASDA-9414 LDA-7424

AIRPORT REMARKS: Attended continuously. All rws CLOSED 0600-1500Z except Rwy 12-30. Rwy 16L-34R OTS indef. Birds on and in/ov arpt. Airships moored in infield and operating in/ov arpt. Rwy 07R lgt twr 152' AGL 2500' W and 500' S of rwy thld. 6' lgt chain link fence located 130' S of centerline of Twy F. Fence begins NW corner of twr and extends 400' to W. 11' lgt fence located 77' south of centerline Twy D at D2. Prior notice requested for military jets and civilian Non-Stage III Jets, etc Noise Abatement 562-570-2635 or frequency 122.85 Mon-Fri 1530-0030Z. Noise limits (decibels single event noise exposure level), Rwy 25R tkf 92.0-ldg 88.0; Rwy 07L tkf 88.0-ldg 92.0; Rwy 25L tkf 95.0 ldg 93.0; Rwy 07R tkf 95.0 ldg 92.0. Rwy 12 and 30 1500-0600Z tkf 102.5 ldg 101.5; 1400-1500Z and 0600-0700Z tkf 90.0 ldg 90.0; 0700-1400Z tkf 79.0 ldg 79.0. Touch and go, stop and go, low apch only permitted 1500-0300Z weekdays and 1600-2300Z weekends and holidays only on Rwy 07L-25R and Rwy 07R-25L unless weather conditions require twr to direct such ops to Rwy 16R-34L and Rwy 16L-34R. Rwy 12-30 maximum ldg weights A-330 347,000 pounds; A-340 379,000 pounds; DC-10-10, DC 10 30/40 and MD-11 379,000 pounds; L-1011 354,000 pounds. Rwy 12-30 maximum tkf weights DC-10 30/40 and MD-11 588,000 pounds; C-17 538,600 pounds. Maximum ldg weight for C-17 at or byd glide slope or rwy aiming point marking 538,600 pounds. Rwy 30 ldg prior to rwy aiming point marking 344,000 pounds. Taxiways D3 and L3 weight limits A-340, DC-10 30/40 and MD-11 541,000 pounds, C-17 450,000 pounds. No twy access to Rwy 07L W of Twy D, 4897' remaining on Rwy 07L from Twy D. Engine run-ups other than preflight are limited to hours of 1500-0500Z weekdays and 1700-0500Z weekends and holidays. ACTIVATE MALSR Rwy 30 when tower clsd—CTAF. Rwy 12-30 HIRL lighted during hours tower clsd. REIL Rwy 12, Rwy 25R, and Rwy 25L, MIRL Rwy 07L-25R, HIRL Rwy 07R-25L, CL TDZL lghts Rwy 12-30 not avbl when ATCT clsd. VASI Rwy 25R and PAPI Rwy 25L opr 1500-0600Z only. VASI Rwy 12 and PAPI Rwy 30 opr continuously. Rwy 30 PAPI lghts will flash to indicate the presence of an acft or vehicle in activation zones; tkf hold position of Rwy 30 (Twy L1/L2 and Twy D1 intersection); mid-field departure position (Twy J, Rwy 16L-34R, Twy C intersection); Twy G intersection. NOTE: See Special Notices — Air Carrier Operations Vicinity of Long Beach (Daugherty Fld), CA.

WEATHER DATA SOURCES: ASOS (562) 424-0572.

COMMUNICATIONS: CTAF 119.4 ATIS 127.75 (562) 595-8564 **UNICOM** 122.95

Ⓡ **SOCAL APP CON** 124.65

Ⓡ **SOCAL DEP CON** 127.2

LONG BEACH TOWER 119.4 (Rwy 30 apch, Rwy 12 dep) 120.5 (Rwy 12 apch, Rwy 30 dep) (1415-0745Z)

GND CON 133.0 **CLNC DEL** 118.15

AIRSPACE: CLASS D svc 1415-0745Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

SEAL BEACH (L) VORTACW 115.7 SLI Chan 104 N33°47.00' W118°03.29' 278° 5.3 NM to fld. 23/15E. **HIWAS.**

BECCA NDB (LOM) 233 LG N33°45.40' W118°04.64' 301° 5.2 NM to fld.

ILS 110.3 I-LGB Rwy 30. Class IT. LOM BECCA NDB. Unmonitored when twr clsd. MM unmonitored.

HELIPAD H1: H20X20 (ASPH)

HELIPAD H4: H20X20 (ASPH)

HELIPAD H2: H20X20 (ASPH)

HELIPAD H5: H20X20 (ASPH)

HELIPAD H3: H20X20 (ASPH)

HELIPAD H6: H20X20 (ASPH)

HELIPORT REMARKS: Training helipads H1, H2, H3 and H4 located N of Rwy 12-30 midfield between Taxiways G and K. Training helipads H5 and H6 located south of Rwy 12-30 between Twy D and Twy J for hover work only.

LONNIE POOL FLD/WEAVERVILLE (See WEAVERVILLE)

LOS ALAMITOS AAF JOINT FORCES TRAINING BASE (JFTB) (SLI)(KSLI) A ARNG (AR) 1 SE **LOS ANGELES**
 UTC-8(-7DT) N33°47.40' W118°03.09' **COPTER**
 32 B NOTAM FILE SLI Not insp. **H-4H, L-3E, 4H, A**
RWY 04R-22L: H8001X200 (ASPH-CONC) PCN 36 R/C/W/T HIRL CL **DIAP, AD**
RWY 22L: SALSF. VASI(V4L).
RWY 04L-22R: H5902X150 (PEM) PCN 36 F/C/W/T MIRL
MILITARY SERVICE: LGT HIRL elevation 1' and located 5' from edge of rwy. **JASU 4(E3) 2(AGPU) 2(AM32A-60B**
 without DC power) **FUEL J8**
MILITARY REMARKS: Sat-Mon 1600-0000Z†, Tue-Fri 1500-0600Z†, closed holidays. **RSTD** PPR ctc afld ops DSN
 972-2571, C562-795-2571; <http://www.calguard.ca.gov/SLI>.
NS ABTMT Procedure in effect. All dep rqr briefings. **MISC** To exceed weight bearing capacity ctc Afld ops. See AP/1
 Route and Area Rstd and Supplementary Arpt Remark. Winds are accurate to within +/- 4 knots. **USAR OPS** Opr
 Mon-Fri 1530-0030Z†, except holidays. DSN 972-2232, C562-795-2232. **ARNG AASF OPS** Opr Mon-Fri,
 1530-2330Z†, except holidays. DSN 972-2006, C562-795-2006 <http://www.calguard.ca.gov/aasf1>
COMMUNICATIONS: ATIS 118.875 379.975
 Ⓡ **SOCAL APP/DEP CON** 124.65 316.125
TOWER 123.85 251.15 Sat-Mon 1600-0000Z†, Tue-Fri 1500-0600Z†, clsd holidays. **GND CON** 126.95
 257.95 **AFLD OPS ADVSY SVC** 126.2 237.2 **USAR OPS** 139.05 230.9 **ARNG AASF OPS** 233.8 41.5
 (Mon and Fri 1530-2330Z†, Tue-Thu 1530-0600Z†, except holidays)
AIRSPACE: CLASS D svc Sat-Mon 1600-0000Z†, Tue-Fri 1500-0600Z†, other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.
SEAL BEACH (L) VORTACW 115.7 SLI Chan 104 N33°47.00' W118°03.29' at fld. 23/15E. **HIWAS**.
BECCA NDB (LOM) 233 LG N33°45.40' W118°04.64' 019° 2.4 NM to fld. NOTAM FILE LGB. Unmonitored
 0745-1415Z†.
ASR/PAR
COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

LOS ANGELES

LOS ANGELES INTL (LAX) 9 SW UTC -8(-7DT) N33°56.55' W118°24.43'

LOS ANGELES

125 B S4 FUEL JET A OX 1, 4 LRA Class I, ARFF Index E NOTAM FILE LAX

COPTER

RWY 07L-25R: H12091X150 (CONC-GRVD) PCN 70 R/A/W/T HIRL CL

H-4H, L-3E, 4G, 7B, A

RWY 07L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 59'. Rgt tfc.

IAP, AD

RWY 25R: MALSR. Thld dspcd 957'. Railroad. 0.3% up.

RWY 07R-25L: H11095X200 (CONC-GRVD) PCN 75 R/A/W/T HIRL CL

RWY 07R: MALSR. PAPI(P4L)—GA 3.0° TCH 57'. Pole. Rgt tfc.

RWY 25L: ALSF2. TDZL. Railroad. 0.3% up.

RWY 06R-24L: H10285X150 (CONC-GRVD) PCN 70 R/A/W/T HIRL CL

RWY 06R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 78'. Thld dspcd 331'. Pole.

RWY 24L: MALSR. PAPI(P4R)—GA 3.0° TCH 79'. Rgt tfc.

RWY 06L-24R: H8925X150 (CONC-GRVD) PCN 70 R/A/W/T HIRL CL

RWY 06L: MALSR. PAPI(P4L)—GA 3.0° TCH 77'. Pole.

RWY 24R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'. Sign. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Rwy 25L preferred emerg rwy. Numerous birds on and invof airport. Turbulence may be deflected upward from the blast fence 180' E of Rwy 25R. ASDE-X Surveillance System in use: Pilots should operate transponders with Mode C on all twys and rwys. Tom Bradley International Gates: check LAWA (Los Angeles World Airport) rules and regulations for latest operating procedures. Ctc LAX airfield ops (310) 646-4265 for B747-400/B-777-300 and 300ER/A340-600 acft ops restrictions. Practice instrument approaches and touch and go landings are prohibited. Noise sensitive arpt. On westerly tkfs no turns before crossing shoreline. Over-ocean apchs utilized 0800-1430Z+. Rwy 24R ALSF2 operates as SSALR till weather goes below VFR. Rwy 25L ALSF2 operates as SSALR until weather goes below VFR. Westbound B747-400 acft on Twy C prohibited from southbound turns onto Twy P. (Twy C-7, C-8, C-9 north of Twy C) and Twy D-7 south of Twy E will not accommodate B747 acft. Twy D between Twy D-7 and D-8 (north of terminal one) restricted to B-767-300 and smaller acft. West remote gates: acft use of open gates as taxi path is prohibited (gates 206, 207, 208, 209). A 700'X500' clearway has been reestablished at west end of Rwy 24R. Touchdown, midpoint and rollout runway visual range avbl Rwy 06L, Rwy 24R, Rwy 06R, Rwy 24L, Rwy 07R, Rwy 25L, Rwy 07L, Rwy 25R. Simultaneous acft ops prohibited on Twy T and Twy H9 between Rwy 07L-25R and Rwy 07R-25L. Simultaneous acft ops prohibited on Twy H2 and Twy G between Rwy 07L-25R and Rwy 07R-25L. Overnight storage fee. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (310) 568-1486.

COMMUNICATIONS: D-ATIS ARR 133.8 D-ATIS DEP 135.65 (310) 646-2297 **UNICOM** 122.95

(R) SOCIAL APP CON 128.5 (045°-089°), 124.9 (090°-224°), 124.5 (225°-044°) 124.3 (App from west)

TOWER 133.9 (N. complex), 120.95 (S. complex), 119.8

GND CON 121.75 (S. complex), 121.65 (N. complex) **CLNC DEL** 121.4 120.35

(R) SOCIAL DEP CON 125.2 (225°-044°) 124.3 (045°-224°) (Dep to west)

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAX.

(H) VORTACW 113.6 LAX Chan 83 N33°55.99' W118°25.92' 051° 1.4 NM to fld. 182/15E.

VOR portion unusable:

175°-205° byd 10 NM blo 3,000'.

277°-300° byd 10 NM blo 8,000'

270°-277° byd 25 NM blo 8,000'

277°-300° byd 28 NM blo 12,000'

ILS/DME 108.5 I-OSS Chan 22 Rwy 24R. Class IIIE.

ILS/DME 111.7 I-HQB Chan 54 Rwy 24L. Class IE.

ILS/DME 109.9 I-LAX Chan 36 Rwy 25L. Class IIIE.

ILS/DME 111.1 I-CFN Chan 48 Rwy 25R. Class IE.

ILS/DME 108.5 I-UWU Chan 22 Rwy 06L. Class IE.

ILS/DME 111.7 I-GPE Chan 54 Rwy 06R. Class IE.

ILS/DME 111.1 I-IAS Chan 48 Rwy 07L. Class ID.

GS unusable byd 5° right of localizer course.


ILS/DME 109.9 I-MKZ Chan 36 Rwy 07R. Class ID.

GS unusable 5° left and 4° right of course.

DME unusable byd 15° right of course. Coupled apch not avbl below 264'.

HELIPAD H3: H63X63 (CONC) S-15 LIRL

HELIPORT REMARKS: Helipad H3 ctc twr for tfc pattern.

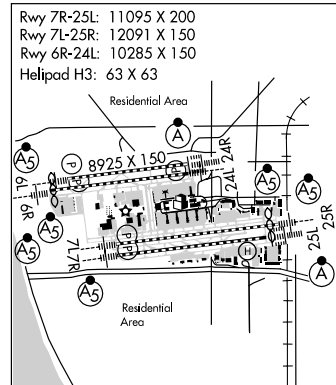

WHITEMAN (WHP) 1 E UTC-8(-7DT) N34°15.56' W118°24.81'

LOS ANGELES

1003 B S4 FUEL 100LL, Jet A OX 1, 3 TPA-2003(1000) NOTAM FILE WHP

COPTER

RWY 12-30: H4120X75 (ASPH) S-12.5 MIRL 1.0% up NW

L-3E, 4G, 7B, A

RWY 12: REIL. PAPI(P2R)—GA 3.8° TCH 40'. Thld dsplcd 729'. P-line.

IAP, AD

RWY 30: REIL. PAPI(P2L)—GA 3.8° TCH 40'. Thld dsplcd 478'.

P-line. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 12: TORA-3442 TODA-4120 ASDA-3910 LDA-3181

RWY 30: TORA-3191 TODA-4120 ASDA-3940 LDA-3462

AIRPORT REMARKS: Attended continuously. Birds on and invof arpt.

Helicopter ops 2500' MSL (1500' AGL) and below. Arpt CLOSED

to helicopter training/pattern opr 0400-1600Z. Dirt infield areas. Helicopters advised to use care to prevent blasting dirt and debris onto movement areas.

COMMUNICATIONS: CTAF 135.0 ATIS 132.1 (818)899-9820

UNICOM 122.95

Ⓡ **SOCAL APP/DEP CON** 120.4 (VNY 280°-BUR 050°) 134.2 (VNY 160°-VNY 280°)

TOWER 135.0 (1600-0400Z). GND CON 125.0

AIRSPACE: CLASS D svc 1600-0400Z other times Class G.


RADIO AIDS TO NAVIGATION: NOTAM FILE VNY.

VAN NUYS (L) VORW/DME 113.1 VNY Chan 78 N34°13.41'

W118°29.50' 046° 4.5 NM to fld. 812/15E.

PACOIMA NDB (MHW) 370 PAI N34°15.58' W118°24.81' at fld. VFR only. NOTAM FILE HHR.

COMM/NAV/WEATHER REMARKS: Whiteman arpt altimeter setting not avbl.



LOS BANOS

LOS BANOS MUNI (LSN) 1 W UTC-8(-7DT) N37°03.83' W120°52.19'

SAN FRANCISCO

121 B S8 FUEL 100LL, JET A TPA-921(800) NOTAM FILE RIU

L-3B

RWY 14-32: H3801X75 (ASPH) S-23 MIRL

IAP

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Tree. Rgt tfc.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 38'. Tree.

AIRPORT REMARKS: Unattended. For cash fuel after hours call 209-827-7070. 24 hour automated fuel avbl with major credit card. Avoid overflight of houses south of arpt. No departures over housing areas to east of arpt.

Major powerplant repairs avbl. Rwy 14 VASI OTS indef. MIRL Rwy 14-32 preset low intensity until 0800Z. To increase intensity and ACTIVATE MIRL, REIL Rwy 14 and Rwy 32, and VASI Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.675 (209) 827-7084

COMMUNICATIONS: CTAF/UNICOM 122.8

PANOCHÉ RCO 122.1R 112.6T (RANCHO MURIETA RADIO)

Ⓡ **NORCAL APP/DEP CON** 120.95

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

PANOCHÉ (L) VORTAC 112.6 PXN Chan 73 N36°42.93' W120°46.72' 332° 21.3 NM to fld. 2060/16E.

SAN LUIS RESERVOIR SPB (ØØØ) 12 W UTC-8(-7DT) N37°03.50' W121°07.56'

SAN FRANCISCO

544 TPA-1344(800) NOTAM FILE RIU

WATERWAY ALL WAY: 15840X13000 (WATER)

SEAPLANE REMARKS: Unattended. Waterway All Way width 13200'. Seaplane ldg area subject to gusty wind conditions.

Spillway and water surface elevations change seasonally and may be as low as 340' MSL.

COMMUNICATIONS: CTAF 122.9

LOST HILLS-KERN CO (L84) 1 NE UTC-8(-7DT) N35°37.49' W119°41.17'

LOS ANGELES

274 TPA-1274(1000) NOTAM FILE RIU

L-3D, 7B

RWY 15-33: H3020X60 (ASPH) S-12

RWY 33: Poles. Rgt tfc.

AIRPORT REMARKS: Unattended. No agriculture flights except by PPR arpt manager 661-391-1800.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

AVENAL (H) VORTAC 117.1 AVE Chan 118 N35°38.82' W119°58.72' 079° 14.4 NM to fld. 710/16E.

LOST ISLE SPB (See STOCKTON)

MAAGG N33°41.33' W117°51.63' NOTAM FILE SNA.

LOS ANGELES

NDB (LMM) 337 NA at John Wayne Airport/Orange Co. Unmonitored indef.
Unusable 010°-090° byd 10NM blo 6000'.

MADERA MUNI (MAE) 3 NW UTC-8(-7DT) N36°59.32' W120°06.75'

SAN FRANCISCO

255 B S4 **FUEL** 100LL, JET A OX 3, 4 TPA-1255(1000) NOTAM FILE MAE

H-3B, L-3C

RWY 12-30: H5545X150 (ASPH) S-30 MIRL

IAP

RWY 12: PAPI(P2L)-GA 3.0° TCH 34'. Rgt tfc.

RWY 30: MALSf. PAPI(P2L)-GA 3.0° TCH 34'.

RWY 07-25: H3702X150 (ASPH) S-30

RWY 07: Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1500-0030Z+. Fuel avbl 24 hours with automated credit card. Jet A single point pressure refueling avbl via truck. Parachute Jumping. Ultralight activity on and invof arpt. Rwy 07-25 restricted for agriculture use only. Rwy 12 200'X150' ovrn ASPH. Rwy 30 200'X150' ovrn ASPH. ACTIVATE MIRL Rwy 12-30 PAPI Rwy 12 and Rwy 30 and MALSf Rwy 30 and wind tee-CTAF.


WEATHER DATA SOURCES: ASOS 134.725 (559) 674-1781.

COMMUNICATIONS: CTAF/UNICOM 122.8

® **FRESNO APP/DEP CON** 119.45

RADIO AIDS TO NAVIGATION: NOTAM FILE FAT.

CLOVIS (H) VORTAC 112.9 CZQ Chan 76 N36°53.06' W119°48.91' 279° 15.6 NM to fld. 360/15E.



MAMMOTH LAKES

MAMMOTH YOSEMITE (MMH) 6 E UTC-8(-7DT) N37°37.44' W118°50.33'

SAN FRANCISCO

7135 B S8 **FUEL** 100LL, JET A OX 1 TPA-8007(872) Class I, ARFF Index Ltd

H-3B, L-SA

NOTAM FILE MMH

IAP

RWY 09-27: H7000X100 (ASPH-GRVD) S-85, D-115 PCN 30 F/B/X/T MIRL 1.0% up W

RWY 27: REIL. PAPI(P4L)-GA 3.0° TCH 45'. Tree. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0300Z+. 100LL fuel avbl 24 hours, card lock system. Ngt flying not recommended without knowledge of local terrain. No snow removal during night time hrs. CLOSED to air carrier ops with more than 30 passenger seats except 24 hour PPR call arpt manager 760-934-3813. Ridge 3 miles from apch end Rwy 09. Ridge at Rwy 27 is 304' above rwy and 1200' north of centerline with hazard beacons. 33' pole located 400' west of apch end of Rwy 27 and 375' south of Rwy 27 centerline. Arpt located in mountainous terrain with occasional strong winds and turbulence. Lgt'd windsock avbl at rwy ends and centerfield. With southerly crosswinds in excess of 15 knots, expect turbulence and possible windshear along first 3000' of Rwy 27. Noise abatement: acft arriving from the south, or departing to the south remain east of highway 395. ACTIVATE MIRL Rwy 09-27 and REIL Rwy 27-CTAF. Ldg fee.

WEATHER DATA SOURCES: AWOS-3 118.05 (760) 934-6020.

COMMUNICATIONS: CTAF/UNICOM 122.8


MAMMOTH RCO 122.15 (RIVERSIDE RADIO)

OAKLAND CENTER APP/DEP CON 125.75

AIRSPACE: CLASS E svc continuous.

RADIO AIDS TO NAVIGATION: NOTAM FILE BIH.

BISHOP (T) VORW/DME 109.6 BIH Chan 33 N37°22.62' W118°21.99' 288° 27.0 NM to fld. 4120/15E.



MANTECA N37°50.02' W121°10.28' NOTAM FILE SCK.

SAN FRANCISCO

(H) **VORTAC** 116.0 ECA Chan 107 302° 4.8 NM to Stockton Metro. 48/17E. HIWAS.

H-3B, L-2F, 3B

VOR unusable:

015°-025° byd 5 NM

032°-034° byd 10 NM

055°-065°

075°-090° byd 5 NM

115°-125° byd 9 NM

126°-180°

200°-224°

251°-254°

300°-310° byd 9 NM

345°-360° byd 10 NM.

MARCH ARB (See RIVERSIDE)

MARINA MUNI (OAR) 2 E UTC-8(-7DT) N36°40.89' W121°45.70' **SAN FRANCISCO**
 137 B S6 FUEL A, 100LL TPA-1137(1000) NOTAM FILE OAK Not insp. **L-3B**
 RWY 11-29: H3483X75 (ASPH) S-20, D-50 MIRL **IAP**
 RWY 29: Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z+. Fuel avbl 24 hours, by credit card lock system. Parachute Jumping.
 Wildlife invof Rwy 11-29. Ultralight and skydiving activity on and invof arpt. Skydiving activity on SE side of arpt.
 PAEW vicinity of ramps and taxiways indef. Rwy 29 calm wind rwy. Depart Rwy 29 execute 45° rgt turn to avoid
 overflight of noise sensitive residential area. ACTIVATE MIRL Rwy 11-29-CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.7
 (R) NORCAL APP/DEP CON 133.0 (360°-150°)
SALINAS (H) VORTACW 117.3 SNS Chan 120 N36°39.83' W121°36.19' 261° 7.7 NM to fld. 101/17E.
HIWAS.

MARIPOSA-YOSEMITE (MPI) 4 W UTC-8(-7DT) N37°30.65' W120°02.37' **SAN FRANCISCO**
 2254 B S4 FUEL 100LL TPA-3254(1000) NOTAM FILE RIU **L-3B, 9A**
 RWY 08-26: H3306X60 (ASPH) S-12 MIRL 0.9% up W **IAP**
 RWY 08: PAPI(P2L)-GA 4.0° TCH 37'. Tree. Rgt tfc. **RWY 26:** PAPI(P2L)-GA 4.5° TCH 40'. Tree.
AIRPORT REMARKS: Attended Apr-Nov 1600-0100Z+, Dec-Mar 1700-0000Z+. Rwy 08 terrain drops along both sides
 of twy 45' from rwy edge. ACTIVATE MIRL Rwy 08-26-CTAF. PAPI Rwy 08 and PAPI Rwy 26 opr continuously.
 Limited parking weekends and holidays.
WEATHER DATA SOURCES: AWOS-3 135.6 (209) 966-2912.
COMMUNICATIONS: CTAF/UNICOM 122.7
 (R) OAKLAND CENTER APP/DEP CON 121.25
RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.
FRIANT (L) VORTACW 115.6 FRA Chan 103 N37°06.27' W119°35.73' 302° 32.3 NM to fld. 2380/17E.
HIWAS.

MARKLEEVILLE

ALPINE CO (M45) 3 N UTC-8(-7DT) N38°44.09' W119°45.98' **SAN FRANCISCO**
 5867 TPA-6667(800) NOTAM FILE RNO **L-9A**
 RWY 17-35: H4443X50 (ASPH)
 RWY 17: Hiil. **RWY 35:** Rgt tfc.
AIRPORT REMARKS: Unattended. No snow removal, arpt CLOSED when snow on rwy. Soil conditions off rwy is poor in
 wet conditions. Call public works for additional information 530-694-2140 extension 0. Large stones along
 edge of rwy off graded surface. Rwy 17-35 ltd by arpt opr to 4,800 lbs single wheel, 9,600 lbs dual wheel.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.
MUSTANG (H) VORTACW 117.9 FMG Chan 126 N39°31.88' W119°39.37' 170° 48.0 NM to fld. 5949/16E.

MARYSVILLE N39°05.92' W121°34.38' NOTAM FILE MYV. **SAN FRANCISCO**
 (T) VOR/DME 110.8 MYV Chan 45 at Yuba Co. 60/16E. **L-26, 3A**
 RC0 122.6 122.1R 110.8T (RANCHO MURIETA RADIO)

MARYSVILLE

YUBA CO (MYV) 3 SE UTC-8(-7DT) N39°05.87' W121°34.19'
 64 B S3 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE MYV
 RWY 14-32: H6006X150 (ASPH) S-75, D-100, ST-129, DT-150 HIRL
 RWY 14: MALS R. REIL. VASI(V4L)—GA 3.0° TCH 50'. Tree.
 RWY 32: VASI(V4L)—GA 3.0° TCH 32'. Pole.
 RWY 05-23: H3281X60 (ASPH) S-42, D-60, DT-95
 RWY 05: Railroad. RWY 23: Tree.

AIRPORT REMARKS: Attended 1400-0200Z†. All acft enter tfc pattern at 1000' AGL except turbined-powered or large airplanes at 1500' AGL. Migratory flocks of waterfowl invof arpt during the spring and fall of the year. Rwy 23 +35' p-lines 900'-1050' from rwy end running 145' left to 210' rgt. Rwy 05-23 has a 210' paved safety area on SW end and 509' paved safety area on NE end. TPA—1064(1000). All acft enter tfc pattern at 1064(1000) except turbine-powered or large airplanes at 1564(1500).
 ACTIVATE HIRL Rwy 14-32, VASI Rwy 14 and Rwy 32, MALS Rwy 14—CTAF.

WEATHER DATA SOURCES: ASOS 118.475 (530) 742-0695.

COMMUNICATIONS: CTAF/UNICOM 123.05


MARYSVILLE RCO 122.6 122.1R 110.8T (RANCHO MURIETA RADIO)

® **NORCAL APP/DEP CON** 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE MYV.

MARYSVILLE (T) VOR/DME 110.8 MYV Chan 45 N39°05.92' W121°34.38' at fld. 60/16E.

ILS 110.5 I-MYV Rwy 14 Class IT. ILS unmonitored.



SAN FRANCISCO
 H-3B, L-26, 3A
 IAP

MAXWELL N39°19.06' W122°13.29' NOTAM FILE RIU.

SAN FRANCISCO
 L-26

(L) **VORTAC** 110.0 MXW Chan 37 343° 11.9 NM to Willows—Glenn Co. 110/18E.

RCO 122.1R 110.0T (RANCHO MURIETA RADIO)

McCLELLAN AIRFIELD (See SACRAMENTO)

McCLELLAN-PALOMAR (See CARLSBAD)

MEADOWS FLD (See BAKERSFIELD)

MEFFORD FLD (See TULARE)

MENDOCINO N39°03.19' W123°16.45' NOTAM FILE UKI.

SAN FRANCISCO
 H-3A, L-26

(H) **VORTACW** 112.3 ENI Chan 70 022° 5.5 NM to Ukiah Muni. 2980/16E. HIWAS.

MENDOTA

WILLIAM ROBERT JOHNSTON MUNI (M90) 0 E UTC-8(-7DT) N36°45.52' W120°22.28'

SAN FRANCISCO
 L-3C

162 TPA—1162(1000) NOTAM FILE RIU

RWY 15-33: H3499X50 (ASPH) S-12.5

RWY 33: Thld dsplcd 777'. Bldg. Rgt tfc.

AIRPORT REMARKS: Unattended. Arpt CLOSED ngts.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

PANOCHÉ (L) VORTAC 112.6 PXN Chan 73 N36°42.93' W120°46.72' 066° 19.8 NM to fld. 2060/16E.

MERCED**CASTLE** (MER) 7 NW UTC-8(-7DT) N37°22.83' W120°34.09'

SAN FRANCISCO

191 B **FUEL** 100LL, JET A TPA—See Remarks Class I, ARFF Index B NOTAM FILE MER


H-3B, L-3B

RWY 13-31: H11802X150 (ASPH-CONC) S-155, D-200, ST-175, DT-415, DDT-720 HIRL

IAP, AD

RWY 13: ALSF1. PAPI (P4L)—GA 3.0° TCH 75'.**RWY 31:** ALSF1. PAPI (P4L)—GA 3.0° TCH 75'. Rgt tfc.

AIRPORT REMARKS: Attended 1700-0200Z†. For aprt info 209-385-7686. For fuel 0200-1700Z† call 209-725-1455. Rwy 31 will be the designated calm wind rwy (wind 5 Kts or less). Opposite end of rwy not visible on tkf. When twr is clsd opposite direction tkfs and ldgs are not authorized. Civilian and military training may occasionally cause pattern congestion. When twr is clsd maximum of 5 acft permitted in VFR traffic pattern at any one time and 2,000' ceiling and 3 miles visibility recommended. TPA—1191(1000), turbine and large acft 1691(1500). Rwy 13-31 180° turns prohibited. ALSF1 Rwy 31 sequenced flashing lgts OTS indef. When twr is clsd **ACTIVATE HIRL** Rwy 13-31, ALSF1 Rwy 13 and Rwy 31—frequency 123.000, 3 clicks on, 5 clicks increase intensity, 7 clicks off. PAPI Rwy 13 and PAPI Rwy 31 opr continuously.

WEATHER DATA SOURCES: AWOS-3 124.475 (209) 725-0104.**COMMUNICATIONS:** CTAF 118.175 ATIS 124.475 **UNICOM** 122.95® **NORCAL APP/DEP CON** 120.95**TOWER** 118.175 (1500-0500Z†) **GND CON** 133.575**AIRSPACE:** CLASS D svc 1500-0500Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MCE.**EL NIDO (L) VOR/DME** 114.2 HYP Chan 89 N37°13.17' W120°24.01' 305° 12.6 NM to fld. 183/15E.**ILS/DME** 109.5 I-MER Rwy 31. LOC unusable bdy 25° both sides of course.**MERCED MUNI/MACREADY FLD** (MCE) 2 SW UTC-8(-7DT) N37°17.09' W120°30.84'

SAN FRANCISCO

155 B S4 **FUEL** 100LL, JET A ARFF Index—See Remarks NOTAM FILE MCE

H-3B, L-3B

RWY 12-30: H5914X150 (ASPH-PFC) S-30, D-100, ST-175, DT-155 HIRL


IAP

RWY 12: REIL. VASI(V4L)—GA 3.0° TCH 47'. Pole. Rgt tfc.**RWY 30:** MALSR. PAPI(P4L)—GA 3.0° TCH 54'. P-line.

AIRPORT REMARKS: Attended 1300-0600Z†. For fuel after hours call 209-722-6300. Class II, ARFF Index A. ARFF Index B 24 hrs PPR. Be alert for extensive student training within 10 NM radius of aprt. Two-way radio communication recommended. Rwy 30 preferred wind rwy. Noise abatement procedures in effect, recommend acft remain east/west of City of Merced at alt blo 3,000' MSL. Departing tfc Rwy 12 no left turns over city until reaching 3,000' MSL. Avoid right turns which will position acft over city. PPR 24 hrs for unscheduled air carrier ops with more than 30 passenger seats call aprt manager 209-385-6873. **ACTIVATE MALSR** Rwy 30 and HIRL Rwy 12-30—CTAF. VASI Rwy 12 and PAPI Rwy 30 opr continuously.

WEATHER DATA SOURCES: ASOS 132.175 (209) 381-0926.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **NORCAL APP/DEP CON** 120.95**AIRSPACE:** CLASS E svc 1600-0100Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MOD.**MODESTO (H) VOR/DME** 114.6 MOD Chan 93 N37°37.64' W120°57.47' 117° 29.5 NM to fld. 90/17E.**EL NIDO (L) VOR/DME** 114.2 HYP Chan 89 N37°13.17' W120°24.01' 291° 6.7 NM to fld. 183/15E.

NOTAM FILE MCE.

ILS/DME 109.3 I-MCE Chan 30 Rwy 30. Class IE. ILS unmonitored 0100-1600Z†. Auto coupled apch non-applicable blo 585'.**MESA DEL REY** (See KING CITY)**METRE** N38°47.70' W121°35.96' NOTAM FILE SMF.

SAN FRANCISCO

NDB (LOM) 230 SM 159° 6.0 NM to Sacramento Intl.**METROPOLITAN OAKLAND INTL** (See OAKLAND)

MIRAMAR MCAS (NKX)(KNKX) MC 3 N UTC-8(-7DT) N32°52.06' W117°08.51'

LOS ANGELES

478 B NOTAM FILE NKX Not insp.

H-4H, L-4H

RWY 06L-24R: H12000X200 (CONC) PCN 66 R/B/W/T HIRL CL

DIAP, AD

RWY 06L: OLS. PAPI(P4L)—GA 3.0° TCH 52'. 0.4% up.

RWY 24R: ALSF1. OLS. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 06R-24L: H8000X200 (PEM) PCN 62 R/B/W/T HIRL

RWY 06R: OLS. PAPI(P4L)—GA 3.0° TCH 55'. 0.6% up.

RWY 24L: OLS. PAPI(P4L)—GA 3.0° TCH 47'.

RWY 10-28: H2800X200 (CONC) PCN 64 R/B/W/T HIRL 0.4% up SW

RWY 28: OLS.

ARRESTING GEAR/SYSTEM

RWY 06L HOOK E28(B) (2490')

HOOK E28(B) (2300') RWY 24R

RWY 06R HOOK E28(B) (1052')

HOOK E28(B) (2300') RWY 24L

HOOK E28(B) (2100' OVRN) RWY 28

MILITARY SERVICE: LGT ACTIVATE HIRL, centerline lgts Rwy 06L-24R and ALSF1, PAPI Rwy 06L-24R on 298.925 or 133.475. PAPI Rwy Reference Point not coincidental with PAR Rwy 24L. PAPI units for Rwy 06R and Rwy 06L are optimized for height group 2 type acft. **A-GEAR** Short fld A-gear Rwy 24R normal de-rigged.

JASU (A/M47A-4) (NC-10A1) (NC-10C) **FUEL J5 FLUID SP LHOX LOX OIL O-148-156 TRAN ALERT** No shuttle svc avbl. All VIP acft ctc Afld OPS on PTD 15 min prior to arrival. No AMC fleet svc avbl. ALCE team rqr for all AMC flt. Limited transient svc, no tie-down, oil/laboratory analysis or transient maintenance svc avbl.

MILITARY REMARKS: Opr Mon-Thu 1530-0800Z, Fri 1530-0200Z, Sat CLOSED, Sun 2200-0200Z. Fld CLOSED national holidays and national holiday weekends. See FLIP/AP/1 Supplementary Arpt Remarks. **RSTD** PPR for all tran acft ctc Visiting Acft Line DSN 267-4284/4285, C858-577-4284/4285 (PPR rstd to 30 min before/after approved time, PPR not valid outside of this window and must be re-coordinated prior to arrival). Prior coordination rqr for AMC/NALO mission with Afld OPS DSN 267-4419/4277, C858-577-4419/4277. After normal working hrs ctc DSN 267-4028/4029/4277, C858-577-4028/4029/4277. 24 hr prior notice for acft with haz cargo. All acft detachments will rqr a host unit and Station Commander approval 90 days prior. For staging (local training flt) or VIP acft ctc Visiting Acft Line DSN 267-4284/4285, C858-577-4284/4285. All acft detachments will require a host unit and Station Commander approval 90 days prior. **CAUTION** High mid-air potential, exercise extreme vigilance. Water on the rubber build-up areas of the rwy may produce poor traction and/or breaking action and standing water on rwy may produce hydroplaning condition. Extensive general aviation traffic all altitudes, all directions near afld. High volume civilian VFR traffic along coast W of airfield. All acft arr/dep VFR via corridor rules to/from coastline are advised to exercise extreme caution to avoid hang gliding activity near Torrey Pines golf course. NKX R-280/5 DME. **TFC PAT** Reduced rwy separation standards in effect USN/USMC acft opr on parallel rwy 700' apart. Multi practice apch Rwy 06L and Rwy 06R not authorized. Radar vectors to final apch, expect steep descent. Rwy 10 not avbl and Rwy 28 emerg use only. **NS ABTMT** Strictly enforced, mandatory procedure and course rules. All transient acft must review and sign Noise Abatement form with flt planning. **MISC** Ordinance, live or inert, not permitted to remain on RON transient acft.

COMMUNICATIONS: SFA ATIS 352.0 PTD 335.625

Ⓡ **SOCAL APP CON** 132.2 269.1 288.325 (288.325 Acft depart W-291 for NKX arrival)

TOWER 135.2 298.925 340.2 (Mon-Thu 1530-0800Z, Fri 1530-0200Z, Sat clsd, Sun 2200-0200Z. Fld CLOSED national holidays and national holiday weekends. **GND CON** 128.625 307.325 **CLNC DEL** 125.975 254.325

Ⓡ **SOCAL DEP CON** 119.6 363.1 (West) 132.2 269.1 (East)

PMSV METRO 342.4

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

(L) **TACAN** Chan 33 NKX (109.6) N32°52.18' W117°09.29' at fld. 430/15E.

ILS 111.15 I-NKX Rwy 24R. Radar required.

ASR/PAR

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

MIRO FLD (See RIALTO MUNI)

MISSION BAY N32°46.93' W117°13.53' NOTAM FILE SAN.

LOS ANGELES

(H) **VORTAC** 117.8 MZB Chan 125 050°4.8 NM to Montgomery Fld. 12/15E.

H-4H, L-4H

VOR unusable:

090°-100° byd 28 NM

190°-219° byd 20 NM

100°-130° byd 17 NM

308°-350° byd 20 NM blo 8,000'

130°-190° byd 14 NM

DME unusable:

310°-350° byd 20 NM blo 6000'

310°-350° byd 30 NM blo 10,000'

MODESTO CITY-CO-HARRY SHAM FLD (MOD) 2 SE UTC-8(-7DT)

SAN FRANCISCO

H-3B, L-2F, 3B

N37°37.55' W120°57.27'


97 B S4 FUEL 100LL, JET A, A1 + OX 1, 2 Class II, ARFF Index A NOTAM FILE MOD IAP, AD

RWY 10L-28R: H5911X150 (ASPH-GRVD) S-60, D-200, ST-175,

DT-350 HIRL 0.3% up W

RWY 10L: REIL. VASI(V4L)—GA 3.0° TCH 50'. Tree.**RWY 28R:** MALSR. Road. Rgt tfc.**RWY 10R-28L:** H3459X100 (ASPH) S-30 MIRL 0.4% up W**RWY 10R:** PAPI(P2L)—GA 3.5° TCH 40'. Tree. Rgt tfc.**RWY 28L:** PAPI(P2L)—GA 3.0° TCH 29'. Tree.

AIRPORT REMARKS: Attended continuously. Rwy 10R-28L CLOSED to acft over 12,500 lbs. gross weight. Birds on and in vicinity of arpt. PPR 48 hours for air carrier operations with more than 30 passenger seats 1600-0100Z weekdays call arpt manager 209-577-5318. Overnrt tiedown fee. For noise abatement turbo-jets discontinue ops 0800-1300Z and park on NE ramp. Noise abatement procedures, pilots are requested to use lighted rwy only. All pure jet and large acft limited to parking and svc at NE ramp only. Rwy 10R-28L not certificated in accordance with FAR-139. Rwy 10R-28L wind cone lgt OTS indef. MIRL Rwy 10R-28L and PAPI Rwy 10R and 28L unavailable when tower closed. ACTIVATE HIRL Rwy 10L-28R and MALSR Rwy 28R and REIL Rwy 10L—CTAF.

WEATHER DATA SOURCES: ASOS 127.7 (209) 572-0914 (0500-1500Z). LAWRS (1500-0500Z).**COMMUNICATIONS:** CTAF 125.3 ATIS 127.7 UNICOM 122.95**RCO 122.1R 114.6T** (RANCHO MURIETA RADIO)**(R) NORCAL APP/DEP CON** 120.95 (East and South) 123.85 (West) 125.1 (North)**TOWER** 125.3 (1500-0500Z) **GND CON** 121.7**AIRSPACE:** CLASS D svc 1500-0500Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MOD.**(H) VOR/DME** 114.6 MOD Chan 93 N37°37.64' W120°57.47' at fld. 90/17E.**WOWAR NDB (LOM)** 367 MO N37°34.39' W120°51.31' 288° 5.7 NM to fld.**ILS** 111.9 I-MOD Rwy 28R. Class IB. LOM WOWAR NDB. Unmonitored when twr closed. MM OTS indef. GS unusable for autocoupled apch blo 660' MSL.**COMM/NAV/WEATHER REMARKS:** Aviation weather available when tower opr, call 209-526-4555.

MOFFETT FEDERAL AIRFIELD (NUQ)(KNUQ) NASA (ANG) 3 N UTC-8(-7DT) **SAN FRANCISCO**
 N37°24.97' W122°02.95' **H-3A, L-2F, 3B, A**
 32 B TPA—See Remarks NOTAM FILE NUQ Not insp. **DIAP, AD**
RWY 14L-32R: H9202X200 (CONC) S-64, T-110, ST-144, SBTT-410, TDT-528, TRT-390 HIRL CL
RWY 14L: TDZL. PAPI(P4L)—GA 3.0° TCH 52'. 0.3% up.
RWY 32R: ALSF1. TDZL. PAPI(P4L)—GA 3.0° TCH 52'.
RWY 14R-32L: H8127X200 (ASPH) S-82, T-142, ST-175, TT-300, DDT-609, TDT-814 HIRL
RWY 14R: 0.4% up. **RWY 32L:** Thld dsplcd 605'.
MILITARY SERVICE: LGT When twr clsd, ACTIVATE HIRL Rwy 14L-32R and ALSF1 Rwy 32R—CTAF. **JASU** (AM32A-60) (AM32A-86). **FUEL** J8 Mon-Fri 1700-0200Z†, ltd svc weekend call 650-965-3400. **FLUID** SP LOX Ltd avbl.
OIL O-117-133-148-156. **TRAN ALERT** Ltd gnd support equipment avbl. Ltd terminal svc avbl.
MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** PPR NASA Base OPS opr 1430-0630Z†, DSN 359-9213/14, C650-603-9213/4. Recommend Standard Instrument Departure, expect delay for radar vectors. Twy C clsd during dalgt hrs. **CAUTION** Possible strong updraft vicinity NASA/AMES wind tunnel located W side of afld. Rwy 14R-32L prefer rwy for ldg heavy weight acft unless IFR cond exist at fld. Bird Hazard. **TFC PAT** TPA—1000(968) Rwy 14L/R, 1500(1468) Rwy 32L/R. Minimum altitude 75' AGL over highway at S boundary. Ltd transient practice apch/touch-and-go. Transient jet practice apch/touch-and-go rqr arpt manager approval.
NS ABTMT No jet dep Rwy 14L/R between hrs of 0700-1300Z†. **CSTM/AG/IMG** Customs, Agriculture, Immigration avbl only by prior notice Mon-Fri 1700-0100Z† except holidays. **MISC** Acft rqr support svc must be sponsored by resident/tenant activity. Update ETA +15 minutes at least 2 hr prior arr. Twr frequency monitor by NASA Fire/Security. Flight plan svc provided by Base OPS. **ANG** Opr Mon-Thu 1330-2400Z†. Ops DSN 359-9357, C650-603-9357. Comd Post DSN 359-9333, Comd Post 650-603-9333. All ANG C130 and H60 acft ctc 129th OSF/OSA for ramp/rstd area access and parking. Ltd fuel and maintenance svcs. No passenger, lodging or transportation svcs avbl. Tran acft parking ltd ctc 129th OSF/OSA DSN 359-9357 for access.
WEATHER DATA SOURCES: ASOS 124.175 283.0 (C650) 604-1529.
COMMUNICATIONS: SFA CTAF 119.55 ATIS 124.175 283.0
 (R) **NORCAL APP CON** 120.1 133.95 134.5 135.2 290.25 317.6 338.2
TOWER 119.55 340.2 346.25 (1500-0700Z†) **GND CON** 121.85 336.4 **CLNC DEL** 380.8
 (R) **NORCAL DEP CON** 120.1 135.65 270.35 310.8
BASE OPS 251.7 **ANG** 390.9 5711 (Opr 1400-2330Z†. SQ OPS call MOFFETT RESCUE. 5711 Upper Side Band)
AIRSPACE: CLASS D svc 1500-0700Z†, other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.
WOODSIDE (L) VORTACW 113.9 OSI Chan 86 N37°23.55' W122°16.88' 066° 11.2 NM to fld. 2270/17E.
(L) TACAN Chan 123 NUQ (117.6) N37°25.94' W122°03.45' 140° 1.1 NM to fld. 4/17E.
 TACAN unusable:
 040°-095° byd 20 NM blo 5,500' 150°-280° byd 10 NM blo 3,500'
 130°-150° byd 20 NM blo 4,000' 340°-040° byd 35 NM blo 5,500'
ILS 110.35 I-NUQ Rwy 32R. Unmonitored 0700-1500Z†. Radar or DME required.
ILS/DME 110.35 I-MNQ Rwy 14L. LOC only. LOC unusable byd 25° rgt side of course. Unmonitored 0700-1500Z†. Radar required for holding.

MOJAVE (MHV) 1 E UTC-8(-7DT) N35°03.52' W118°09.03'

2801 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE MHV

RWY 12-30: H12503X200 (ASPH) S-120, D-150, DT-450 HIRL

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 68'. Thld dsplcd 600'.
1.0% down.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 62'. Thld dsplcd 900'.
Rgt tfc. 1.0% up.

RWY 08-26: H7049X100 (ASPH) S-40, D-60, DT-88 MIRL
0.6% up W

RWY 08: PAPI(P2L)—GA 3.0° TCH 46'.

RWY 26: PAPI(P2L)—GA 3.0° TCH 52'. Rgt tfc.

RWY 04-22: H3946X50 (ASPH) S-40, D-60, DT-60

RWY 04: Pole. RWY 22: Rgt tfc.

AIRPORT REMARKS: Attended continuously. Fuel avbl 1530-0030Z±
other times ctc security on CTAF, fee charged. Be alert to high
speed activity invof arpt. Fee charged. Paving width Rwy 08 200'.
TPA-3801(1000) jets, 3303 (502) helicopters. Helicopters use
south entry and departure. Unlighted twys connect rwy ends 08
and 12 and rwy ends 22 and 26. Rwy 04-22 cracking, loose
gravel and uneven sections. ACTIVATE MIRL Rwy 08-26 and HIRL
Rwy 12-30, and REIL Rwy 12 and Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 132.225 (661) 824-5218. SAWRS.

OTS indef.

COMMUNICATIONS: CTAF 127.6


® JOSHUA APP/DEP CON 133.65

TOWER 127.6 (Mon-Fri 1500-0100Z±) GND CON 123.9

AIRSPACE: CLASS D svc Mon-Fri 1500-0100Z±.

RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.

EDWARDS (L) VORTAC 116.4 EDW Chan 111 N34°58.94' W117°43.96' 268° 21.0 NM to fld. 2354/15E.



LOS ANGELES

H-4H, L-3D, 7C

IAP, AD

MONTAGUE

MONTAGUE-YREKA ROHRER FLD (105) 1 W UTC-8(-7DT) N41°43.83' W122°32.73'

2527 S2 FUEL 100LL TPA-3327(800) NOTAM FILE 105

RWY 14-32: H3360X50 (ASPH) S-12 MIRL

RWY 14: Rgt tfc. RWY 32: VASI(V2L)—GA 3.0° TCH 25'. Road.

RWY 05-23: 2080X100 (TURF)

RWY 23: Rgt tfc

AIRPORT REMARKS: Attended 1600-0100Z±, after hrs call 530-842-0217. Deer on and invof arpt. Occasional balloon
launches. Be alert to mountain north and hills east and west of arpt. Arpt rstd to acft with maximum certificated
tkf weight of 12,500 lbs or less; for more information call arpt ops 530-459-3030. Use of rwy tfc patterns
strongly recommended. Avoid overflight of town ½ mile east of arpt. MIRL Rwy 14-32 preset low ints; to
increase ints ACTIVATE—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

ANTELOPE MOUNTAIN RCO 122.4 (RANCHO MURIETTA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FORT JONES (L) VOR/DME 109.6 FJS Chan 33 N41°26.98' W122°48.39' 016° 20.5 NM to fld. 4900/19E.

HIWAS.

NDB (MHW) 404 MOG N41°43.63' W122°28.91' 255° 2.9 NM to fld. NOTAM FILE SIY. Unmonitored.

Unusable: 190°-200° byd 10 NM all altitudes.

SISKIYOU CO (SIY) 3 NE UTC-8(-7DT) N41°46.89' W122°28.09'
 2648 B S4 FUEL 100LL, JET A TPA—3648(1000) NOTAM FILE SIY
 RWY 17-35: H7484X150 (ASPH) S-60, D-180, ST-175, DT-270 MIRL
 RWY 17: REIL. PAPI(P2L)—GA 3.0° TCH 50'. Road.
 RWY 35: REIL. PAPI(P2L)—GA 3.0° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended Sun-Fri 1600-0100Z†. Migratory flocks of waterfowl invof arpt during spring and fall. Be alert for glider ops May-Sept. US Forest Service fire ops May-Sep. ACTIVATE MIRL Rwy 17-35, PAPI Rwy 17 and Rwy 35, REIL Rwy 17 and Rwy 35—CTAF. Ldg fee.

WEATHER DATA SOURCES: ASOS 121.125 (530) 459-0267.

COMMUNICATIONS: CTAF/UNICOM 123.0

ANTELOPE MOUNTAIN RCO 122.4 (RANCHO MURIETTA RADIO)

Ⓡ **SEATTLE APP/DEP CON 124.85**


RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FORT JONES (L) VOR/DME 109.6 FJS Chan 33 N41°26.98' W122°48.39' 018° 25.1 NM to fld. 4900/19E. **HIWAS.**

MONTAGUE NDB (MHW) 404 MOG N41°43.63' W122°28.91' 352° 3.3 NM to fld. NOTAM FILE SIY.

Unmonitored.

Unusable: 190°-200° byd 10 NM all altitudes.



KLAMATH FALLS
 H-3A, L-21
 IAP

MONTEREY PENINSULA (MRY) 3 SE UTC-8(-7DT) N36°35.22' W121°50.58'
 257 B S4 FUEL 100LL, JET A OX 2, 4 TPA—1757(1500) Class I, ARFF Index B
 NOTAM FILE MRY

SAN FRANCISCO
 H-3A, L-3B
 IAP, AD

RWY 10R-28L: H7616X150 (ASPH-GRVD) S-100, D-160, ST-175, DT-300 HIRL 1.3% up E

RWY 10R: MALSR. PAPI(P4L)—GA 3.0° TCH 50'.

RWY 28L: REIL. VASI(V4L)—GA 3.5° TCH 47'. Thld dsplcd 1000'. Bush. Rgt tfc.

RWY 10L-28R: H3513X60 (ASPH) S-12.5 MIRL 1.7% up E

RWY 28R: Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 10R: TORA-7616 TODA-7616 ASDA-7616 LDA-7616

RWY 28L: TORA-7616 TODA-7616 ASDA-7616 LDA-6616

AIRPORT REMARKS: Attended continuously. Self service fuel avbl 24 hrs with credit card. Services, fuel and repairs between 0500-1300Z† by prior arrangement call 831-373-4151 or 831-373-3201. Rotary wing acft expect to follow fixed wing pattern to rwy ldg. On departure no turns blo 900' unless twr directed. Monterey radar is unreliable when landing on Rwy 28R and Rwy 28L from 1½ miles east of Monterey arpt to touchdown. Twr non-visibility area Twy A east holding bay. Rwy 10R runway visual range touchdown and rollout avbl. Rwy 28L runway visual range touchdown and rollout avbl. Acft with wingspan greater than 95' may not taxi past the terminal on Twy Alpha when an MD-80 or larger acft is parked at terminal. Acft with wingspan greater than 95' prohibited on Twy Bravo west of Twy Delta. Noise abatement procedures in effect 0700-1500Z†. Phone arpt ops for current noise abatement brief and PPR 831-648-7000. Overnight tiedown fee at FBO, ldg fee charged for acft over 6,000 lbs. Ltd transient parking PPR for large and turbine powered multi-engine acft, non FBO transient only 831-648-7000 ext. 217. When twr clsd ACTIVATE HIRL Rwy 10R-28L, MALSR Rwy 10R, PAPI Rwy 10R, and REIL Rwy 28L—118.4. When twr clsd Rwy 10L-28R unlighted. VASI Rwy 28L opr continuously.

WEATHER DATA SOURCES: ASOS (831) 642-0241.

COMMUNICATIONS: CTAF 118.4 ATIS 119.25 (831-375-7433) UNICOM 122.95

Ⓡ **NORCAL APP/DEP CON 133.0 (360°-150°) 127.15 (151°-359°)**

TOWER 118.4 (1400-0500Z†) GND CON 121.9 CLNC DEL 135.45

AIRSPACE: CLASS C svc 1400-0500Z† ctc APP CON other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE SNS.

SALINAS (H) VORTACW 117.3 SNS Chan 120 N36°39.83' W121°36.19' 231° 12.5 NM to fld. 101/17E.

HIWAS.

MUNSO NDB (LOM) 385 MR N36°37.25' W121°56.32' 099° 5.1 NM to fld. NOTAM FILE MRY.

ILS/DME 110.7 I-MRY Chan 44 Rwy 10R. Class IA. LOM MUNSO NDB (ILS/DME unmonitored when twr clsd.) LOC unusable from middle marker inbound, 0.52 NM from threshold.

ILS/DME 110.7 I-MTB Chan 44 Rwy 28L. LOC only. LOC unusable abv 2,000' MSL, 2 DME inbound to thld. DME unusable byd 16 DME, blo 5,000' MSL. (LOC/DME unmonitored when twr clsd.) LOC/DME not avbl when twr clsd.

MONTGOMERY FLD (See SAN DIEGO)

MORRO BAY N35°15.14' W120°45.57' NOTAM FILE HHR.

LOS ANGELES

(L) VORTACW 112.4 MQO Chan 71 083° 5.9 NM to San Luis Co Rgnl.
1463/16E.

H-4G, L-3D, 7A

VOR portion unusable:

290°-315° byd 7 NM blo 4,000'

297°-315° byd 13 NM blo 7,000'

315°-090° byd 7 NM blo 7,000'

MOUNTAIN VALLEY (See TEHACHAPI)**MOUNTAIN VIEW** N37°19.13' W122°08.81'

SAN FRANCISCO

RC0 122.5 (OAKLAND RADIO)

H-3A, L-2F

MOUNT SHASTA N41°19.00' W122°19.00'/3538. (MHS)

KLAMATH FALLS

ASOS (530) 926-1613.

L-2I

MOUNT TAMALPAIS N37°55.65' W122°35.32'

SAN FRANCISCO

RC0 122.35 (OAKLAND RADIO)

H-3A, L-2F, A

MUNN FLD (See CAMP PENDLETON MCAS)**MUNSO** N36°37.25' W121°56.32' NOTAM FILE MRY.

SAN FRANCISCO

NDB (LOM) 385 MR 099° 5.1 NM to Monterey Peninsula.

MURRAY FLD (See EUREKA)**MURRIETA/TEMECULA****FRENCH VALLEY** (F70) 2 NE UTC-8(-7DT) N33°34.45' W117°07.71'

LOS ANGELES

1350 B S4 FUEL 100LL, JET A OX 2 TPA-2350(1000) NOTAM FILE RAL

COPTER

RWY 18-36: H6000X75 (ASPH) S-30 MIRL

H-4H, L-4H

RWY 18: REIL. PAPI(P2L)—GA 3.0° TCH 36'. Road.

IAP

RWY 36: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0200Z+. Self service 100LL fuel avbl. For jet fuel after hours call 951-694-7960. Ultralight activity in vicinity of arpt. All departures—noise sensitive areas to N and S, best rate of climb to TPA before departing the pattern. Calm wind—use Rwy 18. ACTIVATE MIRL Rwy 18-36, PAPI Rwy 18 and Rwy 36, REIL Rwy 18 and Rwy 36 and taxiway lights—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (951)696-1018.**COMMUNICATIONS:** CTAF/UNICOM 122.8


Ⓡ MARCH APP/DEP CON 133.5 (1500-0700Z+) clsd holidays, other times ctc

Ⓡ SOCAL APP/DEP CON 134.0.

RADIO AIDS TO NAVIGATION: NOTAM FILE CRQ.**OCEANSIDE (H) VORTAC** 115.3 OCN Chan 100 N33°14.44'

W117°25.06' 021° 24.8 NM to fld. 53/15E.

COMM/NAV/WEATHER REMARKS. March provides Ground Control App (GCA) radar. When March GCA clsd ctc SOCAL for CLNC DEL at 1-800-448-3724

**NAPA****LAKE BERRYESSA SPB** (E20) 20 NE UTC-8(-7DT) N38°35.49' W122°15.57'

SAN FRANCISCO

440 FUEL MOGAS TPA-1240(800) NOTAM FILE OAK

WATERWAY 14-32: 13000X2000 (WATER)**WATERWAY 32:** Hill.**WATERWAY 15-33:** 10500X1500 (WATER)**WATERWAY 15:** Hill. **WATERWAY 33:** Hill.**WATERWAY 13-31:** 7000X2000 (WATER)**WATERWAY 31:** Hill.

SEAPLANE REMARKS: Unattended. All Idgs must be at least 1000' from shore. No Idgs authorized on exposed roads on dry lake bed. Floating debris exercise care. Overnight moorage at marinas only. No training flights allowed. PPR for use of resorts facilities.

COMMUNICATIONS: CTAF 122.9

NAPA CO (APC) 5 S UTC-8(-7DT) N38°12.79' W122°16.84'

35 B S4 FUEL 100LL, JET A OX 3, 4 TPA-1035(1000) NOTAM FILE APC

RWY 18R-36L: H5931X150 (CONC) S-30, D-50, DT-120 MIRL

RWY 18R: PAPI(P4L)-GA 3.25° TCH 52'. Rgt tfc.

RWY 36L: MALS. Tree.

RWY 06-24: H5007X150 (CONC) S-30, D-50, DT-120

MIRL 0.4% up NE

RWY 06: REIL. RWY 24: Tree.

RWY 18L-36R: H2510X75 (ASPH) S-12.5 0.4% up N.

RWY 36R: Rgt tfc.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18R	06-24	5450
RWY 24	18R-36L	3700

AIRPORT REMARKS: Attended 1400-0500Z†. For fuel svc 0500-1400Z† call 707-224-0887. Unlgt bridge 1 NM S, 167' AGL. Asph apron strength 12,500-30,000 lbs gross weight single wheel. Flocks of gulls and numerous birds in vicinity of airport and on rwys Oct-April and during rainy weather. When tower clsd, ACTIVATE MIRL Rwy 18R-36L and Rwy 06-24, REIL Rwy 06, PAPI Rwy 18R and MALS Rwy 36L-CTAF.

WEATHER DATA SOURCES: ASOS (707) 252-7916.

COMMUNICATIONS: CTAF 118.7 ATIS 124.05 (707) 255-2847

UNICOM 122.95

® OAKLAND CENTER APP CON 127.8

OAKLAND CENTER DEP CON 127.8


TOWER 118.7 (1500-0400Z†) GND CON 121.7 CLNC DEL 127.85

AIRSPACE: CLASS D svc 1500-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE APC.

SCAGGS ISLAND (L) VORTACW 112.1 SGD Chan 58 N38°10.76' W122°22.39' 048° 4.8 NM to fld. 10/17E.

ILS 111.3 I-APC Rwy 36L. (LOC only). Unmonitored when twr clsd.



SAN FRANCISCO

H-3A, L-2F, 3A, A
IAP, AD

NAVAL BASE VENTURA CO (See POINT MUGU NAS)

NEEDLES (EED) 5 S UTC-8(-7DT) N34°45.98' W114°37.40'

983 B S2 FUEL 100LL, JET A TPA-1983(1000) NOTAM FILE EED

RWY 11-29: H5005X100 (ASPH) S-16, D-32 MIRL 1.3% up NW

RWY 11: REIL. PAPI(P2L)-GA 3.0° TCH 40'.

RWY 29: REIL. PAPI(P2L)-GA 3.0° TCH 40'.

RWY 02-20: H4235X100 (ASPH) S-16, D-32 MIRL 2.0% up SW

RWY 02: PAPI(P2L)-GA 3.0° TCH 30'.

RWY 20: PAPI(P2L)-GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1600-0100Z†. Arpt attended by Paradise Aviation 760-326-5263. ACTIVATE MIRL Rwy 11-29 and Rwy 02-20, REIL Rwy 11 and Rwy 29-CTAF. PAPI Rwy 11, Rwy 29, Rwy 02 and Rwy 20 opr continuously.

WEATHER DATA SOURCES: ASOS 128.325 (760) 326-4281.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.1R 115.2T (PRESCOTT RADIO)

® L.A. CENTER APP/DEP CON 134.65

AIRSPACE: CLASS E svc 1600-0000Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

(H) VORTAC 115.2 EED Chan 99 N34°45.96' W114°28.45' 255° 7.4 NM to fld. 620/15E. HIWAS.

VOR unusable:

100°-130°beyond 27 NM below 6600'

220°-280°beyond 35 NM below 6800'

170°-220°beyond 20 NM below 5800'

NERVINO (See BECKWOURTH)

NEVADA CO AIR PARK (See GRASS VALLEY)

NEW COALINGA MUNI (See COALINGA)

PHOENIX

H-41, L-7E
IAP

NEW CUYAMA (L88) 0 S UTC-8(-7DT) N34°56.40' W119°41.14'

LOS ANGELES

2203 TPA-3203(1000) NOTAM FILE RIU

L-3D, 7A

RWY 10-28: H3940X60 (ASPH)

RWY 10: Tree. Rgt tfc.


RWY 28: Fence.

AIRPORT REMARKS: Unattended. Acft parking 80' north of rwy centerline at apch end Rwy 10. Rwy 10 +25' power poles and p-lines run partially underground 300' from rwy end 90' right of centerline. Rwy 10-28 loose rocks on rwy, cracked and spalled surface.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FELLOWS (L) VORTAC 117.5 FLW Chan 122 N35°05.59'
W119°51.94' 120° 12.8 NM to fld. 3870/16E.



NEW JERUSALEM (See TRACY)

NORMAN Y. MINETA SAN JOSE INTL (See SAN JOSE)

NORTH ISLAND NAS (HALSEY FLD) (NZY)(KNZY) NAS (ARNG) 3 SW UTC-8(-7DT)

LOS ANGELES

N32°41.95' W117°12.92'

H-4H, L-4H

26 B NOTAM FILE NZY

Not insp.

DIAP, AD

RWY 18-36: H8000X200 (PEM) PCN 80 R/B/W/T HIRL

RWY 18: REIL. PAPI(P4L).

RWY 36: SALSF. REIL. PAPI(P4L).

RWY 11-29: H7500X300 (PEM)

PCN 77 R/F/B/W/T HIRL CL

RWY 29: ALSF1. PAPI(P4L).

ARRESTING GEAR/SYSTEM

RWY 18: HOOK E28(B) (1850')

HOOK E28(B) (1700') **RWY 36**

RWY 11: HOOK E28(B) (1500')

HOOK E28(B) (2600') **RWY 29**

MILITARY SERVICE: A-Gear Short fld A-Gear Rwy 29 normal de-rigged. Long fld A-Gear Rwy 36 normal de-rigged.

JASU 2(GTC-85) 2(NC-8) FUEL 100LL, J5. Expect refueling delays. **FLUID SP PRESAIR. OIL**

0-128-148-156 Restricted oil analysis avbl, prior coordination required. **TRAN ALERT** Opr 1400-0600Z

weekdays and 1600-0600Z weekends (Daylight Saving Time 1300-0500Z weekdays and 1500-0500Z

weekends). No transient maintenance/limited svc. LOX not avbl. Transient aircrew must remain with acft to

provide technical direction/assistance in servicing. Air terminal/tran line coordinate all refuel req. Arriving acft

passenger svc req to lineman. All transient pilots check in with Operations Duty Officer, OPS building 516, upon arrival.

MILITARY REMARKS: Opr Mon 1430Z†-Sat 0600Z†, Sat 1600Z†-Sun 0600Z†, Sun 1600Z†-Mon 0600Z†. CLOSED

0200Z† day prior to 1430Z† day following all Federal holidays. See FLIP AP/1 Supplementary Airport Remarks.

RSTD Call Operations Duty Officer DSN 735-8233/34, C619-545-8233/34 for PPR. Local flight during remain

overnight prohibited. **CAUTION** Extensive VFR helicopter opr surface—500' vicinity of arpt and surface—2000' 8

NM SE. Light civil acft climb/descent thru Rwy 29 final apch course byd 6 DME enter/dep San Diego Class B

Airspace VFR corridor. Avoid centerline lgt during Rwy 29 arrestment to prevent tailhook bounce. Heavy vehicle

traffic cross Twy L and A. Bird hazard May-Oct, particularly at dep end Rwy 29. Rwy 11-29 sfc area between the

rwy edge lines and rwy edge lgts, approximately 50' on either side, is cracked and has loose gravel. Pilots

should exercise caution transiting the area between the rwy edge lines and rwy edge lgts. **TFC PAT** Use maximum

exterior lgt blo 10,000' within 10 NM. All transient acft limited to full stop only. Touch-and-go/low apch not

avbl. Tran acft section apch not authorized. Reduced rwy separation standard in effect USN/USMC acft. **NS ABTMT**

Strict compliance rqr. **CSTMS/AG/IMG** Customs avbl with 2 hr notice Mon-Sat 1600-0100Z†. Minimum 4 hr notice

rqr 0100-1600Z†. **MISC** VIP/logistic flights ctc Base OPS prior to ldg.

ARNG Army Base OPS DSN 735-0101, C619-545-0101.

COMMUNICATIONS: SFA ATIS 317.8 (Mon 1430Z†-Sat 0600Z†, Sat 1600Z†-Sun 0600Z†, Sun 1600Z†-Mon

0600Z†. CLOSED 0200Z† day prior to 1430Z† day following all Federal holidays. See FLIP AP/1 Supplementary

Airport Remarks.

① **SOCAL APP/DEP CON** 125.15 317.55

TOWER 135.1 336.4 340.2 (Mon 1430Z†-Sat 0600Z†, Sat 1600Z†-Sun 0600Z†, Sun 1600Z†-Mon 0600Z†.

CLOSED 0200Z† day prior to 1430Z† day following all Federal holidays. See FLIP AP/1 Supplementary Airport

Remarks. **GND CON** 118.0 363.25 **CLNC DEL** 128.4 288.25

PMSV METRO 342.36 **BASE OPS** 355.5 **ARNG OPS** (RAID OPS) 142.95 233.8

AIRSPACE CLASS D svc. Mon 1430Z†-Sat 0600Z†, Sat 1600Z†-Sun 0600Z†, Sun 1600Z†-Mon 0600Z†, except

0200Z† day prior to 1430Z† day following all Federal holidays. Other times CLASS G. See FLIP AP/1

Supplementary Airport Remarks. Other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE NZY.

(L) **TACAN** Chan 117 NZY (117.0) N32°42.15' W117°12.97' at fld. 25/14E. No NOTAM MP Sun

1500-1700Z†.

TACAN unusable:

180°-230° byd 20 NM blo 3,000'

300°-340° byd 30 NM blo 3,000'

230°-300° byd 15 NM blo 3,000'

ILS 110.9 I-UBR Rwy 18. LOC only.

ILS 110.9 I-SAN Rwy 29. LOC only.

ASR/PAR

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima. Radar advisory and sequencing to arpt avbl

VFR arr on req ctc SOCAL App Con.

NOVATO

GNSS FLD (DVO) 3 N UTC-8(-7DT) N38°08.62' W122°33.37'

SAN FRANCISCO

2 B S4 FUEL 100LL, JET A TPA—1002(1000) NOTAM FILE OAK

L-2F, 3A, A

RWY 13-31: H3300X75 (ASPH) S-26 MIRL

IAP

RWY 13: PAPI(P2R)—GA 3.5° TCH 25'. Tree.

RWY 31: PAPI(P2L)—GA 4.0° TCH 50'. Hill. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0200Z+. Ditches surround rwy. Jet and turbine acft land Rwy 13 depart Rwy 31 as wind and traffic permit. Helicopters apch from E and depart to E, remain N of radio towers. Rwy 13 calm wind rwy. Rwy 13 has paved 125' overrun. Rwy 31 has 100' overrun. Mountains South and West. Noise sensitive area SE of arpt. Avoid straight-out departures on Rwy 13 and straight-in ldg on Rwy 31.

WEATHER DATA SOURCES: AWOS-3 120.675 (415) 897-2236.

COMMUNICATIONS: CTAF/UNICOM 123.075

® OAKLAND CENTER APP/DEP CON 127.8

RADIO AIDS TO NAVIGATION: NOTAM FILE APC.

SCAGGS ISLAND (L) VORTAC 112.1 SGD Chan 58 N38°10.76' W122°22.39' 239° 8.9 NM to fld. 10/17E.

[illegible]

HELIPAD HI: H60X60 (CONC)

HELIPORT REMARKS: Approach 050°/230° magnetic. Rwy visibility value avbl.

NUT TREE

(See VACAVILLE)

OAKDALE (027) 3 SE UTC-8(-7DT) N37°45.38' W120°48.01'

SAN FRANCISCO

237 B S4 OX 1, 3 TPA—1234(1000) NOTAM FILE RIU

L-2F, 3B

RWY 10-28: H3013X75 (ASPH) S-20 MIRL 0.4% up SE

IAP

RWY 10: VASI(V2L)—GA 2.5° TCH 22'.

AIRPORT REMARKS: Attended daylight hours. Nights on call 1-800-868-8750. Apron on south side of rwy damaged and unusable. ACTIVATE MIRA Rwy 10-28-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

® NORCAL APP/DEP CON 125.1

RADIO AIDS TO NAVIGATION: NOTAM FILE SCK.

MODESTO (H) VOR/DME 114.6 MOD Chan 93 N37°37.64' W120°57.47' 27° 10.8 NM to fld. 90/17E.

OAKLAND

METROPOLITAN OAKLAND INTL (OAK) 4 S UTC-8(-7DT) N37°43.28' W122°13.24'

SAN FRANCISCO

9 B S4 **FUEL** 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks LRA

H-3A, L-2F, 3B, A

NOTAM FILE OAK Class I, ARFF Index D

IAP, AD

RWY 11-29: H1000X150 (ASPH-GRVD) PCN 71 F/A/W/T

HIRL CL

RWY 11: MALSR. PAPI(P4L)—GA 2.75° TCH 65'. Rgt tfc.

RWY 29: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 71'.

RWY 09R-27L: H6213X150 (ASPH-GRVD) PCN 97 F/B/W/T HIRL

RWY 09R: REIL. PAPI(P4R)—GA 3.0° TCH 50'. Tree.

RWY 27L: PAPI(P4L)—GA 3.0° TCH 71'.

RWY 09L-27R: H5449X150 (ASPH-GRVD) PCN 69 F/C/W/T HIRL

RWY 09L: PAPI(P4R)—GA 3.0° TCH 49'.

RWY 27R: MALSR. PAPI(P4L)—GA 2.9° TCH 57'. Building. Rgt tfc.

RWY 15-33: H3372X75 (ASPH) S-12.5 MIRL

RWY 33: Rgt tfc.

AIRPORT REMARKS: Attended continuously. Rwy 15-33 CLOSED to air

carrier acft. Birds on and in/ov arpt. Acft with experimental or

limited certification having over 1,000 horsepower or 4,000

pounds are restricted to Rwy 11-29. Noise abatement: 24 hr

restriction turboprop acft over 17,000 lbs, all jet acft and 4

engine piston acft prohibited from tkf Rwy 27L, 27R or ldg Rwy 27L, 27R.

For noise abatement information ctc noise abatement

office at 510-563-6463. Intersection of Twy B, Twy W and Twy V not visible from twr. Twy M E between Rwy 33

and Twy D and portions of Twy D not visible from twr. Preferential rwy use program in effect 0600-1400Z.

North fld preferred arrival Rwy 27L, north fld preferred departure Rwy 09R or 27R. If these Rwy unacceptable

for safety or twr instruction then Rwy 11-29 must be used. Noise prohibitions not applicable in emerg or

whenever Rwy 11-29 is closed due to maintenance, safety, winds or weather. 400' blast pad Rwy 29 and 500'

blast pad Rwy 11. Rwy 29, 27R and 27L distance remaining signs left side. TPA—Rwy 27L 606(597),

TPA—Rwy 27R 1006(997). Ldg fee may apply for Rwy 11-29, rwy commercial ops and tiedown, ctc afld ops

510-563-3361. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS (510) 383-9514. HIWAS 116.8 OAK.

COMMUNICATIONS: D-ATIS 133.775 (510) 635-5850 (N and S Complex) UNICOM 122.95

OAKLAND RCO 122.0 122.2 122.5 129.4 131.95 (OAKLAND RADIO)

Ⓡ **NORCAL APP CON** 125.35 (East) 135.65 (South) 135.1 (West) 134.5 120.9

Ⓡ **NORCAL DEP CON** 135.1 (West) 120.9 (Northwest)

OAKLAND TOWER 118.3 (N Complex) 127.2 (S Complex) 124.9

GND CON 121.75 (S Complex) 121.9 (N Complex) **CLNC DEL** 121.1

AIRSPACE: CLASS C svc continuous ctc APP CON

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

OAKLAND (H) VORTACW 116.8 OAK Chan 115 N37°43.56' W122°13.42' at fld. 10/17E. HIWAS.


ILS 111.9 I-AAZ Rwy 11. Class IC.

ILS 109.9 I-OAK Rwy 27R. Class 1E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr. Emerg frequency 121.5 not avbl at FSS. Rwy 11

glide slope deviations are possible when critical areas are not required to be protected. Acft operating in/ov

glide slope transmitter.

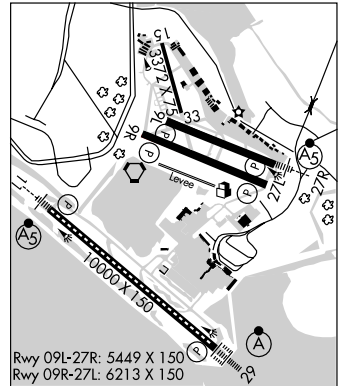

OAKLAND N37°43.56' W122°13.42' NOTAM FILE OAK.

SAN FRANCISCO

(H) **VORTACW** 116.8 OAK Chan 115 at Metropolitan Oakland Intl. 10/17E. HIWAS.

H-3A, L-2F, 3B, A

VOR unusable:

035°-045° byd 35 NM blo 7,000'

318°-360° byd 26 NM blo 5000'

307°-318° byd 10 NM

318°-360° byd 10 NM blo 4000'

DME unusable:

040°-065° byd 30 NM blo 4,100'

330°-360° byd 34 NM blo 7,500'

307°-323° byd 30 NM blo 1,500'

350°-030° byd 20 NM blo 3,500'

330°-360° byd 26 NM blo 5,000'

RCO 122.0 122.2 122.5 129.4 131.95 (OAKLAND RADIO)

OCEANO CO (L52) 1 W UTC-8(-7DT) N35°06.09' W120°37.34'

LOS ANGELES

14 B FUEL 100LL TPA-1000(986) NOTAM FILE HHR

RWY 11-29: H2325X50 (ASPH) S-12.5 MIRL

RWY 11: Brush. Rgt tfc.

RWY 29: Brush.

AIRPORT REMARKS: Attended Wed-Mon 1600-0100Z†. Unattended Tue and Christmas day. Self svc fuel avbl 24 hr.

Ultralight activity on and in/ov arpt. Recurring flocks of waterfowl on and in/ov arpt. Be alert for kites flown along beach 1/2 mile west of rwy. Unsurfaced areas soft and unusable. Taxilanes very narrow near buildings and parked acft. Extremely noise sensitive arpt and community, for tkf Rwy 29 pilots are requested to maintain rwy heading until crossing the shoreline. ACTIVATE MIRL Rwy 11-29-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7**OCEAN RIDGE** (See GUALALA)**OCEANSIDE** N33°14.44' W117°25.06' NOTAM FILE CRQ.

LOS ANGELES

(H) VORTAC 115.3 OCN Chan 100 097° 3.6 NM to Oceanside Muni. 53/15E.

H-4H, L-4H

VOR unusable 227°-265° byd 20NM.

RCO 122.1R 115.3T (SAN DIEGO RADIO)

OCEANSIDE MUNI (OKB) 2 NE UTC-8(-7DT) N33°13.08' W117°21.09'

LOS ANGELES

28 B FUEL 100LL TPA-1028(1000) NOTAM FILE OKB

L-4H

RWY 06-24: H2712X75 (ASPH) S-12 MIRL

IAP

RWY 06: Road.

RWY 24: REIL. Hill. Rgt tfc.

AIRPORT REMARKS: Attended 1800-0200Z†. Fuel avbl 1400-0500Z†.

Touch and Go Landings not authorized. Flocks of geese, waterfowl and seagulls on and in/ov arpt. Rwy has no pavement marking or edge lights byd dspld thld. All tfc patterns to N. Mountains W, NW, SW Rwy 06 up to 280' MSL. Unlgt'd mountain 160' MSL in apch zone 3500' from W end of pavement Rwy 06. Do not confuse road south of arpt with the rwy. Noise abatement: Dep Rwy 24, remain over river and canyon until harbor before turning. Departing Rwy 06 start left turn speed and altitude permitting to avoid school and homes E of arpt. +40-+90' trees 75'-125' N of rwy centerline; fence and road within primary surface N side. MIRL Rwy 06-24 preset low ints, to increase ints ACTIVATE-CTAF.

WEATHER DATA SOURCES: ASOS 127.8 (760) 439-9683.**COMMUNICATIONS:** CTAF/UNICOM 123.0


RCO 122.1R 115.3T (SAN DIEGO RADIO)

® SOCIAL APP/DEP CON 127.3

RADIO AIDS TO NAVIGATION: NOTAM FILE CRQ.

(H) VORTAC 115.3 OCN Chan 100 N33°14.44'

W117°25.06' 097° 3.6 NM to fld. 53/15E.

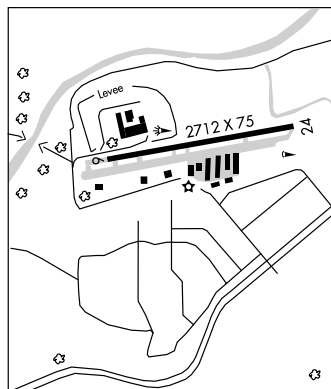**OCOTILLO WELLS****OCOTILLO** (L90) 0 N UTC-8(-7DT) N33°08.87' W116°07.90'

LOS ANGELES

160 TPA-960(800) NOTAM FILE SAN

RWY 13-31: 4210X150 (DIRT)

RWY 13: Hill.

RWY 31: Road. Rgt tfc.

RWY 09-27: 2475X150 (DIRT)

RWY 09: Hill. Rgt tfc.

RWY 27: Hill.

AIRPORT REMARKS: Unattended. Fid unusable when wet. Rwy 09 and Rwy 27, Rwy 13 and Rwy 31 thlds marked by white paving blocks. All rwy intersections marked by white paving blocks. Dune buggies and motorcycles are driven on and across rws. Ultralight ops within 2 NM radius, surface to 4000' mean sea level dalgt hrs.

COMMUNICATIONS: CTAF 122.9

ONTARIO INTL (ONT) 2 E UTC-8(-7DT) N34°03.36' W117°36.07'

LOS ANGELES

944 B S4 FUEL 100LL, JET A OX 3, 4 Class I, ARFF Index D NOTAM FILE ONT

COPTER

RWY 08L-26R: H12197X150 (CONC-GRVD) S-30, D-200, ST-175, DT-560, DDT-850

H-4H, L-3E, 4H, 7C, A

HIRL CL

IAP, AD

RWY 08L: MALSR. TDZL. Thld dsplcd 997'. Railroad.

RWY 26R: MALSR. PAPI(P4L)-GA 3.0° TCH 75'. Pole. Rgt tfc.

RWY 08R-26L: H10200X150 (CONC-GRVD) S-30, D-200, ST-175, DT-560, DDT-850 HIRL CL

RWY 08R: PVASI(P5IL)-GA 3.0°. Rgt tfc.

RWY 26L: ALSF2. TDZL. PAPI(P4R)-GA 3.0° TCH 50'. Pole.

AIRPORT REMARKS: Attended continuously. Wildlife hazard management plan in effect; potential bird hazards may exist on and in/ov arpt;

be alert to large numbers of starlings and crows possible on approach to Rwy 26L and Rwy 26R, hawks, eagles, falcons and owls spotted on occasion. Aft parking and contract ground svc

are ltd for non-scheduled ops. For scheduling information call afld ops (909) 975-5344. Pilots should use judgmental oversteer on Twy A, Twy M, Twy J, Twy S-3 and Twy S-4. No access to Rwy 08R from Twy A. Twy W south of Twy S is a non-movement area, all acft ctc ramp ctl 131.325 for access. Twy H restricted to acft with wingspan of 124' or smaller acft when Gate 35A occupied by B747 or larger acft. Twy J restricted to acft with wing span of 108' or smaller. Twy M, Twy A, Twy S-3 and Twy S-4 restricted to acft with wingspan 117' or smaller. Eastbound B747, B777, A330, A340 or larger acft on Twy S prohibited from northbound turns onto Twy K. B747, B777, A330, A340 or larger acft on Twy S prohibited from northbound turns onto Twy P. Twy S south of centerline b/n Twy S2 and Twy S3, and the southern half of Twy S3 are not visible from twr. Rwy 08L and Rwy 26R, Rwy 08R and Rwy 26L touchdown, midfield, and rollout runway visual range avbl. Runway visibility value Rwy 08L and Rwy 26R avbl. Runway visibility value Rwy 08R and Rwy 26L avbl. Overnight tiedown and parking fee. Parking for military and general aviation acft is restricted to Ontario arpt FBO's facilities. FBO's on frequencies 130.7 and 131.6. Noise abatement procedures in effect; full-length turbojet departures encouraged, nightly preferential rwy usage, 0500-1400Z.

WEATHER DATA SOURCES: ASOS (909) 937-2186. LAWRS.

COMMUNICATIONS: D-ATIS 124.25 (909) 605-0056.

① **SOCAL APP/DEP CON** 135.4 (S-SW) 134.0 (E-S) 127.25 (N-NE) 125.5 (SW-N) 119.65 (NE-E)

TOWER 120.6 **GND CON** 121.9 **CLNC DEL** 118.1

AIRSPACE: CLASS C svc ctc **APP CON**

RADIO AIDS TO NAVIGATION: NOTAM FILE POC.


POMONA (L) VORTAC 110.4 **POM** Chan 41 N34°04.70' W117°47.22' 083° 9.4 NM to fld. 1273/15E.

PETIS NDB (HW) 397 **SB** N34°03.39' W117°21.97' 256° 11.7 NM to fld. NOTAM FILE ONT.

ILS/DME 109.7 **I-ONT** Chan 34 Rwy 26R. Class IA. Glide path unusable for coupled approach below 1,520'.

ILS/DME 111.35 **I-TWO** Chan 50(Y) Rwy 26L. Class IIIE.


ILS 109.7 **I-AOD** Rwy 08L. Class IE.



ORLAND

HAIGH FLD (O37) 3 SE UTC-8(-7DT) N39°43.22' W122°08.78'
 215 B S4 FUEL 80, 100LL TPA-1215(1000) NOTAM FILE RIU
RWY 15-33: H4500X60 (ASPH) S-30 MIRL
RWY 15: PAPI(P2L). Road. **RWY 33:** PAPI(P2L). Poles.
AIRPORT REMARKS: Attended 1600-0100Z+. For attendant after hours call 530-865-1173. Ultralight activity on and invof arpt. ACTIVATE MIRL Rwy 15-33 and PAPI Rwy 15 and Rwy 33-CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.7
CHICO RCO 122.1R 109.8T (RANCHO MURIETA RADIO)
 (R) **OAKLAND CENTER APP/DEP CON** 132.2
RADIO AIDS TO NAVIGATION: NOTAM FILE CIC.
CHICO (T) VOR/DME 109.8 CIC Chan 35 N39°47.39' W121°50.83' 237° 14.5 NM to fld. 215/16E.


SAN FRANCISCO
 L-26
 IAP

**OROVILLE**

LAKE OROVILLE LANDING AREA SPB (O06) 5 NE UTC-8(-7DT) N39°33.99' W121°28.06' **SAN FRANCISCO**
 900 FUEL MOGAS TPA-1700(800) NOTAM FILE RIU
WATERWAY ALL WAY: 9000X9000 (WATER)
SEAPLANE REMARKS: Unattended. For lake information ctc marina 530-589-3152. Lake elevation varies from 700'-900' MSL. Waterway all way ldg area located in center of main body of lake. Waterway all way ldg zone is a 9,000 ft diameter circular area in center of main body of lake.
COMMUNICATIONS: CTAF 122.9

OROVILLE MUNI (OVE) 3 SW UTC-8(-7DT) N39°29.27' W121°37.32' **SAN FRANCISCO**
 192 B FUEL 100LL, JET A TPA-992(800) NOTAM FILE OVE
RWY 01-19: H6020X100 (ASPH) S-60, D-80 HIRL
RWY 19: PAPI(P2L)-GA 3.0° TCH 41'.
RWY 12-30: H3540X100 (ASPH) S-25 HIRL 0.5% up NW
RWY 12: VASI(V2L)-GA 3.0° TCH 35'.
RWY 30: VASI(V2L)-GA 3.0° TCH 32'. Trees.
AIRPORT REMARKS: Unattended. For Arpt information Mon-Fri ctc (530) 538-2490. Firefighting acft invof arpt May-Oct. Rwy 12-30 NSTD MIRL 25' from pavement edge. Twy from Rwy 01-19 to golf course/restaurant tiedowns 20' wide with no shoulders. ACTIVATE HIRL Rwy 01-19 and Rwy 12-30-CTAF. PAPI Rwy 19, VASI Rwy 12 and VASI Rwy 30 opr continuously.
WEATHER DATA SOURCES: ASOS 121.425 (530) 533-5792.
COMMUNICATIONS: CTAF/UNICOM 122.8
 (R) **NORCAL APP/DEP CON** 125.4
RADIO AIDS TO NAVIGATION: NOTAM FILE MYV.
MARYSVILLE (T) VOR/DME 110.8 MYV Chan 45 N39°05.92' W121°34.38' 338° 23.4 NM to fld. 60/16E.
NDB (MHW) 212 OVE N39°29.68' W121°37.33' at fld.
 NOTAM FILE OVE. Unmonitored.

SAN FRANCISCO
 H-3B, L-26
 IAP



• • • • •
HELIPAD H1: H25X25 (ASPH)
HELIPAD H2: H25X25 (ASPH)

OXNARD (OXR) 1 W UTC-8(-7DT) N34°12.05' W119°12.43'

LOS ANGELES

45 B S4 FUEL 100LL, JET A OX 1, 2 TPA—See Remarks Class III, ARFF Index A
NOTAM FILE OXR

COPTER
H-4G, L-3E, 4G, 7B
IAP, AD

RWY 07-25: H5953X100 (ASPH) S-50, D-70, ST-89 MIRL

RWY 07: VASI (V4L)—GA 3.0° TCH 25'. RWY 25: MALSR. PAPI (P2L). Thld dspcd 1377'. Pole.

AIRPORT REMARKS: Attended continuously. Arpt ops located at base of tower; ctc on 134.95 when twr closed or call 805-382-3022. Noise sensitive all quadrants practice noise abatement/Fly Quiet/procedures. Scheduled air carrier ops involving acft with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt and confirmation that ARFF svcs are avbl prior to ldf or tkf, ctc 805-382-3022. No turns before reaching 743'. No touch and go, stop and go, or taxi back ops 0400-1500Z†. TPA single engine 1045(1000), multi engine and jet 1445(1400). Ldg fee over 12,500 pounds. ACTIVATE MIRL Rwy 07-25 and MALSR Rwy 25 when tower closed—CTAF.

WEATHER DATA SOURCES: ASOS (805) 382-0569.

COMMUNICATIONS: CTAF 134.950 ATIS 118.05 (805) 985-1758

Ⓡ POINT MUGU APP/DEP CON 124.7 (1500-0700Z†) other times ctc

Ⓡ L.A. CENTER APP/DEP CON 135.5


TOWER 134.95 (1500-0500Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1500-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE CMA.

CAMARILLO (L) VORW/DME 115.8 CMA Chan 105 N34°12.75' W119°05.66' 248° 5.7 NM to fld. 62/15E.

ILS 108.7 I-OXR Rwy 25. ILS unmonitored when twr clsd. OM and MM unmonitored.



PACOIMA N34°15.58' W118°24.81' NOTAM FILE HHR.

LOS ANGELES

NDB (MHW) 370 PAI at Whiteman. (VFR only).

COPTER

PAJAR N36°54.81' W121°48.48' NOTAM FILE WVI.

LOS ANGELES

NDB (MHW) 327 PDG 017° 1.6 NM to Watsonville Muni.

L-3B

PALMDALE RGNL/USAF PLANT 42

(PMD)(KPMd) CIV/MIL 3 NE UTC-8(-7DT) N34°37.76' W118°05.07'

LOS ANGELES

2543 B TPA—See Remarks NOTAM FILE PMD

H-4H, L-3E, 4G, 7C

RWY 07-25: H12002X150 (CONC) S-83, D-173, DT-450, DDT-778 PCN 94 R/B/W/T HIRL IAP, AD

RWY 07: 0.5% down. RWY 25: PAPI(P4L). Rgt tfc.

RWY 04-22: H12001X150 (CONC) S-83, D-173, DT-315, DDT-778

PCN 73 R/C/W/T HIRL

RWY 04: Hill. Rgt tfc. 0.6% down.

RWY 22: PAPI(P4L). 0.3% up.

RWY 072-252: H6000X75 (CONC) ST-175 PCN 132 R/B/W/T

MILITARY SERVICES: Svc normally associated with an AFB are not avbl at this industrial installation. No Base OPS — Flt plans must be activated/clsd with FSS. LGT Gated thld lgt Rwy 07-25 and Rwy 04-22.

AIRPORT REMARKS: Attended 1230-0500Z, other times clsd to all tfc without approval. Official business only. Military arpt. Civil use requires USAF approval and DD form 2400/01/02. Call 661-272-6708 during duty hrs, 661-272-6600 after duty hrs. Limited fueling avbl to government acft only 1530-0130Z. Call plant office to arrange. Rwy 04-22 CLOSED Mon-Thu 1400-0000Z indef. Bird hazard. When twr clsd arpt CLOSED to all tfc without written approval. Primarily training 747-707-727. Unlighted obstructions surround airfield. Rwy 07, Rwy 04 and Rwy 22 3' wooden box at 150' from thld. Parking ramp C located south of Rwy 22 and Twy V not visible from twr. ACTIVATE HIRL Rwy 04-22 and Rwy 07-25, PAPI Rwy 22 and Rwy 25—CTAF. Ldg fee.

MILITARY REMARKS: Official business only, Military arpt civil use requires USAF approval and DD form 2400/01/02.

Plant Office open weekdays 1530-2359Z only. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** Official Business Only. PPR for all full stop ldg and touch and go. Call 661-272-6715 during duty hrs, OT 661-272-6600 after duty hrs. Rwy 072-252 used as a military assault strip. Assault ldg zone located 1st 6000' east end of Twy B, assault landing zone open to C-130 acft, PPR only; call 661-272-6715. Assault Landing Zone one way landing assault landing zone 25 only. **CAUTION** Rwy 07-25 1000' asph overrun each end, overrun poor condition emergency use only. Rwy 04-22 1150' asph overrun each end, overrun poor condition, emergency use only. Rwy edge lgt located 30' from outside side stripe. 60' AGL string of utility poles violate Rwy 22 Clear Zone sfc N of extended centerline. **TFC PAT** TPA overhead 4043(1500). Fighter and trainer type acft 4043(1500). All others, rectangular 4543(2000). Acft less than 50,000 pounds 4043(1500). **MISC** Winds are estimated due to FMQ-13 wind sensors being accurate to within only +/- 2 Kt. ATC/Wx will not include/relay wind correction into forecasts/phraseology. Therefore, aircrews will incorporate a +/- 2 Kt accuracy into their decision making process for flying opr.

WEATHER DATA SOURCES: ASOS 118.275 (661) 272-3798.

COMMUNICATIONS: CTAF 123.7

® JOSHUA APP/DEP CON 124.55 363.0

TOWER 123.7 317.6 (1330-0600Z) GND CON 121.9 348.6

AIRSPACE: CLASS D svc (1330-0600Z) other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PMD.

(H) VORTAC 114.5 PMD Chan 92 N34°37.88' W118°03.83' at fld. 2498/15E.

VOR portion unusable:

010°-020°

110°-160° byd 35 NM blo 11,600'

160°-235° byd 30 NM blo 8,100'

TACAN azimuth unusable:

110°-145° byd 20 NM blo 15,500'

345°-355° byd 35 NM


145°-235° byd 20 NM blo 14,500'

TACAN azimuth and DME unusable:

120°-145° byd 20 NM blo 15,500'

145°-150° byd 20 NM blo 14,500'

ILS 110.7 I-PMD Rwy 25. Class IE.



PALM SPRINGS

BERMUDA DUNES

(UDD) 13 E UTC-8(-7DT) N33°44.91' W116°16.49'
 73 B S4 FUEL 100LL, JET A OX 3 TPA-1073(1000) NOTAM FILE RAL
 RWY 10-28: H5002X70 (ASPH) S-25, D-70, ST-89 LIRL 0.6% up NW

LOS ANGELES
 H-4H, L-4I
 IAP

RWY 10: Fence.

RWY 28: REIL. VASI(V2L)—GA 3.0° TCH 25'. Thld dsplcd 300'. Road.

AIRPORT REMARKS: Attended Sat-Thu 1400-0500Z†, Fri 1400-0600Z†.

Fuel avbl 1430-0430Z†. Arpt CLOSED to turbine powered acft 0700-1400Z†. 25' tree line 125' N of centerline Rwy 10-28.

Parallel twy clsd acft wingspan greater than 68'. For noise abatement procedures call arpt manager 760-345-2558. No agricultural flights except by PPR arpt manager. Ldg fee. Ldg fee based on acft type/size. LIRL Rwy 10-28 VASI Rwy 28 on until 0600Z†, after 0600Z† ACTIVATE—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ SOCIAL APP/DEP CON 135.275 (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 128.15 (0700-1400Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE TRM.

Ⓡ THERMAL (H) VORTAC 116.2 TRM Chan 109 N33°37.69' W116°09.61' 309° 9.2 NM to fld. -87/13E.

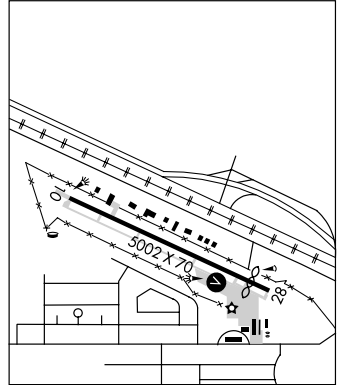

JACQUELINE COCHRAN RGNL

(TRM) 20 SE UTC-8(-7DT) N33°37.60' W116°09.58'
 -115 B S4 FUEL 100LL, JET A OX 1, 2 TPA-885(1000) NOTAM FILE TRM
 RWY 17-35: H8500X150 (ASPH) S-75, D-200, ST-175, DT-325, DDT-850 MIRL

LOS ANGELES
 H-4H, L-4I
 IAP

RWY 17: REIL. VASI(V2L)—GA 3.0° TCH 50'.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 50'.

RWY 12-30: H4995X100 (ASPH) S-20 MIRL 0.3% up NW

RWY 12: PAPI(P2L)—GA 3.0° TCH 25'.

RWY 30: PAPI(P2L)—GA 3.0° TCH 25'.

AIRPORT REMARKS: Attended 1500-0200Z†. Rwy 17-35 200' blast pad both ends. ACTIVATE MIRL Rwy 12-30 and Rwy 17-35, REIL Rwy 17 and Rwy 35, and VASI Rwy 17, and PAPI Rwy 12, Rwy 30 and Rwy 35—CTAF.

WEATHER DATA SOURCES: ASOS 118.325 (760) 399-8054.

COMMUNICATIONS: CTAF/UNICOM 123.0


Ⓡ THERMAL RCO 122.3 (RIVERSIDE RADIO)

Ⓡ SOCIAL APP/DEP CON 135.275 (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 128.15 (0700-1400Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE TRM.

Ⓡ THERMAL (H) VORTAC 116.2 TRM Chan 109 N33°37.69' W116°09.61' at fld. -87/13E.

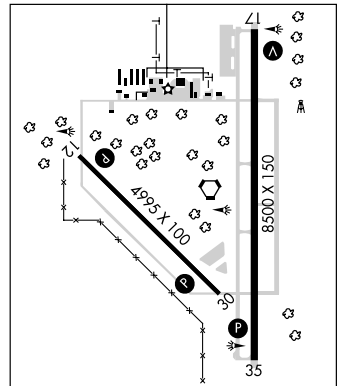

PALM SPRINGS INTL (PSP) 2 E UTC-8(-7DT) N33°49.78' W116°30.40'

LOS ANGELES

477 B S4 FUEL 100LL, JET A OX 4 TPA—See Remarks LRA Class I, ARFF Index C
NOTAM FILE PSP

H-4H, L-4I
IAP, AD

RWY 13R-31L: H10001X150 (ASPH-PFC) S-105, D-200, ST-175, DT-330, DDT-800 HIRL

RWY 13R: REIL. VASI(V6L)—Upper GA 3.25° TCH 73'. Lower GA 3.0° TCH 42'. Thld dsplcd 3000'. 1.0% down.

RWY 31L: REIL. VASI(V6L)—Upper GA 3.25° TCH 103'. Lower GA 3.0° TCH 56'. Thld dsplcd 1500'. Rgt tfc. 0.7% up.

RWY 13L-31R: H4952X75 (ASPH) S-12.5 D-60 MIRL
0.8% up NW

RWY 13L: REIL. PAPI(P4L)—GA 3.5°.

RWY 31R: REIL. PAPI(P4L)—GA 3.5°. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 13R: TORA-10000 TODA-10000 ASDA-9857 LDA-6857

RWY 31L: TORA-10000 TODA-10000 ASDA-10000 LDA-8500

AIRPORT REMARKS: Attended continuously. Do not mistake center twy (Twy C) as rwy. Rwy 13R designated calm wind rwy. No formation lds or tkfs and no overhead maneuvers. Do not use VASI Rwy 31L byd 3 NM or byd Cathedral City due to high terrain. VASI Rwy 31L operates on request through twr. U.S. Customs user fee arpt. Noise sensitive area all quadrants, exercise quiet flight procedures. For further information ctc duty supervisor 760-318-3820. TPA-1977(1500) large acft, 1477(1000) small acft. Rwy 13L-31R MIRL and Twy E not lgtd from 0700-1400Z†. When twr clsd ACTIVATE HIRL Rwy 13R-31L—CTAF. VASI and REIL Rwsy 13R and 31L, PAPI and REIL Rwsy 13L and 31R unavbl 0700-1400Z†. Customs avbl 24 hrs, 4 hrs prior notification required call 760-318-3880 FAX 3883.

WEATHER DATA SOURCES: ASOS (760) 320-7645. LAWRS.

COMMUNICATIONS: CTAF 119.7 ATIS 118.25 (760) 327-2770 UNICOM 122.95

RCO 122.1R 115.5T (RIVERSIDE RADIO)

Ⓡ **SOCAL APP/DEP CON** 126.7 (W-N) 135.275 (NE-SW) (1400-0700Z†)

Ⓡ **L.A. CENTER APP/DEP CON** 128.15 (0700-1400Z†)

TOWER 119.7 (1400-0700Z†) **GND CON** 121.9 **CLNC DEL** 128.35

AIRSPACE: CLASS D svc 1400-0700Z† other times CLASS G.

TRSA svc ctc APP CON 15 NM out.

RADIO AIDS TO NAVIGATION: NOTAM FILE TRM.


THERMAL (H) VORTAC 116.2 TRM Chan 109 N33°37.69' W116°09.61' 292° 21.1 NM to fld. -87/13E.

(L) **VORTAC** 115.5 PSP Chan 102 N33°52.20' W116°25.79' 225° 4.5 NM to fld. 1600/13E. NOTAM FILE PSP.

VORTAC unusable:

135°-215° byd 20 NM blo 10,200'

215°-270° byd 15 NM blo 12,800'



278°-320° byd 25 NM blo 13,000'
320°-090° byd 15 NM blo 7,300'

PALO ALTO ARPT OF SANTA CLARA CO (PAO) 0 E UTC-8(-7DT) N37°27.67' W122°06.90' **SAN FRANCISCO**
 04 B S4 FUEL 100LL, JET A OX 4 TPA—See Remarks NOTAM FILE PAO L-2F, 3B, A
 RWY 13-31: H2443X70 (ASPH) S-12.5 MIRL IAP, AD

RWY 13: REIL. PAPI(P2L)—GA 4.0° TCH 29'. Berm.
 RWY 31: REIL. PAPI(P2L)—GA 4.0° TCH 29'. Berm. Rgt tfc.

AIRPORT REMARKS: Attended Thu-Tue 1600-0200Z†, Wed 1500-0500Z†. Arpt rstd by arpt operator to acft with maximum certificated weight of 12,500 lbs or less. Self-fueling avbl 24/7. P-line SE. Birds on and in vicinity of arpt. +100' transmission towers east of arpt. Be alert for pedestrians crossing a dike road 8' high and 300' from end Rwy 13. Continuous pedestrian, vehicle activity on acft taxi lanes not designated as twy movement areas. Noise sensitive area southeast thru west of arpt. Landing not authorized for pure jet and surplus military acft except those acft meeting FAR 36 stage 3 noise criteria. Recommend acft ldg at Palo Alto Arpt fly at or above 1500' until crossing the Bayshore Freeway. Recommend acft depart Rwy 31 turn 10° right after txf until reaching Dumbarton Auto Bridge. On apch to Rwy 31 be alert to possible strong updraft from wind tunnel located on west side of Moffett Federal Airfield. TPA—1004(1000) west, and 804(800) east. Arpt security procedures in effect.

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 118.6 ATIS 135.275 (650) 858-0606

UNICOM 122.95

(R) NORCAL APP CON 121.3 133.95 134.5

(R) NORCAL DEP CON 121.3


TOWER 118.6 (1500-0500Z†) GND CON 125.0

AIRSPACE: CLASS D svc 1500-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

WOODSIDE (L) VORTACW 113.9 OSI Chan 86 N37°23.55' W122°16.88' 046° 8.9 NM to fld. 2270/17E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at tower.

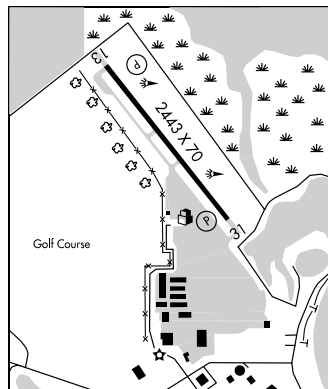

PANOCHÉ N36°42.93' W120°46.72' NOTAM FILE RIU. **SAN FRANCISCO**
 (L) VORTAC 112.6 PXN Chan 73 332° 21.3 NM to Los Banos Muni. 2060/16E. H-3B, L-3C
 VOR unusable 230°-280° byd 7 NM blo 9000'
 RCO 122.1R 112.6T (RANCHO MURIETA RADIO)

PARADISE N33°55.10' W117°31.80' NOTAM FILE RAL. **LOS ANGELES**
 (H) VORTAC 112.2 PDZ Chan 59 287° 6.3 NM to Chino. 1432/15E. COPTER
 VORTAC unusable: H-4H, L-3E, 4H, A
 130°-145° byd 25 NM blo 5,000' 310°-325° byd 35 NM blo 10,900'
 145°-190° blo 8000' 325°-345° byd 25 NM blo 11,500'
 190°-230° all distances blo 10,000' 345°-360° byd 35 NM blo 10,500'
 VOR portion unusable:
 145°-190° blo 8,000' 145°-190° byd 39 NM blo 13,500'
 145°-190° byd 25 NM blo 10,000'

PARKER N34°06.12' W114°40.93' NOTAM FILE RAL.

LOS ANGELES

(H) VORTAC 117.9 PKE Chan 126 067° 20.7 NM to Avi Suquilla AZ. 1000/15E.

H-4I, L-4I, 5A

VOR portion unusable:

090°-110° beyond 25 NM below 3800'

110°-140° beyond 8 NM below 4200'

140°-155° beyond 20 NM below 4200'

155°-170° beyond 25 NM below 4900'

170°-185° beyond 30 NM below 4900'

DME portion unusable:

090°-167°

167°-170° byd 25 NM blo 4900'

170°-185° byd 30 NM blo 4900'

230°-240° byd 33 NM blo 5900'

230°-240° beyond 33 NM below 5900'

260°-290° beyond 29 NM below 5900'

290°-300° beyond 33 NM below 6800'

300°-315° beyond 25 NM below 6800'

325°-335° beyond 25 NM below 5300'

260°-290° byd 29 NM blo 5900'

290°-300° byd 33 NM blo 6800'

300°-315° byd 25 NM blo 6800'

325°-335° byd 25 NM blo 5300'

RCO 122.1R 117.9T (RIVERSIDE RADIO)

PARSONS HERMITAGE

(See GROVELAND)

PASO ROBLES MUNI

(PRB) 4 NE UTC-8(-7DT) N35°40.38' W120°37.63'

LOS ANGELES

840 B S2 FUEL 100LL, JET A OX 4 TPA-1840(1000) NOTAM FILE PRB

H-4G, L-3C, 7A

RWY 01-19: H6008X150 (ASPH-GRVD) S-60, D-106, ST-134, DT-150 HIRL

IAP

RWY 19: REIL. PAPI(P4L)—GA 3.0° TCH 39'.

RWY 13-31: H4701X100 (ASPH) S-30, D-50, DT-90 MIRL

RWY 31: PAPI(P4L)—GA 3.0° TCH 39'. Tree.

AIRPORT REMARKS: Attended 1500-0200Z+. Fee for call out svc other hours. 805-239-5860 (FBO). Rwy lgts opr dusk-0600Z+, after 0600Z+, ACTIVATE HIRL Rwy 01-19, MIRL Rwy 13-31, PAPI Rwy 19 and Rwy 31, Rwy H1 perimeter lgts—CTAF. Overnight tiedown fee.

WEATHER DATA SOURCES: ASOS 120.125 (805) 239-3593.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.4 (HAWTHORNE RADIO)

(R) OAKLAND CENTER APP/DEP CON 128.7


RADIO AIDS TO NAVIGATION: NOTAM FILE PRB.

(L) VORTACW 114.3 PRB Chan 90 N35°40.35'

W120°37.63' at fld. 817/16E. HIWAS.

HELIPAD H1: H100X100 (ASPH)

HELIPORT REMARKS: Helipad H1 perimeter lgts.

**PERRIS VALLEY** (L65) 1 SE UTC-8(-7DT) N33°45.88' W117°13.14'

LOS ANGELES

1413 S4 FUEL 100LL, JET A TPA-2413(1000) NOTAM FILE RAL Not insp.

COPTER

RWY 15-33: H5100X50 (ASPH)

H-4H, L-4H, A

RWY 15: Thld displcd 1900'. Trees. Rgt tfc.

RWY 33: Thld displcd 144'.


AIRPORT REMARKS: Attended dawn-dusk. Fuel available for emergency use only. Parachute Jumping. Extensive ultralight and parachuting activities daily, do not overfly arpt, avoid airspace adjacent East. Ultralights on and in vicinity of arpt. Ultralight and parachuting activities can be monitored on frequency 122.775. Rwy 15-33 north 1000' CLOSED indef. Rwy 15-33 north 1900' asph poor condition, remaining 3200' asphalt fair condition.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'

W117°31.80' 106° 18.1 NM to fld. 1432/15E.




PETALUMA MUNI (O69) 1 NE UTC-8(-7DT) N38°15.47' W122°36.32' **SAN FRANCISCO**
 90 B S4 **FUEL** 100LL, JET A OX 2, 3, 4 TPA-1090(1000) NOTAM FILE OAK L-2F, 3A, A
 RWY 11-29: H3601X75 (ASPH) S-12.5 MIRL 0.4% up W IAP
 RWY 11: Trees. RWY 29: PAPI(P4L)-GA 3.0° TCH 39'. Rgt tfc.
AIRPORT REMARKS: Attended 1600-0100Z±. Noise abatement procedure 800' MSL before crosswind turn, straight out climb to 1500' MSL for departures, downwind stay outside Adobe Road, avoid overflights of the Old Adobe Historic Park. ACTIVATE PAPI Rwy 29-CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.7
 (R) **OAKLAND CENTER APP/DEP CON** 127.8
RADIO AIDS TO NAVIGATION: NOTAM FILE APC.
SCAGGS ISLAND (L) VORTACW 112.1 SGD Chan 58 N38°10.76' W122°22.39' 276° 11.9 NM to fld. 10/17E.

PETIS N34°03.39' W117°21.97' NOTAM FILE ONT. **LOS ANGELES**
 NDB (HW) 397 SB 056° 6.9 NM to San Bernardino Intl. COPTER
 L-4H, 7C, A

PINE MOUNTAIN LAKE (See GROVELAND)

PLACERVILLE (PVF) 3 E UTC-8(-7DT) N38°43.45' W120°45.20' **SAN FRANCISCO**
 2585 B S4 **FUEL** 80, 100LL, JET A TPA-3385(800) NOTAM FILE RIU L-3A
 RWY 05-23: H4201X75 (ASPH) S-26 MIRL IAP
 RWY 05: VASI(V4L)-GA 3.0° TCH 27'. Rgt tfc.
 RWY 23: SAVASI(S2L)-GA 3.8° TCH 25'.
AIRPORT REMARKS: Attended 1600-0100Z±. Fuel avbl 24 hrs by credit card. Deer on and invof rwy especially ngts. Rwy safety areas are non-standard length, severe drop off 100' byd end of Rwy 05 and Rwy 23. PPR for touch and go lds for acft over 12,500 pounds. Noise abatement procedures no mid-field departures, no turns W or N prior to 3400 MSL or clear of noise sensitive area. Rwy 23 after tkf make 10° left turn at end of rwy to avoid noise sensitive residential areas. ACTIVATE MIRL Rwy 05-23 and VASI Rwy 05 and SAVASI Rwy 23-CTAF.
WEATHER DATA SOURCES: AWOS-3 128.125 (530)622-5698.
COMMUNICATIONS: CTAF/UNICOM 122.8
HANGTOWN RCO 122.1R 115.5T (RANCHO MURIETA RADIO)
 (R) **NORCAL APP/DEP CON** 127.4
RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.
HANGTOWN (L) VOR/DME 115.5 HNW Chan 102 N38°43.48' W120°44.96' at fld. 2583/17E.
 • • • • •



HELIPAD H1: H50X50 (CONC)

HELIPAD REMARKS: Helipad located on N side of Rwy 23 end, tfc pattern and noise abatement procedures apply.

POGGI N32°36.62' W116°58.75' NOTAM FILE SDM. **LOS ANGELES**
 (L) **VORTACW** 109.8 PGY Chan 35 167° 2.3 NM to Brown Fld Muni. 580/14E. L-4H
 VOR unusable 060°-080° beyond 27 NM below 8000'.
 DME unusable:
 005°-010° byd 35 NM. 060°-070° byd 27 NM
 070°-110°

POINT ARENA N38°57.28' W123°44.43' **SAN FRANCISCO**
 RCO 122.6 (OAKLAND RADIO) L-26

POINT MUGU NAS (NAVAL BASE VENTURA CO) (NTD)(KNTD) NAS (ANG) O N UTC-8(-7DT) **LOS ANGELES**
 N34°07.22' W119°07.26' H-4G, L-3E, 4G, 7B
 13 B NOTAM FILE NTD Not insp. DIAP, AD
RWY 03-21: H11102X200 (ASPH) PCN 62 R/C/W/T HIRL
RWY 03: SALSF. OLS. VASI(V4L)—GA 3.0° TCH 47'.
RWY 21: MALSF. OLS. RAIL. VASI(V4R)—GA 3.0° TCH 45'.
RWY 09-27: H5502X200 (ASPH) PCN 64 F/B/W/T HIRL
RWY 27: OLS.
ARRESTING GEAR/SYSTEM
RWY 03 HOOK E28(B) (2500') HOOK E28(B) (2502') **RWY 21**
RWY 09 HOOK E28(B) (641') HOOK E28(B) (1252') **RWY 27**
MILITARY SERVICE: JASU 3(NCPR-105) 8(A/M47A-4) 9(GTC-85) **FUEL** J5, J8 **FLUID** SP LHOX LOX **OIL**
 0-128-148 **TRAN ALERT** Opr weekdays 1400-0200Z; clsd alternate Fri, Sat, Sun and Federal Holidays. No
 tran acft outside these hrs without PPR.
MILITARY REMARKS: Opr 1500-0700Z. See FLIP AP/1 Supplementary Arpt Remarks and AP/1A. **RSTD** PPR. OPS Duty
 Officer DSN 351-8521, C805-989-8521. Prior coordination or flt advisory rqr AMC/NALO mission. **CAUTION**
 Extreme mid-air potential due to high density VFR general aviation tfc in vicinity. Civilian arpt (Camarillo) 6 NM N
 uncontrolled 0500-1500Z daily. High terrain to 1567' E of fld. Bird hazard. Hang glider activity vicinity Round
 Mt 4 NM NE SR-SS. **TFC PAT** Reduced rwy separation standards in effect USN/USMC acft. Rwy 21 dep do not
 commence turns until 500' and ½ NM offshore. Rwy 27 dep do not commence turns until 500'. **NS ABTMT** Avoid
 populated areas when possible due to extreme noise sensitive area. Procedure in effect 0200-1600Z. Expect
 Rwy 03 arr on Rwy 21 dep between 0200-1600Z and 24 hr weekdays, alternate Fri, Sat, Sun, and Federal
 Holidays. **CSTMS/AG/IMS** Customs, Agriculture, Immigration avbl during opr hr with 24 hr prior notice. **ANG** Channel
 Islands ANGB PPR DSN 893-7577, C805-986-7577.
COMMUNICATIONS: SFA ATIS 125.55 363.05
FILLMORE RCO 122.1R 112.5T (HAWTHORNE RADIO)
 (R) **APP/DEP CON** 128.65 307.275 (1500-0700Z)
 (R) **L.A. CENTER APP/DEP CON** 135.5 327.1 (0700-1500Z)
TOWER 124.85 135.175 290.375 340.2 (1500-0700Z, clsd holidays other times etc L.A. Center App/Dep
 Con) **GND CON** 121.6 360.2 **CLNC DEL** 120.75 279.55
PMSV METRO 386.35 **BASE OPS** 267.5 **ANG OPS** 305.6
AIRSPACE: CLASS D svc 1500-0700Z other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.
FILLMORE (L) VORTAC 112.5 FIM Chan 72 N34°21.40' W118°52.88' 205° 18.5 NM to fld. 2200/15E.
 (L) **TACAN** Chan 43 NTD (110.6) N34°07.40' W119°07.32' at fld. 6/15E. NOTAM FILE OXR. Unmonitored
 0700-1500Z. **TACAN** unusable 060°-110° byd 15 NM blo 5,000'
ILS/DME 109.3 I-RRG Chan 30 Rwy 21. Unmonitored 0700-1500Z.
ASR/PAR (1500-0700Z)
COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima. Expanded Radar Svc—All flt conducted under
 positive control. Inbound acft not opr under ATC or Plead (127.55 306.6), etc APP CON 25 NM out.

POINT REYES N38°04.79' W122°52.07' NOTAM FILE OAK. **SAN FRANCISCO**
 (H) **VORTACW** 113.7 PYE Chan 84 057° 15.4 NM to Gness Fld. 1340/17E. H-3A, L-2F, 3A, A
 San Francisco Intl ATIS avbl.
 VOR unusable 135°-305° beyond 20 NM below 3000'

POMONA N34°04.70' W117°47.22' NOTAM FILE POC. **LOS ANGELES**
 (L) **VORTAC** 110.4 POM Chan 41 at Brackett Fld. 1273/15E. **COPTER**
VORTAC unusable: H-4H, L-3E, 4H, 7C, A
 300°-045° byd 20 NM
VOR unusable:
 280°-300° byd 20 NM blo 13,000'
RCO 123.65 (RIVERSIDE RADIO)

PORTERVILLE MUNI (PTV) 3 SW UTC-8(-7DT) N36°01.78' W119°03.76'

SAN FRANCISCO

442 B S4 FUEL 80, 100LL, JET A TPA-1442(1000) NOTAM FILE PTV

H-4H, L-3C, 9A

RWY 12-30: H5908X150 (ASPH-PFC) S-30, D-70, DT-110 HIRL

IAP

RWY 12: VASI(V4R)—GA 3.0° TCH 29'. Road.

RWY 30: REIL. VASI(V4R)—GA 3.0° TCH 60'. Road.

AIRPORT REMARKS: Attended May-Oct 1500-0300Z, Nov-Apr 1600-0100Z. For arpt attendant call 559-782-7540. Self svc fuel avbl 24 hrs with credit card. HIRL Rwy 12-30 preset low intensity dusk-0700Z; after 0700Z ACTIVATE—CTAF. ACTIVATE VASI Rwy 12—CTAF, VASI Rwy 30 operates continuously.

WEATHER DATA SOURCES: AWOS-3 134.625 (559)784-3874.

COMMUNICATIONS: CTAF/UNICOM 122.8

TULE RCO 122.1R 109.2T (RANCHO MURIETA RADIO)


Ⓡ BAKERSFIELD APP/DEP CON 120.5 (1400-0700Z)

L.A. CENTER APP/DEP CON 127.1 (0700-1400Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE PTV.

TULE (L) VOR/DME 109.2 TTE Chan 29 N35°54.78'

W119°01.25' 328° 7.3 NM to fld. 580/16E.



POSO-KERN CO (See FAMOSO)

PRIEST N36°08.42' W120°39.90' NOTAM FILE OAK.

SAN FRANCISCO

(L) VORW 110.0 ROM 267° 23 NM to Mesa Del Rey.

L-3C

PROBERTA N40°06.84' W122°14.25' NOTAM FILE RBL.

KLAMATH FALLS

NDB (HW) 338 PBT 327° 2.3 NM to Red Bluff Muni. Unmonitored. Unusable byd 15 NM.

L-2H

QUINCY N39°56.43' W120°55.73'

SAN FRANCISCO

RCO 122.4 (RANCHO MURIETA RADIO)

L-11A

QUINCY

GANSNER FLD (201) 1 N UTC-8(-7DT) N39°56.63' W120°56.72'

SAN FRANCISCO

3415 B FUEL 100LL TPA-4415(1000) NOTAM FILE RIU

L-11A

RWY 06-24: H4105X60 (ASPH) S-12.5 MIRL

RWY 06: Highway. RWY 24: VASI(V2L). Rgt tffc.

AIRPORT REMARKS: Unattended. 24 hr 100LL fuel by credit card.

CAUTION—Due to proximity of terrain normal opr are: for

dep/touch and go Rwy 06 only; Idgs on Rws 06 and 24.

Ultralights on and invof arpt. Firefighting acft invof arpt May-Oct.

Rapidly rising terrain with 100' trees on north side of rwy. Arpt

rstd by arpt opr to acft maximum certificated tkf weight of 12,500

lbs or less. Rotating bcn located 2000' N of arpt on top of hill.

Secondary white bcn 3 miles S of arpt. ACTIVATE MIRL Rwy

06-24—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.7

QUINCY RCO 122.4 (RANCHO MURIETA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

SQUAW VALLEY (L) VORW/DME 113.2 SWR Chan 79 N39°10.82'

W120°16.18' 310° 55.5 NM to fld. 8850/16E. HIWAS.



RAMONA (RNM) 2 W UTC-8(-7DT) N33°02.35' W116°54.92'
 1395 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE RNM
RWY 09-27: H5001X150 (ASPH) S-75, D-95, DT-170 MIRL
RWY 09: PAPI(P2L)—GA 3.5° TCH 49'.
RWY 27: REIL. PAPI(P2L)—GA 3.5° TCH 32'.

AIRPORT REMARKS: Attended 1600-0200Z±. Be alert for birds year-round, various species, large and small. Helipads N of rwy not open to public. Ultralights not authorized. Forest Service fire fighting acft on and in/ov arpt. Air tankers in vicinity May-Nov frequently fly NSTD pattern entries. Voluntary jet curfew 0600-1500Z±. Noise abatement, tkf climb on rwy heading until 1900' MSL. TPA—2395(1000) single engine, 2895(1500) multi-engine. For information regarding fire fighting activity call arpt manager 760-788-3366. Rwy 27 calm wind rwy. ACTIVATE MIRL Rwy 09-27, REIL Rwy 27 and twy lgts—CTAF, PAPI Rwy 09-27 ops 24 hrs.

WEATHER DATA SOURCES: ASOS 132.025 (760) 789-0736.

COMMUNICATIONS: CTAF 119.875 ATIS: 132.025 (760) 789-0736
 UNICOM 122.95

Ⓡ **SOCAL APP CON** 132.2

Ⓡ **SOCAL DEP CON** 127.3

TOWER 119.875 (1600-0400Z±) **GND CON** 121.65

AIRSPACE: CLASS D svc 1600-0400Z± other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

JULIAN (L) VORTACW 114.0 JLI Chan 87 N33°08.43' W116°35.16' 235° 17.7 NM to fld. 5560/15E.

HIWAS.

.....
HELIPAD H1: H340X66 (ASPH-CONC)

HELIPORT REMARKS: Helipad use is not authorized when tower clsd.



RANCHAERO (See CHICO)

RANCHO MURIETA (RIU) 1 W UTC-8(-7DT) N38°29.21' W121°06.17'

SAN FRANCISCO

141 FUEL 100LL, JET A TPA—941(800) NOTAM FILE RIU Not insp.

L-2F, 3A

RWY 04-22: H3800X75 (ASPH)

RWY 04: VASI(V2L)—GA 3.0° TCH 12'. Road. Rgt tfc.

RWY 22: VASI(V2L)—GA 3.0° TCH 12'. Tree.

AIRPORT REMARKS: Attended 1600-0100Z±. Arpt CLOSED at night. Deer on and in/ov rwy. Unmarked and unltd 65' trees SE and parallel to Rwy 04-22. +65' trees, +30' power lines parallel to Rwy 04-22. All ultralights must comply with FAR 103 and have an operating acft radio. All transient acft rqrd to park in designated transient area. Rwy 04 VASI OTS indef. Arpt lgts opr 1600-0100Z±.

COMMUNICATIONS: CTAF/UNICOM 122.8.

RCO 122.2 121.5 (RANCHO MURIETA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 066° 21.3 NM to fld. 10/17E.

HIWAS.

RAND MOUNTAIN N35°20.31' W117°41.02'

LOS ANGELES

RCO 122.4 (RIVERSIDE RADIO)

L-7C

RAVENDALE (O39) 0 N UTC-8(-7DT) N40°48.20' W120°21.97'

KLAMATH FALLS

5299 TPA—6099(800) NOTAM FILE RNO

RWY 17-35: H2920X30 (ASPH)

RWY 35: Thld dspld 900'. Pole.

AIRPORT REMARKS: Unattended. Unpaved areas extremely soft when wet. Rwy 17-35 has numerous cracks and loose gravel.

COMMUNICATIONS: CTAF 122.9

REAM FLD (See IMPERIAL BEACH NOLF)

RED BLUFF MUNI (RBL) 2 S UTC-8(-7DT) N40°09.04' W122°15.14'

KLAMATH FALLS

352 B S4 FUEL 80, 100LL, JET A TPA—See Remarks NOTAM FILE RBL

H-3A, L-2H

RWY 15-33: H5700X100 (ASPH) S-30, D-65, ST-83 MIRL

IAP

RWY 15: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 33: REIL. VASI(V4L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1500Z†-dusk. Automated credit card fuel system 24 hours. Ultralight activity on and invof arpt. TPA—1852 (1500) turbo ops, 1352 (1000) others. Rwy 15 calm wind rwy.

ACTIVATE MIRL Rwy 15-33, PAPI Rwy 15 and VASI Rwy 33—CTAF.

WEATHER DATA SOURCES: ASOS 120.775 (530) 528-8030. HIWAS 115.7 RBL.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.4 (RANCHO MURIETA RADIO)

® OAKLAND CENTER APP/DEP CON 132.2


AIRSPACE: CLASS E svc continuous.

RADIO AIDS TO NAVIGATION: NOTAM FILE RBL.

(H) VORTACW 115.7 RBL Chan 104 N40°05.93'

W122°14.18' 329° 3.2 NM to fld. 322/18E. HIWAS.

VOR unusable 280°-300° below 3500'.



REDDING

BENTON FLD (O85) 1 W UTC-8(-7DT) N40°34.45' W122°24.45'

KLAMATH FALLS

719 B S2 FUEL 100LL, JET A TPA—1719(1000) NOTAM FILE RIU

RWY 15-33: H2420X80 (ASPH) S-12.5 MIRL

RWY 15: PAPI(P2L)—GA 3.5° TCH 40'. Trees. Rgt tfc.

RWY 33: PAPI(P2L)—GA 3.5° TCH 40'. Tree.

AIRPORT REMARKS: Attended 1400Z†-dusk. High & low pressure & oxygen replacement bottles avbl in Redding. Large birds frequently on and invof arpt Oct-Apr. Steep bluff 100' from each rwy end. For noise abatement climb 1281' AGL before turning. Rwy 15-33 thld lgts are NSTD, being 13' short of the rwy thld. ACTIVATE MIRL Rwy 15-33—CTAF. PAPI Rwy 15 and Rwy 33 opr continuously.

COMMUNICATIONS: CTAF/UNICOM 122.8

BRIDGE BAY RESORT SPB (H77) 11 N UTC-8(-7DT) N40°45.46' W122°19.40'

KLAMATH FALLS

1065 FUEL MOGAS TPA—1865(800) NOTAM FILE RIU.

WATERWAY NE-SW: 10000X4000 (WATER)

SEAPLANE REMARKS: Attended dawn-dusk.

COMMUNICATIONS: CTAF 122.9

REDDING MUNI (RDD) 6 SE UTC-8(-7DT) N40°30.54' W122°17.60'**KLAMATH FALLS**

505 B S4 **FUEL** 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks Class I, ARFF Index A
 NOTAM FILE RDD

H-3A, L-2H
 IAP, AD

RWY 16-34: H7003X150 (ASPH-GRVD) S-98, D-128, ST-135, DT-195 HIRL

RWY 16: REIL. VASI(V4L)—GA 3.0° TCH 36'. Tree.

RWY 34: MALSR. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 12-30: H5067X150 (ASPH) S-60, D-72, ST-91, DT-110 MIRL

RWY 12: Trees.

RWY 30: PAPI(P2L)—GA 3.0°. Tree.

AIRPORT REMARKS: Attended dawn-dusk. PPR For unscheduled air carrier ops with more than 30 passenger seats. 0530-1430Z† call arpt manager 530-224-4321. For noise abatement avoid overflights of residential housing when possible. US Forest Service on fld, expect heavy air tanker activity during fire season. TPA—Light acft 1505(1000) Large-Turbo Jet acft 2005(1500). ACTIVATE HIRL Rwy 16-34, MIRL Rwy 12-30, VASI Rwy 16, MALSR Rwy 34 and twy lgts—CTAF.

WEATHER DATA SOURCES: ASOS (530) 221-7144.

COMMUNICATIONS: CTAF 119.8 ATIS 124.1 UNICOM 122.95

RCO 122.1R 108.4T (RANCHO MURIETA RADIO)

® **OAKLAND CENTER APP/DEP CON** 132.2

TOWER 119.8 (1430-0530Z†) **GND CON** 121.7


AIRSPACE: CLASS D svc 1430-0530Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE RDD.

(T) **VOR/DME** 108.4 RDD Chan 21 N40°30.27' W122°17.50' at fld. 490/18E.

ILS/DME 108.7 I-RDD Chan 24 Rwy 34. ILS unmonitored when twr clsd. LOC unusable within 2 NM from antenna (within 3.3 DME) abv 2,000'.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

**REDLANDS MUNI** (REI) 2 NE UTC-8(-7DT) N34°05.12' W117°08.78'**LOS ANGELES**

1571 B S4 **FUEL** 100LL OX 1,2 TPA—2500(929) NOTAM FILE RAL

COPTER

RWY 08-26: H4505X75 (ASPH) S-12.5 MIRL 2.3% up E

L-4H, 7C, A

RWY 08: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.

IAP

RWY 26: REIL. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. Self serve 100LL fuel avbl 24-7. ACTIVATE MIRL Rwy 08-26, REIL Rwy 08, REIL Rwy 26 and PAPI Rwy 08—CTAF.

WEATHER DATA SOURCES: AWOS-3 123.050 (617) 262-3825. OTS indef.


COMMUNICATIONS: CTAF/AUNICOM 123.05

SOCAL APP/DEP CON 127.25

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'

W117°31.80' 047° 21.6 NM to fld. 1432/15E.



REEDLEY MUNI (032) 4 N UTC-8(-7DT) N36°40.25' W119°27.07'
383 B S4 FUEL 100LL, JET A TPA-1383(1000) NOTAM FILE RIU
RWY 15-33: H3300X60 (ASPH) S-12 MIRL

SAN FRANCISCO

L-3C, 9A

RWY 15: REIL. PAPI(P2L)—GA 3.0° TCH 41'. Trees.
RWY 33: REIL. PAPI(P2R)—GA 4.0° TCH 49'. Tree. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z+. Self svc fuel 24 hrs computerized credit card. For fuel phone number beside pumps; 7 days 1600-0100Z+. Rwy 15-33 PAEW adjacent rwy 2300-0300Z+ every Mon.

ACTIVATE MIRL Rwy 15–33, REIL Rwys 15 and 33, and PAPI Rwys 15 and 33 and twy lgts—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FRIANT (L) VORTACW 115.6 FRA Chan 103 N37°06.27' W119°35.73' 148° 26.9 NM to fld. 2380/17E.
HIWAS.

REEVES FLD (See LEMOORE NAS)

REID—HILLVIEW OF SANTA CLARA CO (See SAN JOSE)

REIGA N37°41.53' W121°41.05' NOTAM FILE LVK.

SAN FRANCISCO

NDB (MHW/LOM) 374 LV 255° 6.5 NM to Livermore Muni.

L-2F, 3B

RIALTO MUNI (MIRO FLD) (L67) 3 NW UTC-8(-7DT) N34°07.73' W117°24.09'

LOS ANGELES

1455	B	S4	FUEL	100LL JET A	OX 4	TPA—See Remarks	NOTAM FILE RAL
------	---	----	------	-------------	------	-----------------	----------------

COPTER

RWY 06-24: H4500X100 (ASPH) D-60 MRL 0.5% up SW

L-4H. 7C. A

RWY 06: REIL. RWY 24: REIL. PAPI(P2L)—GA 3.5° TCH 40'. Rgt tfc.

IAP

RWY 17-35: H2650X50 (ASPH) S-12.5 MIRL 1.6% up N

RWY 17: Trees. Rgt tfc. RWY 35: PAPI(P2L)—GA 3.5° TCH 40'.

AIRPORT REMARKS: Attended 1600-0100Z+. After departure, no turn

below 2455' MSL. Helicopters maintain 2000' MSL until N of Base line road, for clsd pattern remain N of Base line road. Avoid overflying residential areas west of arpt for noise abatement.

Avoid overflying schools .5 mile east of arpt on turn from downwind to base. TPA fixed wing 2455(1000), helicopters 1955(500). Rwy 06-24 has 500' area each end of rwy. Rwy 06-24 5' brush covering rwy lighting. ACTIVATE MRL Rwy 06-24 and Rwy 17-35. PAPI Rwy 24 and Rwy 35-CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

® SOCIAL APP/DEP CON 127.25

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10'
W117°31.80' 012° 14.2 NM to fld. 1432/15E.

PETIS NDB (HW/LOM) 397 SB N34°03.39' W117°21.97'
324° 4.7 NM to fld. NOTAM FILE ONT.



RIO LINDA	(L36)	1 S	UTC-8(-7DT)	N38°40.50' W121°26.73'
------------------	-------	-----	-------------	------------------------

SAN FRANCISCO

45 B S4 FUEL 100LL OX 1,3 TPA—845(800) NOTAM FILE RIU

RWY 17-35: H2625X42 (ASPH) S-12 LIRL

RWY 17: TRCV(TRIL)—GA 3.5° TCH 7'. Trees. Rgt tfc. **RWY 35:** Trees.

AIRPORT REMARKS: Attended 1600-0100Z+. Heavy jet tfc vicinity McClellan AFB. Tree lines east, west and north of arpt—unlighted. Touch and go landings not authorized. Ultralights not authorized. For noise abatement Rwy 17 right turn to heading 215° after txf to avoid overflight of school. Rotating beacon and VASI ops dusk-0800Z+.

ACTIVATE LIRL Rwy 17-35 and TRCV Rwy 17 key 122.9 7 times.

COMMUNICATIONS: CTAF/UNICOM 123.0

RIO VISTA MUNI (O88) 3 NW UTC-8(-7DT) N38°11.60' W121°42.22'

SAN FRANCISCO

20 B FUEL 100LL TPA-1020(1000) NOTAM FILE RIU

L-2F, 3A, A

RWY 07-25: H4200X75 (ASPH) S-30 MIRL

IAP

RWY 07: PAPI(P2L)—GA 4.0°.

RWY 25: PAPI(P2L)—GA 4.0°. Rgt tfc.

RWY 14-32: H2200X60 (ASPH) S-12.5 MIRL

RWY 14: PAPI(P2L)—GA 4.0°. Pole.

RWY 32: PAPI(P2L)—GA 4.0° TCH 15'. Pole. Rgt tfc.

AIRPORT REMARKS: Unattended. Fast pay fuel system avbl 24 hours.

Rwy 25 calm wind rwy. Noise sensitive area N of Rwy 32. Do not overfly ranch and corrals off Rwy 32. All runways climb to 700' before turns. Rwy 07 PAPI OTS indef. Rwy 25 PAPI OTS indef. Rwy 14 PAPI OTS indef. ACTIVATE MIRL Rwy 07-25 and Rwy 14-32, PAPI Rwy 07 and Rwy 25 and Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.725

Ⓡ **NORCAL APP/DEP CON** 125.25

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62'


W121°33.10' 189° 16.6 NM to fld. 10/17E. **HIWAS.**

• • • • •

HELIPAD H1: H180X180 (CONC) PERIMETER LGTS

HELIPORT REMARKS: No autorotations, hovering auto's or running

landings to pavement. Helicopter tfc to helipad remain S of arpt 500'. When wind favors Rwy 14-32 helicopters may use apron area W of Rwy 14-32. Helicopter tfc to W apron remain W of arpt 500'.



RIVERSIDE

MARCH ARB (RIV)(KRIV) CIV/MIL 6 SE UTC-8(-7DT) N33°52.84' W117°15.57'

LOS ANGELES

1535 B TPA—See Remarks NOTAM FILE RIV Not insp.

COPTER

RWY 14-32: H13300X200 (CONC) PCN 45 R/B/W/T HIRL CL

H-4H, L-4H, A

RWY 14: PAPI(P4L)—GA 2.5° TCH 56'.

RWY 32: ALSF1. TDZL. PAPI(P4L)—GA 3.0° TCH 73'.

DIAP, AD

RWY 12-30: H3010X100 (ASPH) PCN 23 F/A/W/T

ARRESTING GEAR/SYSTEM

RWY 14 HOOK BAK-12B(B) (1500')

HOOK BAK-12B(B) (1500') **RWY 32**

MILITARY SERVICE:

JASU (MC-2A) (A/M32-86) (AM32-95). **FUEL** J8. **FLUID** SP LHOX LOX LHNIT. **OIL** SOAP avbl only on reserve weekend. 0-148. **TRAN ALERT** Opr Mon-Sat 1500-0400Z, Sun 1500-0300Z.

AIRPORT REMARKS: Attended 1500-0700Z, clsd holidays. Ops 0700-1500Z and on holidays rstd to KRIV based alert mission exc rqr 452 OG/CC approval. Extensive glider, skydiving, balloonist and ultralight activity at Perris Arpt, 7 NM south of March. Heavy glider activity from Hemet-Ryan Arpt, 15 NM southeast of March. Activity is heavy on weekends. Rwy 12-30 avbl for March ARB assigned Aero Club, CSTMS acft, and tran copter only, no exc. 24 hr prior notice/PPR for all tran acft, DSN 447-4404/2422, C951-655-4404. Tran acft no practice apch 0600-1400Z. All inbound passengers/cargo acft must ctc Command Post 24 hr prior to arrival with type cargo and number of passengers. Transportation extremely ltd, prior coordination rqr, ctc DSN 447-2944 weekdays. Twy A parallel to civilian ramp, and Twy A from Twy B to Rwy 12-30 are 50' wide. Parking rows Mary 9 and Mary 10 are permanently clsd to all acft, medium to large frame acft are not allowed to taxi on Lima parking row without a follow me escort. Category II opr is authorized for civil use only. Civilian pilots are reminded to check Mil NOTAM with AFSS or <https://www.pilotweb.nas.faa.gov/distribution/atccsc.html>. NSTD rwy marking—assault strip mark (3500x90) painted on Rwy 32 (base assigned C-17 only). TPA—rectangular 3000 (1465), overhead 3500 (1965). CSTMS, AG avbl thru Airfield Management OPS, 24 hr prior coordination rqr with initial ctc before dep to March DSN 447-4404. RSRs authorized for Det 144 F/W F16 acft only. Wx station opr 24 hrs. For additional information ctc the 25th OWS at Davis Monthan AFB, AZ DSN 228-6698, C520-228-6698, toll free 1-877-451-8367 ext 1.

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Info. **RSTD** All acft must advise ATC prior to executing a Visibility Climb Over Arpt (VCOA). Inbound acft with passengers or distinguished visitor ctc Command Post no later than 60 min prior to ETA and again within 20 NM of Base. Helicopter ldg pad clsd. Tran acft with ordnance not authorized. Wheel crossing height data: GP1 (50.86). **CAUTION** TACAN check point sign not valid on south Twy A Rwy 32 hammer head.

COMMUNICATIONS: ATIS 134.75 239.05 PTD 372.2 (Reception extremely limited due to high surrounding terrain.)

HOMELAND RCO 122.1R 113.4T (RIVERSIDE RADIO)

Ⓡ **APP/DEP CON** 119.25 133.5 284.0 324.1 1500-0700Z, clsd holidays, other times ctc

Ⓡ **SOCAL APP/DEP** 134.0 278.3

TOWER 127.65 253.5 **GND CON** 121.75 335.8 **CLNC DEL** 121.75 335.8

COMD POST 311.0 349.4 **PMSV METRO** 239.8. Wx Station opr 24 hrs. During evacuation of WT, ctc 25 OWS at DSN 228-6598, C520-228-6598.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS C svc 1500-0700Z†, clsd holidays, other times CLASS D.

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 084° 13.7 NM to fld. 1432/15E.

HOMELAND (L) VOR 113.4 HDF N33°46.58' W117°11.12' 315° 7.3 NM to fld.

VOR unusable:

170°-250° byd 10 NM

360°-040° byd 30 NM blo 15,500'

360°-040° byd 20 NM blo 10,000'

(L) TACAN Chan 77 RIV (113.0) N33°54.40' W117°16.56' 141° 1.7 NM to fld. 1540/14E. No NOTAM MP
Fri 1500-1700Z† (1500 3+1).

TACAN unusable:

035°-055° byd 30 NM blo 17,500'

305°-330° byd 30 NM blo 13,000'

210°-220° byd 30 NM blo 10,000'

330°-350° byd 15 NM blo 17,000'

250°-275° byd 20 NM blo 8,000'

350°-035° byd 30 NM blo 14,000'

ILS 110.1 I-RIV Rwy 32. Class II. No NOTAM MP schedule: LOC/GS Tue 1500-1700Z† (1500/3+1).

RADAR or DME rqr.

RIVERSIDE MUNI (RAL) 4 SW UTC-8(-7DT) N33°57.11' W117°26.71'

LOS ANGELES

819 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE RAL

COPTER

RWY 09-27: H5401X100 (ASPH) S-48, D-70, ST-89, DT-110 MIRL 1.1% up E

H-4H, L-4H, A

RWY 09: MALSR, PAPI(P4L)—3.0° TCH 41'. RWY 27: REIL, PAPI(P4L)—3.0° TCH 40'. Ground.

IAP, AD

RWY 16-34: H2850X50 (ASPH) S-40, D-50, DT-80

MIRL 0.8% up N

RWY 16: Pole. Rgt tfc.

RWY 34: PAPI(P2L)—GA 3.0° TCH 36'. Tree.

AIRPORT REMARKS: Attended 1500-0200Z†. For fuel after hrs call 951-689-1160. Numerous power lines 1780'-2887' N of Rwy 16 thld at or blo 80' AGL. Rwy 09 drain 8' deep at 100' from rwy end. Rwy 27 -20' ditch 50' from rwy end. Rwy 16-34 limited by arpt operator to 12,500 pounds single wheel gear. Power plant 3000' N of Rwy 16 thld producing thermal plume, avoidance advised. Noise abatement procedures in effect ctc arpt manager 951-351-6113. TPA—1819(1000) light acft, 2319(1500) jet and all other acft. Acft departing Rwy 09 and Rwy 27 not visible to acft at other end of rwy. S 1400' of Rwy 34 and Twy J and Twy B not visible from twr. REIL Rwy 27 OTS indef. ACTIVATE MIRL Rwy 09-27 and Rwy 16-34, MALSR Rwy 09, Twy lgts and helipad perimeter lgts—121.0. PAPI Rwy 09, Rwy 27, and Rwy 34 opr continuously.

WEATHER DATA SOURCES: ASOS (951) 352-4392. LAWRS.

COMMUNICATIONS: CTAF 121.0 ATIS 128.8 (951) 688-7257

UNICOM 122.95

RIVERSIDE RCO 122.2 122.05 (RIVERSIDE RADIO)

® SOCIAL APP/DEP CON 135.4

TOWER 121.0 (1500-0400Z†) GND CON 121.7

AIRSPACE: CLASS D svc 1500-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 050° 4.7 NM to fld. 1432/15E.

(T) VOR 112.4 RAL N33°57.31' W117°26.99' at fld.


ILS 110.9 I-RAL Rwy 09. Class IB. ILS unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at FSS.

.....

HELIPAD H1: H60X60 (ASPH)

HELIPAD REMARKS: ACTIVATE perimeter lgts Helipad H1—121.0.



CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS C svc 1500-0700Z†, clsd holidays, other times CLASS D.

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 084° 13.7 NM to fld. 1432/15E.
HOMELAND (L) VOR 113.4 HDF N33°46.58' W117°11.12' 315° 7.3 NM to fld.

VOR unusable:

170°-250° byd 10 NM

360°-040° byd 30 NM blo 15,500'

360°-040° byd 20 NM blo 10,000'

(L) TACAN Chan 77 RIV (113.0) N33°54.40' W117°16.56' 141° 1.7 NM to fld. 1540/14E. No NOTAM MP
Fri 1500-1700Z† (1500 3+1).

TACAN unusable:

035°-055° byd 30 NM blo 17,500'

305°-330° byd 30 NM blo 13,000'

210°-220° byd 30 NM blo 10,000'

330°-350° byd 15 NM blo 17,000'

250°-275° byd 20 NM blo 8,000'

350°-035° byd 30 NM blo 14,000'

ILS 110.1 I-RIV Rwy 32. Class II. No NOTAM MP schedule: LOC/GS Tue 1500-1700Z† (1500/3+1).

RADAR or DME rqr.

RIVERSIDE MUNI (RAL) 4 SW UTC-8(-7DT) N33°57.11' W117°26.71'

LOS ANGELES

819 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE RAL

COPTER

RWY 09-27: H5401X100 (ASPH) S-48, D-70, ST-89, DT-110 MIRL 1.1% up E

H-4H, L-4H, A

RWY 09: MALSR, PAPI(P4L)—3.0° TCH 41'. RWY 27: REIL, PAPI(P4L)—3.0° TCH 40'. Ground.

IAP, AD

RWY 16-34: H2850X50 (ASPH) S-40, D-50, DT-80

MIRL 0.8% up N

RWY 16: Pole. Rgt tfc.

RWY 34: PAPI(P2L)—GA 3.0° TCH 36'. Tree.

AIRPORT REMARKS: Attended 1500-0200Z†. For fuel after hrs call 951-689-1160. Numerous power lines 1780'-2887' N of Rwy 16 thld at or blo 80' AGL. Rwy 09 drain 8' deep at 100' from rwy end. Rwy 27 -20' ditch 50' from rwy end. Rwy 16-34 limited by arpt operator to 12,500 pounds single wheel gear. Power plant 3000' N of Rwy 16 thld producing thermal plume, avoidance advised. Noise abatement procedures in effect ctc arpt manager 951-351-6113. TPA—1819(1000) light acft, 2319(1500) jet and all other acft. Acft departing Rwy 09 and Rwy 27 not visible to acft at other end of rwy. S 1400' of Rwy 34 and Twy J and Twy B not visible from twr. REIL Rwy 27 OTS indef. ACTIVATE MIRL Rwy 09-27 and Rwy 16-34, MALSR Rwy 09, Twy lgts and helipad perimeter lgts—121.0. PAPI Rwy 09, Rwy 27, and Rwy 34 opr continuously.

WEATHER DATA SOURCES: ASOS (951) 352-4392. LAWRS.

COMMUNICATIONS: CTAF 121.0 ATIS 128.8 (951) 688-7257

UNICOM 122.95

RIVERSIDE RCO 122.2 122.05 (RIVERSIDE RADIO)

® SOCIAL APP/DEP CON 135.4

TOWER 121.0 (1500-0400Z†) GND CON 121.7

AIRSPACE: CLASS D svc 1500-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 050° 4.7 NM to fld. 1432/15E.

(T) VOR 112.4 RAL N33°57.31' W117°26.99' at fld.


ILS 110.9 I-RAL Rwy 09. Class IB. ILS unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at FSS.

.....

HELIPAD H1: H60X60 (ASPH)

HELIPAD REMARKS: ACTIVATE perimeter lgts Helipad H1—121.0.

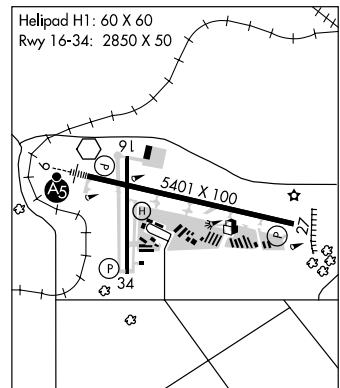

RIVERSIDE (RUBIDOUX)**FLABOB** (RIR) 3 NW UTC-8(-7DT) N33°59.33' W117°24.60'**LOS ANGELES**

764 S4 FUEL 80, 100LL TPA—See Remarks NOTAM FILE RAL Not insp.

COPTER**RWY 06-24:** H3200X50 (ASPH) S-4 MIRL (NSTD)**L-4H, A****RWY 06:** Trees. **RWY 24:** Trees.

AIRPORT REMARKS: Attended Mon-Fri 1630-0030Z \pm . Mountain 1340' MSL $\frac{3}{4}$ mile SE of arpt, +20' cross on top. TPA—1464(700). Night TPA—1764(1000) around the mountain. Avoid over flight of trailer park 1000' east of Rwy 06-24 on tkf. Dep to the S ctc Riverside Twr. Rwy 24 after tkf turn 10°; stay N of riverbed. Rwy 24 calm wind rwy. Helicopter flt training prohibited. Rwy 06-24 NSTD MIRL, one red/green lgt each side of thld. ACTIVATE MIRL Rwy 06-24—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RAL.**PARADISE (H) VORTAC** 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 040° 7.3 NM to fld. 1432/15E.**ROGERS FLD** (See CHESTER)**ROHNERVILLE** (See FORTUNA)**ROSAMOND SKYPARK** (L00) 3 W UTC-8(-7DT) N34°52.23' W118°12.33'**LOS ANGELES**

2415 B FUEL 100LL TPA—See Remarks NOTAM FILE RAL

L-3D, 7B**RWY 08-26:** H3600X50 (ASPH) LIRL (NSTD)**RWY 08:** Thld dsplcd 300'. Rgt tfc. **RWY 26:** Thld dsplcd 200'. Trees.

AIRPORT REMARKS: Unattended. Hill NE of arpt. Terrain approximately 3200' MSL 2 miles northeast and 3 miles northwest of arpt. Arpt use restricted by arpt manager to acft having a maximum certificated gross tkf weight of 12,500 lbs or less. Ctc arpt manager for additional information (888) 397-6290. Gliders, ultralights and helicopters tfc pattern N of rwy. Powered acft only may use S traffic pattern. No touch and go landings between 0600-1500Z \pm . Avoid over flight of schools 1 mile E and 2 miles W. Calm wind use Rwy 26. TPA—3215(800); gliders 2915(500). Maintain rwy heading until reaching arpt boundary. Rwy 08-26 NSTD LIRL 25' from edge of rwy. ACTIVATE LIRL Rwy 08-26 and bcn—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE PMD.**PALMDALE (H) VORTAC** 114.5 PMD Chan 92 N34°37.88' W118°03.83' 319° 15.9 NM to fld. 2498/15E.**ROUND VALLEY** (See COVELO)**RUTH** (T42) 7 S UTC-8(-7DT) N40°12.69' W123°17.86'**KLAMATH FALLS**

2781 TPA—3781(1000) NOTAM FILE RIU

L-2H**RWY 13-31:** H3500X50 (ASPH) S-12**RWY 13:** Berm. **RWY 31:** Hill.

AIRPORT REMARKS: Unattended. Arpt CLOSED ngt. Intermittently closed winters due to snow, ctc county transportation office for information 530-623-1365. High terrain all quadrants.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RBL.**RED BLUFF (H) VORTACW** 115.7 RBL Chan 104 N40°05.93' W122°14.18' 260° 49.3 NM to fld. 322/18E. HIWAS.**ROY WILLIAMS** (See JOSHUA TREE)

SACRAMENTO

Mc CLELLAN AIRFIELD (MCC)(KMCC) P (CG) 6 NE UTC-8(-7DT) N38°40.06' W121°24.04' **SAN FRANCISCO**
 77 B **FUEL** 100LL, JET A NOTAM FILE MCC **H-3B, L-2G, 3A**
RWY 16-34: H10600X200 (CONC-GRVD) S-155, D-300, ST-175, SBTT-620, DT-500, DDT-840 **IAP, AD**

HIRL(NSTD)

RWY 16: SSALR. PAPI(P4L)—GA 3.0° TCH 51'. Rgt tfc.

RWY 34: PAPI(P4L)—GA 3.0° TCH 52'. Tower.

MILITARY SERVICE: FUEL A+ (NC-100LL, A), C916-570-5356.

AIRPORT REMARKS: Attended 1600-0400Z+. Fld conditions, rwy, twy and apron good. Rwy 16-34 marked for 150' width. Strict compliance rqr with noise abatement program. All acft exit rwy to the east, no services west side. NSTD HIRL located 25' from rwy edge markings. ACTIVATE HIRL Rwy 16-34, SSALR Rwy 16 and twy lgts—CTAF. PAPI Rwy 16 and Rwy 34 opr continuously. Ldg fee charged for all commercial ops.

MILITARY REMARKS: RSTD C5 touch and go prohibited. Tran acft PPR for USCG ramp C916-643-7659, with crew list for arr/dep passengers.

WEATHER DATA SOURCES: AWOS-3 125.975 (916) 641-1272.

COMMUNICATIONS: CTAF/UNICOM 122.975

Ⓡ **NORCAL APP/DEP CON** 127.4 317.5 **CLNC DEL** 119.825

PMSV METRO 344.6 (Part time.)

USCG COMSRA SAN FRAN 3123 5696 8984 11201 (Opr 0500-1100Z+.)

USCG SACRAMENTO 167.9 237.9.

RADIO AIDS TO NAVIGATION: NOTAM FILE MCC.

(T) **VORW/DME** 109.2 MCC Chan 29 N38°40.04' W121°24.25' at fld. 72/17E. Unmonitored 0030-1600Z+.

VOR portion unusable:

090°-150° blo 3,000'

170°-340° beyond 5 NM blo 5,000'

090°-150° byd 10 NM blo 5,000'

170°-340° byd 15 NM blo 7,000'

090°-150° byd 15 NM blo 7,000'

280°-340° byd 5 NM blo 5,000'

280°-340° byd 15 NM blo 7,000'

DME portion unusable:

210°-300° blo 5,000'

ILS 109.7 I-MCC Rwy 16. Class IA. Unmonitored.

SACRAMENTO EXECUTIVE (SAC) 3 S UTC-8(-7DT) N38°30.75' W121°29.61'

SAN FRANCISCO

24 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE SAC

H-3B, L-26, 3A

RWY 02-20: H5503X150 (ASPH) S-60, D-130, ST-165, DT-210 MIRL

IAP, AD

RWY 02: MALSR. Tree.

RWY 20: REIL. VASI(V4L)—GA 3.0° TCH 52'. Tree.

RWY 12-30: H3836X100 (ASPH) S-30, D-43, DT-67 MIRL

RWY 12: REIL. VASI(V2L)—GA 3.0° TCH 58'. Tree.

RWY 30: REIL. VASI(V2L)—GA 3.5° TCH 26'. Tree.

RWY 16-34: H3485X150 (ASPH) S-60, D-85, ST-108, DT-90

RWY 16: Tree.

RWY 34: Tree.

AIRPORT REMARKS: Attended 1400-0500Z†. Birds invof arpt. Prior permission from arpt opr rqr for acft over 50,000 lbs maximum tkf weight. Rwy 16 CLOSED to takeoffs of turbo-jet acft. No touch and go landings, low apchs or practice instrument apchs between hrs 0500-1400Z†. For more information call 916-874-0359. No mid-field, intersection or formation tkfs. Rwy 16 blast pad from Rwy 12-30 intersection to north hangars clsd permanently to acft taxi. Rwy 20 calm wind rwy. Ditch and concrete bridge in Rwy 02-20 safety area located 500' prior to Rwy 02 thld on centerline. Golf course lights shine across Rwy 02 final apch 800' rwy centerline dusk to 0600Z†. TPA—1024(1000), turbine and large aircraft 1524(1500). Arpt noise abatement procedures in effect 0500-1400Z† for more information call 916-875-9037 or 916-875-9035. Arpt 24 hr emergency 916-929-5000. VASI Rwy 20 ops continuously. When twr clsd ACTIVATE all airfield lgts—CTAF.

WEATHER DATA SOURCES: ASOS (916) 421-0923.

COMMUNICATIONS: CTAF 119.5 ATIS 125.5 (916) 428-7066 UNICOM 122.95

SACRAMENTO RCO 122.05 (RANCHO MURIETA RADIO)

® NORCAL APP/DEP CON 125.25 (Southeast-Northwest) 127.4 (North-East)

EXEC TOWER 119.5 (1400-0500Z†) GND CON 125.0

AIRSPACE: CLASS D svc 1400-0500Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.


(H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 017° 5.0 NM to fld. 10/17E.

EXECC NDB (LOM) 356 SA N38°26.99' W121°32.78' 019° 4.5 NM to fld. HIWAS.

ILS 110.3 I-SAC Rwy 02. Class IA. LOM EXECC NDB. ILS unmonitored when tower closed.

• • • • •
HELIPAD H1: H60X60 (ASPH)

HELIPORT REMARKS: Helipad H1 perimeter lgts.



SACRAMENTO INTL (SMF) 10 NW UTC-8(-7DT) N38°41.73' W121°35.45'

SAN FRANCISCO

27 B S6 FUEL 100LL, JET A LRA Class I, ARFF Index C NOTAM FILE SMF

H-38, L-26, 3A

RWY 16L-34R: H8601X150 (CONC-GRVD) S-100, D-209, ST-175, DT-407, DDT-850 HIRL CL

IAP, AD

RWY 16L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 64'.

RWY 34R: PAPI(P4L)—GA 3.0° TCH 64'. Rgt tfc.

RWY 16R-34L: H8600X150 (ASPH-PFC) S-100, D-209, ST-175, DT-407, DDT-850 HIRL CL

RWY 16R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 72'. Rgt tfc.

RWY 34L: MALSR. VASI(V4L)—GA 3.0° TCH 59'.

AIRPORT REMARKS: Attended continuously. Birds on and invof arpt. Crop duster opr invof arpt at or blo 200'AGL. Rwy 16R-34L DC-10-10 and DC-10-30 maximum gross weight allowance 500,000 pounds. All acft ctc ground control prior to movement on ramp. The maximum allowable gross acft load for Twys G1, G2, and the general aviation parking apron is 70,000 lbs for single gear acft, 170,000 lbs for dual gear acft, and 250,000 lbs for dual tandem gear acft. An acft cannot exceed the airplane design group III criteria and must have a wheel base of less than 60 ft. Noise sensitive areas W of arpt on SAC River. Local turn discouraged for jet acft. When conducting IFR apch in VFR conditions execute missed apch at dep end of rwys. Plan VFR patterns to E. Use minimum power settings. Rwy 16R ALSF2 operates as SSALR till weather goes blo VFR. Rwy 16R ALSF2 unmonitored.

WEATHER DATA SOURCES: ASOS (916) 649-3996.

COMMUNICATIONS: D-ATIS 126.75 (916) 874-0679. UNICOM 122.95

Ⓡ NORCAL APP/DEP CON 125.4 (Northeast) 125.25 (South-Southwest) 127.4 (East-Southeast) 134.8 (West-North)

CAPITOL TOWER 125.7 GND CON 121.7 CLNC DEL 121.1

AIRSPACE: CLASS C svc continuous ctc APP CON 125.25 (SW) 134.8 (West)

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.


(H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 336° 15.2 NM to fld. 10/17E. HIWAS.

METRE NDB (LOM) 230 SM N38°47.70' W121°35.96' 159° 6.0 NM to fld.

ILS/DME 111.75 I-MDK Chan 54(Y) Rwy 16L. Class IA.

ILS/DME 111.1 I-SMF Chan 48 Rwy 16R. Class IIIE. LOM METRE NDB.

ILS/DME 111.1 I-HUX Chan 48 Rwy 34L. Class IE.



SACRAMENTO MATHER (MHR) 10 E UTC-8(-7DT) N38°33.32' W121°17.84'

SAN FRANCISCO

99 B S4 FUEL 100LL, JET A OX 2 TPA-See Remarks NOTAM FILE MHR

H-3B, L-26, 3A

RWY 04R-22L: H11301X150(ASPH-CONC) S-160, D-280, ST-175, DT-500 (SWL 65/PSI640) HIRL IAP, AD

RWY 04R: VASI(V4L)—GA 3.0° TCH 50'. Rgt tfc.

RWY 22L: MALSR. VASI(V4L)—GA 3.0° TCH 55'.

RWY 04L-22R: H6040X150 (ASPH) S-90, D-105, ST-133, DT-190 MIRL

RWY 22R: Rgt tfc.

AIRPORT REMARKS: Attended continuously. Birds in/ovf arpt. Be alert for large transport acft tkfs and lds and high performance military T-38 jets. Avoid noise sensitive residential areas North/East of Rwy 22L ILS final apch course. Turbojet nighttime noise abatement arrival and departure procedures in effect 0600-1500Z+. Pilot information on noise abatement 916-874-0800. Rwy 22L calm wind rwy. TPA for piston acft 1099 (1000); Turbine 1899 (1800). Acft entering Rwy 22R tfc pattern from the north should expect to fly base leg extended 2 miles from rwy thld. Twy D limited to acft with maximum gross weight 50,000 lbs or less. Twy D1 limited to acft with maximum gross weight 17,000 lbs or less.

WEATHER DATA SOURCES: AWOS-3 (916) 231-0103. SAWRS

COMMUNICATIONS: ATIS 118.325 UNICOM 123.075

Ⓡ NORCAL APP/DEP CON 127.4 TOWER 120.65 GND CON 121.85 CLNC DEL 121.85

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.


SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 044° 13.7 NM to fld. 10/17E.

HIWAS.

ILS 110.7 I-MHR Rwy 22L.

HELIPAD H1: H30X30 (ASPH)

HELIPAD H2: H100X100 (ASPH)



SALINAS MUNI (SNS) 3 SE UTC-8(-7DT) N36°39.77' W121°36.38'

SAN FRANCISCO

85 B S4 FUEL 100LL, JET A OX 3 TPA-885(800) NOTAM FILE SNS

H-3A, L-3B

RWY 08-26: H6004X150 (ASPH) S-25, D-32, DT-62 MIRL

IAP, AD

RWY 08: VASI(V4L)—GA 3.0° TCH 53'. Thld displcd 396'. Rgt tfc.

RWY 26: VASI(V4L)—GA 3.0° TCH 43'.

RWY 13-31: H4825X150 (ASPH) S-65, D-100, ST-127, DT-170 HIRL

RWY 13: REIL. VASI(V4L)—GA 3.0° TCH 50'. Trees.

RWY 31: MALSR. PAPI(P2L)—GA 3.0° TCH 59'. Rgt tfc.

RWY 14-32: H1900X50 (ASPH) S-30, D-45, DT-75

RWY 14: Tree.

AIRPORT REMARKS: Attended continuously. Rwy 14-32 PPR call arpt manager 831-758-7214. Portions of Twy B between D and N limited twr svc provided. When twr clsd ACTIVATE MIRL Rwy 08-26, HIRL Rwy 13-31, and MALSR Rwy 31—CTAF. REIL Rwy 13, VASI Rwy 08 and Rwy 26, VASI Rwy 13 and PAPI Rwy 31 operate continuously.

WEATHER DATA SOURCES: ASOS (831) 422-2830. HIWAS 117.3 SNS.

LAWS.


COMMUNICATIONS: CTAF 119.4 ATIS 124.85 UNICOM 122.95

RCO 122.6 (OAKLAND RADIO)

Ⓡ NORCAL APP/DEP CON 133.0 (360°-150°)

TOWER 119.4 (Oct-Mar 1400-0300Z+, Apr-Sep 1300-0300Z+) GND CON 121.7

AIRSPACE: CLASS D svc Oct-Mar 1400-0300Z+, Apr-Sep 1300-0300Z+ other times CLASS E.



CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE SNS.

(H) VORTACW 117.3 SNS Chan 120 N36°39.83' W121°36.19' at fld. 101/17E. HIWAS.

VOR portion unusable:

010°-016° byd 22 NM blo 7,000'

016°-080° byd 22 NM blo 8,000'

010°-016° byd 26 NM blo 8,000'

150°-170° byd 8 NM blo 10,000'

DME portion unusable:

010°-080° byd 22 NM blo 8,000'

150°-200° all distances blo 11,000'

CHUALAR NDB (MHW) 263 UAD N36°29.46' W121°28.50' 312° 12.1 NM to fld.

Unusable 360°-080° byd 10 NM, 135°-245° byd 10 NM.

ILS 108.5 I-SNS Rwy 31.

• • • • •
HELIPAD H1: H90X90 (ASPH-CONC-AFSC)

SALTON CITY

SALTON SEA (SAS) 1 SW UTC-8(-7DT) N33°14.47' W115°57.16'

PHOENIX

-84 TPA-716(800) NOTAM FILE SAN

RWY 07-25: 5000X75 (GRVL) S-28

RWY 07: Rgt tfc.

AIRPORT REMARKS: Unattended. Two inch rocks on rwy. Loose gravel in vicinity of parking area. Occasional ultralight activity on weekends.

COMMUNICATIONS: CTAF 122.9

SAN ANDREAS

CALAVERAS CO—MAURY RASMUSSEN FLD (CPU) 4 SE UTC-8(-7DT)

SAN FRANCISCO

N38°08.77' W120°38.89'

L-3B

1325 B S4 FUEL 100LL NOTAM FILE RIU

IAP

RWY 13-31: H3603X60 (ASPH) S-12.5 MIRL 0.6% up SE

RWY 13: Tree. RWY 31: VASI(V4R) —GA 3.0° TCH 31'. Rgt tfc.

AIRPORT REMARKS: Attended Nov-Apr 1600-0100Z†, May-Oct 1500-0200Z†. For attendant after hours call 209-736-2501 or 209-754-4220. Helicopter parking positions southeast corner of arpt. MIRL Rwy 13-31 ops dusk-0800Z†; after 0800Z† ACTIVATE MIRL—CTAF. ACTIVATE VASI Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (209) 736-2523.

COMMUNICATIONS: CTAF/UNICOM 123.0

ANGLES CAMP RCO 122.3 (RANCHO MURIETA RADIO)

OAKLAND CENTER APP/DEP CON 126.85

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48' W121°00.23' 059° 17.4 NM to fld. 260/17E.

• • • • •
HELIPAD H1: H65X65 (ASPH)

HELIPAD H2: H65X65 (ASPH)

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE SNS.

(H) VORTACW 117.3 SNS Chan 120 N36°39.83' W121°36.19' at fld. 101/17E. HIWAS.

VOR portion unusable:

010°-016° byd 22 NM blo 7,000'

016°-080° byd 22 NM blo 8,000'

010°-016° byd 26 NM blo 8,000'

150°-170° byd 8 NM blo 10,000'

DME portion unusable:

010°-080° byd 22 NM blo 8,000'

150°-200° all distances blo 11,000'

CHUALAR NDB (MHW) 263 UAD N36°29.46' W121°28.50' 312° 12.1 NM to fld.

Unusable 360°-080° byd 10 NM, 135°-245° byd 10 NM.

ILS 108.5 I-SNS Rwy 31.

• • • • •
HELIPAD H1: H90X90 (ASPH-CONC-AFSC)

SALTON CITY

SALTON SEA (SAS) 1 SW UTC-8(-7DT) N33°14.47' W115°57.16'

PHOENIX

-84 TPA-716(800) NOTAM FILE SAN

RWY 07-25: 5000X75 (GRVL) S-28

RWY 07: Rgt tfc.

AIRPORT REMARKS: Unattended. Two inch rocks on rwy. Loose gravel in vicinity of parking area. Occasional ultralight activity on weekends.

COMMUNICATIONS: CTAF 122.9

SAN ANDREAS

CALAVERAS CO—MAURY RASMUSSEN FLD (CPU) 4 SE UTC-8(-7DT)

SAN FRANCISCO

N38°08.77' W120°38.89'

L-3B

1325 B S4 FUEL 100LL NOTAM FILE RIU

IAP

RWY 13-31: H3603X60 (ASPH) S-12.5 MIRL 0.6% up SE

RWY 13: Tree. RWY 31: VASI(V4R) —GA 3.0° TCH 31'. Rgt tfc.

AIRPORT REMARKS: Attended Nov-Apr 1600-0100Z†, May-Oct 1500-0200Z†. For attendant after hours call 209-736-2501 or 209-754-4220. Helicopter parking positions southeast corner of arpt. MIRL Rwy 13-31 ops dusk-0800Z†; after 0800Z† ACTIVATE MIRL—CTAF. ACTIVATE VASI Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (209) 736-2523.

COMMUNICATIONS: CTAF/UNICOM 123.0

ANGLES CAMP RCO 122.3 (RANCHO MURIETA RADIO)

OAKLAND CENTER APP/DEP CON 126.85

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

LINDEN (H) VORTAC 114.8 LIN Chan 95 N38°04.48' W121°00.23' 059° 17.4 NM to fld. 260/17E.

• • • • •
HELIPAD H1: H65X65 (ASPH)

HELIPAD H2: H65X65 (ASPH)

SAN BERNARDINO INTL (SBD) 2 SE UTC-8(-7DT) N34°05.73' W117°14.07'
 1159 B S4 FUEL 100LL, JET A OX 1 TPA-1959(800) LRA Class IV, ARFF Index A
 NOTAM FILE RAL
RWY 06-24: H10001X200 (CONC-GRVD) S-97, D-265, DT-890, DDT-960 HIRL
RWY 06: PAPI(P4L)—GA 3.0° TCH 52'. Rgt tffc. 0.7% up.
RWY 24: PAPI(P4L)—GA 3.0° TCH 50'. 0.8% down.

LOS ANGELES

COPTER

H-4H, L-4H, 7C, A
IAP, AD

AIRPORT REMARKS: Attended 1600-0100Z+. After hours general aviation access and fuel available with PPR call fixed base operator 909-382-0101. Periodic live firefighting training producing smoke and light emissions approximately 6000' northeast of Rwy 06 thld. Rwy 06 designated calm wind rwy. High terrain N and E of arpt. Rwy 06-24 strength rated for the A380 at 1,300,000 lbs. Fire fighting acft ctc US Forest Svc tanker base on ground frequency 123.975. 24 hr PPR for air carrier acft operating under FAR Part 121 or Part 380, ctc arpt manager via pager at 909-426-4324, ARFF avbl with 24 hr prior permission only. Twy F lgts OTS indef. Rwy 24 PAPI unusable byd 4 NM due to high terrain. HIRL preset low ints, to increase ints ACTIVATE—CTAF. PAPI Rwy 06 and Rwy 24 operate continuously.

WEATHER DATA SOURCES: AWOS-3 124.175 (909) 382-0067.

COMMUNICATIONS: CTAF 119.45 ATIS 124.175 UNICOM 122.975

Ⓡ **SOCAL APP/DEP CON** 135.4 (S-SW) 134.0 (E-S) 127.25 (N-NE) 125.5 (SW-N) 119.65 (NE-E)

TOWER 119.45 (1500-0500Z+) **GND CON** 121.8


AIRSPACE: CLASS D svc 1500-0500Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 039° 18.0 NM to fld 1432/15E.

PETIS NDB (HW) 397 SB N34°03.39' W117°21.97' 056° 6.9 NM to fld. NOTAM FILE ONT. NDB unmonitored.

ILS 109.3 I-SBD Rwy 06. ILS unmonitored 0500-1500Z+.



SAN CARLOS (SQL) 2 NE UTC-8(-7DT) N37°30.71' W122°14.97'
 05 B S4 FUEL 100LL, JET A OX 1, 3, 4 TPA-805(800) NOTAM FILE SQL
RWY 12-30: H2600X75 (ASPH) S-12.5 MIRL
RWY 12: REIL. VASI(V2L)—GA 3.0° TCH 25'. Pole.
RWY 30: REIL. VASI(V2L)—GA 3.0° TCH 25'. Levee. Rgt tffc.

SAN FRANCISCO

L-2F, 3B, A
IAP, AD

AIRPORT REMARKS: Attended 1500-0500Z+. Migratory bird activity on and in vicinity of arpt. 100' steel transmission towers and powerlines located 750' west and parallel to Rwy 12-30. 7' lighted dike located in rwy safety area on apch end Rwy 30. Calm wind Rwy 12. No touch and go landings, or stop and go landings, when twr clsd. Noise sensitive areas south through northeast of arpt. For noise abatement procedures ctc arpt manager 650-573-3700. When twr clsd, ACTIVATE MIRL Rwy 12-30 and REIL Rwy 30—119.0.

WEATHER DATA SOURCES: LAWRs.

COMMUNICATIONS: CTAF 119.0 ATIS 125.9 (650) 593-0613

UNICOM 122.95

Ⓡ **NORCAL APP CON** 133.95 135.65

Ⓡ **NORCAL DEP CON** 135.65


TOWER 119.0 (1500-0500Z+) **GND CON** 121.6

AIRSPACE: CLASS D svc 1500-0500Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

WOODSIDE (L) VORTACW 113.9 OSI Chan 86 N37°23.55' W122°16.88' 355° 7.3 NM to fld. 2270/17E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at tower.




SAN CLEMENTE ISLAND NALF (FREDRICK SHERMAN FLD) (NUC) NAF O NW UTC-8(-7DT) **LOS ANGELES**
 N33°01.36' W118°35.31' **H-4H, L-4G**
 184 B NOTAM FILE NUC Not insp. **DIAP, AD**
RWY 05-23: H9301X200 (CONC) PCN 68 R/C/W/T HIRL
RWY 05: REIL. **RWY 23:** OLS. REIL. 1.0% down.
ARRESTING GEAR/SYSTEM
RWY 05: HOOK E-28(B) (2201') **HOOK E-28(B) (2025') RWY 23**
MILITARY SERVICE: JASU 1(GTC-85) 1(A-4). **FUEL J5. FLUID SP.**
MILITARY REMARKS: Opr Mon-Thu 1600-0200Z†, Fri 1600-0000Z†, CLOSED Sat, Sun and hol. **RSTD** PPR for civil acft at all times and mil other times, DSN 524-9240. Req to use NUC as BINGO fld for carrier opr rqr 7 days prior notice and special air opr after normal opr hr require 72 hr prior notice thru San Clemente Island Air OPS DSN 524-9240. **CAUTION** Extensive missile and off-shore bombardment in vicinity of San Clemente Island. Beaver TACAN NSD Chan 86 located 11 NM S of NUC TACAN Chan 123. Perimeter road in close proximity to airfield, use extreme caution. Hold short mark 100' from rwy edge. Expect hold short instructions from twr. **TFC PAT** Reduced rwy separation standard in effect USN/USMC acft. **MISC** Acft desiring radar advisory svc ctc twr 20 NM out. No search and rescue facility normally avbl (crash boat and helicopter). Flt planning svc not avbl. Acft transition W291 ctc Beaver Control 120.85 266.9. **ACTIVATE** 5 step HIRL Rwy 05-23, 1 step REIL Rwy 05-23 after normal working hrs for emergencies 119.55.
COMMUNICATIONS: ATIS 268.6 (Mon-Thu 1600-0200Z†, Fri 1600-0000Z†, clsd Sat, Sun and holidays)
TOWER 126.75 278.8 340.2 (Mon-Thu 1600-0200Z†, Fri 1600-0000Z†, clsd Sat, Sun and holidays.)
GND CON 119.55 251.05
(R) RADAR ADVISORY SERVICE (BEAVER CONTROL) 120.85 266.9 (Ctc twr 20 NM out).
AIRSPACE: CLASS D svc Mon-Thu 1600-0200Z†, Fri 1600-0000Z† except Sat, Sun and holidays other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE NUC.
(L) TACAN Chan 123 NUC (117.6) N33°01.62' W118°34.78' at fld. 161/15E. Opr only during NOTAM hr Class D Airspace.
ASR/PAR PAR may not be avbl due to scheduled MP on Tue 1800-2000Z†.
COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

SAN DIEGO N33°08.43' W116°35.16' **LOS ANGELES**
RCO 122.4 122.2 (SAN DIEGO RADIO) **L-4I**

SAN DIEGO

BROWN FLD MUNI (SDM) 13 SE UTC-8(-7DT) N32°34.34' W116°58.81' **LOS ANGELES**
 526 B S4 **FUEL** 100LL, JET A OX 1, 2 TPA—See Remarks LRA NOTAM FILE SDM **H-4H, L-4H**
RWY 08L-26R: H7972X150 (ASPH-CONC) S-80, D-110, ST-140, DT-175 MIRL **IAP, AD**
RWY 26R: Rgt tfc.
RWY 08R-26L: H3180X75 (ASPH) S-14 0.5% up W
RWY 08R: Rgt tfc.
AIRPORT REMARKS: Attended Mon-Fri 1600-0400Z†. For fuel after hours call FBO's at 619-671-9222, fee for callout. Military fuel avbl by calling 619-671-9222. Parachute Jumping on arpt and 3 miles east. **CAUTION:** Arpt boundry one mile north from Mexican/USA international border. **CAUTION** advised when departing on Rwy 08L at night due to rising terrain to the east. Be alert to high terrain 3,566' MSL 6 miles east of arpt. Rwy 08R-26L opr permits only 12000 lbs. Noise sensitive area approximately 2 miles west of arpt. No overflight of surface antenna array below 1,500'. Antenna array located 1,600' north of Rwy 26R. Rwy 08R-26L dalgt hrs only. No engine ops on ramps except as necessary for arrivals and departures. Local Wx observation facility. TPA—1526(1000) Rwy 08L-26R, 1126(600) Rwy 08R-26L. Flight Notification Service (ADCUS) available.
WEATHER DATA SOURCES: ASOS (619) 661-8297.
COMMUNICATIONS: CTAF 126.5 ATIS 132.35 (619) 661-0152
UNICOM 122.95
(R) SOCAL APP CON 124.35
(R) SOCAL DEP CON 125.15
TOWER 126.5 (128.25 Rwy 08R-26L) (1600-0400Z†) **GND CON** 124.4 **CLNC DEL** 124.4
AIRSPACE: CLASS D svc 1600-0400Z† other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE SDM.
POGGI (L) VORTACW 109.8 PGY Chan 35 N32°36.62' W116°58.75' 167° 2.3 NM to fld. 580/14E.



MONTGOMERY FLD (MYF) 6 N UTC-8(-7DT) N32°48.94' W117°08.38'

LOS ANGELES

427 B S4 FUEL 100LL, JET A OX 1, 4 TPA—See Remarks NOTAM FILE MYF

L-4H

RWY 10L-28R: H4577X150 (ASPH-RFSC) S-12 MIRL 0.3% up E

IAP, AD

RWY 10L: VASI(V4L)—GA 3.0° TCH 40'. Tree.

RWY 28R: MALSR. VASI(V4L)—GA 3.0° TCH 29'. Thld dspcd 1176'.

Rgt tfc.

RWY 05-23: H3400X150 (ASPH) S-12 0.3% up NE

RWY 05: Thld dspcd 389'. P-line. RWY 23: Tree.

RWY 10R-28L: H3401X60 (ASPH-RFSC) S-12

RWY 10R: Tree. Rgt tfc. RWY 28L: REIL. Tree.

AIRPORT REMARKS: Attended Mon-Fri 1400-0200Z+. Be alert heavy acft activity in the vicinity of Lake Murray and Mt Soledad. Pilots are urged to be vigilant for other acft in these areas and to ctc the twr early enough for timely traffic advisories if proceeding east bound advise twr of destination arpt. Be alert to military jet acft invof arpt and 4.7 NM NW of arpt bearing 312° invof Mission Bay VORTAC. Be alert birds on and in the vicinity of arpt. Coyote activity on runways and taxiways. Arpt use restricted by arpt manager to acft having maximum certificated gross tkf weight of 20,000 pounds or less. Overweight acft subject to fines. Touch and go ops are prohibited 0500-1430Z+. Intersection tkfs and stop-and-go's are prohibited at all times. Practice low approaches are prohibited 0730-1430Z+. Simulated engine failures are prohibited over residential areas. No jet touch and go ops. For noise abatement regulations ctc the noise abatement office at 858-573-1436. Acft with high noise levels are requested to use Rwy 10L-28R. Ldg fees for PART 135 ops. Extreme noise sensitive areas west and south of arpt. Noise monitoring in effect. Maximum noise limit 0730-1430Z+ 70 DB over residential areas. Maximum noise limit 1430-0730Z+ 88 DB. Dep use Rwy 10L when tower not opr and wind permitting. No practice low apchs 0730-1430Z+. TPA Rwy 10R-28L and 05-23 single engine 1427(1000) and multi-engine/turbo powered 2027(1600). TPA—Rwy 10L-28R 1227(800) single engine, 2027(1600) multi-engine/turbo. When twr clsd MIRL Rwy 10L-28R opr continuously. When twr clsd ACTIVATE MALSR Rwy 28R and VASI Rwy 10L and Rwy 28R—119.2.

WEATHER DATA SOURCES: ASOS (858) 576-4337.

COMMUNICATIONS: CTAF 119.2 ATIS 126.9 (858) 277-3075 UNICOM 122.95

Ⓡ SOCIAL APP CON 124.35

Ⓡ SOCIAL DEP CON 119.6

TOWER 119.2 125.7 (1400-0500Z+) GND CON 118.22 CLNC DEL 123.725

AIRSPACE: CLASS D svc 1400-0500Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

MISSION BAY (H) VORTAC 117.8 MZB Chan 125 N32°46.93' W117°13.53' 050° 4.8 NM to fld. 12/15E.


ILS/DME 111.7 I-MYF Chan 54 Rwy 28R. LOC/DME unmonitored when twr clsd.

HELIPAD H1: H100X100 (ASPH)

HELIPAD H2: H48X48 (ASPH)

HELIPAD H3: H48X48 (ASPH)

HELIPORT REMARKS: Cityport helipad limited to 20,000 lbs maximum certificated gross tkf weight. Midport helipad limited to 6,000 lbs maximum certificated gross tkf weight. No midport overnight parking without prior permission from arpt ops ctc 858-573-1440.

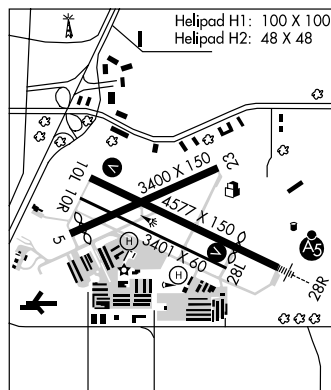

SAN DIEGO INTL (SAN) 2 W UTC-8(-7DT) N32°44.01' W117°11.38'

LOS ANGELES

17 B S2 FUEL 100LL, JET A OX 1, 2 AOE Class I, ARFF Index D NOTAM FILE SAN H-4H, L-4H

RWY 09-27: H9401X200 (CONC-ASPH-GRVD) S-100, D-150, ST-175, DT-250, DDT-720 HIRL CL IAP, AD


RWY 09: MALSR. TDZL. Thld dsplcd 700'. Tree.

RWY 27: MALSR. TDZL. PAPI(P4L)—GA 3.5° TCH 66'. Thld dsplcd 1810'. Sign. Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 27 EMAS 315' X 218'.

AIRPORT REMARKS: Attended continuously. Intermittent presence of birds on and invof arpt. Pilots are required to ctc gnd controller prior to pushback, tow out and taxi for tfc advisories. PPR for acft with wingspan in excess of 230'. Ultralight vehicles prohibited on arpt. Practice approaches and touch and go landings prohibited. Taxiing acft are prohibited from passing to the south of acft located on Twy B into alley located between Gates 7 and 14. Taxiing acft shall follow lead-in lines until the nose wheel of the acft has entered the non-movement area of the alley. Rwy 09-27 FAA gross weight strength DC10-10 410; DC10-30 530; L-1011 430; B747 720. 747 and larger acft are prohibited from making intersection tkfs. Twy D north 1800' designated air cargo ramp. To reduce jet blast impact at north end of Twy D acft will not start engine until 800' from north end of Twy D, abeam the second parking pad. Aircraft crossing Rwy 09-27 on Twy C4, hold short of Twy C4 facing west on Taxiway C, parallel to runway. Outboard engines of four-engine acft are to be kept at idle power for all ground maneuvering. Cross-bleed engine starts permitted only on parallel twy with acft aligned on twy centerline. Military acft provide advance notification to arpt ops call 619-400-2710. Rwy 27 PAPI 4-box left NSTD. 3.5° angle; TCH 66' from dsplcd thld; Baffled horizontally 4.8° north of centerline and 10° south of centerline; lateral coverage has been narrowed to avoid obstacles; close alignment to rwy centerline is necessary; use of localizer recommended. Possible erroneous ground proximity warning system alert between 1.6 and 1.3 DME while on PAPI apch path for Rwy 27. Twy edge lgts on north side of Twy C OTS indef. Flight Notification Service (ADCUS) available.

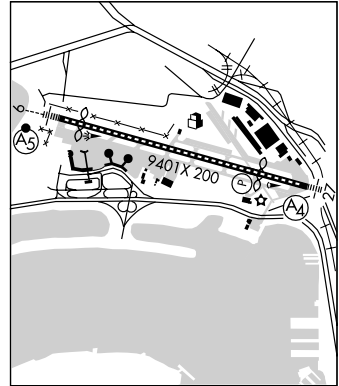

WEATHER DATA SOURCES: ASOS (619) 296-8934.

COMMUNICATIONS: D-ATIS 134.8 (619) 298-0997 UNICOM 122.95

Ⓡ **SOCAL APP/DEP CON** 124.35 (East) 119.6 (West)

LINDBERGH TOWER 118.3 GND CON 123.9 CLNC DEL 125.9

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN. VHF/DF ctc FSS.

MISSION BAY (H) VORTAC 117.8 MZB Chan 125 N32°46.93' W117°13.53' 133° 3.4 NM to fld. 12/15E.

BOING NDB (LMM) 245 AN N32°44.40' W117°12.95' 092° 1.4 NM to fld. SHUTDOWN.

ILS/DME 111.55 I-SAN Chan 52(Y) Rwy 09. Class IE. LMM BOING NDB. LMM SHUTDOWN.

ILS/DME 110.9 I-UBR Chan 46 Rwy 27. LOC only.

SAN DIEGO/EL CAJON**GILLESPIE FLD** (SEE) 10 NE UTC-8(-7DT) N32°49.57' W116°58.35'**LOS ANGELES**

388 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE SEE

H-4H, L-4H

RWY 09L-27R: H5342X100 (ASPH) S-90, D-120, DT-200 MIRL 0.5% up E

IAP, AD

RWY 09L: VASI(V2L)—GA 3.5° TCH 35'. Tree.**RWY 27R:** PAPI(P4L)—GA 4.5° TCH 45'. Thld displcd 706'. Road. Rgt tfc.**RWY 17-35:** H4145X100 (ASPH) S-58, D-106, DT-195

MIRL 0.5% up S

RWY 17: VASI(V2L)—GA 4.0° TCH 43'. Thld displcd 450'. Fence.**RWY 35:** VASI(V2L)—GA 4.0° TCH 35'. Thld displcd 685'. Pole.**RWY 09R-27L:** H2738X60 (ASPH) S-12 0.5% up E**RWY 27L:** Sign.**AIRPORT REMARKS:** For fuel svc or assistance during business hrs ctc


(619) 449-0611 or (619) 448-5991. Rwy 09R-27L CLOSED dusk-dawn, not lgtd. Formation procedures avbl as tfc permits, limited to no more than 3 acft per formation tkf. Numerous cranes 200' AGL 2000' NE Rwy 27R thld. PPR for VFR low apchs blo 1000' AGL from arpt director. PPR for all military acft, call arpt manager 619-956-4800. Helicopter training ops use "Pioneer" pattern, ctc arpt management for further information 619-956-4800. Noise abatement procedures in effect, touch and go ops and jet departures strongly discouraged 0600-1500Z.

Please ctc arpt management at 619-956-4800. Rwy 17 preferred noise abatement dep when twr clsd.

TPA—Rwy 17-35 1188(800) dawn-dusk, 1388(1000) dusk-dawn. Rwy 27R 1588(1200) rgt tfc dawn-dusk, 1388(1000) left tfc dusk-dawn due to 893' AGL mountain 2.1 NM east-northeast of arpt. Rwy 27L 1188(800) left tfc dawn-dusk. West portions of Twy Delta not visible from twr. Rwy 27R close alignment to rwy centerline necessary, use of localizer recommended due to proximity of mountain. Rwy 27R PAPI unusable beyond 6° right of course. When twr clsd ACTIVATE MIRL Rwy 09L-27R and Rwy 17-35, and VASI Rwy 17, Rwy 35, VASI Rwy 09L, and PAPI Rwy 27R—CTAF.

WEATHER DATA SOURCES: AWOS-3 125.45 (619) 449-1228.**COMMUNICATIONS:** CTAF 120.7 ATIS 125.45 (619) 449-1228. (General outlook when tower closed.)

UNICOM 123.05

® **SOCAL APP/DEP CON** 124.35**GILLESPIE TOWER** 120.7 123.8 (1500-0500Z) **GND CON** 121.7 **CLNC DEL** 125.1**AIRSPACE:** CLASS D svc 1500-0500Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SAN.**MISSION BAY (H) VORTAC** 117.8 MZB Chan 125 N32°46.93' W117°13.53' 063° 13.1 NM to fld. 12/15E.**ILS** 110.5 I-SEE Rwy 27R. LOC only. Unmonitored when twr closed.

SAN FRANCISCO INTL (SFO) 8 SE UTC-8(-7DT) N37°37.14' W122°22.49'

SAN FRANCISCO

13 B S4 FUEL 100, 100LL OX 1, 2, 3, 4 LRA Class I, ARFF Index E

H-3A, L-2F, 3B, A

NOTAM FILE SFO

IAP, AD

RWY 10L-28R: H11870X200 (ASPH-GRVD) PCN 80 F/B/X/T HIRL CL

RWY 10L: REIL. PAPI(P4L)—GA 3.0° TCH 80'. Transmission twr.

RWY 28R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 51'. Rgt tfc.

RWY 10R-28L: H10602X200 (ASPH-GRVD) PCN 80 F/B/X/T

HIRL CL

RWY 10R: PAPI(P4L)—GA 3.0° TCH 75'. Transmission twr. Rgt tfc.

RWY 28L: SSALR. PAPI(P4L)—GA 3.0° TCH 75'.

RWY 01R-19L: H8648X200 (ASPH-GRVD) PCN 100 F/B/X/T

HIRL CL

RWY 01R: REIL. Thld dsplcd 238'. Blast fence.

RWY 19L: PAPI(P4L)—GA 3.0° TCH 75'. SSALS. TDZL.

RWY 01L-19R: H7500X200 (ASPH-CONC-GRVD) PCN 90 F/B/X/T

HIRL CL

RWY 01L: REIL. Thld dsplcd 491'.

RWY 19R: PAPI(P4L)—GA 3.0° TCH 73'.

AIRPORT REMARKS: Attended continuously. PAEW AER 28L, Rwy 28R

and Rwy 19L indef. Flocks of birds feeding along shoreline

adjacent to arpt, on occasions fly across various parts of arpt.

Due to obstructed vision, SFO twr is able to provide only limited

arpt tfc control svc on Twy A between gates 88 and 89. Twr

personnel are unable to determine whether this area is clear of traffic or obstructions. Rwy 10 preferred rwy

between 0900-1400Z weather and flight conditions permitting. Simultaneous ops in effect all rwys. Noise

sensitive arpt. For noise abatement procedures ctc arpt noise office Monday-Friday 1600-0100Z by calling

650-821-5100. Non-standard lateral spacing of hold bar lights on all Rws 10L-28R, 10R-28L, 01R-19L, and

01L-19R. Airline pilots shall strictly follow the painted nose gear lines and no oversteering adjustment is

permitted. No grooving exists at arpt rwy intersections. Rwy 01L-19R, 01R-19L, Rwy 10R-28L, Rwy 10L-28R

grooved full length except at rwy intersections. B747, B777, A330, A340 or larger acft are restricted from using

Twy A1 when B747-400, A340-600 or larger acft are holding short of Rwy 01R on Twy A. 747-400's shall taxi

at a speed of less than 10 miles per hour on all non-restricted taxiways on the terminal side of the intersecting

rwys. All outbound Twy Y heavy aircraft with a wingspan of 171' or greater under power prohibited from entering

westbound Twy Z. Ramp clsd to acft with wingspan over 117' at Terminal 1, gate C41 indef. Movement speed of

not more than 5 miles per hour is required when two 747-400's pass or overtake each other on parallel

taxiways A and B. Terminal 2 gates D1-D14 and ramp area clsd indef. Rwy 19L SALSF are only 1100' long with

only one flasher on the last light station. Ldg fee. Flight Notification Service (ADCUS) available. NOTE: See

Special Notices—Intersection Departures During Period of Darkness.

WEATHER DATA SOURCES: ASOS (650) 872-0246. LLWAS.

COMMUNICATIONS: D-ATIS 135.45 118.85 115.8 113.7 (650) 877-3585/8422

UNICOM 122.95

Ⓡ NORCAL APP CON 135.65 (S) 133.95

Ⓡ NORCAL DEP CON 135.1 (SE-W) 120.9 (NW-E)

TOWER 120.5 GND CON 121.8 CLNC DEL 118.2

PRE TAXI CLNC 118.2

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE SFO.

(L) VORW/DME 115.8 SFO Chan 105 N37°37.17' W122°22.43' at fld. 13/17E. San Francisco Intl ATIS

avbl.

VOR/DME unusable:

025°-065° beyond 30 NM below 18000'.

035°-055° beyond 12 NM below 6500'

150°-190° beyond 25 NM below 4500'

190°-260° beyond 10 NM below 4500'

260°-295° beyond 35 NM below 3000'

295°-330° beyond 20 NM below 4000'

BRIJ NDB (LOM) 379 SF N37°34.33' W122°15.59' 282° 6.2 NM to fld.

Unusable 160°-195° byd 6 NM all altitudes.

ILS/DME 111.7 I-GWQ Chan 54 Rwy 28R. Class IIIE. LOM BRIJ NDB. LOM unusable 160°-195°


byd 6 NM all altitudes.

ILS/DME 109.55 I-SFO Chan 32(Y) Rwy 28L. Class IT.

ILS/DME 108.9 I-SIA Chan 26 Rwy 19L.

LDA/DME 110.75 I-FNP Chan 044(Y) Rwy 28R.

COMM/NAV/WEATHER REMARKS: ILS Rwy 19L-pilots be alert for momentary LOC course excursions due to large acft opr in vicinity of LOC antenna. Rwy 19L glideslope deviations are possible when critical areas are not required to be protected. Acft operating invof glideslope transmitter.



SAN JOSE N37°22.48' W121°56.68' NOTAM FILE SJC.**SAN FRANCISCO**

(L) VOR/DME 114.1 SJC Chan 88 118° 1.0 NM to Norman Y. Mineta San Jose Intl. 43/16E.

L-2F, 3B, A

VOR unusable:

360°-070° byd 25 NM blo 6,500'

170°-240° byd 30 NM blo 6,700'

140°-160° byd 25 NM blo 6,100'

SAN JOSE**NORMAN Y. MINETA SAN JOSE INTL** (SJC) 2 NW UTC-8(-7DT) N37°21.76' W121°55.75'**SAN FRANCISCO**

62 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks LRA

H-3A, L-2F, 3B, A

Class I, ARFF Index D NOTAM FILE SJC

IAP, AD

RWY 12L-30R: H11000X150 (CONC-GRVD) S-220, D-250, ST-175, DT-605 HIRL CL 0.3% up SE**RWY 12L:** REIL. PAPI(P4R)—GA 3.0° TCH 70'. Dsplcd thld 1307'. Pole.**RWY 30R:** PAPI(P4L)—GA 3.0° TCH 69'. Dsplcd thld 2537'. Tree. Rgt ttc.**RWY 12R-30L:** H11000X150 (CONC-GRVD) S-220, D-250, ST-175, DT-605, DDT-875 HIRL CL**RWY 12R:** MALSR. PAPI(P4R)—GA 3.0° TCH 76'. Thld dsplcd 1302'. Pole. Rgt ttc.**RWY 30L:** MALSR. PAPI(P4L)—GA 3.0° TCH 72'. Thld dsplcd 2542'. Fence.**RWY 11-29:** H4599X100 (ASPH) S-60 MIRL**RWY 11:** PAPI(P4L)—GA 3.0° TCH 42'. Rgt ttc.**RWY 29:** REIL. PAPI(P4L)—GA 3.6° TCH 52'. Tree.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 12L:** TORA-10125 TODA-11000 ASDA-10125 LDA-8810**RWY 30R:** TORA-10020 TODA-11000 ASDA-10020 LDA-7479**RWY 12R:** TORA-9883 TODA-11000 ASDA-9883 LDA-8584**RWY 30L:** TORA-10142 TODA-11000 ASDA-10142 LDA-7605

AIRPORT REMARKS: Attended continuously. Birds frequently on or in vicinity of arpt. First 400' Rwy 30R and Rwy 30L CLOSED for tkf DC10, MD11, L1011. Crane 275' AGL 1300' east Rwy 12L-30R between Twy F-Twy G 2100-0900Z† daily indef. Noise abatement procedure: Rwy 12R-30L is preferred arrival rwy for jet acft and Rwy 12L-30R is the preferred departure rwy for jet acft. All jet acft take-offs are to be initiated from end of rwy unless directed otherwise by twr. Jet departure on Rwy 11-29 not authorized except for jets under 75,000 pounds manufacture designed certified gross take-off weight and only during closures of both Rwy 12R-30L and Rwy 12L-30R. TPA-1004(942) single-engine acft, 1504(1442) multi-engine and turbine powered acft. Unscheduled ops by group 5 acft (B747) and larger not authorized except with prior arpt approval ctc arpt manager 408-277-4705. Rwy 11-29 limited to acft with wingspan of less than 79' and apch speed of less than 121 knots (Gulfstream 1 or smaller). All engine run-ups require prior arpt approval, ctc manager on duty 408-277-5378. Rwy 12R-30L and Rwy 12L-30R FAR 139 certified. Curfew hours 0700-1500Z† FAR 36 Stage II, 0730-1430Z† FAR 36 Stage III acft listed on the schedule of authorized acft issued by the Director of Aviation. Delayed scheduled flights and alternate emerg ops may be exempt from curfew hr restrictions. Prior arpt notification is required for all late/early arrivals. Ctc manager on duty at 408-277-5378. Twy Y will be periodically restricted to acft with a wingspan of less than 171' (MD-11 or smaller) during B-777 ops on Rwy 12L-30R. Twy Z will be periodically restricted to acft with a wingspan of less than 118' (BBJ smaller) during B-777 ops. Twy W between Twy B and Twy C restricted to acft with a wingspan of 118', (BBJ or smaller). Twy G and Twy J between Rwy 12R-30L and Twy V limited to 100,000 pounds gross weight. Twy V limited to acft with wingspan of less than 118' (A-321 or smaller). ACTIVATE MIRL Rwy 11-29, HIRL Rwy 12L-30R and Rwy 12R-30L. MALSR Rwy 12R and MALSR Rwy 30L—Frequency 124.0 when twr clsd. Rwy 12R-30L 900' dsplcd thld on NW end not grvd. Rwy 30L 1873' dsplcd thld on SE end not grvd. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (408)969-0838. LAWRS.**COMMUNICATIONS:** CTAF 124.0 D-ATIS 126.95 (408) 980-8459

Ⓡ NORCAL APP CON 120.1 125.35 134.5

Ⓡ NORCAL DEP CON 121.3

TOWER 124.0 (1400-0800Z†)**GND CON** 121.7 **CLNC DEL** 118.0 **PRE TAXI CLNC** 118.0**AIRSPACE:** CLASS C svc 1400-0800Z other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SJC.**SAN JOSE (L) VOR/DME** 114.1 SJC Chan 88 N37°22.48' W121°56.68' 118° 1.0 NM to fld. 43/16E.**ILS/DME** 110.9 I-SJC Chan 046(X) Rwy 30L. Class IE. ILS unmonitored when twr clsd.**ILS/DME** 110.9 I-SLV Chan 046(X) Rwy 12R. Class IE. ILS unmonitored when twr clsd.**COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not avbl at tower.

REID—HILLVIEW OF SANTA CLARA CO (RHV) 4 SE UTC-8(-7DT)

SAN FRANCISCO

N37°19.97' W121°49.19'

L-2F, 3B

135 B S4 FUEL 100LL, JET A OX 2, 4 TPA—1135(1000) NOTAM FILE RHV

IAP, AD

RWY 13L-31R: H3100X75 (ASPH) S-17 MIRL 0.4% up NW

RWY 13L: REIL. VASI(V2L)—GA 4.0° TCH 25'. Thld dsplcd 499'.

Tree.

RWY 31R: REIL. VASI(V2L)—GA 4.0° TCH 17'. Thld dsplcd 410'.

Road. Rgt tfc.

RWY 13R-31L: H3099X75 (ASPH) S-17 0.4% up NW

RWY 13R: Thld dsplcd 499'. Tree. Rgt tfc.

RWY 31L: VASI(V2L)—GA 4.0° TCH 17'. Thld dsplcd 409'. Road.

AIRPORT REMARKS: Attended 1500-0600Z†. Self-fueling avbl 24/7.

Birds on and in/ov arpt. Rwy 31R calm wind rwy when twr closed.

No pure jet or surplus military acft except those meeting FAR 36

noise criteria. No touch and go landings 0500-1500Z†. No

simulated emergencies in arpt tfc area. No turns blo 500' when

leaving pattern except Rwy 31R departures—as soon as

practicable after departure make a slight right turn to avoid school

one half mile off departure end. When twr clsd ACTIVATE MIRL Rwy

13L-31R, REIL Rwy 13L and Rwy 31R—CTAF. VASI Rwy 13L, Rwy

31R and Rwy 31L opr continuously.

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 119.8 ATIS 125.2 (408) 923-7100

UNICOM 122.95

(R) NORCAL APP CON 120.1 134.5 133.95

(R) NORCAL DEP CON 121.3


REID—HILLVIEW TOWER 119.8 (Rwy 13L-31R) 126.1 (Rwy 13R-31L) (1500-0600Z†) GND CON 121.65

AIRSPACE: CLASS D svc 1500-0600Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE SJC.

SAN JOSE (L) VOR/DME 114.1 SJC Chan 88 N37°22.48' W121°56.68' 097° 6.5 NM to fld. 43/16E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at tower.



SAN LUIS OBISPO

SAN LUIS COUNTY RGNL (SBP) 3 S UTC-8(-7DT)

LOS ANGELES

N35°14.24' W120°38.56'

H-4G, L-3D, 7A

212 B S4 FUEL 100LL, JET A OX 1, 3, 4 TPA—See Remarks Class I, ARFF Index B

IAP, AD

NOTAM FILE SBP

RWY 11-29: H6100X150 (ASPH-GRVD) S-50, D-65, ST-82

HIRL 0.8% up SE

RWY 11: MALSR. VASI(V4L)—GA 3.0° TCH 50'. Thld dsplcd 800'.

RWY 29: REIL. VASI(V4L)—GA 3.25° TCH 50'. Thld dsplcd 500'

RWY 07-25: H2500X100 (ASPH) S-12.5, D-12.5 1.1% up E

RWY 07: Road.

ARRESTING GEAR/SYSTEM

RWY 11: EMAS 300' X 170'

RWY 29: EMAS 312' X 170'

AIRPORT REMARKS: Attended 1400-0100Z†. Recurring flocks of waterfowl on and in vicinity of arpt during winter months. Twr

unable to see acft in holding bay at NW end of Twy A. Movement

from holding bay reqrs tower approval during twr hrs. Noise

sensitive arpt. For noise abatement information ctc arpt manager

805-781-5205. Rwy 29 designated calm wind rwy.

TPA—1212(1000). TPA—1203 (991) single engine; 1703 (1491)

multi-engine, jet and high performance. Taxilane widths less than

standard. When twr clsd ACTIVATE MALSR—CTAF.

WEATHER DATA SOURCES: ASOS (805) 547-1260. LAWRS.

COMMUNICATIONS: CTAF 124.0 ATIS 120.6 UNICOM 122.95

(R) SANTA BARBARA APP/DEP CON 127.725 (1400-0700Z†)

(R) L.A. CENTER APP/DEP CON 119.05 (0700-1400Z†)


TOWER 124.0 (1400-0400Z†) GND CON 121.6

AIRSPACE: CLASS D svc (1400-0400Z†) other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

MORRO BAY (L) VORTACW 112.4 MQO Chan 71 N35°15.14' W120°45.57' 083° 5.8 NM to fld. 1463/16E.

ILS 109.7 I-SBP Rwy 11. Class IE. Unmonitored when twr clsd.



SAN LUIS RESERVOIR SPB (See LOS BANOS)**SAN MARCUS** N34°30.57' W119°46.26' NOTAM FILE HHR.

LOS ANGELES

(H) **VORTAC** 114.9 RZS Chan 96 201° 6.1 NM to Santa Barbara Muni. 3623/14E. **HIWAS.** H-4G, L-3D, 4F, 7A
VOR portion unusable 140°-178° byd 27 NM.**RCO** 122.3 122.1R 114.9T (HAWTHORNE RADIO)**SAN MARTIN****SOUTH COUNTY AIRPORT OF SANTA CLARA CO** (E16) 1 E UTC-8(-7DT)

SAN FRANCISCO

N37°04.90' W121°35.81'


L-3B

281 B S4 **FUEL** 100LL, JET A OX 3 TPA-1281(1000) NOTAM FILE OAK

IAP

RWY 14-32: H3100X75 (ASPH) S-12.5 MIRL 0.3% up N**RWY 14:** PAPI(P2L)-GA 4.0°. Pole.**RWY 32:** PAPI(P2L)-GA 4.0°. Tree. Rgt tfc.**AIRPORT REMARKS:** Attended SR-SS. Self fueling facility avbl 24/7. Arpt CLOSED to pure jet aircraft and surplus military acft except those meeting FAR 36 noise criteria. Approaching aircraft fly downwind legs east of freeway. No touch and go landings between 0300-1500Z. No crosswind turns below 1300' MSL, departures climb to 2000' MSL. **ACTIVATE** MIRL Rwy 14-32 and PAPI Rwys 14 and 32-CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.7Ⓡ **NORCAL APP CON** 124.525Ⓡ **NORCAL DEP CON** 120.1**RADIO AIDS TO NAVIGATION:** NOTAM FILE SJC.**SAN JOSE (L) VOR/DME** 114.1 SJC Chan 88 N37°22.48'

W121°56.68' 120° 24.2 NM to fld. 43/16E.

**SAN NICOLAS ISLAND NOLF** (NSI) NAF O E UTC-8(-7DT) N33°14.39' W119°27.49'

LOS ANGELES

506 B NOTAM FILE NSI

Not insp.

H-4G, L-3E, 4G

RWY 12-30: H10002X194 (PEM) PCN 63 R/C/W/T HIRL

DIAP, AD

RWY 12: Thld displcd 990'. **RWY 30:** Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION:****RWY 12:** LDA-9012**ARRESTING GEAR/SYSTEM****RWY 12** HOOK E28(B) (3100')HOOK E28(B) (3250') **RWY 30****MILITARY SERVICE:** JASU 1(GTC-85) 1(NC-10C) 1(NCPP-105) **FUEL** J5**MILITARY REMARKS:** Opr Mon-Thu/alternate Fri 1500-0000Z, CLOSED alternate Fri, all Sat, Sun and holidays. **RSTD**Official Business Only. 24 hr PPR for all acft opr other times, 48 hr PPR for C-5 and acft exceeding published ldg weight from San Nicolas ATC DSN 351-2253, C805-989-2253. Possible divert all acft except emergency to Point Mugu NAWS due drone missile opr. Rwy 12 tkf and ldg 9002'. **CAUTION** Possible turbulence short final Rwy 30. **NS ABTMT** Remain at least 1 mile offshore or 1000' MSL. **MISC** Hangar space maintenance not avbl. Call Plead CON or Point Mugu APP 128.65 325.0 prior to entering W289.**COMMUNICATIONS:****TOWER** 126.85 379.3 (Mon-Fri 1500-0030Z) **PLEAD CON** 127.55 306.6**AIRSPACE:** CLASS D svc Mon-Fri 1500-0030Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE NSI.(L) **TACAN** Chan 39 NSI (110.2) N33°14.10' W119°27.50' at fld. 521/15E. Unmonitored during non-working hrs.**TACAN** azimuth unusable

110°-280° blo 7,700'.

110°-280° byd 11 NM.

NDB (HW) 203 NSI N33°14.15' W119°26.96' at fld.**ILS** 109.7 I-NSI Rwy 30. DME required.**SANDBERG** N34°44.62' W118°43.45'./4523. (SDB) NOTAM FILE HHR.

LOS ANGELES

ASOS 120.625 (661) 248-2329

L-3D, 4G, 7B

SANTA ANA N33°40.88' W117°51.85'

LOS ANGELES

RCO 122.45 (RIVERSIDE RADIO)

L-3E, 4H, A

SANTA ANA

JOHN WAYNE AIRPORT/ORANGE CO

(SNA) 4 S UTC-8(-7DT) N33°40.54' W117°52.09'

LOS ANGELES

56 B S4 FUEL 100LL, JET A OX 3, 4 TPA—See Remarks Class I, ARFF Index C
NOTAM FILE SNA

COPTER

H-4H, L-3E, 4H, A

IAP, AD

RWY 01L-19R: H5701X150 (ASPH-GRVD) S-70, D-95, ST-121, DT-152 HIRL 0.3% up S

RWY 01L: VASI(V4L)—GA 3.0° TCH 51'.

RWY 19R: MALSR. VASI(V4L)—GA 3.0° TCH 47'. Rgt tfc.


RWY 01R-19L: H2887X75 (ASPH-PFC) S-25, D-60 MIRL

0.4% up S

RWY 01R: Rgt tfc.

RWY 19L: REIL. VASI(V4L)—GA 3.0° TCH 25'. Building.

AIRPORT REMARKS: Attended continuously. Rwy 01R-19L CLOSED when twr clsd. CAUTION: Birds on and in vicinity of arpt. Noise abatement procedures in effect contact arpt noise office 949-252-5185. Maintain at or above 300' AGL until established on final. VFR Acft: to avoid overflight of Rwy 19R: Rwy 19L arrival fly final at 15° angle to rwy, Rwy 19L departures turn 15° left at departure end of rwy. To avoid overflights of Rwy 01L, Rwy 01R departures turn 15° right at Freeway. ASDE-X Surveillance System in use: Pilots should opr transponders with Mode C on all twys and rwys. Rwy 01L-19R TPA—1056 (1000) small acft, 1556 (1500) turbine acft over 12500 lbs. Rwy 01R-19L TPA—856 (800) small single engine acft, 1056 (1000) twin engine acft. FBO general aviation aprons limited to max gwt of 100,000 lbs (dual gear) and with wingspans less than 100'. General aviation acft prohibited from using any portion of the air carrier commercial ramp. When twr clsd ACTIVATE MALSR and VASI Rwy 19R-126.8. When twr clsd no local training or touch and go operations. Overnight tiedown fee.

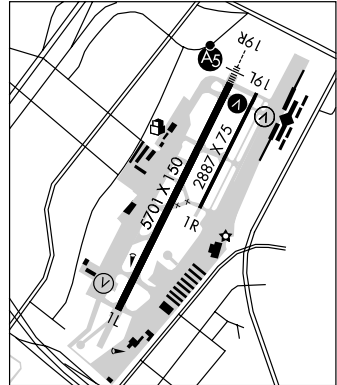

WEATHER DATA SOURCES: ASOS (714) 424-0590. LAWRS (1400-0700Z).

COMMUNICATIONS: CTAF 126.8 D-ATIS 126.0 (714) 546-2279 UNICOM 122.95

SANTA ANA RCO 122.45 (RIVERSIDE RADIO)

Ⓡ SOCAL APP CON 121.3

Ⓡ SOCAL DEP CON 128.1

TOWER 119.9 (Rwy 01R-19L) 126.8 (Rwy 01L-19R) 128.35 (1415-0700Z).

GND CON 120.8 (East) 132.25 (West) CLNC DEL 118.0 121.85

AIRSPACE: CLASS C svc 1415-0700Z ctc APP CON other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

SEAL BEACH (L) VORTACW 115.7 SLI Chan 104 N33°47.00' W118°03.29' 110° 11.3 NM to fld. 23/15E.

HIWAS.

MAAGG NDB (LMM) 337 NA N33°41.33' W117°51.63' at fld. Unmonitored indef.

NDB unusable 010°-090° byd 10 NM blo 6000'.

ILS/DME 111.75 I-SNA Chan 54(Y) Rwy 19R. LMM MAAGG NDB. ILS unmonitored when twr clsd.

Backcourse unusable 25° left of course.

LDA/DME 108.3 I-OJW Chan 20 Rwy 19R. Unmonitored when twr clsd.

SANTA BARBARA MUNI (SBA) 7 W UTC-8(-7DT) N34°25.57' W119°50.49'

LOS ANGELES

13 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks LRA

H-4G, L-3D, 4F, 7A

Class I, ARFF Index C NOTAM FILE SBA

IAP, AD

RWY 07-25: H6052X150 (ASPH-PFC) S-110, D-160, ST-175, DT-245 HIRL**RWY 07:** MALSR. Tree. Rgt tfc.**RWY 25:** REIL. VASI(V4L)—GA 3.0° TCH 46'. Fence.**RWY 15R-33L:** H4184X100 (ASPH) S-48, D-63, ST-80, DT-100 MIRL**RWY 15R:** REIL. Tree.**RWY 33L:** Tree. Rgt tfc.**RWY 15L-33R:** H4178X75 (ASPH) S-35, D-41, ST-80, DT-63**RWY 15L:** Thld displcd 217'. Bldg.**RWY 33R:** Rgt tfc.

AIRPORT REMARKS: Attended 1330-0600Z†. Fee for fuel after hours call 805-964-6733 or 967-5608. Numerous flocks of birds on and invof arpt. Rwy 15L-33R dalgt hrs only. Arpt has noise abatement procedures ctc arpt ops 805-692-6005. Due to limited ramp space at the airline terminal non-scheduled transport category acft with more than 30 passenger seats are required to ctc arpt ops 805-692-6005 24 hour PPR to arrival. Commercial airline ramp CLOSED to all General Aviation acft. TPA—1003(990) small acft, 1503(1490) large acft. Pure jet touch/go or low approaches prohibited. When twr clsd ACTIVATE MIRL Rwy 15R-33L CTAF.

WEATHER DATA SOURCES: ASOS (805) 681-0583.**COMMUNICATIONS:** CTAF 119.7 ATIS 132.65 (805) 967-0283

UNICOM 122.95

Ⓡ APP/DEP CON 125.4 (330°-150°) 124.15 127.725 120.55 (151°-329°) 124.15 127.725 (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 119.05 (0700-1400Z†)


TOWER 119.7 (1400-0700Z†) CLNC DEL 132.9 GND CON 121.7

AIRSPACE: CLASS C svc 1400-0700Z† ctc APP CON other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE HHR.

SAN MARCUS (H) VORTAC 114.9 RZS Chan 96 N34°30.57' W119°46.26' 201° 6.1 NM to fld. 3623/14E.
HIWAS.

GAVIOTA (L) VORTACW 113.8 GVO Chan 85 N34°31.88' W120°05.47' 101° 13.9 NM to fld. 2616/16E.

ILS/DME 110.3 I-SBA Chan 40 Rwy 07. Unmonitored when twr clsd.

**SANTA CATALINA** N33°22.50' W118°25.20' NOTAM FILE HHR.

LOS ANGELES

(L) VORTACW 111.4 SXC Chan 51 352° 1.8 NM to Catalina. 2090/15E.

H-4H, L-3E, 4G

SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX) 3 S UTC-8(-7DT)

LOS ANGELES

N34°53.94' W120°27.45'

H-4G, L-3D, 4F, 7A

261 B S4 FUEL 100LL, JET A TPA—See Remarks

ARFF Index—See Remarks

IAP, AD

NOTAM FILE SMX

RWY 12-30: H6304X150 (ASPH-GRVD) S-75, D-181, ST-175,

DT-400 HIRL 0.6% up SE

RWY 12: MALSR. Rgt tfc.

RWY 30: VASI(V4L)—GA 3.5° TCH 57'. Trees.

RWY 02-20: H5130X75 (ASPH) S-70, D-90, ST-114, DT-150
0.3% up NE

RWY 02: Rgt tfc.

RWY 20: Trees.

AIRPORT REMARKS: Attended 1400-0600Z†. For attendant after hours

ctc 122.95 805-928-9431 or 129.975 805-937-9300.

Self-service fueling avbl 24 hrs. Acft fuel servicing 129.975 or

122.950. CLOSED to supplemental part 121 and part 135 air

carrier ops except 24 hours PPR call arpt manager

805-922-1726 weekdays 1600-0100Z†. Class I, declared arpt

ARFF Index is 'A' but is capable of providing Index 'B'. Numerous

birds on and invof arpt. Lgtd street less than ¼ mile NW of and

parallel to Rwy 12-30. Calm wind less than 8 knots use Rwy 30.

No touch and go opr landing practice or practice instrument

approaches 0600-1500Z†. TPA—1261(1000), turbojet and

purejet 1761(1500). Run-up apron Rwy 30 gross weight limit

110,000 pounds dual wheel, 110,000 pounds dual wheel. Rwy 12 touchdown runway visual range avbl. Portions

of Twy A not visible from twr and unlighted. U.S. Customs user fee arpt. When twr clsd ACTIVATE MALSR Rwy

12—CTAF. HIRL Rwy 12-30 and VASI Rwy 30 ops continuously. ACTIVATE twy lgts 0800-1400Z†—CTAF. U.S.

Customs user fee arpt, 24 hr notice rqr.

WEATHER DATA SOURCES: ASOS (805) 928-0384.

COMMUNICATIONS: CTAF 118.3 ATIS 121.15 (805) 347-9136 UNICOM 122.95

GUADALUPE RCO 122.1R 111.0T (HAWTHORNE RADIO)

Ⓡ SANTA BARBARA APP/DEP CON 124.15 (1400-0700Z†)

Ⓡ L.A. CENTER APP/DEP CON 119.05 (0700-1400Z†)

TOWER 118.3 (1400-0400Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1400-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

MORRO BAY (L) VORTACW 112.4 MQO Chan 71 N35°15.14' W120°45.57' 129° 25.9 NM to fld. 1463/16E.


GUADALUPE (T) VOR 111.0 GLJ N34°57.14' W120°31.29' 119° 4.5 NM to fld.

VOR unusable 300°-325° beyond 10 NM below 3000'.

ILS/DME 108.9 I-SMX Chan 26 Rwy 12. Class IE. LOC/DME back course unusable byd 9 NM blo


3000'. LOC back course unusable byd 12 NM all altitudes. LOC back course unusable byd 25° right of course.

Unmonitored when twr closed.



SANTA MONICA MUNI (SMO) 3 E UTC-8(-7DT) N34°00.95' W118°27.08'**LOS ANGELES**177 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks LRA NOTAM FILE SMO **COPTER****RWY 03-21:** H4973X150 (ASPH-GRVD) S-40, D-60, DT-105 MIRL 1.2% up NE **L-3E, 4G, 7B, A****RWY 03:** REIL. VASI(V4L)—GA 4.0° TCH 27'. Tree. Rgt tfc.**IAP, AD****RWY 21:** REIL. PAPI(P4L)—GA 4.0° TCH 65'.

AIRPORT REMARKS: Attended continuously. PPR for dual wheel acft in excess of 60,000 pounds certified maximum ldg weight, ctc arpt manager 310-458-8591. Helicopter flight training ops prohibited, helicopter ops apch boundry at midfield at or above 900' MSL. No touch/go, stop/go, or low apch permitted on Sat, Sun, holidays, weekdays SS-1500Z+. Noise test on 122.85. Continuous noise ordinance in effect ctc noise office prior to arrival 310-458-8759/8692 or 310-434-2640. Noise abatement procedures: Pure jet and stage II (with/without hush kits) prohibited. Maximum noise limit 95.0 single event noise exposure level (senel) all acft. No engine starts or departures except PPR lifeguard flights 0700-1500Z+ Mon-Fri and 0700-1600Z+ weekends. PPR ex-military acft ctc arpt manager 310-458-8591. VFR departures Rwy 21 turn left 10° at end of rwy then turn right 225° to over-fly golf course W of arpt. No crosswind turn until reaching Lincoln Blvd (1 mile W) and out 800 ft MSL. If departure pattern, no turn before reaching shoreline. Rwy 03 departure no turn prior to freeway located 1 mile E. Engine maintenance runup: Jets and turboprop N side within 300' E of Twy A3. Piston single and twins on S side, within 300' E if Twy B3. TPA-1377(1200) single engine, 1877(1700) twin engine. Intersection departures and formation landings and departures prohibited. Rwy 03-21 dep end approximately 220' from residential homes. Extended high power settings on run-up or dep negatively impact the community. When twr clsd ACTIVATE MIRL Rwy 03-21, VASI Rwy 03, REIL Rwy 03 and Rwy 21 and PAPI Rwy 21—CTAF. Ldg fee.

**WEATHER DATA SOURCES:** ASOS (310) 392-6453 LAWRS.**COMMUNICATIONS:** CTAF 120.1 ATIS 119.15 (310) 450-4620 **UNICOM** 122.95

(R) **SOCAL APP CON** 124.3 (101°-245°) 124.9 (069°-100°) 125.2 (246°-341°) 128.5 (342°-068°)
 (R) **SOCAL DEP CON** 125.2

TOWER 120.1 (1500-0500Z+) **GND CON** 121.9**VFR ADVSY SVC** ctc **TOWER****AIRSPACE:** CLASS D svc 1500-0500Z+ other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SMO.(L) **VORW/DME** 110.8 SMO Chan 45 N34°00.61' W118°27.40' at fld. 114/15E.**VOR/DME** unusable:

260°-280° byd 15 NM blo 4,000'

330°-360° byd 30 NM blo 6,000'

280°-290° byd 20 NM blo 4,000'

360°-030° byd 35 NM blo 9,000'

290°-330° byd 30 NM blo 8,000'

HELIPAD H1: H40X40 (ASPH)**HELIPORT REMARKS:** Helicopter flight training opr prohibited, helicopters cross arpt boundary at 900' MSL. Rwy H1 perimeter lights.**SANTA PAULA** (SZP) 1 SE UTC-8(-7DT) N34°20.82' W119°03.70'**LOS ANGELES**

243 S4 FUEL 80, 100LL TPA-843(600) NOTAM FILE HHR

COPTER**RWY 04-22:** H2713X60 (ASPH) S-8**RWY 04:** Thld dspcd 197'. Building. Rgt tfc.**RWY 22:** Thld dspcd 225'. Trees.

AIRPORT REMARKS: Attended 1600-0100Z+. 24 hour self fueling with all major credit cards. Ultralights, banner towing, gliders, remote control models operating in the vicinity. Daily aerobatic activity 3-18 miles E up to 5255' AGL. Ngt operations prohibited.

COMMUNICATIONS: CTAF 122.9**HELIPAD H1:** H60X60 (ASPH)

SANTA ROSA N38°30.49' W122°48.63' NOTAM FILE STS.

SAN FRANCISCO

(L) VORW/DME 113.0 STS Chan 77 at Charles M. Schulz—Sonoma Co 117/16E.

L-26, 3A

VOR/DME unusable:

360°-030°beyond 25 NM below 10000'

080°-120°beyond 25 NM below 5500'

030°-080°beyond 25 NM below 7500'

340°-360°beyond 32 NM below 10000'

SANTA ROSA

CHARLES M. SCHULZ—SONOMA CO

(STS) 6 NW UTC-8(-7DT) N38°30.54' W122°48.77'

SAN FRANCISCO

128 B S4 FUEL 100LL, JET A OX 2, 4 TPA—See Remarks Class I, ARFF Index B

H-3A, L-26, 3A

NOTAM FILE STS

IAP, AD

RWY 14-32: H5119X150 (ASPH-GRVD) S-60, D-95, ST-121, DT-150 HIRL

RWY 14: REIL. VASI(V4R)—GA 3.0° TCH 50'. Trees. Rgt tfc.

RWY 32: MALSR. Trees.

RWY 01-19: H5004X100 (ASPH-GRVD) S-60, D-95, ST-121,

DT-150 0.3% up S

RWY 01: Trees.

RWY 19: PAPI(P4L)—GA 3.5° TCH 30'. Trees.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 01: TORA-5002 TODA-5002 ASDA-4700 LDA-4700

RWY 19: TORA-5002 TODA-5002 ASDA-5002 LDA-5002

AIRPORT REMARKS: Attended 1400-0600Z+. 100LL avbl 24 hrs with credit card. Jet A avbl during attendance hrs. Be alert for numerous flocks of birds on and invof arpt including seasonally migratory geese. Rwy 14 rgt tfc when twr clsd. TPA for small acft 1128(1000) and TPA for large acft 1628(1500). Twy B between Rwy 01-19 and Rwy 14-32 limited to S-12, D-25. Arpt has noise abatement procedures ctc arpt manager 707-565-7243. Twy Z between Rwy 14-32 and Twy Y limited to S-20, D-40. Ldg fee. When twr clsd ACTIVATE HIRL Rwy 14-32, twy lgts, MALSR Rwy 32, VASI Rwy 14—CTAF. When twr clsd ACTIVATE REIL Rwy 14 only when rwy lgts on highest intensity—CTAF. When twr clsd PAPI Rwy 19 not avbl.

WEATHER DATA SOURCES: ASOS (707) 573-8393.

COMMUNICATIONS: CTAF 118.5 ATIS 120.55 (707) 545-ATIS.

UNICOM 122.95

Ⓡ **OAKLAND CENTER APP/DEP CON** 127.8


SANTA ROSA TOWER 118.5 (1500-0400Z+) **GND CON** 121.9

AIRSPACE: CLASS D svc 1500-0400Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE STS.

SANTA ROSA (L) VORW/DME 113.0 STS Chan 77 N38°30.49' W122°48.63' at fld. 117/16E.

ILS 109.3 I-STS Rwy 32. Class IE. (BC unusable).



SANTA YNEZ (IZA) 1 SE UTC-8(-7DT) N34°36.41' W120°04.53'

LOS ANGELES

674 B S4 FUEL 100LL, JET A TPA-1674(1000) NOTAM FILE IZA

L-3D, 4F, 7A

RWY 08-26: H2812X75 (ASPH) S-12.5 MIRL 0.7% down W

RWY 08: Hill. Rgt tfc. **RWY 26:** VASI(V2L)—GA 3.4° TCH 20'.

AIRPORT REMARKS: Attended 1500-0300Z+. Fuel avbl 24 hours using automated system. Parachute Jumping. Ultralight ops south of Rwy 08-26. Glider ops on dirt apch zone Rwy 26. Rwy 26 tkf recommend heading 210° at arpt perimeter if safety permit for noise abatement. MIRL Rwy 08-26 preset low ints; increase ints and ACTIVATE VASI Rwy 26—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.075 (805) 686-8903.

COMMUNICATIONS: CTAF/UNICOM 122.8


Ⓡ **SANTA BARBARA APP/DEP CON** 124.15 (1400-0700Z+)

Ⓡ **L.A. CENTER APP/DEP CON** 119.05 (0700-1400Z+)

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

SAN MARCUS (H) VORTAC 114.9 RZS Chan 96 N34°30.57'

W119°46.26' 277° 16.2 NM to fld. 3623/14E. HIWAS.



SAUSALITO N37°51.32' W122°31.37' NOTAM FILE OAK.

SAN FRANCISCO

(L) **VORTACW** 116.2 SAU Chan 109 137° 15.8 NM to San Francisco Intl. 1040/17E.

H-3A, L-2F, 3A, A

VORTAC unusable 300-313° beyond 10 NM below 12,000'

SCAGGS ISLAND N38°10.76' W122°22.39' NOTAM FILE APC.

SAN FRANCISCO

(L) **VORTACW** 112.1 SGD Chan 58 048° 4.8 NM to Napa Co. 10/17E.

L-2F, 3A, A

SCHELLVILLE-SONOMA

SONOMA VALLEY (ØQ3) 4 S UTC-8(-7DT) N38°13.44' W122°26.98'

SAN FRANCISCO

10 S4 **FUEL** 100LL TPA-810(800) NOTAM FILE OAK

RWY 07-25: H2700X45 (ASPH) S-12.5

RWY 07: Tree. Rgt tfc. **RWY 25:** Trees.

RWY 17-35: H1500X50 (ASPH) S-12.5

RWY 17: Pole **RWY 35:** Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1500-0200Z†. Be alert to glider activities invof arpt. Rwy 07-25 no touch and go ldg, rgt 20° turn after tkf. Rwy 25 turn crosswind after 600'. Rwy 17-35 restricted PPR.

COMMUNICATIONS: CTAF 122.9

SCOTT VALLEY (See FORT JONES)

SEAL BEACH N33°47.00' W118°03.29' NOTAM FILE HHR.

LOS ANGELES

(L) **VORTACW** 115.7 SLI Chan 104 at Los Alamitos AAF (Joint Forces Training Base JFTB). 23/15E. **COPTER**

HIWAS

H-4H, L-3E, 4H, A

VOR portion unusable 125°-180° byd 30 NM blo 4,000'.

TACAN azimuth and DME unusable 125°-195° byd 20 NM blo 5,000'.

SELMA (ØQ4) 2 NW UTC-8(-7DT) N36°34.85' W119°39.43'

SAN FRANCISCO

305 B S4 **FUEL** 80, 100LL TPA-1105(800) NOTAM FILE RIU

RWY 10-28: H2490X50 (ASPH) S-12 LIRL (NSTD)

RWY 10: Thld dspclcd 176'. P-line. **RWY 28:** Thld dspclcd 125'. Berm.

AIRPORT REMARKS: Attended 1600-0100Z†. Arpt clsd to helicopters exc PPR 559-896-1001. First 176' Rwy 10 not lgtd. Rwy 10-28 NSTD LIRL, first 176' of Rwy 10 not lgtd. PPR for rotating beacon after 0900Z† call 559-896-1001 during attendant hours.

COMMUNICATIONS: CTAF/UNICOM 122.8

SEQUOIA FLD (See VISALIA)

SHAFTER N35°29.07' W119°05.84' NOTAM FILE BFL.

LOS ANGELES

(H) **VORTACW** 115.4 EHF Chan 101 133° 3.6 NM to Meadows Fld. 548/14E. **HIWAS.**

H-4G, L-3D, 7B

SHAFTER-MINTER FLD (MIT) 4 E UTC-8(-7DT) N35°30.36' W119°11.50'

LOS ANGELES

424 B S4 **FUEL** 100LL, JET A TPA-1424(1000) NOTAM FILE RIU

L-3D, 7B

RWY 12-30: H4501X100 (ASPH) S-22 HIRL

IAP

RWY 30: PAPI(P2L).

RWY 17-35: H2970X100 (CONC) S-25, D-30 0.3% up N

RWY 17: Road. **RWY 35:** Highway.

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z†. Self-service fuel avbl 24 hours with major credit card. Heavy crop duster activity invof arpt. Ultralight activity on and in vicinity of arpt. HIRL Rwy 12-30 ops dusk-0800Z†, after 0800Z† ACTIVATE-CTAF.

WEATHER DATA SOURCES: HIWAS 115.4 EHF.

COMMUNICATIONS: CTAF 122.9


® **BAKERSFIELD APP/DEP CON** 126.45 (1400-0700Z†)

® **L.A. CENTER APP/DEP CON** 127.1 (0700-1400Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07'

W119°05.84' 272° 4.8 NM to fld. 548/14E. **HIWAS.**



SHELTER COVE (ØQ5) 1 W UTC-8(-7DT) N40°01.69' W124°04.46'

KLAMATH FALLS

L-2H

69 TPA-1069(1000) NOTAM FILE OAK

RWY 12-30: H3400X75 (ASPH) S-20

RWY 12: Thld dsplcd 100'. Tree. Rgt tfc.

RWY 30: Thld dsplcd 500'. Tree.


AIRPORT REMARKS: Unattended. Day use only; CLOSED ngts. Be alert for ultralights, hang gliders and parachuters invof arpt. Arpt use restricted by arpt manager to acft having a maximum certificated gross tkf weight of 12,500' or less, etc arpt manager for additional info (707) 986-7447. Expect crosswinds, downdrafts, and extended periods of fog year-round. Student pilot solo flts prohibited. No practice apchs or touch and go lds. Golf carts operating on and invof arpt. Terrain +40' drop off located 500' north Rwy 12 end.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19'

W123°16.45' 312° 69.2 NM to fld. 2980/16E. HIWAS.

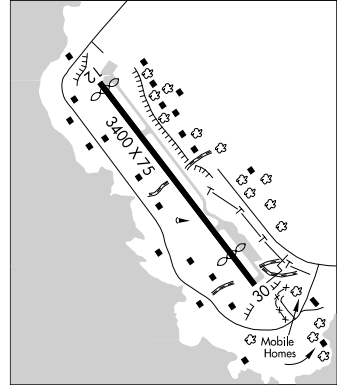

SHOSHONE (L61) 1 S UTC-8(-7DT) N35°58.12' W116°16.16'

LAS VEGAS

1568 TPA-2368(800) NOTAM FILE RAL

RWY 15-33: H2380X30 (ASPH) MIRL (NSTD)

RWY 15: Trees.

RWY 33: Berm. Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy CLOSED to helicopters. Rwy 15-33 NSTD MIRL, thld lgts 35' outboard of designated thld of rwy. ACTIVATE MIRL Rwy 15-33-122.8.

COMMUNICATIONS: CTAF 122.9

SIERRA SKY PARK (See FRESNO)

SIERRAVILLE DEARWATER (Ø79) 1 SE UTC-8(-7DT) N39°34.90' W120°21.24'

SAN FRANCISCO

L-9A

4984 TPA-5784(800) NOTAM FILE RNO

RWY 03-21: H3260X50 (ASPH) S-12

RWY 21: Thld dsplcd 193'. Road. Rgt tfc.


AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Rwy 03-21 severe cracks in pavement.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

SQUAW VALLEY (L) VORW/DME 113.2 SWR Chan 79 N39°10.82'

W120°16.18' 335° 24.4 NM to fld. 8850/16E. HIWAS.

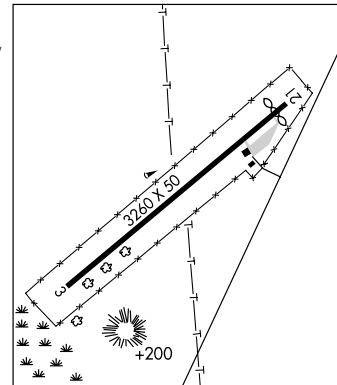

SISKIYOU CO (See MONTAGUE)

SONOMA SKYPARK (ØQ9) 3 SE UTC-8(-7DT) N38°15.45' W122°26.05'

SAN FRANCISCO

20 S4 FUEL 100LL, MOGAS TPA-1020(1000) NOTAM FILE OAK

RWY 08-26: H2480X40 (ASPH) S-8

RWY 08: Thld dsplcd 140'. Trees. Rgt tfc.

RWY 26: Thld dsplcd 237'. Trees.

AIRPORT REMARKS: Attended 1700-0100Z†. Ngt ops prohibited. Noise sensitive area E end of Rwy 08-26. For noise abatement information call arpt manager 707-996-2100. Rotorwing turbojet, ultralights plus acft over 8,500 pounds gross weight are prohibited. Perform pre-dep runup W end. Rwy 26 is calm wind rwy. Rwy 08 for arrival and dep only, no touch and go ldg or practice apchs.

COMMUNICATIONS: CTAF/UNICOM 122.8

SONOMA VALLEY (See SCHELLVILLE-SONOMA)

SOUTHARD FIELD (See BIEBER)

SOUTH CO AIRPORT OF SANTA CLARA CO (See SAN MARTIN)

SOUTHERN CALIFORNIA LOGISTICS (See VICTORVILLE)

SOUTH LAKE TAHOE

LAKE TAHOE (TVL) 3 SW UTC-8(-7DT) N38°53.63' W119°59.72'

SAN FRANCISCO

6264 B S2 FUEL 100LL, JET A OX 3 TPA-SEE Remarks Class IV, ARFF Index A

H-3B, L-9A

NOTAM FILE TVL

IAP, AD

RWY 18-36: H8544X150 (ASPH-GRVD) S-70, D-125, ST-159, DT-210 MIRL

RWY 18: MALSF. PAPI(P4L)-GA 3.0° TCH 47'. Brush.

RWY 36: REIL. Thld dsplcd 2037'. Trees. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 18: TORA-8541 TODA-8541 ASDA-7817 LDA-7017

RWY 36: TORA-8541 TODA-9541 ASDA-7741 LDA-5708

AIRPORT REMARKS: Attended Sep-May 1500-0000Z†, Jun-Aug 1500-0400Z†. Birds and waterfowl invof arpt. After winter storms arpt opens before all taxiways are clear. Arpt surrounded on E, S and W by rapidly rising terrain. Tfc advisories and sequencing in the tfc pattern are based on position reports received from pilots in these areas. Adverse weather effects magnified by mountains. Avoid desolation wilderness W of arpt. Preferred arrival Rwy 18. Preferred departure Rwy 36. For large and high performance acft dep Rwy 18, right downwind dep is recommended. ARFF not avbl without PPR, call 530-541-0480. CLOSED to air carrier ops with more than 30 passenger seats except 24 hrs PPR call arpt manager 530-541-0480. Access noise restrictions: max 80 DBA departure, 84 DBA arrival (Transport-85 DBA), maximum 77.1 DBA night limit. Noise abatement, depart Rwy 36, rwy heading 1 mile, left 320° at white arrow to shoreline. For noise abatement information call 530-541-0480. Recreational airborne activity along southern lakeshore. TPA 7500(1236) small acft, 8000(1736) transport/high performance aircraft. Twy H west of Twy A restricted to acft less than 12,500 pounds. ACTIVATE MIRL Rwy 18-36, MALSF and PAPI Rwy 18-CTAF.

WEATHER DATA SOURCES: ASOS 124.725 (530) 541-5739. LAWRS.

COMMUNICATIONS: CTAF 122.95 UNICOM 122.95

SQUAW VALLEY RCO 122.25 (RENO RADIO)


OAKLAND CENTER APP/DEP CON 127.95 CLNC DEL 134.3

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

SQUAW VALLEY (L) VORW/DME 113.2 SWR Chan 79 N39°10.82' W120°16.18' 127° 21.4 NM to fld.

8850/16E. HIWAS.

LDA/DME 108.9 I-TVL Chan 26 Rwy 18. LOC front unusable byd 15° left of course byd 15° right of course. LOC front unusable from thld within 4.1 DME.



SPAULDING (See SUSANVILLE)

SQUAW VALLEY N39°10.82' W120°16.18' NOTAM FILE TVL.

(L) VORW/DME 113.2 SWR Chan 79 127° 21.4 NM to Lake Tahoe. 8850/16E. HIWAS.
RCO 122.25 (RENO RADIO)

SAN FRANCISCO
H-3B, L-9A

STOCKTON

LOST ISLE SPB (S74) 8 NW UTC-8(-7DT) N38°00.25' W121°27.40'

SAN FRANCISCO

00 TPA-800(800) NOTAM FILE RIU

WATERWAY NW-SE: 4000X300 (WATER)

SEAPLANE REMARKS: Attended 1600Z±-dusk. Boat docks avbl for seaplane use.

COMMUNICATIONS: CTAF 122.9

STOCKTON METROPOLITAN (SCK) 3 SE UTC-8(-7DT) N37°53.65' W121°14.30'

SAN FRANCISCO

33 B S4 FUEL 100, 100LL, JET A OX 1, 3 TPA-See Remarks. Class I, ARFF Index B
NOTAM FILE SCK. H-3B, L-2F, 3B IAP, AD

RWY 11L-29R: H10650X150 (ASPH-GRVD) S-40, D-150, ST-175, DT-360, DDT-650 HIRL

RWY 11L: PAPI(P4L)-GA 3.0° TCH 65'. Thld dsplcd 990'.

RWY 29R: MALSR. PAPI(P4L)-GA 2.94° TCH 62'. Thld dsplcd 1000'. Rgt tfc.

RWY 11R-29L: H4454X75 (ASPH) S-12.5

RWY 11R: Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 11L: TORA-9600 TODA-10600 ASDA-9690 LDA-8690

RWY 29R: TORA-10037 TODA-11037 ASDA-9701 LDA-8701

AIRPORT REMARKS: Attended continuously. Fuel and svc 1300-0500Z±, other times call 209-468-4722-svc charge. Seagulls on and in vicinity of arpt especially during rainy weather. CLOSED to unscheduled air carrier ops with more than 30 passenger seats except one hr PPR call airport manager 209-468-4700 or 4722; after hours call 209-468-4722. Arpt CLOSED to touch and go landings and planned low approaches for turbojet acft 0600-1500Z± except by PPR from arpt manager Part 36 Stage 3 acft. Practice circling apchs to Rwy 11L/11R not allowed for any Turbine powered/Prop driven acft exceeding 12,500 lbs except PPR from arpt manager. Avoid overflying San Joaquin General Hospital and the city of Manteca. TPA-1033(1000) for light acft, and 1533(1500) for turbine acft. Ldg fee for acft over 12,500 pounds. ACTIVATE HIRL Rwy 11L-29R, PAPI Rwy 11L and Rwy 29R, MALSR Rwy 29R-CTAF.

WEATHER DATA SOURCES: ASOS (209) 982-4270. LAWRS.

COMMUNICATIONS: CTAF 120.3 ATIS 118.25 (209) 982-4667 UNICOM 122.95

RCO 122.65 (RANCHO MURIETA RADIO)

Ⓡ NORCAL APP CON 123.85 (SE-NW 7000' and blo) 125.1 (N-SE 7000' and blo) 124.8 (8000' and abv)

Ⓡ NORCAL DEP CON 125.1

STOCKTON TOWER 120.3 (1500-0500Z±) **GND CON** 121.9

AIRSPACE: CLASS D svc 1500-0500Z± other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE SCK.

MANTECA (H) VORTAC 116.0 ECA Chan 107 N37°50.02' W121°10.28' 302° 4.8 NM to fld. 48/17E. HIWAS.


JOTLY NDB (LOM) 271 SC N37°49.90' W121°08.12' 290° 6.1 NM to fld.

ILS 109.1 I-SCK Rwy 29R. **LOM JOTLY NDB.** Localizer unusable byd 15° right and left of course.

.....

HELIPAD H1: H70X70 (CONC) S-45, D-55

HELIPORT REMARKS: Helipad H1 ODALS.



STOVEPIPE WELLS (See DEATH VALLEY NATIONAL PARK)

STRATHMORE

ECKERT FIELD (1Q1) 1 NE UTC-8(-7DT) N36°09.74' W119°03.04'

SAN FRANCISCO

426 FUEL 100LL TPA-1426(1000) NOTAM FILE RIU

RWY 13-31: H2000X50 (ASPH)

RWY 13: Thld dsplcd 185'. Trees. **RWY 31:** Thld dsplcd 265'. Trees.

AIRPORT REMARKS: Attended daylight hours. Night ops prohibited. Rwy 13-31 asph cracked, worn and pondswater.

Rwy 13-31 markings faded and partially obscured. Rwy 13-31 gross weight 10,000 pounds provided by arpt manager.

COMMUNICATIONS: CTAF/UNICOM 122.8

SUSANVILLE**SPAULDING** (1Q2) 16 NW UTC—8(7DT) N40°39.02' W120°46.11'**KLAMATH FALLS**

5116 B TPA—5916(800) NOTAM FILE RNO

L-11A

RWY 16-34: H4600X50 (ASPH) S-12.5 MIRL**RWY 34:** Rgt tfc.**AIRPORT REMARKS:** Unattended. Rwy 16-34 pavement surface is deteriorated. Rwy 16-34 has numerous cracks and loose rocks. ACTIVATE MIRL Rwy 16-34—122.8.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RDD.**REDDING (T) VOR/DME** 108.4 RDD Chan 21 N40°30.27' W122°17.50' 064° 70.2 NM to fld. 490/18E.**SUSANVILLE MUNI** (SVE) 5 SE UTC—8(—7DT) N40°22.54' W120°34.38'**KLAMATH FALLS**4149 B S4 **FUEL** 80, 100LL, JET A TPA—4949(800) NOTAM FILE SVE

L-11A


RWY 11-29: H4049X75 (ASPH-GRVD) S-15 MIRL 0.6% up NW

IAP

RWY 11: Trees.**RWY 29:** VASI(V2L)—GA 3.0° TCH 25'. Rgt tfc.**RWY 07-25:** 2179X60 (DIRT) 0.8% up W**RWY 07:** Fence.**AIRPORT REMARKS:** Attended 1600-0100Z+. Rwy 11-29 limited to 12,000 pounds by arpt manager. Twy D obstructed by a lgtd heliport H2. Rwy 11 powerline orange balls below tree line partially obscured. ACTIVATE MIRL Rwy 11-29—CTAF.**WEATHER DATA SOURCES:** AWOS-3 133.8 (530) 257-0315.**COMMUNICATIONS:** CTAF/UNICOM 122.8**OAKLAND CENTER APP/DEP CON** 128.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**MUSTANG (H) VORTACW** 117.9 FMG Chan 126 N39°31.88'

W119°39.37' 304° 66 NM to fld. 5949/16E.

.


HELIPAD H1: H120X120 (ASPH)**HELIPAD H2:** H65X65 (ASPH)**SUTTER CO** (See YUBA CITY)**TAFT-KERN CO** (L17) 1 E UTC—8(—7DT) N35°08.50' W119°26.29'**LOS ANGELES**

875 B S2 TPA—1675(800) NOTAM FILE RIU

L-3D, 7B

RWY 07-25: H3550X60 (ASPH) S-4 MIRL**RWY 07:** Pole. **RWY 25:** PAPI(P2L)—GA 3.0° TCH 40'.**AIRPORT REMARKS:** Attended Mon-Fri 1600-0000Z+, Sat-Sun 1800-0000Z+. Parachute Jumping. Be alert to lgtd cranes within 5 NM radius 200' AGL and below. Rwy 07 marked with X's, no landings. Rwy 25 steep uphill grade (2.2%). Rwy 07-25 has a dry streambed NE end. Rwy 07 no txf with tailwinds. No student solo flights permitted. For arpt information call 661-393-7990. MIRL Rwy 07-25 and PAPI Rwy 25 ngt use only ACTIVATE—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RIU.**FELLOWS (L) VORTAC** 117.5 FLW Chan 122 N35°05.59'

W119°51.94' 066° 21.2 NM to fld. 3870/16E.



TEHACHAPI

MOUNTAIN VALLEY (L94) 2 SE UTC-8(-7DT) N35°06.06' W118°25.39'

LOS ANGELES

4220 S4 FUEL 100LL OX 2, 4 TPA-5220(1000) NOTAM FILE RIU

L-3D, 7B

RWY 09R-27L: H4890X36 (ASPH-DIRT)

RWY 09R: Tree. Rgt tfc. RWY 27L: Berm.

RWY 09L-27R: H4890X36 (ASPH-DIRT)

RWY 09L: Road RWY 27R: Berm. Rgt tfc.

AIRPORT REMARKS: Attended 1600-2100Z±, 2200-0100Z±. For fuel after hours call 805-822-5159. Gliders apch from N, use Rwy 09L-27R, powered acft apch from S; use Rwy 09R-27L. Rwy end 09R first 1200'X36' dirt, Rwy end 27L remaining 3,690'X36' asphalt. Rwy end 09L first 1200'X36' dirt; Rwy end 27R remaining 3690' asphalt of varying widths. Rwy 09R-27L marked with nstd thld bars at each end; no numbers no centerline. Rwy 09L-27R restricted to sailplane use. Rwy 09L no runway centerline. Rwy 09L nstd thld marking only. Rwy 09L marked with letter R on each end no centerline. Rwy 27R no runway centerline. Rwy 27R nstd thld marking only.

NOTE: See Special Notice—Aerobatic Practice Area Mountain Valley Airport, Tehachapi, CA.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

LAKE HUGHES (L) VORTACW 108.4 LHS Chan 21 N34°40.98' W118°34.62' 002° 26.2 NM to fld. 5790/15E.

TEHACHAPI MUNI (TSP) 0 NE UTC-8(-7DT) N35°08.10' W118°26.35'

LOS ANGELES

4001 B S4 FUEL 100LL TPA-5001(1000) NOTAM FILE RIU

L-3D, 7B

RWY 11-29: H4031X75 (ASPH) HIRL

RWY 11: Thld dsplcd 285'. Hill. Rgt tfc.

RWY 29: PAPI(P2L)—GA 3.5° TCH 15'. Thld dsplcd 375'. Poles.

AIRPORT REMARKS: Attended 1600-0100Z±. CLOSED holidays. For after hrs arpt attendance call 661-303-1505. Fuel 24 hrs credit card. Lgtd obstruction mountain 1 mile west of arpt 4279' MSL. Gross weight pavement strength provided by arpt manager: 24,000 lbs.


ACTIVATE HIRL Rwy 11-29—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.025 (661) 823-0473.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

LAKE HUGHES (L) VORTACW 108.4 LHS Chan 21 N34°40.98' W118°34.62' 359° 27.9 NM to fld. 5790/15E.



THERMAL N33°37.69' W116°09.61' NOTAM FILE TRM.**LOS ANGELES**(H) **VORTAC** 116.2 TRM Chan 109 at Jacqueline Cochran Rgnl. -87/13E.**H-4H, L-4I**

VOR portion unusable:

160°-185° byd 20 NM blo 12,000'

160°-185° byd 30 NM blo 14,000'

185°-260° byd 20 NM blo 18,500'

260°-265° byd 35 NM blo 11,000'

260°-265° byd 36 NM blo 12,000'

265°-285° byd 35 NM blo 13,500'

DME portion unusable:

160°-285° byd 15 NM blo 17,500'

160°-285° byd 30 NM all altitudes

325°-060° byd 20 NM blo 12,000'

325°-045° byd 20 NM blo 12,000'

325°-045° byd 35 NM blo 13,500'

045°-060° byd 30 NM blo 12,000'

045°-060° byd 35 NM blo 13,500'

060°-090° byd 35 NM blo 9,000'

325°-060° byd 30 NM blo 15,000'

060°-090° byd 35 NM blo 9,000'

RCO 122.3 (RIVERSIDE RADIO)**TORRANCE****ZAMPERINI FLD** (TOA) 3 SW UTC-8(-7DT) N33°48.20' W118°20.38'**LOS ANGELES**103 B S4 **FUEL** 80, 100LL OX 1, 2, 3, 4 TPA-1103(1000) NOTAM FILE TOA**COPTER****RWY 11L-29R:** H5001X150 (ASPH-CONC) S-30, D-50, DT-90 MIRL 0.3% up E**H-4H, L-3E, 4G, A****RWY 11L:** VASI(V2L)-GA 3.5° TCH 10'. Thld dsplcd 541'. Trees.**IAP, AD****RWY 29R:** MALSR. VASI(V4L)-GA 4.0° TCH 11'. Thld dsplcd 540'.

Building. Rgt tfc.

RWY 11R-29L: H3000X75 (ASPH) S-28 MIRL**RWY 11R:** Rgt tfc.**RWY 29L:** REIL. VASI(V2L)-GA 4.0° TCH 25'. Building.**AIRPORT REMARKS:** Attended 1400-0600Z†. Fuel avbl 1500-0400Z†.


Numerous flocks of birds on and in/ov arpt. CAUTION: Farm equipment operating near all rwy and taxiways. Noise sensitive area all quadrants. For noise abatement procedures information contact Arpt Noise Abatement 310-784-7950 or 122.9. Certain turbojet acft permanently excluded. Touch and go ldg and stop and go ldg and low apch operations limited to 1600-0400Z† (taxi-back until 0600Z†) weekdays and 1800-0100Z† Sat. No touch and go ldg and stop and go ldg and low apch operations and taxi-back operations on Sun and holidays. Arpt CLOSED to departure 0600-1500Z† weekdays and 0600-1600Z† weekends and holidays. No multi-engine simulated engine-out procedures authorized in tfc pattern. Taxiways cross apch zone both ends Rwy 11R-29L observe taxi hold lines. When twr clsd ACTIVATE MALSR Rwy 29R-CTAF. MIRL Rwy 11L-29R ops SS-SR, MIRL Rwy 11R-29L ops 1400-0400Z†.

WEATHER DATA SOURCES: LAWRS.**COMMUNICATIONS:** CTAF 124.0 ATIS 125.6 (310) 534-2847 **UNICOM** 122.95Ⓡ **SOCAL APP CON** 124.3 (Rwy 11L and Rwy 11R) 127.2 (Rwy 29R and Rwy 29L)Ⓡ **SOCAL DEP CON** 124.3 (Rwy 29R and Rwy 29L) 127.2 (Rwy 11L and Rwy 11R)**TOWER** 135.6 (North) 124.0 (South) (1500-0400Z†) **GND CON** 120.9**AIRSPACE:** CLASS D svc 1500-0400Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE LAX.**LOS ANGELES (H) VORTAC** 113.6 LAX Chan 83 N33°55.99' W118°25.92' 134° 9.0 NM to fld. 182/15E.**ILS/DME** 111.9 I-TOA Chan 56 Rwy 29R.**COMM/NAV/WEATHER REMARKS:** Twr sectorization is based on center of arpt parallel to Rwy 11-29 centerline.

.....

HELIPAD H1: H110X110 (ASPH)**HELIPORT REMARKS:** Helipad H2 yellow perimeter lgts. Torrance Medical Center helipad located on arpt property.

ACTIVATE H1 perimeter lgts 24 hrs-CTAF.

**TRACY****NEW JERUSALEM** (1Q4) 7 SE UTC-8(-7DT) N37°40.67' W121°18.07'**SAN FRANCISCO**

62 TPA-862(800) NOTAM FILE RIU

L-2F, 3B**RWY 12-30:** H3530X60 (ASPH) S-12.5**AIRPORT REMARKS:** Unattended. Model acft activity on abandoned rwy ends.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SCK.**MANTECA (H) VORTAC** 116.0 ECA Chan 107 N37°50.02' W121°10.28' 197° 11.2 NM to fld. 48/17E. **HIWAS.**

TRACY MUNI (TCY) 3 SW UTC-8(-7DT) N37°41.34' W121°26.50'

SAN FRANCISCO

193 B S4 FUEL 100LL, JET A TPA-993(800) NOTAM FILE TCY

L-2F, 3B

RWY 08-26: H4005X100 (ASPH) S-50, D-70, ST-89, DT-120 MIRL 0.5% up W

IAP

RWY 08: PAPI(P2L)—GA 3.4° TCH 20'. Thld dsplcd 271'. Fence.

RWY 26: PAPI(P2R)—GA 3.0° TCH 21'. Thld dsplcd 295'. Road.

RWY 12-30: H4001X100 (ASPH) S-50, D-70, ST-89, DT-120
MIRL 0.3% up SE

RWY 12: Building.

RWY 30: VASI(V4L)—GA 3.0° TCH 30'. Thld dsplcd 261'. Road.

AIRPORT REMARKS: Attended May-Sep 1600-0400Z†, Oct-Apr 1600-0100Z†. Balloon, gyrocopter, ultralight and paraplane activity on weekends. Aerobatic area adjacent within 1 statute mile radius from 500 AGL-3000 MSL SR-SS. 100' crane located 600' SW of the apch end Rwy 30. Weather robot phone 209-835-6098. ACTIVATE MIRL Rwy 08-26 and Rwy 12-30—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (209) 831-4335.

COMMUNICATIONS: CTAF/UNICOM 122.8


® NORCAL APP/DEP CON 123.85

RADIO AIDS TO NAVIGATION: NOTAM FILE SCK.

MANTECA (H) VORTAC 116.0 ECA Chan 107 N37°50.02'

W121°10.28' 219° 15.5 NM to fld. 48/17E. HIWAS.

TRACY NDB (MHW) 203 TCY N37°41.54' W121°26.68' at fld. NOTAM FILE RIU. Unmonitored.



TRAVIS AFB (SUU)(KSUU) AF 3 E UTC-8(-7DT) N38°15.76' W121°55.65'

SAN FRANCISCO

62 B TPA—See Remarks AOE NOTAM FILE SUU Not insp.

H-3A, L-2F, 3A, A

RWY 03L-21R: H11001X150 (PEM) PCN 64 R/C/W/T HIRL

DIAP, AD

RWY 03L: PAPI(P4L). **RWY 21R:** PAPI(P4L).

RWY 03R-21L: H10992X150 (CONC) PCN 49 R/C/W/T HIRL CL

RWY 03R: PAPI(P4L). **RWY 21L:** ALSF2. TDZL. PAPI(P4L).

MILITARY SERVICE: LGT PAPI coincidental with ILS GS Rwy 03L and 21L visual descent point for Height Group 4 acft only. PAPI Rwy 03R and 21R provides proper TCH for Height Group 4 acft only. NSTD ALSF2 Rwy 21L. Rwy 21R thld lgts gated. Rwy 03L-21R thld and edge lgts are on step 3 unless req otherwise or unless step 4 or step 5 is rqr for wx conditions. **JASU** 1(MA-1) 6(MA-1A) 1(MC-1A) 1(MC-2A) 8(A/M32A-86) 1(707 Starting unit)

FUEL J8 OIL 0-128-133-148-156 **TRAN ALERT** Svc 24 hr daily. Expect extensive svc delay weekends and holidays. Transient acft, except AMC mission, etc Command Post not later than 15 minutes out for svc req. Fleet svc avbl.

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remark. Heavy concentration of blackbirds, gulls, and other migratory birds in the apch and dep routes and along infield areas from 1 Sep-30 Apr (Phase II). **RSTD** PPR required DSN 837-5517 C707-424-5517 except all Air Mobility Command (AMC), AMC gained and AMC contract missions. NOTE: Aircraft carrying Distinguished Visitors, Emergency Air Evac and Special Air Missions (SAM) require PPR for Command Post notification and tracking purposes. Max performance climbs are prohibited for high performance acft. When Rwy 03L-21R not avbl, aircrew should req 15 minute early engine start for rqr back taxi opr. B52 acft taxi opr limited to Twys G, N and M only. C-5 ops not permitted on Twys K and L NW of Twy N. Acft larger than C-17, tow only on Twy L. 180° turn rstd to concrete portion of rwy only. **CAUTION** Take-off obstacles Rwy 3L: 122' MSL (58' AGL) parked KC10 tails 966' to 1870' from departure end of rwy, 738' to 958' left of centerline. Extreme bright light on ramp located W side of arpt can cause hazard illusions and disorientation during dep/ldg. Rwy edge lgts for both rwys located more than 10' from edge of usable rwy surface. Rwy 03L-21R and Rwy 03R-21L edge lgts have gaps of more than 400' on the apch/departure end of rwys. Rwy 03L-21R thld lgts are located more than 10' from the edge of the usable rwy sfc. Extensive lgt acft ops. Possible radio frequency interference all frequencies 9 NM NE over Navy transmit. Expect wind shear blo 2000' on apch to all rwys. Heavy C5 jet tfc in immediate vicinity. High density VFR tfc cross final apch and dep course. Arrival acft expect heavy jet acft cross rwy to parallel twy. Breaking action on rwy and twy may be impaired due to heavy rubber deposits. Avoid overflight of firing range located 550' right of centerline and 1 NM prior to apch end Rwy 21R when red bcn is on or red flag is displayed. Twy N may be temporarily clsd without notice south of the 900 ramp due to C-17 combat off-load training. Hang glider/tow ops on-going at Maine Prairie Arpt, 3 miles N of Travis, (TZZ R328/SUU018010/3822N12149W) sfc to 5000'. Outboard engines rstd to idle only on Twy Delta east of Rwy 03R-21L for B747 acft and larger. C17 offloads prohibited on Twy D east of Rwy 03R-21L. **TFC PAT** TPA—Rectangular 1600(1538), overhead 2100(2038). **CSTMS/AG/IMG** Due to limited customs, prior notice/coordination required for arrival outside of normal workday hrs. For night, Sat, Sun and holiday arrival, 5 hr prior notice required. All mission coordination thru Travis Comd Post. **MISC** All acft carrying Distinguished Visitor will notify Comd Post no later than 24 hr prior with arr time and rqr at DSN 837-5517 or C707-424-5517. Acft with Distinguished Visitor code 7 or abv and all inbound passenger/cargo acft must ctc Comd Post 30 min prior to ldg and confirm block time. Base OPS DSN 837-2836, C707-424-2836. No backing oper on spots 511 thru 515. First 1000' Rwy 21R and first 2900' Rwy 03L concrete, mid 7100' asph. Rwy 03R-21L ungrooved. Rwy 21R grooved between 10,000' and 7,750' remaining and between 4,800' and 1,100' remaining. Rwy 03L grooved between 9900' and 6200' remaining and between 3250' and 1000' remaining. Aircrews should exercise caution following rain where standing water is present or sfc appears glassy, expect reduced braking performance, or possible hydroplaning.

COMMUNICATIONS: SFA (Avbl on req) **D-ATIS** 135.55 292.125 DSN 387-2847

AERO CLUB UNICOM 123.3 **PTD** 285.575

① **APP CON** 119.9 322.325 (S) 126.6 291.0 (N)

TOWER 120.75 239.05 254.4 **GND CON** 121.8 289.4 **CLNC DEL** 127.55 335.8

① **DEP CON** 119.9 126.6 322.325 (S) 306.9 (N)

COMD POST 141.9 349.4 **PMSV METRO** 269.2 PMSV svc avbl only when Wx Flt forecasters on duty. Wx obsn avbl 24hr via automated obsn system. Wx Flt forecasters on duty during normal wing flying hrs or forecasted severe wx excluded wind below 50kts DSN 837-3003, C707-424-3003. During Wx Flt closures remote briefing svc avbl from 25 Op Wx Squadron DSN 228-6598/6599/6588. When automated obsn system inoperable, obstructions at 350°-020° and 210°-280° may impact manually derived prevailing visibility.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE SUU.

(L) TACAN Chan 113 SUU (116.6) N38°14.73' W121°56.70' 022° 1.3 NM to fld. 32/17E. No NOTAM MP Tue 1300-1600Z† (1500 3+1).

TACAN azimuth and DME unusable:

155°-160° byd 20 NM blo 7,000'

260°-320° byd 20 NM blo 10,000'

(L) VORW 116.4 TZZ N38°20.65' W121°48.64' 211° 7.4 NM to fld. No NOTAM MP Mon 1300-1600Z† (1500 3+1). SHUTDOWN.

ILS 110.1 I-SUU Rwy 21L. Back course unusable. Middle Marker not installed, DME in lieu of Middle Marker. No NOTAM MP Wed-Fri 1300-1600Z† (1500 3+1).

ILS 108.35 I-TXV Rwy 03L. Class IT. Middle Marker not installed, DME in lieu of Middle Marker. No NOTAM MP Wed-Fri 1300-1600Z† (1500-3+1)

ILS 108.35 I-MZP Rwy 21R. Class IT.

ASR-No NOTAM MP Mon-Fri 0801-1300Z†.

COMM/NAV/WEATHER REMARKS: ILS Rwy 21L (CAT II) Special aircrew and acft certification rqr. Missed apch at Inner Marker if acft not radar altimeter equipped. ILS/Radar-Radar: Limitation between 075° and 185° radials, beginning 3 DME out to 13 DME all altitudes. Tfc advisories may not be avbl for non-transponder equipment acft. Obstructions may impact prevailing visibility 350°-020° and 210°-280°. ATC will enhance surface obstructions when twr visibility is less than 45 statute miles and different than reported visibility. During evacuation of Combat Weather Team (CWT), ctc 250WS (Operational Weather Team) at number below if unable to reach CWT at DSN 837-7241 C707-424-7241. Alternate WX location visibility severely limited due to trees, buildings and parked acft. ATC will supplement surface obstructions as needed. KSUU Metro operational 24/7. Transient briefing service avbl 25 OWS DSN 228-6598 C520-228-6598.

TRINITY CENTER (086) 0 E UTC-8(-7DT) N40°58.97' W122°41.62'

KLAMATH FALLS

2390 TPA-3190(800) NOTAM FILE RIU

L-2H

RWY 14-32: H3215X50 (ASPH) S-10

RWY 14: Thld dspcd 200'.

RWY 32: Thld dspcd 200'. Rgt tfc.


AIRPORT REMARKS: Unattended. Arpt clsd ngt. Be alert to deer on rwy. Calm wind Rwy 14. Intermittently clsd winters due to snow. Ctc county transportation office for information 530-623-1365. High terrain all quadrants. Noise abatement procedures in effect W and NW of arpt. Trees/homes west side of arpt.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FORT JONES (L) VOR/DME 109.6 FJS Chan 33 N41°26.98'

W122°48.39' 151° 28.5 NM to fld. 4900/19E. HIWAS.



TRONA (L72) 4 N UTC-8(-7DT) N35°48.75' W117°19.64'

LAS VEGAS

1716 B S4 TPA-2716(1000) NOTAM FILE RAL

H-4H, L-7C

RWY 17-35: H5930X60 (ASPH) LIRL (NSTD)

RWY 17: Fence.

AIRPORT REMARKS: Attended irregularly. Rwy 17-35 NSTD LIRL edge lgts 55' from edges of rwy. ACTIVATE LIRL Rwy 17-35 5 clicks on frequency-122.8.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.

EDWARDS (L) VORTAC 116.4 EDW Chan 111 N34°58.94' W117°43.96' 007° 53.6 NM to fld. 2354/15E.

• • • • •

HELIPAD H1: H52X52 (ASPH)

HELIPORT REMARKS: Helipad H1 is located 230' west of Rwy 17-35 and 3,380' south of Rwy 17 thld.

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE SUU.

(L) TACAN Chan 113 SUU (116.6) N38°14.73' W121°56.70' 022° 1.3 NM to fld. 32/17E. No NOTAM MP Tue 1300-1600Z† (1500 3+1).

TACAN azimuth and DME unusable:

155°-160° byd 20 NM blo 7,000'

260°-320° byd 20 NM blo 10,000'

(L) VORW 116.4 TZZ N38°20.65' W121°48.64' 211° 7.4 NM to fld. No NOTAM MP Mon 1300-1600Z† (1500 3+1). SHUTDOWN.

ILS 110.1 I-SUU Rwy 21L. Back course unusable. Middle Marker not installed, DME in lieu of Middle Marker. No NOTAM MP Wed-Fri 1300-1600Z† (1500 3+1).

ILS 108.35 I-TXV Rwy 03L. Class IT. Middle Marker not installed, DME in lieu of Middle Marker. No NOTAM MP Wed-Fri 1300-1600Z† (1500-3+1)

ILS 108.35 I-MZP Rwy 21R. Class IT.

ASR-No NOTAM MP Mon-Fri 0801-1300Z†.

COMM/NAV/WEATHER REMARKS: ILS Rwy 21L (CAT II) Special aircrew and acft certification rqr. Missed apch at Inner Marker if acft not radar altimeter equipped. ILS/Radar-Radar: Limitation between 075° and 185° radials, beginning 3 DME out to 13 DME all altitudes. Tfc advisories may not be avbl for non-transponder equipment acft. Obstructions may impact prevailing visibility 350°-020° and 210°-280°. ATC will enhance surface obstructions when twr visibility is less than 45 statute miles and different than reported visibility. During evacuation of Combat Weather Team (CWT), ctc 250WS (Operational Weather Team) at number below if unable to reach CWT at DSN 837-7241 C707-424-7241. Alternate WX location visibility severely limited due to trees, buildings and parked acft. ATC will supplement surface obstructions as needed. KSUU Metro operational 24/7. Transient briefing service avbl 25 OWS DSN 228-6598 C520-228-6598.

TRINITY CENTER (086) 0 E UTC-8(-7DT) N40°58.97' W122°41.62'

KLAMATH FALLS

2390 TPA-3190(800) NOTAM FILE RIU

L-2H

RWY 14-32: H3215X50 (ASPH) S-10

RWY 14: Thld dspcd 200'.

RWY 32: Thld dspcd 200'. Rgt tfc.


AIRPORT REMARKS: Unattended. Arpt clsd ngt. Be alert to deer on rwy. Calm wind Rwy 14. Intermittently clsd winters due to snow. Ctc county transportation office for information 530-623-1365. High terrain all quadrants. Noise abatement procedures in effect W and NW of arpt. Trees/homes west side of arpt.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FORT JONES (L) VOR/DME 109.6 FJS Chan 33 N41°26.98'

W122°48.39' 151° 28.5 NM to fld. 4900/19E. HIWAS.



TRONA (L72) 4 N UTC-8(-7DT) N35°48.75' W117°19.64'

LAS VEGAS

1716 B S4 TPA-2716(1000) NOTAM FILE RAL

H-4H, L-7C

RWY 17-35: H5930X60 (ASPH) LIRL (NSTD)

RWY 17: Fence.

AIRPORT REMARKS: Attended irregularly. Rwy 17-35 NSTD LIRL edge lgts 55' from edges of rwy. ACTIVATE LIRL Rwy 17-35 5 clicks on frequency-122.8.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EDW.

EDWARDS (L) VORTAC 116.4 EDW Chan 111 N34°58.94' W117°43.96' 007° 53.6 NM to fld. 2354/15E.

• • • • •

HELIPAD H1: H52X52 (ASPH)

HELIPORT REMARKS: Helipad H1 is located 230' west of Rwy 17-35 and 3,380' south of Rwy 17 thld.

TRUCKEE-TAHOE (TRK) 2 E UTC-8(-7DT) N39°19.20' W120°08.37'

SAN FRANCISCO

5900 B S4 FUEL 100LL, JET A1 + OX 1, 2 TPA-7000(1100) NOTAM FILE TRK

H-3B, L-9A

RWY 10-28: H7000X100 (ASPH-GRVD) S-60, D-100, ST-127 MIRL

IAP

RWY 10: REIL. Tree.

RWY 01-19: H4650X75 (ASPH) S-12.5 MIRL

RWY 01: Tree.

RWY 19: VASI(V2L)—GA 3.5° TCH 30'. Thld displcd 115'.

Rgt tffc.

AIRPORT REMARKS: Attended 1400-0700Z±. Fuel avbl 1500-0300Z± (0600-SS 100LL only). Wildlife on and invof arpt. Sailplanes ops NE of arpt May-Sep. Down drafts may be encountered expect windshear. Summer density altitudes in afternoon often exceed 9000'. No de-ice svc avbl. Rwy 19 sailplanes left traffic. Ultralight activity on and invof arpt. Noise abatement procedures in effect. Please avoid flight over residential areas, N, W, S and voluntarily avoid arrivals between 0700-1400Z±. Ctc arpt administration at 530-587-4119 for more information. Rwy 19 displcd thld not lgtd. Rwy 19 edge lgtg begin 400' from end of rwy. ACTIVATE MIRL Rwy 01-19, Rwy 10-28, and VASI Rwy 19—CTAF. REIL Rwy 10 avbl on req ctc UNICOM (1400-0700Z±).


WEATHER DATA SOURCES: AWOS-3 118.0 (530) 587-4599.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® OAKLAND CENTER APP/DEP CON 127.95

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

SQUAW VALLEY (L) VORW/DME 113.2 SWR Chan 79 N39°10.82' W120°16.18' 020° 10.3 NM to fld.

8850/16E. HIWAS.

**TULARE****MEFFORD FLD** (TLR) 3 SE UTC-8(-7DT) N36°09.38' W119°19.59'

SAN FRANCISCO

265 B FUEL 100LL, A TPA-1265(1000) NOTAM FILE RIU

L-3C, L-9A

RWY 13-31: H3901X75 (ASPH) S-12.5 MIRL

IAP

RWY 13: VASI(V2L)—GA 3.5° TCH 30'. Road.

RWY 31: VASI(V2L)—GA 3.0° TCH 26'. Trees.

AIRPORT REMARKS: Attended 1600Z±-dusk. ACTIVATE MIRL Rwy 13-31—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.7


® FRESNO APP/DEP CON 118.5

RADIO AIDS TO NAVIGATION: NOTAM FILE VIS.

VISALIA (T) VOR/DME 109.4 VIS Chan 31 N36°22.04'

W119°28.93' 133° 14.7 NM to fld. 260/16E.

COMM/NAV/WEATHER REMARKS: Communication with Fresno App unavailable blo 1,000' communication through Rancho Murieta FSS 1-800-992-7433.

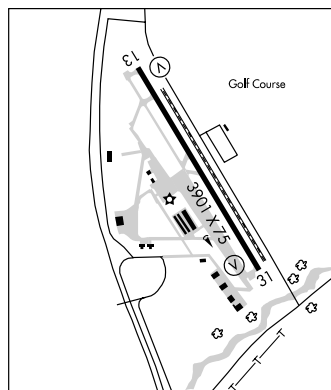**TULE** N35°54.78' W119°01.25' NOTAM FILE PTV.

SAN FRANCISCO

(L) VOR/DME 109.2 TTE Chan 29 328° 7.3 NM to Porterville Muni. 580/16E.

H-4H, L-3D, 7B

VOR/DME unusable:

160°-170° byd 30 NM blo 3,800' 290°-320° byd 39NM

RCO 122.1R 109.2T (RANCHO MURIETA RADIO)

TULELAKE MUNI (081) 7 SE UTC-8(-7DT) N41°53.44' W121°21.65'

KLAMATH FALLS

4044 B S2 FUEL 100LL TPA-4844(800) NOTAM FILE RIU

L-21, 11A

RWY 11-29: H3577X44 (ASPH) S-12.5 MIRL

RWY 11: Road. RWY 29: Rgt tfc.


AIRPORT REMARKS: Attended Jun-Aug 1400-0100Z†, Sept-May Mon-Fri 1600-0100Z†, Sep-May Sat-Sun on call. For fuel call 530-664-2661. ACTIVATE MIRL Rwy 11-29-122.8.

COMMUNICATIONS: CTAF 122.9

KLAMATH FALLS RCO 122.6 (MC MINNVILLE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE LMT.

KLAMATH FALLS (H) VORTACW 115.9 LMT Chan 106 N42°09.19' W121°43.65' 117° 22.7 NM to fld. 4087/17E. HIWAS.



TURLOCK MUNI (015) 8 E UTC-8(-7DT) N37°29.04' W120°41.83'

SAN FRANCISCO

159 B S4 FUEL 100LL TPA-959(800) NOTAM FILE RIU

RWY 12-30: H2985X50 (ASPH) S-12 LIRL (NSTD)

RWY 12: Tree.

AIRPORT REMARKS: Attended continuously. Fuel avbl 24 hrs. Rwy 12-30 NSTD LIRL, lgts 20' from rwy edge. ACTIVATE LIRL Rwy 12-30 —CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

TUSI AHP (HUNTER LIGGETT) (HGT) A 3 NW UTC-8(-7DT) N35°59.61' W121°14.20'

LOS ANGELES

1017 B NOTAM FILE OAK Not insp.

L-3C

RWY 14-32: H570X50 (CONC) MIRL

DIAP

MILITARY SERVICE: FUEL J8. Avbl Mon-Fri 1600-0000Z† except holiday. PPR DSN 686-2403/2503.

MILITARY REMARKS: RSTD CLOSED to fixed wing acft. 24 hr PPR all acft. Ctc Range Con DSN 686-2403/2503, C831-386-2403/2503 for entry approval of Hunter Liggett Reservation. **CAUTION** Parking ramp/twy less than minimum clearance, exercise extreme caution, acft parked within 150' of centerline. **NS ABTMT** Procedure (remain 1000' AGL) in effect outside of Ft. Hunter Liggett boundary. Acft remain clear of cantonment area, lakes and reservoirs. **MISC** Tactical fixed wing airstrip (Schoonover Landing Zone) avbl for C-130 and OV-10 mil fixed wing acft only, 2¼ NM SE of main heliport. Fuel unavbl at Schoonover Landing Zone.

COMMUNICATIONS:

OAKLAND CENTER APP/DEP CON 128.7 307.0

RANGE CON OPS 126.2 229.5 41.05 (All acft ctc for advisory upon entering reservation.)

RADIO AIDS TO NAVIGATION: NOTAM FILE OAK.

BIG SUR (L) VORTACW 114.0 BSR Chan 87 N36°10.88' W121°38'53' 104° 22.7 NM to heliport. 4085/16E.

TWENTYNINE PALMS (TNP) 6 E UTC-8(-7DT) N34°07.90' W115°56.75'

LOS ANGELES

1888 B S2 FUEL 100LL TPA-2888(1000) NOTAM FILE RAL

H-4H, L-4I

RWY 08-26: H5531X75 (ASPH) MIRL 1.6% up W

IAP, DIAP

RWY 08: REIL. PAPI(P2L)—GA 3.0° TCH 40'. P-line.

RWY 26: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 17-35: H3797X50 (ASPH) MIRL 0.9% up S

RWY 17: P-lines.

RWY 35: HIII.

AIRPORT REMARKS: Attended 1600-0100Z±. Parachute Jumping. Be alert for acrobatic activity south of Rwy 17-35. Rwy 08 REIL OTS indef. Rwy 26 REIL OTS indef. ACTIVATE MIRL Rwy 08-26 and Rwy 17-35, REIL Rwy 08 and 26—CTAF. Twy lgts on twy connecting Rwy 08-26 and Rwy 17-35, plus blue reflectors on parallel twy serving Rwy 17-35.

COMMUNICATIONS: CTAF/AUNICOM 122.8

RCO 122.1R 114.2T (RIVERSIDE RADIO)

L.A. CENTER APP/DEP CON 128.15

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

(L) VORTAC 114.2 TNP Chan 89 N34°06.73' W115°46.19'

263° 8.8 NM to fld. 1374/15E.

VORTAC unusable:

005°-035° byd 18 NM blo 6,800'

035°-065° byd 25 NM blo 6,000'

080°-095° byd 30 NM blo 6,000'


095°-150° byd 18 NM blo 6,000'

150°-170° byd 20 NM blo 7,000'

170°-190° byd 25 NM blo 7,000'

VOR portion and DME unusable:

190°-245° byd 20 NM blo 7,000'



315°-330° byd 33 NM blo 6,200'

330°-345° byd 20 NM blo 6,200'

345°-005° byd 35 NM blo 8,300'

245°-260° byd 25 NM blo 7,500'

TWENTYNINE PALMS SELF (NXP) MC 9 NW UTC-8(-7DT) N34°17.77' W116°09.73' LOS ANGELES
 2041 B NOTAM FILE NXP Not insp. H-4H, L-41, 7D
RWY 10-28: 8015X150 (PSP) S-80, T-180, ST-175, TT-320, TDT-850, TRT-520 HIRL DIAP, AD
RWY 10: SALSF. OLS. Rgt tfc. 0.4% down. **RWY 28:** SALSF. OLS.
ARRESTING GEAR/SYSTEM
RWY 10 M31 (1981') M31 (1981') **RWY 28**
MILITARY SERVICE: LGT All lgt by prior apvl. Rwy 10 and Rwy 28 portable lgt. **A-GEAR** Ctc twr for arrestment, expect 5 min delay. **FUEL** J5. Qualified acft captain/crew chief must be provided by user to refuel acft. Hot refuel avbl w/PPR Mon-Thu 2000-0600Z†, Fri 1700-0000Z†. **TRAN ALERT** No gas turbine system technicians avbl, users should ctc respective logistics squadrons.
MILITARY REMARKS: Opr Mon-Thu 1700-0600Z†, Fri 1700-0000Z†, clsd Sat, Sun. See FLIP AP/1, Supplementary Arpt Remarks. **RSTD** CLOSED fld ops prohibited except MCAGCC (Marine Corps Air Ground Combat Center) SAR acft only. PPR required for FUEL, VIP/passenger movement, practice arrestments, and ngt vision devices training. Opr outside public hrs permitted by 24 hr PPR; 72 hr PPR for Sat, Sun opr. Base OPS DSN 230-7816, C760-830-7816. Austere/desert training environment primarily for support of CAX. Variable hr year round as req by CAX Command Element. If Twentynine Palms Strategic Expeditionary Landing Field (SELF) is final destination, ensure NXP is filed, not TNP. **CAUTION** Helicopter LZ (HLZ) White Rhino (unmanned air vehicle strip 2000' x 72') S of and parallel to Rwy 28 is primarily for tenant Unmanned Aircraft System (UAS) support, rstd to unmanned aircraft system and copter ops only; no tiltrotor ops authorized. Marked with 72' x 72' Helo Spots on E and W end. 17' AGL hanger located 120' S of landing zone centerline. Rwys have AM-2 rwy surface matting. This is fabricated aluminum panel 1.5 inches thick, which consists of hollow, extruded one-piece main section with extruded end connectors welded to each end. The top surface of the AM-2 matting is coated with non-skid material. Weight bearing characteristics are correctly noted by the avbl rwy code above TRT-520. **TFC PAT** All traffic pat S due to live fire range immediately N of SELF. Remain on or S of extended centerline on final apch. VFR fixed wing to Rwy 28 maintain at or abv 4100' MSL until NXP 5 DME. VFR fixed wing departures Rwy 10 cross NXP 5 DME at or abv 4100' MSL or right turn to BANDINI (Water Treatment Facility 6 NM SE). UAS opr within Class D rstd to Restricted Operating Zone (ROZ) DRAGON and SELF/HLZ White Rhono via established course rules.
COMMUNICATIONS: ATIS 386.35
TOWER 135.525 340.2 (Mon-Thu 1700-0600Z†, Fri 1700-0000Z†.) **GND CON** 363.35 41.7
PMSV METRO 308.3
AIRSPACE: CLASS D Mon-Thu 1700-0600Z†, Fri 1700-0000Z†, other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.
(L) VORTAC 114.2 TNP Chan 89 N34°06.73' W115°46.19' 285° 22.4 NM to fld. 1374/15E.
COYOTE (H) TACAN Chan 63 NXP (133.6) N34°17.80' W116°09.44' at fld. 2006/14E.

UKIAH N39°07.81' W123°04.63' NOTAM FILE UKI. SAN FRANCISCO
RCO 122.35 (OAKLAND RADIO) H-3A, L-26

UKIAH MUNI (UKI) 1 S UTC-8(-7DT) N39°07.56' W123°12.05' SAN FRANCISCO
 614 B S4 **FUEL** 100LL, JET A OX 1 TPA-1614(1000) NOTAM FILE UKI L-26
RWY 15-33: H4415X150 (ASPH) S-28 MIRL 0.3% up N IAP

RWY 15: REIL. VASI(V4L)—GA 3.0° TCH 27'. Trees.
RWY 33: REIL. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1600Z†-dusk. No jet acft dep 0600-1500Z†. For noise abatement calm wind rwy is Rwy 15. Arpt manager requests no VFR straight in apchs to Rwy 15-33 right turn after departure Rwy 33 to avoid overflight of town. Second rotating beacon on mountain 250° and 2 miles from arpt. REIL Rwy 15 and Rwy 33 OTS indef. **ACTIVATE** MIRL Rwy 15-33, REIL and VASI Rwy 15, REIL Rwy 33—CTAF. Ldg fee for all acft over 12,500 lbs.

WEATHER DATA SOURCES: ASOS 119.275 (707) 462-7343.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.35 (OAKLAND RADIO)


OAKLAND CENTER APP/DEP CON 127.8

RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19' W123°16.45' 022° 5.5 NM to fld. 2980/16E. **HIWAS**.

KEARN NDB (LOM) 371 UK N39°16.55' W123°14.43' 151° 9.2 NM to fld.

ILS/DME 109.1 I-UKI Chan 28 Rwy 15. (LOC only). LOM KEARN NDB. LOC/DME unusable byd 25°W of LOC centerline. Locator bcn on arpt south end of fld (white only no code).

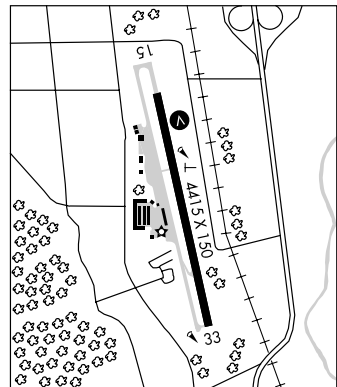

UNIVERSITY (See DAVIS)

UPLAND

CABLE (CCB) 2 NW UTC-8(-7DT) N34°06.70' W117°41.24'

1444 B S4 **FUEL** 100LL, JET A OX 1, 2, 3, 4 TPA-2244(800) NOTAM FILE RAL

RWY 06-24: H3864X75 (ASPH) S-20 MIRL 1.3% up NE.

RWY 06: VASI(V2L)—GA 4.0° TCH 26'. Thld dsplcd 106'.

RWY 24: VASI(V2R)—GA 4.0° TCH 28'. Thld dsplcd 158'. Road.

AIRPORT REMARKS: Attended daltg hours. Fuel: Self service 24 hours.

Rwy 06-24 gross pavement strength provided by arpt operator 12,500 pounds. MIRL Rwy 06-24 preset on low ints dusk to 0600Z+, after 0600Z+ ACTIVATE—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓡ **SOCAL APP/DEP CON** 125.5

RADIO AIDS TO NAVIGATION: NOTAM FILE POC.

POMONA (L) VORTAC 110.4 POM Chan 41 N34°04.70'

W117°47.22' 053° 5.4 NM to fld. 1273/15E.

HELIPAD H1: H65X65 (ASPH)

HELIPAD H2: H65X65 (ASPH-CONC)


HELIPORT REMARKS: ACTIVATE Rwy H1 perimeter lgts—CTAF.

LOS ANGELES

COPTER

L-3E, 4H, 7C, A

IAP



UPPER LAKE

GRAVELLY VALLEY (1Q5) 17 N UTC-8(-7DT) N39°27.04' W122°57.28'

SAN FRANCISCO

1900 TPA-2700(800) NOTAM FILE OAK

RWY 01-19: 4050X200 (GRVL) S-12.5

RWY 01: Trees. **RWY 19:** Hill.

AIRPORT REMARKS: Unattended. CAUTION—hang glider opr particularly summer months. CAUTION—do not land S of Hull Mountain Road. No ldg on Rwy 19 due to hill northeast of arpt. No txf on Rwy 01 due to hill northeast of arpt. Tall trees on both sides of runway. Rwy 01-19 not regularly maintained, rwy may be rough, uneven and rutted.

COMMUNICATIONS: CTAF 122.9

VACAVILLE

NUT TREE (VCB) 2 NE UTC-8(-7DT) N38°22.67' W121°57.70'

SAN FRANCISCO

117 B S4 **FUEL** 100LL, JET A TPA-1117(1000) NOTAM FILE VCB

L-2F, 3A

RWY 02-20: H4700X75 (ASPH) S-30 MIRL

IAP

RWY 02: REIL. PAPI(P2L). Poles.

RWY 20: REIL. PAPI(P2L). Rgt txf.

AIRPORT REMARKS: Attended May-Oct 1530-0330Z+, Nov-Apr 1600-0100Z+. No turns to crosswind below 800' MSL, noise sensitive area W of arpt. After 0600Z+ ACTIVATE MIRL and parallel taxiway lgts Rwy 02-20; PAPI and REILs Rwy 02 and Rwy 20—CTAF. Taxiway lgts on parallel taxiway only.

WEATHER DATA SOURCES: ASOS 134.75 (707) 448-1594.


COMMUNICATIONS: CTAF/UNICOM 122.7

TRAVIS APP/DEP CON 128.4

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62'

W121°33.10' 241° 19.8 NM to fld. 10/17E. **HIWAS.**



VANDENBERG AFB (VBG)(KVBG) AF 7 NW UTC-8(-7DT) N34°44.24' W120°35.06' **LOS ANGELES**
 369 B TPA—See Remarks NOTAM FILE VBG Not insp. **H-4G, L-3D, 4F, 7A**
RWY 12-30: H15000X200 (CONC) PCN 42 R/C/W/T HIRL **DIAP, AD**
RWY 12: ALSF2. PAPI(P4L)—GA 3.0° TCH 70'. **RWY 30:** ALSF2. PAPI(P4L)—GA 3.0° TCH 72'. 0.9% down.
MILITARY SERVICE: LGT ACTIVATE HIRL Rwy 12-30, ALS, SFL and PAPI Rwy 30 when twr closed—CTAF. Rwy 12 ILS and PAPI glideslope angles are not coincidental. Rwy 30 apch lgt sys is NSTD ALSF2 configuration. Thld lghts 17' from usable pavement sfc. **JASU** 4(A/M32A-86) 2(AM32-95). **FUEL** J8. Fuel svc by truck only. Expect svc delays. **FLUID** SP PRESAIR LPOX LOX LHNIT. **OIL** O-148-156. **TRAN ALERT** Limited fleet svc avbl, ctc AM OPS.
MILITARY REMARKS: Opr 1600-0100Z†, CLOSED Sat, Sun and holidays. See FLIP AP/1 Supplementary Arpt Info. **RSTD** Activation of AN/APS 145 radar or similar radar systems is prohibited while in R2516, R2517, R2534A and R2534B. Ctc twr on Gnd Con prior to engine start, engine start or afld opr not auth until ctc with twr is made. No intersection departure between official SS-SR. PPR for all transient full stop acft, DSN 276-6941/2, C805-606-6941/2. **CAUTION** Uncontrolled civilian arpt tfc 7 NM SE. When arpt is VMC acft will not exceed 1900' until crossing dep end of rwy to avoid overhead tfc pattern. Heavy and large acft are req to use minimum taxi power and shut down or idle outboard engines to avoid blowing foreign object onto pavement. Use follow-me vehicle and wing walker. Rwy 30 thld lghts are 17' from usable pavement sfc. Old displaced thld markings bleeding through concrete at the intersection of Rwy 12-30 near intersection of the rwy and N Twy Alpha (drm 7 for Rwy 30 or drm 8 for Rwy 12). These markings are not to be used as a navigation/landing aid. **TFC PAT** TPA—Overhead 2400(2031), rectangular 1900(1531). TPA—1400(1031) lgt acft, 900(531) helicopter.
CSTMS/AG/IMG CONUS outbound the unit of acft/aircrew assigned is responsible. **MISC** All acft req full stop at VBG or supporting VBG VIP movement, ctc PTD (other times Comd Post) 30 minutes prior to ldg. Alternate afld rqr. AM OPS DSN 276-6941/42, C805-606-6941/42 fax extension 6664.
WEATHER DATA SOURCES: ASOS (805) 605-8926
COMMUNICATIONS: CTAF 124.95 **D-ATIS** 133.125 257.975. DSN 275-2847 or C805-605-2847 **PTD** 126.2 372.2
 (R) **SANTA BARBARA APP/DEP CON** 124.15 327.8 (1400-0700Z†)
 (R) **L.A. CENTER APP/DEP CON** 119.05 269.5 (0700-1400Z†)
TOWER 124.95 326.2 (Mon-Fri 1600-0100Z† except holidays) **GND CON** 121.75 275.8
CLNC DEL 121.75 275.8
COMD POST 311.0 321.0 **PMSV METRO** 342.4 Full svc 1100-0300Z†. After hr wx briefings/updates avbl fm the 25 OWS at DSN 228-6958/6599/6588 or toll free C877-451-8367 ext 1. **RANGE CON** 121.4 256.0 266.0
AIRSPACE: CLASS D svc Mon-Fri 1600-0100Z† except holidays other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.
 (L) **TACAN** Chan 59(Y) VBG (112.25) N34°43.95' W120°34.98' at fld. 312/14E. Unmonitored 0100-1600Z†. No NOTAM MP Mon 1400-1600Z†.
 TACAN unusable:
 121°-191° byd 25 NM blo 3,700' 336°-353° byd 35 NM blo 6,000'
 336°-353° byd 25 NM blo 5,000'
ILS/DME 110.1 I-BVD Rwy 12. Unmonitored 0100-1600Z†. No NOTAM MP Tue-Fri 1400-1600Z†.
ILS/DME 110.1 I-VBG Rwy 30. Unmonitored 0100-1600Z†. No NOTAM MP Tue-Fri 1400-1600Z†.

VAN NUYS (VNY) 3 NW UTC-8(-7DT) N34°12.59' W118°29.40'

LOS ANGELES

802 B S4 FUEL 100LL, JET A OX 1, 3, TPA—See Remarks NOTAM FILE VNY

COPTER

RWY 16R-34L: H8001X150 (ASPH) S-90, D-120, ST-152, DT-210 HIRL

H-4H, L-3E, 4G, 7B

RWY 16R: MALS. VASI(V4L)—GA 3.9° TCH 54'. Thld dsplcd 1430'. Fence. Rgt tfc. 0.7% down.

IAP, AD


RWY 34L: VASI(V2L)—GA 3.0° TCH 50'. Trees. 0.7% up.

RWY 16L-34R: H4011X75 (ASPH) S-14 MIRL 0.7% up N

RWY 16L: Thld dsplcd 1431'. Railroad.

RWY 34R: REIL. VASI(V4L)—GA 3.0° TCH 26'. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Arpt CLOSED to air carrier ops. Birds on and invof arpt. Bird abatement may occur between rws when twr is open. Standing water on rws during periods of heavy rainfall. When twr clsd, acft must self announce on freq 119.3 prior to ldg or departing. Rwy 16R left tfc when tower clsd. Rwy 16L-34R CLOSED and unlgtd when tower clsd. Helicopter ctc twr for apch-dep routes. TPA—2002(1200) Rwy 16R-34L, 1802(1000) Rwy 16L-34R. Extreme noise sensitive area. NOISE ORDINANCE CURFEW: No tkf for acft exceeding 74 DBA (PER AC36-3) between 0600-1500Z†, except military, mercy flights and law enforcement acft. For Stage 2 acft restrictions, ctc Arpt Ops 818-909-3527. All jet acft must use full rwy length for departure unless otherwise directed by twr. Formation arrivals and departures prohibited except for emerg response acft. Taxilane Alpha 3 rstd to acft with wingspan less than 105'. Turbine power acft rqr to stop and shutdown engines on Taxilane Alpha 3 after clearing Twy Alpha. Taxilane Alpha 1 has NSTD object free area dimensions. ACTIVATE MALS. Rwy 16R when twr clsd—119.3, key mic 5 times. When twr clsd HIRL Rwy 16R-34L and twy lgts on med ints.

**WEATHER DATA SOURCES:** ASOS (818) 904-9213. LAWRS.**COMMUNICATIONS:** CTAF 119.3 ATIS 118.45 (818) 780-4993 UNICOM 122.95

① **SOCAL APP/DEP CON** 124.6 (S between BUR 150°-VNY 160°), 134.2 (VNY 160°-280°), 120.4 (VNY 280°-BUR 050°), 135.05 (BUR 050°-150°)

TOWER 119.3 (162°-345° and dep Rwy 16R-34L), 120.2 (346°-161° and dep Rwy 16L-34R), 119.0 (helicopters)(1400-0645Z†) **GND CON** 121.7 **CLNC DEL** 126.6

AIRSPACE: CLASS D svc 1400-0645Z† other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE VNY.(L) **VORW/DME** 113.1 VNY Chan 78 N34°13.41' W118°29.50' at fld. 812/15E.

VOR/DME unusable:

010°-030° byd 20 NM blo 6,700'

330°-350° byd 25 NM blo 5,500'

030°-050° byd 25 NM blo 8,600'

350°-010° byd 15 NM blo 6,100'

DME unusable: 094°-096° byd 35 NM blo 5,000'

ILS 111.3 I-VNY Rwy 16R. Class IA. Unmonitored when twr clsd.**LDA** 109.5 I-BUR**VENTURA** N34°06.90' W119°02.97' NOTAM FILE HHR.

LOS ANGELES

(L) **VORW/DME** 108.2 VTU Chan 19 324° 6.3 NM to Camarillo. 1560/15E.

COPTER

VOR/DME unusable:

060°-085° byd 10 NM blo 13,000'

H-4G, L-3E, 4G, 7B, A

VICTORVILLE N34°35.65' W117°23.40' NOTAM FILE RAL.

LOS ANGELES

(T) **VORW/DME** 109.4 VCV Chan 31 at Southern California Logistics 2855/14E. AWOS-3

L-4H, 7C

VISALIA MUNI (VIS) 4 W UTC-8(-7DT) N36°19.12' W119°23.57'
 295 B S4 FUEL 100LL, JET A TPA-1295(1000) Class III, ARFF Index A
 NOTAM FILE VIS

SAN FRANCISCO
 H-4G, L-3C, 9A
 IAP

RWY 12-30: H6559X150 (ASPH-PFC) S-60, D-100, ST-127, DT-160 HIRL

RWY 12: REIL. VASI(V4L)—GA 3.0° TCH 50'. Thld dsplcd 275'.

Fence.

RWY 30: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 12: TORA-6560 TODA-7560 ASDA-6560 LDA-5635

RWY 30: TORA-5635 TODA-6635 ASDA-5635 LDA-5635

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z†, Sat-Sun

1700-0000Z†. Self-svc fuel 100LL avbl 24 hours. Self service fuel Jet A avbl 24 hrs. 48 hrs PPR for unscheduled air carrier ops with more than 9 passenger seats and less than 31 passenger seats call arpt manager 559-713-4201 for ARFF svc. Rwy 30 designated calm wind rwy. No down wind turns when departing Rwy 12 until reaching traffic pattern altitude. Remaining overnight tiedown fee. ACTIVATE HIRL Rwy 12-30, MALSR Rwy 30, VASI Rwy 12 and PAPI Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (559) 651-2418.

COMMUNICATIONS: CTAF/UNICOM 123.05

RCO 122.1R 109.4T (RANCHO MURIETA RADIO)

® **FRESNO APP/DEP CON 118.5**

AIRSPACE: CLASS E svc 1400-0800Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE VIS.


(T) VOR/DME 109.4 VIS Chan 31 N36°22.04' W119°28.93' 108° 5.2 NM to fld. 260/16E.

VILIA NDB (LOM) 220 VI N36°15.29' W119°18.89' 299° 5.4 NM to fld. Unmonitored 0800-1500Z† weekdays, 0600-1600Z† weekends.

ILS 108.5 I-VIS Chan 31 Rwy 30. Class IE. LOM VILIA NDB. ILS and LOM unmonitored 0800-1500Z† weekdays, 0600-1600Z† weekends.

HELIPAD H1: H45X45 (ASPH) S-18, D-45, DT-90

HELIPORT REMARKS: H1 Helipad on parallel twy then hover taxi to adjacent concrete parking pad, 20,000 pounds maximum weight.



WARD FIELD (See GASQUET)

WASCO-KERN CO (L19) 2 NW UTC-8(-7DT) N35°37.18' W119°21.22'

LOS ANGELES
 L-3D, 7B

313 B FUEL 100LL TPA-1113(800) NOTAM FILE RIU

RWY 12-30: H3380X60 (ASPH) S-6 MIRL

RWY 12: Thld dsplcd 455'. Trees.


RWY 30: Thld dsplcd 240'. Road.

AIRPORT REMARKS: Attended irregularly. Fuel avbl by phone call only 661-758-3009. Rwy 12 lgtd thld relocated 455', Rwy 30 lgtd thld relocated 240' for ngt ops, 2685' of Rwy 12-30 usable at ngt. Crop dusting ops prohibited except by arpt manager 661-393-1800. ACTIVATE MIRL Rwy 12-30—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE BFL.

SHAFTER (H) VORTACW 115.4 EHF Chan 101 N35°29.07' W119°05.84' 289° 14.9 NM to fld. 548/14E. HIWAS.



WATSONVILLE MUNI (WVI) 3 NW UTC-8(-7DT) N36°56.14' W121°47.38'

SAN FRANCISCO

163 B S6 FUEL 100LL, JET A OX 4 TPA-1163(1000) NOTAM FILE WVI

L-3B

RWY 02-20: H4501X150 (ASPH) S-81, D-96, ST-122, DT-167 MIRL 0.4% up NE

IAP

RWY 02: REIL. VASI(V2L)-GA 3.0° TCH 48'. Trees.

RWY 20: VASI(V2L)-GA 3.5° TCH 49'. Thld dsplcd 590'. Tree.

RWY 08-26: H3999X100 (ASPH) S-45, D-65, ST-83 0.7% up W

RWY 08: PAPI(P2R)-GA 4.0° TCH 45'. Tree.

RWY 26: Tree.

AIRPORT REMARKS: Attended 1500-0300Z±. Seagulls on and in/ov arpt.

Rwy 20 preferred calm wind rwy. Arpt has noise abatement procedures ctc arpt manager 831-728-6064. Unlighted +69' tree, 390' right of rwy 20 thld. +110' trees 435' left of Rwy 26 thld. ACTIVATE MIRL Rwy 02-20; REIL Rwy 02, VASI Rwy 02 and Rwy 20-CTAF.

WEATHER DATA SOURCES: ASOS 132.275 (831) 724-8794.

COMMUNICATIONS: CTAF/UNICOM 122.8

® NORCAL APP/DEP CON 127.15 (151°-359°)

RADIO AIDS TO NAVIGATION: NOTAM FILE SNS.


SALINAS (H) VORTACW 117.3 SNS Chan 120 N36°39.83'

W121°36.19' 314° 18.6 NM to fld. 101/17E. HIWAS.

PAJAR NDB (MHW) 327 PDG N36°54.81' W121°48.48' 017°

1.6 NM to fld. NOTAM FILE WVI.

ILS 108.3 I-AYN Rwy 02. (LOC only).



WATTS-WOODLAND (See WOODLAND)

WEAVERVILLE N40°43.14' W122°58.85'

KLAMATH FALLS

RCO 122.4 (RANCHO MURIETA RADIO)

L-2H

WEAVERVILLE

LONNIE POOL FLD/WEAVERVILLE (O54) 1 NE UTC-8(-7DT) N40°44.84' W122°55.34'

KLAMATH FALLS

2350 TPA-3150(800) NOTAM FILE RIU

RWY 18-36: H2980X50 (ASPH) S-5

RWY 18: Trees.

RWY 36: PAPI(P2L)-GA 3.0° TCH 40'. Thld dsplcd 90'. Road.

AIRPORT REMARKS: Unattended. Arpt CLOSED nights. Arpt intermittently CLOSED winters due to snow. Call county transportation office for info 530-623-1365. Ultralight activity on and in/ov arpt. Land Rwy 36 only, touch & go's prohibited. Recommend no go-arounds below 2,600' MSL. Tkf prohibited on Rwy 36 due to rwy elev increase of approximately 100' north end of rwy. Tall trees and rising terrain north of arpt. Significant variations in wind direction and ints can occur at the apch to Rwy 36. Tkf only Rwy 18. Road 50' east of centerline at Rwy 18 thld and 60' trees in primary sfc 80' east of centerline.

COMMUNICATIONS: CTAF/UNICOM 122.8

WEAVERVILLE RCO 122.4 (RANCHO MURIETA RADIO)

WEED (O46) 4 NW UTC-8(-7DT) N41°28.85' W122°27.27'

KLAMATH FALLS

2938 B FUEL 100LL, JET A TPA-3938(1000) NOTAM FILE RIU

H-3A, L-21

RWY 14-32: H5000X60 (ASPH-AFSC) S-12 MIRL

RWY 14: VASI(V2L)-GA 3.0° TCH 23'. Rgt tfc.

RWY 32: VASI(V2L)-GA 3.0° TCH 20'. Road.

AIRPORT REMARKS: Attended May-Oct, Mon-Sun 1600-0100Z±, Nov-Apr, Mon-Fri 1600-0100Z±. Ramp twys clsd near midfield intersection and near south ramp exit. ACTIVATE MIRL Rwy 14-32-CTAF. Ldg fee.


COMMUNICATIONS: CTAF/UNICOM 122.7

ANTELOPE MOUNTAIN RCO 122.4 (RANCHO MURIETA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

FORT JONES (L) VOR/DME 109.6 FJS Chan 33 N41°26.98'

W122°48.39' 064° 16.0 NM to fld. 4900/19E. HIWAS.



WESTOVER FIELD AMADOR CO (See JACKSON)

WHITEMAN (See LOS ANGELES)

WILLIAM ROBERT JOHNSTON MUNI (See MENDOTA)

WILLIAMS N39°04.27' W122°01.64' NOTAM FILE RIU. SAN FRANCISCO
 (L) VORTACW 114.4 ILA Chan 91 356° 6.7 NM to Colusa Co. 50/18E. HIWAS. H-3A, L-26, 3A

WILLITS
ELLS FLD-WILLITS MUNI (028) 3 NW UTC-8(-7DT) N39°27.08' W123°22.34' SAN FRANCISCO
 2063 B S2 FUEL 100LL TPA-3063(1000) NOTAM FILE OAK L-26
 RWY 16-34: H3000X75 (ASPH) S-30 MIRL 1.3% up N IAP

RWY 16: Trees. RWY 34: Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z+. Fuel avbl 24 hrs with credit card. Deer and turkey on and invof rwy. Acft not visible from opposite end of the runway. Rotating bcn OTS. ACTIVATE MIRL Rwy 16-34-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

(R) OAKLAND CENTER APP/DEP CON 132.2

RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

 MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19' W123°16.45' 333° 24.3 NM to fld. 2980/16E. HIWAS.

WILLOWS-GLENN CO (WLW) 1 W UTC-8(-7DT) N39°30.95' W122°13.04' SAN FRANCISCO
 141 B FUEL 100LL TPA-1141(1000) NOTAM FILE RIU L-26
 RWY 16-34: H4125X100 (ASPH) S-38, D-53 MIRL IAP

RWY 16: Road. Rgt tfc. RWY 34: VASI(V4L)-GA 3.0° TCH 31'.

RWY 13-31: H3788X100 (ASPH) S-12

RWY 13: Trees. Rgt tfc. RWY 31: Thld dspcd 243'.

AIRPORT REMARKS: Attended 1630-0030Z+. Phone number for attendant after hours is located at fuel station, service charge. Rwy 34 non-precision instrument markings missing aiming point marking. ACTIVATE MIRL Rwy 16-34 and VASI Rwy 34-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

OAKLAND CENTER APP/DEP CON 132.2


MAXWELL RCO 122.1R 110.0T (RANCHO MURIETA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

MAXWELL (L) VORTAC 110.0 MXW Chan 37 N39°19.06' W122°13.29' 343° 11.9 NM to fld. 110/18E.

.

HELIPAD H1: H60X60 (CONC)

HELIPORT REMARKS: Helipad H1 +8' fuel tank within helipad safety area NE corner, +8' bushes 25' NE of helipad. Helipad H1 perimeter lgts.

WOODLAKE (042) 2 S UTC-8(-7DT) N36°23.93' W119°06.41' SAN FRANCISCO

425 B FUEL 100LL TPA-1225(800) NOTAM FILE RIU

RWY 07-25: H3320X50 (ASPH-GRVL) S-8 LIRL

RWY 07: Thld dspcd 525'. Trees. RWY 25: Thld dspcd 600'. Road.

AIRPORT REMARKS: Unattended. Arpt not approved for night use. Rwy 07-25 outer 10' of each side of rwy is rough, cracked and deteriorating. Rwy 07-25 only 2720' between Rwy 25 dspcd thld and west end lighted. Rwy 07 dspcd surface is gravel with unsafe potholes. Unsuitable for use. Rwy 07-25 LIRL OTS indef.

COMMUNICATIONS: CTAF 122.9

WOODLAND

WATTS-WOODLAND (041) 4 W UTC-8(-7DT) N38°40.43' W121°52.32'

SAN FRANCISCO

125 B S7 FUEL 100LL JET A OX 3, 4 TPA—See Remarks NOTAM FILE RIU

L-2G, 3A

RWY 18-36: H3770X60 (ASPH) S-12 MRL 0.5% up S

IAP

RWY 18: TRCV(TRIL). Thld dsplcd 630'. Trees.

RWY 36: Thld dsplcd 385'. Antenna.


AIRPORT REMARKS: Attended Oct-Apr 1600-0100Z† and May-Sept 1500-0200Z†. Fuel 24 hours with credit card. Ultralight ops prohibited. Rwy 18 unlgtd 60' trees higher than pole mounted obstruction lgts. Twin engine acft back taxi on rwy. TPA for turbine aircraft 1625(1500). TPA for other aircraft 1125(1000). ACTIVATE MRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

TRAVIS APP/DEP CON 126.6

RADIO AIDS TO NAVIGATION: NOTAM FILE SAC.

SACRAMENTO (H) VORTACW 115.2 SAC Chan 99 N38°26.62' W121°33.10' 296° 20.4 NM to fld. 10/17E. HIWAS.



WOODSIDE N37°23.55' W122°16.88' NOTAM FILE OAK.

SAN FRANCISCO

(L) VORTACW 113.9 OSI Chan 86 066° 11.2 NM to Moffett Federal Airfield. 2270/17E.

H-3A, L-2F, 3B, A

VOR portion unusable:

225°-305° byd 20 NM blo 9,000'

DME portion unusable:

060°-160° byd 35 NM blo 7,000'

160°-350° blo 11,000'

190°-230° byd 20 NM blo 13,000'

230°-350° byd 20 NM

WOWAR N37°34.39' W120°51.31' NOTAM FILE MOD.

SAN FRANCISCO

NDB (LOM) 367 MO 288° 5.7 NM to Modesto City-Co-Harry Sham Fld.

YOLO CO (See DAVIS, WOODLAND, WINTERS)

YUBA CITY

SUTTER CO (052) 1 S UTC-8(-7DT) N39°07.42' W121°36.32'

SAN FRANCISCO

58 B S4 FUEL 100LL TPA—See Remarks NOTAM FILE RIU

L-2G, 3A

RWY 17-35: H3045X75 (ASPH) MRL

RWY 17: TRCV(TRIL)—GA 3.0° TCH 10'. Tree. Rgt tfc.

RWY 35: Tree.

AIRPORT REMARKS: Attended 1600-0100Z†. Fuel avbl by credit card. Agricultural acft fly NSTD tfc pattern.

Turbined-powered acft or large acft shall enter the traffic pattern at 1558(1500). Other acft TPA—1058(1000).

Rwy 17-35 gross weight strength estimated by owner 21,000 pounds. ACTIVATE MRL Rwy 17-35—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE RIU.

WILLIAMS (L) VORTACW 114.4 ILA Chan 91 N39°04.27' W122°01.64' 062° 19.8 NM to fld. 50/18E. HIWAS.

YUBA CO (See MARYSVILLE)

YUCCA VALLEY (L22) 3 E UTC-8(-7DT) N34°07.79' W116°24.41'

LOS ANGELES

3224 S3 TPA—4224(1000) NOTAM FILE RAL

L-4I

RWY 06-24: H4363X60 (ASPH) S-12.5 MRL

RWY 06: Thld dsplcd 360'. Tree. Rgt tfc.

RWY 24: Thld dsplcd 330'. Trees.

AIRPORT REMARKS: Attended irregularly. PAEW adjacent Rwy 06-24. ACTIVATE MRL Rwy 06-24—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARADISE (H) VORTAC 112.2 PDZ Chan 59 N33°55.10' W117°31.80' 062° 57.4 NM to fld. 1432/15E.

ZAMPERINI FLD (See TORRANCE)

AKRON

COLORADO PLAINS RGNL (AKO) 1 N UTC-7(-6DT) N40°10.54' W103°13.32'

4714 B S4 FUEL 100LL, JET A1 Class IV, ARFF Index A. NOTAM FILE AKO

RWY 11-29: H7000X100 (ASPH) S-65, D-85, DT-125 MIRL 0.6% up NW.

RWY 11: REIL. PAPI (P2L)—GA 3.0° TCH 40'.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1500-0000Z†. For fuel when arpt unattended call 970-345-2397. CLOSED to air carrier ops with more than 30 passenger seats except 24 hr PPR. Extensive crop spraying ops in the area Apr-Oct. ACTIVATE MIRL Rwy 11-29—CTAF.

WEATHER DATA SOURCES: ASOS 135.475 (970) 345-2320.

COMMUNICATIONS: CTAF/UNICOM 122.8


RCO 120.675 (DENVER RADIO)

DENVER CENTER APP/DEP CON 133.95

RADIO AIDS TO NAVIGATION: NOTAM FILE AKO.

(H) VORW/DME 114.4 AKO Chan 91 N40°09.33'

W103°10.79' 289° 2.3 NM to fld. 4620/13E.



CHEYENNE
H-5A, L-10G
IAP

GEBAUER (5V6) 8 NE UTC-7(-6DT) N40°14.67' W103°05.61'

CHEYENNE

4509 NOTAM FILE DEN

RWY 08-26: 3000X70 (TURF-GRVL)

RWY 08: Road.

RWY 11-29: 2150X70 (TURF-GRVL)

RWY 11: Road.

AIRPORT REMARKS: Unattended. Rwy 08-26 and Rwy 11-29 soft when wet and rough. Ctc arpt manager for current fld conditions 970-345-2482 or 970-345-2455. Rwy 11 has 6' berm on rwy edge, right side, 800' from rwy end.

Farm equipment 15' from rwy edge in various places on right side.

COMMUNICATIONS: CTAF 122.9

AKRON N40°09.33' W103°10.79' NOTAM FILE AKO.

CHEYENNE
H-5A, L-10G

(H) VORW/DME 114.4 AKO Chan 91 289° 2.3 NM to Colorado Plains Rgnl. 4620/13E.

DME portion unusable 214°-224° byd 15 NM blo 7,500'.

RCO 120.675 (DENVER RADIO)

ALAMOSA N37°20.95' W105°48.93' NOTAM FILE ALS.

DENVER
H-5A, L-8J, 9E

(H) VORTACW 113.9 ALS Chan 86 322° 5.7 NM to San Luis Valley Rgnl/Bergman Fld.

7535/13E.

VORTAC unusable 025°-045° beyond 25 NM below 15,900' 150°-180° beyond 35 NM below 11,600'

RCO 122.15 (DENVER RADIO)

ALAMOSA

SAN LUIS VALLEY RGNL/BERGMAN FLD (ALS) 2 S UTC-7(-6DT)

N37°26.10' W105°51.99'

7539 B S4 FUEL 100LL, JET A OX 3, 4 Class I, ARFF Index A NOTAM FILE ALS

RWY 02-20: H8519X100 (ASPH-GRVD) S-52, D-70, ST-89 HIRL

RWY 02: MALSR. PAPI(P4L)—GA 3.0° TCH 48'.

RWY 20: REIL. VASI(V4L)—GA 3.0° TCH 52'. Tree.

RWY 06-24: 3200X100 (DIRT)

AIRPORT REMARKS: Attended daylight hours. PPR for air carrier operations with more than 30 passenger seats call arpt manager 719-580-6444. Rwy 06-24 for light acft only. 893' paved blastpad Rwy 02. ACTIVATE HIRL Rwy 02-20, MALSR Rwy 02, PAPI Rwy 20, REIL Rwy 20 and VASI Rwy 20—CTAF.

WEATHER DATA SOURCES: ASOS 135.175 (719) 589-5669.

COMMUNICATIONS: CTAF/UNICOM 122.8

ALAMOSA RCD 122.15 (DENVER RADIO)

DENVER CENTER APP/DEP CON 128.375


AIRSPACE: CLASS E svc Mon-Fri 1245-0200Z†, Sat and Sun 1430-0200Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE ALS.

ALAMOSA (H) VORTACW 113.9 ALS Chan 86 N37°20.95'

W105°48.93' 322° 5.7 NM to fld. 7535/13E.

ILS 111.9 I-VQR Rwy 02. Class IE. ILS unmonitored.



DENVER

H-3E, 5A, L-8J, 9E

IAP

ANIMAS AIR PARK (See DURANGO)

ARUBA N38°17.45' W104°21.30' NOTAM FILE PUB.

NDB (MHW/LDM) 373 TF 258° 6.7 NM to Pueblo Mem.


DENVER

L-10F

ASPEN-PITKIN CO/SARDY FLD (ASE) 3 NW UTC-7(-6DT) N39°13.39' W106°52.13'**DENVER**7820 B S2 FUEL 100LL, JET A1 + OX 3 TPA—See Remarks Class I, ARFF Index B
NOTAM FILE ASEH-3E, L-9E
IAP, AD**RWY 15-33:** H7006X100 (ASPH-GRVD) S-80, D-100, DT-160 MIRL 2.0% up SE**RWY 15:** MALSF. PAPI(P4L)—GA 3.5° TCH 57'.**RWY 33:** REIL. Road. Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 15:** TORA-7006 TODA-7006 ASDA-7006 LDA-7006**RWY 33:** TORA-7006 TODA-7006 ASDA-7006 LDA-7006**AIRPORT REMARKS:** Attended 1400-0600Z†. Airport CLOSED

0600-1400Z†. Hang gliders, para gliders, hot air balloons and glider operations on and in vicinity of arpt up to 18,000' MSL.

Arpt located in high mountain valley with mountainous terrain from 12,500'-14,000' MSL in near proximity to arpt, numerous unlighted obstructions. All adverse weather situations magnified in mountains. Ops during periods of reduced visibility discouraged for pilots unfamiliar with area. Unless ceilings are at least 2000' above highest terrain and visibility is 15 miles or more, mountain flying is not recommended. Due to high apch minimums pilots may need an IFR alternate even though weather is forecast to be higher than 2000'-3,000'. Terrain will not allow for normal tfc patterns. High rates of descent may be required due to terrain and local procedures. Unique VFR dep procedures exist, call arpt manager 970-920-5384, or FBO 970-920-2016 for more information. FBO requires 4 hours advance notice for staging acft prior to departure. Noise abatement required—fly ATC assigned heading or standard dep procedure in effect, ctc arpt manager 970-920-5384. If no heading or dep procedure is assigned; turn right noise abatement heading of 360° for 2 miles before proceeding on course. Noise abatement procedures in effect, ctc arpt manager 970-920-5384. For all general aviation ops between 30 minutes after sunset to 0600Z† the following applies: acft equipped as required under FAR 91.205(D) for instrument flight—pilot is instrument rated; VFR pilot-in-command has completed at least one tcf or ldg in the preceding 12 months at ASE. IFR: execute apch/dep procedures with ATC clearance. Stage II/III acft only from 1400Z† to 30 minutes after sunset by county ordinance. Stage III acft only from 30 minutes after sunset to 0600Z†. No departures after 0530Z†. All Stage 1 acft ops prohibited; violators will be prosecuted. Acft requiring IFR should file flight plan with flight service 45 minutes prior to estimated dep. Tcf not authorized on Rwy 15 without written permission from arpt manager. Review of airplane performance recommended including density altitude, weight and balance and climb performance. Ops during periods of reduced visibility discouraged for pilots unfamiliar with area. Due to poor visibility in valley, use landing lights in tfc pattern. TPA for light acft 9005(1185), for heavy acft 9505(1685). Ldg fee. Uncontrolled tfc on the ramps. Rwy 33 run-up area not visible from twr. Rwy 15 PAPI unusable byd 4 NM from rwy thld and byd 7° rgt of rwy centerline. Bcn lgtns ops dusk-0600Z†. When twr clsd

ACTIVATE MALSF Rwy 15, PAPI Rwy 15 and REIL Rwy 33—CTAF.
WEATHER DATA SOURCES: ASOS (970) 925-9168. LAWRS.
COMMUNICATIONS: CTAF 118.85 ATIS 120.4 UNICOM 122.95
① **ASPEN APP/DEP CON** 123.8 (1400-0300Z†)
① **DENVER CENTER APP/DEP CON** 125.35 (0300-1400Z†)
TOWER 118.85 (1400-0300Z†) **GND CON** 121.9 **CLNC DEL** 123.75
AIRSPACE: CLASS D svc 1400-0300Z† other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.
RED TABLE (H) VORW/DME 113.0 DBL Chan 77 N39°26.36' W106°53.68' 163° 13.0 NM to fld. 11800/12E.
ILS/DME 111.15 I-ASE Chan 48(Y) Rwy 15. (LOC only). LOC unusable byd 25° left and right of course, byd 14 NM blo 12,500'. DME unusable byd 25° left and right of course, byd 14 NM blo 12,500'.
COMM/NAV/WEATHER REMARKS: Primary radar not avbl. Radar traffic advisories and services available for transponder equipped acft only. LDA 108.5 I-PKN available for missed approach/departures only. LDA unmonitored when twr clsd.**BADGER MOUNTAIN** N39°02.93' W105°30.73'**DENVER**

RC0 122.2 (DENVER RADIO)

L-10F

BALD MOUNTAIN (7BM) N38°47.95' W106°13.01'/9825.**DENVER**

AWOS-3 132.05 (303) 512-4919

L-9E

BATTEN N40°31.92' W103°13.81' NOTAM FILE DEN.**CHEYENNE**

NDB (MHW) 392 BAJ 331° 5.2 NM to Sterling Muni.

L-10G

BLACK FOREST N38°56.67' W104°38.01' NOTAM FILE DEN.

DENVER

(L) VORTACW 112.5 BRK Chan 72 188° 8.9 NM to City of Colorado Springs Muni. 6934/13E. H-3E, 5A, L-10F
 VORTAC unusable
 100°-115° byd 25 NM blo 9,000'
 VOR unusable:
 300°-040° byd 10 NM
 RCO 122.25 (DENVER RADIO)

BLAKE FLD (See DELTA)

BLANCA (Ø5V) 3 SW UTC-7(-6DT) N37°24.67' W105°33.10'

DENVER

7720 NOTAM FILE DEN

RWY 03-21: 6160X52 (DIRT)

RWY 03: Road. RWY 21: Road.

AIRPORT REMARKS: Unattended. Unlimited vehicle access to field, wildlife on and invof arpt. Rwy 03-21 soft when wet. Rwy 03-21 low center. Rwy 03-21 1 to 2' vegetation both sides of rwy full length. Rwy 03-21 has 6 to 12" dirt windows along both sides full length.

COMMUNICATIONS: CTAF 122.9

BLUE MESA N38°27.13' W107°02.39' NOTAM FILE DEN.

DENVER

(H) VORW/DME 114.9 HBU Chan 96 032° 7.0 NM to Gunnison-Crested Butte Rgnl. 8730/14E.

H-3E, L-9E

DME portion unusable 315°-325° byd 27 NM blo 17,500'.

RCO 122.55 (DENVER RADIO)

BOULDER MUNI (BDU) 3 NE UTC-7(-6DT) N40°02.37' W105°13.55'

CHEYENNE

5288 B S4 FUEL 100LL, JET A TPA-6300 (1012) NOTAM FILE DEN

L-10F, A

RWY 08-26: H4100X75 (ASPH) S-16 MRL

RWY 26: VASI(V4L)—GA 3.5° TCH 40'. Road. Rgt tfc.

RWY 08G-26G: 4100X20 (ASPH-TURF)

RWY 08G: Thld dspcd 200'. Trees.

RWY 26G: Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-4100 TODA-4100 ASDA-4100 LDA-3900

RWY 26: TORA-4100 TODA-4100 ASDA-3900 LDA-3900

AIRPORT REMARKS: Attended 1500-0000Z±. Parachute Jumping.


Waterfowl on and invof arpt. 24 hr self serve 100LL avbl. Rwy 08G-26G for glider use only, 220' separation centerline to centerline. Rwy 08G-26G 3000' x 20' chip and seal on west end, east 1100' is grass. Rwy 08-26 ldg area undefined, varmint holes in various places along rwy edge. Hayden Lake located 250' from Rwy 08 and Rwy 08G thresholds. Rwy 08 and Rwy 08G 25 ft to 55 ft trees outline Hayden Lake as close as 200' from Rwy 08G thld. Rwy 08-26 TPA (1012' AGL) (6300' MSL, Rwy 08 dep no turn blo (512' AGL) 5800' MSL. Rwy 08 preferred under lgt wind conditions. During west wind conditions expect severe wind turbulence approaching and departing Rwy 26. Noise abatement procedures in effect, call arpt manager 303-441-3108 or <http://www.boulder.colorado.gov/airport>. Rwy 26 has 300' safety area outlined with red reflectors. 130' dropoff east of marked area. ACTIVATE MRL Rwy 08-26—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.825 (303) 541-9540.

COMMUNICATIONS: CTAF/UNICOM 122.75

RADIO AIDS TO NAVIGATION: NOTAM FILE BJC.

JEFFCO (H) VORW/DME 115.4 BJC Chan 101 N39°54.78' W105°08.34' 321° 8.6 NM to fld. 5728/11E.



BRUSH MUNI (7V5) 3 E UTC-7(-6DT) N40°15.86' W103°34.54'

CHEYENNE

4280 **FUEL** A NOTAM FILE DEN

L-10F

RWY 07-25: H4300X60 (ASPH) S-6 LIRL (NSTD)

RWY 07: Trees. **RWY 25:** Ground.

AIRPORT REMARKS: Attended irregularly. For svc call 970-842-5279 or 970-842-5777. Parachute Jumping. Unlighted 320' twr 3 miles east of arpt. High tension powerlines within 1 mile S of arpt. Rwy 25 lgt'd thld relocated 195' for ngt ops. Rwy 07-25 one thld light each rwy side both ends. Rwy 25 thld markings begin 195' W of pavement end. Rwy 07-25 NSTD LIRL, one thld lgt each side of rwy both ends. ACTIVATE NTSD LIRL Rwy 07-25 5 times on and 8 times off—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE AKO.

AKRON (H) VORW/DME 114.4 AKO Chan 91 N40°09.33' W103°10.79' 277° 19.3 NM to fld. 4620/13E.

BUCKLEY AFB (BKF)(KBKF) ANG (A AF ARNG N MC) ON UTC-7(-6DT) N39°42.10' W104°45.10' **DENVER**

5662 B TPA—See Remarks Class I, ARFF Index Ltd. NOTAM FILE DEN

H-3E, 5A, L-10F, A

RWY 14-32: H11000X150 (PEM) PCN 40 R/B/W/T HIRL

DIAP, AD

RWY 14: REIL. PAPI(P4L). 0.7% up. **RWY 32:** ALSF1. PAPI(P4L).

ARRESTING GEAR

RWY 14 ←HOOK E5 (116' OVRN) HOOK BAK-12B(B) (1500')

HOOK BAK-12B(B) (1500') HOOK E5 (116' OVRN) →RWY 32

MILITARY SERVICE: Lgt Rwy 32 ILS Glide Slope Runway Point of Intercept and PAPI GS Runway Reference Point not coincidental. **A-GEAR** E5 cables on apch end are connected at all times. Rwy 14-32 BAK-12B connected at all times, usable rwy between cables is 8000'. Due to high probability of hook skip, E5 at departure ends of Rwy 14-32 are not recommended for engagement. Operators use at own risk. Consider use of BAK 12 at apch ends of Rwy 14-32. **JASU** 9(A/M32A-86) 3(AM32A-60A) 6(AM32A-60B) 6(AM32A-95) **FUEL** Avbl Sun-Mon 1500-2200Z+, Tue-Sat 1330-0130Z+. **J8. FLUID** SP PRESAIR LOX LHOX. De-Ice avbl. **OIL** O-148 SOAP. Avbl Tue-Fri 1315-0000Z+ excluding holidays. PPR.

MILITARY REMARKS: Opr Tue-Sat 1330-0530Z+, Sun-Mon 1500-2300Z+. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** PPR, ctc Base OPS DSN 847-9650, C720-847-9650, 140th Air National Guard OPS, DSN 847-9470. Tran acft may be req to fly straight-in full stop. C5, C-17, KC10, F4, EA6, F14 acft start run-up 300' down rwy prior to tkf to prevent asphalt and lgt system damage. Large/heavy acft req u-turn on rwy, make left turns at rwy end on the concrete portion. Avoid over flight radar domes NW Rwy 14-32. Aerodrome limited to wing assigned F16 alert acft only from Tues-Sat 0530-1330Z+, and Sun and Mon 2300-1500Z+. When local F-16s are opr in the arm-dearm area, tran acft larger than fighter size will park on the east ramp. For normal day to day ops, larger acft can be held on twys B, K, or M waiting for the F-16s to clear the area. **CAUTION** Friction tests indicate potentially hgt condition at the touchdown areas of Rwy 32 and Rwy 14 during wet condition due to low friction, especially rgt of center. The haz areas slow up at 1000-2500' from the thld. Hi mid-air collision potential, extreme vigilance rqr. Phase II wildlife activity during migration/morning/evening hrs and winter months. Ctc ATIS or PTD for current conditions. Possible crosswind hazard Rwy 14-32. Unlgt'd fence around afld. Heavy commercial tfc on Denver Intl Rwy 35 ILS course between 6500' and 12000' 2 NM east of Buckley. Heavy uncontrolled general aviation VFR tfc from Centennial 9 NM southwest. Tfc is concentrated from sfc to 10000' south, southeast and east of Buckley Class D Airspace. Ldg illusion exists on short final Rwy 14. Terrain rises short of thld then descends for 2000' creating illusion of acft being hi on final and excessive ground rush. Unlighted obstruction southwest of Rwy 32. Unlighted fence around afld. Extra caution should be used during ngt ldg. Avoid over flight of firing range located 890' left of centerline and 1 NM at apch end Rwy 32 when red bcn is on or red flag is displayed. **TFC PAT** Rwy 32 left tfc, Rwy 14 rgt tfc, overhead 7200(1538). Fighter acft expect clsd tfc and overhead pattern east of Buckley for noise avoidance. **MISC** First 1700' Rwy 14, first 1700' Rwy 32 concrete, middle 7600' Rwy 14-32 asphalt. Protocol, except priority refueling, not avbl. Four engine acft if able, shut down or idle outboard engine prior to taxi after ldg for Foreign Object Damage Control. Afld management does not issue or store COMSEC. **ARNG** Blackjack Ops DSN 250-1623/20 C720-250-1623/20.

COMMUNICATIONS: ATIS 119.675 259.3 **PTD** 372.2

® **DENVER APP/DEP CON** 128.45 251.075

TOWER 121.0 291.675 (Tue-Sat 1330-0530Z+, Sun-Mon 1500-2300Z+) **GND CON/CLNC DEL** 121.6 275.8

PMSV METRO 228.45

BLACKJACK XRAY 46.90 149.1 308.1

AIRSPACE: CLASS D svc Tue-Sat 1330-0530Z+, Sun-Mon 1500-2300Z+ other times Class E.

RADIO AIDS TO NAVIGATION: NOTAM FILE BKF.

BUCKLEY (L) TACAN Chan 33 BKF (109.6) N39°42.44' W104°45.13' at fld. 5580/12E. No NOTAM MP Mon 1500-1700Z+. Unmonitored 0530-1330Z+.

ILS 109.7 I-BKF Rwy 32 Class IE. No NOTAM MP: Tue 1500-1700Z+, GS Wed 1500-1700Z+.

BUENA VISTA

CENTRAL COLORADO RGNL (AEJ) 2 S UTC-7(-6DT) N38°48.85' W106°07.24'

7946 B S4 FUEL 100LL, JET A OX 1 NOTAM FILE DEN

RWY 15-33: H8300X75 (ASPH) S-30, D-30 MIRL

RWY 15: PAPI(P2L)—GA 3.0° TCH 41'. Rgt tfc.

RWY 33: PAPI(P2L)—GA 3.0° TCH 40'. 0.7% up.

AIRPORT REMARKS: Attended 1500-0000Z. For svc after hrs call 719-839-0422. Deer on and in vicinity of arpt. All taxiways marked with blue/yellow reflectors. -3' drainage ditch 170' E of Rwy 15-33 centerline, full length. ACTIVATE MIRL Rwy 15-33 and PAPI Rwy 15 and Rwy 33—CTAF.

WEATHER DATA SOURCES: AWOS-3 132.925 (719) 395-2599.


COMMUNICATIONS: CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 119.85

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLUE MESA (H) VORW/DME 114.9 HBU Chan 96 N38°27.13' W107°02.39' 049° 48.4 NM to fld. 8730/14E.

DENVER
H-3E, 5A, L-9E
IAP



BUFFS N40°20.08' W104°37.57' NOTAM FILE DEN.

NDB (LOM) 348 DC 346° 6.2 NM to Greeley-Weld Co.

CHEYENNE

BURLINGTON

KIT CARSON CO (ITR) 3 S UTC-7(-6DT) N39°14.55' W102°17.12'

4219 B S4 FUEL 100LL, JET A1+ OX 3, 4 NOTAM FILE ITR

RWY 15-33: H5201X75 (ASPH) S-12.5 MIRL 0.3% up NW

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 31'.

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 32'.

AIRPORT REMARKS: Attended dalgt hours. ACTIVATE MIRL Rwy 15-33 PAPI and REIL Rwy 15 and Rwy 33—CTAF.

WEATHER DATA SOURCES: ASOS 135.225 (719) 346-7036.

COMMUNICATIONS: CTAF/UNICOM 122.8

® DENVER CENTER APP/DEP CON 132.5

RADIO AIDS TO NAVIGATION: NOTAM FILE GLD.


GOODLAND (H) VORTACW 115.1 GLD Chan 98 N39°23.27' W101°41.54' 241° 29.0 NM to fld. 3650/12E. HIWAS.

NDB (MHW) 209 ITR N39°14.78' W102°17.03' at fld. NOTAM FILE ITR. NDB monitored 1330-2330Z daily.

ILS/DME 111.9 I-OBG Chan 56 Rwy 33. Class IT.

LOC only. LOC monitored 1330-2330Z daily.

WICHITA
H-5A, L-10G
IAP




BUTTS AAF (FORT CARSON) (FCS) (KFCS) A 3 S UTC-7(-6DT) N38°40.70' W104°45.39' DENVER
 5838 B TPA—See Remarks NOTAM FILE FCS Not insp. L-10F
 RWY 13-31: H4572X75 (ASPH) PCN 24 F/B/W/T MIRL DIAP
MILITARY SERVICE: FUEL J8. Opr Mon-Fri 1600-0630Z† except holidays. PPR for transient fuel. J8.
MILITARY REMARKS: Opr continuous except New Years Day, Thanksgiving and Christmas. RSTD PPR DSN
 691-3935/3936, C719-526-3936/3935. 500' ovm on NW end of rwy avbl for use by C-12 and smaller acft.
CAUTION Extensive artillery and small arms firing. During periods of strong SW surface winds, expect structure and terrain generated turbulence with wind shear near the apch end Rwy 13. **TFC PAT** TPA—Multi engine fixed wing NSTD tfc Rwy 13-31 E tfc 7300(1462). All others: rotary wing 6600(762), fixed wing 6800(962).
MISC Automated obs are avbl 24 hrs. Obs are augmented Mon-Fri 1200-0600Z† except holidays (or end of local flying). Wx technician avbl Mon-Fri 1200-0600Z† except holidays (or end of local flying). Remote weather briefing avbl from 25th OWS DSN 228-6598/6599, C520-228-6598/6599.
COMMUNICATIONS: ATIS 108.8 PTD/OPS 141.15
SPRINGS APP/DEP CON 124.0 257.875
TOWER 125.5 229.4 239.3 41.50 24 hrs except New Years Day. Thanksgiving and Christmas.
PMSV METRO 44.1 (Wx technician avbl Mon-Fri 1200-0600Z† except holidays (or end of local flying).
FLT FLW 38.55 138.15 (Butts Radio avbl 24 hours except New Years Day, Thanksgiving and Christmas)
AIRSPACE: CLASS D 24 hrs except New Years Day, Thanksgiving and Christmas. Other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE FCS.
 (T) VOR/DME 108.8 FCS Chan 25 N38°40.84' W104°45.42' at fld. 5829/12E. VOR unusable 050°-070°
 byd 10 NM blo 15,000'. VOR/DME unusable 230°-305° byd 10 NM blo 15,000'.
IRONHORSE NDB (MHW) 335 IHS N38°40.70' W104°45.20' at fld. Unmonitored Thanksgiving, Dec 25 and Jan 1. Unusable 210°-300° byd 20 NM blo 20,000'.

BYERS N39°45.95' W103°55.68' NOTAM FILE DEN. DENVER
 (H) VORW/DME 113.5 BVR Chan 82 269° 34.6 NM to Denver Intl. 5252/10E. H-5A, L-10F

CALHAN (5V4) 1 N UTC-7(-6DT) N39°02.91' W104°17.61' DENVER
 6450 S1 FUEL 100LL, JET A TPA—7250(800) NOTAM FILE DEN
 RWY 17-35: 4565X50 (TURF-GRVL) LIRL (NSTD)
 RWY 17: TRCV(TRIL). Road. RWY 35: Trees. Rgt tfc.
AIRPORT REMARKS: Attended irregularly. Parachute Jumping. Vehicles crossing rwy. Rwy 17-35 width varies from 50' to 100'. Rwy 17 first 1250' 45' wide artificial turf. Aerobatic practice area 1/2 mile west of Rwy 17-35 300' AGL to 10,000' MSL. South end rwy has side slope. -6' ditch 40' west of centerline. Ground raises on east side of rwy. Rwy 17-35 NSTD LIRL, north 2500' rwy lgtd. ACTIVATE NSTD LIRL Rwy 17-35 and VASI Rwy 17—CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.725

CANON CITY

FREMONT CO (1V6) 6 E UTC-7(-6DT) N38°25.68' W105°06.35' DENVER
 5439 B S4 FUEL 100LL, JET A OX 1, 2 TPA—6200(761) NOTAM FILE DEN H-3E, 5A, L-10F
 RWY 11-29: H5399X75 (ASPH) S-26, D-26 MIRL 1.1% up NW IAP
 RWY 11: REIL. PAPI(P2R)—GA 3.0°TCH 30'.
 RWY 29: REIL. PAPI(P2L)—GA 3.0°TCH 32'.
 RWY 17-35: 3261X35 (TURF-GRVL) 1.1% up N
 RWY 17: Road. RWY 35: Fence.
AIRPORT REMARKS: Attended 1500-0000Z†. Parachute Jumping. Glider towing invof arpt. Glider ops on and invof arpt. Rwy 17 has a 20' building 66' left of rwy centerline, 105' remaining from rwy end. 2' terrain W of Rwy 17-35 first 250' south of Rwy 11-29. Rwy 17-35 North 1491' grvl, south 1695' turf, Rwy 17-35 crosses asph twy and Rwy 11-29. Rwy 17-35 varies in width from 35' to 45'. Rwy 17-35 prairie dog holes throughout. All paved twys marked with blue and white reflectors. ACTIVATE MIRL Rwy 11-29, PAPI and REIL Rwy 11 and Rwy 29—CTAF.
WEATHER DATA SOURCES: AWOS-3 120.025.
COMMUNICATIONS: CTAF/UNICOM 122.8
DENVER APP/DEP CON 120.1 (1300-0500Z†) other times ctc
DENVER CENTER APP/DEP CON 128.375.
RADIO AIDS TO NAVIGATION: NOTAM FILE PUB.
PUEBLO (H) VORTACW 116.7 PUB Chan 114 N38°17.66' W104°25.77' 271° 32.9 NM to fld. 4760/13E.

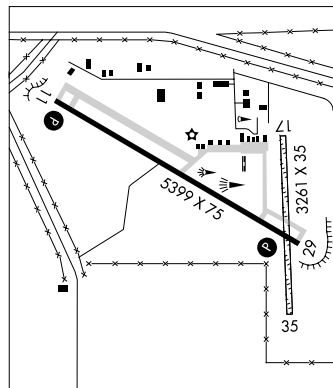

CASSE N39°27.12' W104°50.75' NOTAM FILE APA.
NDB (HW/LOM) 260 AP 348° 7.1 NM to Centennial.

DENVER
L-10F, A

CENTENNIAL (See DENVER)

CENTER

LEACH (1V8) 4 NE UTC-7(-6DT) N37°47.10' W106°02.82'

DENVER
H-3E, 5A, L-9E

7598 FUEL 100LL NOTAM FILE DEN

RWY 12-30: H7000X50 (ASPH) S-12 LIRL

RWY 12: Thld dsplcd 204'. Building. RWY 30: PAPI(P2L) Thld dsplcd 1314'. P-line.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z, Sat 1500-1900Z. Rwy 12-30 has +12' sprinklers along both sides of rwy 54' from centerline full length of rwy. Rwy 12 dsplcd thld markings missing. Rwy 12 has 135' nighttime dsplcd thld. ACTIVATE LIRL Rwy 12-30-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE ALS.

ALAMOSA (H) VORTACW 113.9 ALS Chan 86 N37°20.95' W105°48.93' 324° 28.4 NM to fld. 7535/13E.

CENTRAL COLORADO RGNL (See BUENA VISTA)

CITY OF COLORADO SPRINGS MUNI (See COLORADO SPRINGS)

CITY OF LAS ANIMAS-BENT COUNTY (See LAS ANIMAS)

COLLN N40°21.79' W104°58.28' NOTAM FILE FNL.

CHEYENNE

NDB (LOM) 400 FN 332° 5.6 NM to Fort Collins-Loveland Muni.

COLORADO PLAINS RGNL (See AKRON)

COLORADO SPRINGS

CITY OF COLORADO SPRINGS MUNI (COS) 6 SE UTC-7(-6DT) N38°48.35' W104°42.05'

DENVER
H-3E, 5A, L-10F

6187 B S4 FUEL 100LL, JET A LRA Class I, ARFF Index C NOTAM FILE COS

RWY 17L-35R: H13501X150 (CONC-GRVD) S-75, D-175, ST-175, DT-400, DDT-850 HIRL CL IAP, AD

RWY 17L: MALSR. TDZL. PAPI(P4L)-GA 3.0° TCH 54'. 0.6% down.

RWY 35R: TDZL. REIL. PAPI(P4R)-GA 3.0° TCH 72'. 0.6% up.

RWY 17R-35L: H11022X150 (ASPH-GRVD) S-75, D-175, ST-175, DT-340, DDT-750 HIRL

RWY 17R: REIL. PAPI(P4L)-GA 3.0° TCH 50'. 1.2% down.

RWY 35L: MALSR. PAPI(P4L)-GA 3.0° TCH 73'. 1.2% up.

RWY 12-30: H8269X150 (ASPH-GRVD) S-75, D-175, ST-175, DT-280, DDT-550 MIRL

RWY 12: REIL. PAPI(P4R)-GA 3.0° TCH 65'. 0.3% down.

RWY 30: REIL. PAPI(P4L)-GA 3.0° TCH 52'. Thld dsplcd 355'. Hill. 0.5% up.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 30	17R-35L	7450
RWY 35L	12-30	10250

AIRPORT REMARKS: Attended continuously. Waterfowl and migratory bird

activity on and in/ovf arpt. Turbo Jet training flights prohibited

0600-1300Z. B52 operations prohibited. Portions of Twys A, B, E, F, G, and M are blocked from view from the twr by obstructions.

Portions of Twy C and Rwy 17R-35L are blocked from view from

the twr when the infield mil operation sfc is occupied by a C17 or C5. Insufficient twy corner fillets pavement

for acft with wingspans over 117' at Twys A2, A3, A4, and Twy B3 and B4. Rwy 17L touchdown runway visual

range avbl. Lgtd windsock apch Rws 17L, 35R, 17R and 35L, 12 and 30. For REIL Rwy 12 and Rwy 30 and

Rwy 17R ctc twr. Customs avbl for all military/civilian acft. Ctc US Customs 719-574-6607.

WEATHER DATA SOURCES: ASOS (719) 637-9696. LLWAS.

COMMUNICATIONS: ATIS 125.0 (719) 596-7040 UNICOM 122.95


BLACK FOREST RCO 122.25 (DENVER RADIO)

Ⓡ SPRINGS APP CON 118.5 120.6

Ⓡ SPRINGS DEP CON 124.0

SPRINGS TOWER 119.9 (West) 133.15 (East) GND CON 121.7 CLNC DEL 134.45

AIRSPACE: CLASS C svc ctc APP CON



CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLACK FOREST (L) VORTACW 112.5 BRK Chan 72 N38°56.67' W104°38.01' 188° 8.9 NM to fld. 6934/13E.**PETEE NDB (MHW/LOM)** 407 CO N38°41.66' W104°42.98' 354° 6.7 NM to fld. NOTAM FILE COS.**ILS** 109.9 I-COS Rwy 35L. Class IE. LOM PETEE NDB. LOC unusable byd 25° left of centerline.

LOC unusable byd 8NM 10° left of centerline. TCH is higher than standard.

ILS/DME 109.1 I-LPI Chan 28 Rwy 17L.**ILS/DME** 109.1 I-AHI Chan 28 Rwy 35R. Class IE. LOC front course unusable byd 8 NM DME byd 15° left of course due to mil rstd areas.**MEADOW LAKE** (ØØV) 14 NE UTC-7(-6DT) N38°56.75' W104°34.19'

DENVER

H-5A, L-10F

6874 B S4 **FUEL** 100LL NOTAM FILE DEN**Rwy 15-33:** H6000X60 (ASPH) S-12.5 MIRL**Rwy 15:** PAPI(P2L)—GA 3.3° TCH 43'. Road.**Rwy 33:** PAPI(P2L)—GA 3.0° TCH 40'. Rgt ttc.**Rwy 08-26:** 2084X35 (ASPH-GRVL)**Rwy 08:** P-lines. Rgt ttc. **Rwy 26:** Road.**Rwy N-S:** 1800X15 (ASPH-TURF)**Rwy N:** Building. **Rwy S:** Road.**AIRPORT REMARKS:** Attended 1500-0000Z±. Wildlife on and in/ov arpt.

Rwy 15-33 CLOSED to acft over 18,500 pounds. Rwy 26 +4'

fence 50' right of centerline 40' west of thld. Rwy 08-26 primarily

used as a twy, emergency rwy use only. Vehicle use across Rwy

08-26, no hold lines on twy at Rwy 08 intersection. Rwy N-S

glider use only. Gliders operating SW of Rwy 15-33. Twy E

numerous potholes indef. Ultralights operating in vicinity of arpt.

PPR for acft over 12,500 pounds gross weight etc arpt mgr

719-683-2202. Rwy 15 is recommended for tkf, touch and go

landings when effective tail wind is less than 5 knots. Rwy 08-26

east 1184' gravel, west 900' asphalt. Rwy 26 has —4' terrain 5'


from rwy edge first 100' on both sides. Rwy N-S north 1530'

paved with asph. Rwy N end marked with solid yellow line at thld. Rwy 08-26 edge marked with yellow tires.

ACTIVATE MIRL Rwy 15-33, PAPI Rwy 15 and Rwy 33—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLACK FOREST (L) VORTACW 112.5 BRK Chan 72 N38°56.67' W104°38.01' 076° 3.0 NM to fld. 6930/13E.**COLORADO SPRINGS EAST** (See ELLICOTT)**CONES** N38°02.42' W108°15.52' NOTAM FILE DEN.

DENVER

(L) **VOR/DME** 110.2 ETL Chan 39 095° 17.4 NM to Telluride Rgnl. 8460/12E. Unmonitored.

L-9E

VOR/DME unusable 078°-090° byd 30 NM, 115°-125° byd 25 NM, 145°-175° byd 25 NM,

350°-360° byd 35 NM.

COPPER MOUNTAIN (CCU) N39°28.50' W106°09.15'/12075.

DENVER

AWOS-3 118.075 (970) 968-1715

L-9E

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLACK FOREST (L) VORTACW 112.5 BRK Chan 72 N38°56.67' W104°38.01' 188° 8.9 NM to fld. 6934/13E.**PETEE NDB (MHW/LOM)** 407 CO N38°41.66' W104°42.98' 354° 6.7 NM to fld. NOTAM FILE COS.**ILS** 109.9 I-COS Rwy 35L. Class IE. LOM PETEE NDB. LOC unusable byd 25° left of centerline.

LOC unusable byd 8NM 10° left of centerline. TCH is higher than standard.

ILS/DME 109.1 I-LPI Chan 28 Rwy 17L.**ILS/DME** 109.1 I-AHI Chan 28 Rwy 35R. Class IE. LOC front course unusable byd 8 NM DME byd 15° left of course due to mil rstd areas.**MEADOW LAKE** (ØØV) 14 NE UTC-7(-6DT) N38°56.75' W104°34.19'

DENVER

H-5A, L-10F

6874 B S4 **FUEL** 100LL NOTAM FILE DEN**Rwy 15-33:** H6000X60 (ASPH) S-12.5 MIRL**Rwy 15:** PAPI(P2L)—GA 3.3° TCH 43'. Road.**Rwy 33:** PAPI(P2L)—GA 3.0° TCH 40'. Rgt ttc.**Rwy 08-26:** 2084X35 (ASPH-GRVL)**Rwy 08:** P-lines. Rgt ttc. **Rwy 26:** Road.**Rwy N-S:** 1800X15 (ASPH-TURF)**Rwy N:** Building. **Rwy S:** Road.**AIRPORT REMARKS:** Attended 1500-0000Z±. Wildlife on and in/ov arpt.

Rwy 15-33 CLOSED to acft over 18,500 pounds. Rwy 26 +4'

fence 50' right of centerline 40' west of thld. Rwy 08-26 primarily

used as a twy, emergency rwy use only. Vehicle use across Rwy

08-26, no hold lines on twy at Rwy 08 intersection. Rwy N-S

glider use only. Gliders operating SW of Rwy 15-33. Twy E

numerous potholes indef. Ultralights operating in vicinity of arpt.

PPR for acft over 12,500 pounds gross weight etc arpt mgr

719-683-2202. Rwy 15 is recommended for tkf, touch and go

landings when effective tail wind is less than 5 knots. Rwy 08-26

east 1184' gravel, west 900' asphalt. Rwy 26 has —4' terrain 5'


from rwy edge first 100' on both sides. Rwy N-S north 1530'

paved with asph. Rwy N end marked with solid yellow line at thld. Rwy 08-26 edge marked with yellow tires.

ACTIVATE MIRL Rwy 15-33, PAPI Rwy 15 and Rwy 33—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLACK FOREST (L) VORTACW 112.5 BRK Chan 72 N38°56.67' W104°38.01' 076° 3.0 NM to fld. 6930/13E.**COLORADO SPRINGS EAST** (See ELLICOTT)**CONES** N38°02.42' W108°15.52' NOTAM FILE DEN.

DENVER

(L) **VOR/DME** 110.2 ETL Chan 39 095° 17.4 NM to Telluride Rgnl. 8460/12E. Unmonitored.

L-9E

VOR/DME unusable 078°-090° byd 30 NM, 115°-125° byd 25 NM, 145°-175° byd 25 NM,

350°-360° byd 35 NM.

COPPER MOUNTAIN (CCU) N39°28.50' W106°09.15'/12075.

DENVER

AWOS-3 118.075 (970) 968-1715

L-9E

CORTEZ MUNI (CEZ) 3 SW UTC-7(-6DT) N37°18.18' W108°37.68'

DENVER

5918 B S4 FUEL 100LL, JET A OX 1 Class III, ARFF Index A NOTAM FILE CEZ
RWY 03-21: H7205X100 (ASPH-PFC) S-40, D-56 MIRL IAP

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Trees.

RWY 21: REIL. VASI(V4L)—GA 3.0° TCH 50'. Road.

AIRPORT REMARKS: Attended dawn-dusk. PPR for unscheduled air carrier operations with more than 30 passenger seats ctc arpt manager 970-565-7458. Air carrier ops with more than 30 passenger seats restricted to twy connectors A1 and A2, back taxi on rwy to and from these points to apron. ACTIVATE MIRL Rwy 03-21 and REIL Rwy 21—CTAF.

WEATHER DATA SOURCES: ASOS 135.625 (970) 564-0193.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (DENVER RADIO)

DENVER CENTER APP/DEP CON 118.575

AIRSPACE: CLASS E svc 1300-0500Z†, except holidays other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE CEZ.

(L) VOR/DME 108.4 CEZ Chan 21 N37°23.39'

W108°33.71' 197° 6.1 NM to fld. 6223/14E.

VOR unusable:

210°-230° beyond 20 NM below 11,500'.


DME unusable:

060°-102° byd 22 NM blo 18,000'.

102°-131° byd 18 NM blo 18,000'.

131°-141° byd 18 NM blo 14,000'.

131°-141° by 32 NM blo 18000'.



141°-174° byd 18 NM blo 18000'

174°-192° byd 22 NM blo 18000'.

209°-025° byd 22 NM blo 18000'.

CRAIG-MOFFAT (CAG) 2 SE UTC-7(-6DT) N40°29.71' W107°31.30'

CHEYENNE

6193 B FUEL 100LL, JET A NOTAM FILE CAG

H-3E, L-9E, 11E

RWY 07-25: H5600X100 (ASPH) S-35, D-40 MIRL IAP

RWY 07: REIL. P-line.

RWY 25: REIL. PAPI(P4L)—GA 3.0° TCH 32'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z† Sat-Sun irregularly. Twys marked with blue reflectors. MIRL Rwy 07-25 preset low ints, to increase ints and ACTIVATE MIRL Rwy 07-25, REIL Rwy 07 and Rwy 25, and PAPI Rwy 25—CTAF.

WEATHER DATA SOURCES: ASOS 135.425 (970) 824-2373.


COMMUNICATIONS: CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 120.475

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

HAYDEN (H) VOR/DME 115.6 CHE Chan 103 N40°31.21'

W107°18.29' 248° 10.0 NM to fld. 7269/14E.



CRAWFORD (99V) 2 W UTC-7(-6DT) N38°42.25' W107°38.62'
DENVER

6470 S2 OX 4 TPA-7470(1000) NOTAM FILE DEN

L-9E**RWY 07-25:** H4900X20 (ASPH) LIRL (NSTD)**RWY 07:** VASI (NSTD). Trees.**RWY 25:** VASI (NSTD) Tank. Rgt tfc.**RWY E-W:** 2500X125 (TURF)**RWY E:** Rgt tfc.**RWY W:** Trees.**AIRPORT REMARKS:** Attended continuously. Rwy 07-25 west 1300' only 25' wide. Heavy glider ops at arpt. Land to the east tkr to the west winds permitting. 100LL fuel avbl for emergency use only. Wildlife on and invof arpt.

Unlimited vehicle use on arpt. Rwy West has +15' building 170' from thld 30' left, +10' road 100' from thld centerline. +45' tree 100' L of Rwy 07 extended centerline 414' from rwy end. -8' to -20' terrain off both sides of first 674' of Rwy 25 end. E-W rwy occasionally has 6 inch diameter irrigation pipes crossing rwy width in various places. Rwy 07 has 20' trees and -10' to 20' terrain 20' right of rwy first 150'. E-W rwy consists of +12 inch alfalfa vegetation during various times of the year. Arpt lgts opr dusk-0800Z. Rwy 07 1 box VASI left side for local operators only or PPR call 970-921-7700 or 970-921-3018. Rwy 07-25 LIRL on N side from Rwy 25 end W 3800'. Rwy 07 1300' from end E 300'. No thld lgts Rwy 07-25 3800' usable for ngt ops.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE MTJ.**MONTROSE (H) VORW/DME** 117.1 MTJ Chan 118 N38°30.39' W107°53.96' 033° 16.9 NM to fld. 5710/12E.

CREEDE
MINERAL CO MEM (C24) 2 E UTC-7(-6DT) N37°49.33' W106°55.79'**DENVER**

8680 NOTAM FILE DEN

H-3E, L-9E**RWY 07-25:** H6880X60 (ASPH) S-12.5, D-70, DT-110**RWY 07:** Thld dsplcd 188'.**RWY 25:** Road.**AIRPORT REMARKS:** Unattended. Elk and deer on and invof arpt. Glider and hang glider activity on and in vicinity of arpt. Mountains in all directions. Departure to NE avoid over flight of trailers and resident homes, climb to 200' above ground level on centerline extended prior to turn. Acft stay to right of valley on apch and/or departure route. 2' cable fence around apron.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.**BLUE MESA (H) VORW/DME** 114.9 HBU Chan 96 N38°27.13' W107°02.39' 158° 38.1 NM to fld. 8730/14E.

CUCHARA VALLEY AT LA VETA (See LA VETA)
DEL NORTE MUNI & CO (8V1) 3 N UTC-7(-6DT) N37°42.82' W106°21.27'**DENVER**


7949 NOTAM FILE DEN

L-9E**RWY 02-20:** 6015X60 (TURF-DIRT)**RWY 20:** Mountain.**RWY 08-26:** H3775X49 (ASPH) S-23 LIRL**RWY 08:** Mountain.**AIRPORT REMARKS:** Unattended. Wildlife on and invof arpt. CAUTION: Rwy 20 has 10' road 45' left of centerline, +4' fence 75' left of centerline. Rwy 02-20 has 3' dirt windrow along both sides of rwy entire length. Mountainous terrain surrounds arpt in all directions. Rwy 08-26 line of sight both ends obstructed due to rwy slope. Sheep and antelope on and in vicinity of arpt. Rwy 08-26 has +1' reflectors 35' from centerline full length of rwy both sides. Rwy 08-26 LIRL OTS indef. ACTIVATE LIRL Rwy 08-26-CTAF.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE ALS.**ALAMOSA (H) VORTACW** 113.9 ALS Chan 86 N37°20.95' W105°48.93' 298° 33.7 NM to fld. 7535/13E.

DELTA

BLAKE FLD (AJZ) 3 N UTC-7(-6DT) N38°47.19' W108°03.82'
 5193 B S4 **FUEL** 100LL TPA-6200(1007) NOTAM FILE DEN
RWY 03-21: H5598X75 (ASPH) S-30, D-30 MIRL
RWY 03: PAPI(P2L). Rgt tfc. **RWY 21:** PAPI(P2L).
AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†. 24 hr self serve
 fuel avbl. After hrs emerg phone Sheriff Department at
 970-874-2000/after hrs svc 970-209-0883. Antelope on and in
 the vicinity of arpt. Rwy 03-21 has 4' bushes 15-20' from rwy
 edge on both sides in various places. Rwy 03-21 slopes up to the
 NE. ACTIVATE MIRL Rwy 03-21 and PAPI Rwy 03 and Rwy
 21-CTAF.
WEATHER DATA SOURCES: AWOS-3 134.0 (970) 874-3251.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.
GRAND JUNCTION (H) VOR/DME 112.4 JNC Chan 71 N39°03.57'
 W108°47.56' 100° 37.9 NM to fld. 7100/15E.

DENVER
 H-3E, L-9E



WESTWINDS (D17) 4 W UTC-7(-6DT) N38°45.51' W108°08.91'
 5000 NOTAM FILE DEN
RWY 04-22: H4100X40 (ASPH)
RWY 04: Hill. **RWY 22:** Trees.
RWY 13-31: 2000X70 (GRVL-DIRT)
RWY 13: Hill. **RWY 31:** Road.
AIRPORT REMARKS: Attended 1500-0000Z†. +100' to 300' mountains located north, west and east of arpt at varying
 distances. Rwy 22 has 180' mountain 4900' from rwy end, approach slope 26:1. PAEW on and invof arpt. +2-4'
 crops on and invof arpt. Wildlife on and in vicinity of arpt. Glider tfc in all area surrounding arpt, heavy tfc May
 thru Sep.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE MTJ.
MONTROSE (H) VOR/DME 117.1 MTJ Chan 118 N38°30.39' W107°53.96' 310° 19.1 NM to fld. 5710/12E.

DENVER
 L-9E

DENVER**CENTENNIAL** (APA) 15 SE UTC-7(-6DT) N39°34.21' W104°50.96'**DENVER**

5885 B S4 FUEL 100LL, JET A OX 1, 2 TPA-6885(1000) NOTAM FILE APA

H-3E, 5A, L-10F, A

RWY 17L-35R: H10002X100 (ASPH-GRVD) S-56, D-75, ST-95 MIRL

IAP, AD

RWY 17L: PAPI(P4L)—GA 3.0° TCH 50'. 1.0% up.**RWY 35R:** MALSR. PAPI(P4L)—GA 3.0° TCH 53'. Building, Rgt tfc. 0.8% down.**RWY 17R-35L:** H7000X77 (ASPH-GRVD) S-30 MIRL 0.9% up S**RWY 17R:** REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.**RWY 35L:** REIL. PAPI(P4R)—GA 3.0° TCH 52'. Ground.**RWY 10-28:** H4800X75 (ASPH) S-12.5 MIRL 0.6% up W**RWY 28:** REIL. PAPI(P2L)—GA 4.0° TCH 28'. Ground.**AIRPORT REMARKS:** Attended continuously. Self serve fuel avbl.

Waterfowl on and in vicinity of arpt. Numerous cranes invof arpt.

+109' twr located 1800' east/northeast of Rwy 17L thld.

Numerous flood lgts located ½ mile north of thld Rwy 17L

SS-0700Z†. Rwy 10 temporarily CLOSED for arrivals, avbl upon

req ctc twr. Noise abatement procedures in effect, ctc noise office

303-790-0598. Rwy 35R crosswind/base leg south of Lincoln

Ave., Rwy 17L crosswind/base leg south of Arapahoe Rd. Rwy

17R-35L clsd tfc remain south of Arapahoe Rd and east of

Interstate 25. Rwy 10-28 avoid noise sensitive areas 1 mile east

and south of rwy. Preferential rwy program in effect btn

0500-1300Z†, wind and weather permitting. FAR Part 36 Stage II acft ltd to 70,000 lbs maximum certified


gross tkf weight. All acft blo 70,000 lbs maximum gross tkf weight and Stage III acft up to 75,000 lbs maximum

gross tkf weight may be operated, one-time exceptions may be authorized by Executive Director on a

case-by-case basis. Helicopter ops please ctc preferred FBO for ldg zone locations. Helicopter ops on front

ramp not advised. U.S. Customs user fee arpt. Call U.S. Customs 303-768-0309. 24 hr user fee customs avbl.

Ctc arpt for fee information.

WEATHER DATA SOURCES: ASOS (303) 706-9098.**COMMUNICATIONS:** ATIS 120.3 (303) 799-6722 UNICOM 122.95**DENVER RCO** 122.35 122.2 122.0 (DENVER RADIO)**DENVER APP/DEP CON** 132.75**TOWER** 118.9 **GND CON** 121.8 **CLNC DEL** 128.6**AIRSPACE:** CLASS D svc continuous.**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.**FALCON (H) VORTACW** 116.3 FQF Chan 110 N39°41.41' W104°37.26' 225° 12.8 NM to fld. 5780/11E.**CASSE NDB (HW/LOM)** 260 AP N39°27.12' W104°50.75' 348° 7.1 NM to fld. NOTAM FILE APA.**ILS/DME** 111.3 I-APA Chan 50 Rwy 35R. LOM CASSE NDB. LOC unusable byd 13 NM blo 9,000'.**COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not avbl at twr. Advise GND CON when ready for dep. GND CON will advise when to monitor the twr frequency.

DENVER INTL (DEN) 16 NE UTC-7(-6DT) N39°51.70' W104°40.39'

DENVER

5431 B S4 FUEL 100, 100LL, JET A, MOGAS OX 1, 3 Class I, ARFF Index E

H-3E, 5A, L-10F, A

NOTAM FILE DEN

IAP, AD

RWY 16R-34L: H16000X200 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 16R: MALSR. TDZL. PAPI(P4R)—GA 3.0° TCH 71'.

RWY 34L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 70'.

RWY 07-25: H12000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 07: MALSR. TDZL. PAPI(P4R)—GA 3.0° TCH 55'.

RWY 25: MALSR. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 08-26: H12000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 08: MALSR. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 26: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 55'. 0.5% up.

RWY 16L-34R: H12000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 16L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 34R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 17R-35L: H12000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 17R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 55'. 0.5% up.

RWY 35L: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 55'.

RWY 17L-35R: H12000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-380, DDT-850 HIRL CL

RWY 17L: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. 0.4% up.

RWY 35R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 55'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 25:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 08:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 26:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 16L:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 34R:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 16R:	TORA-16000	TODA-16000	ASDA-16000	LDA-16000
RWY 34L:	TORA-16000	TODA-16000	ASDA-16000	LDA-16000
RWY 17L:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 35R:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 17R:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000
RWY 35L:	TORA-12000	TODA-12000	ASDA-12000	LDA-12000

AIRPORT REMARKS: Attended continuously. Waterfowl and migratory bird activity invof arpt year round. ASDE-X Surveillance System in use: Pilots should opr transponders with Mode C on all twys and rwys. RVR Rwy 07 touchdown, rollout, RVR Rwy 25 touchdown, rollout, RVR Rwy 08 touchdown, rollout, RVR Rwy 26 touchdown, rollout, RVR Rwy 16L touchdown, midfield, rollout, RVR Rwy 34R touchdown, midfield, rollout, RVR Rwy 17L touchdown, midfield, rollout, RVR Rwy 35R touchdown, midfield, rollout, RVR Rwy 17R touchdown, midfield, rollout, RVR Rwy 35L touchdown, midfield, rollout, RVR Rwy 16R touchdown, midfield, rollout, RVR Rwy 34L touchdown, midfield, rollout, Commuter taxilane around East end of concourse 'C' between Twys 'CS' and 'CN'. Entire area not visible fm ramp twr, taxi with care. Daylight hrs only. Overhead passenger bridge on South side of concourse 'A' provides 42 ft tall and 118 ft wingspan clearance when on twy centerline. Insufficient twy corner fillet pavement in the SE corner of the Twy M/M2 intersection for acft with wingspan over 107 ft. Fixed or movable object line between ramp and S Twys BN-BS removed. Informal rwy use program is in effect 24 hours a day. For additional noise abatement information contact airport management at 303-342-2200. Ldg fee. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS (303)342-0838. LLWAS. TDWR.

COMMUNICATIONS: D-ATIS ARR 125.6 (303) 342-0819 D-ATIS DEP 134.025 (303) 342-0820 UNICOM 122.95

RCO 123.65 (DENVER RADIO)


Ⓡ APP CON 119.3 (North) 120.35 (South) FINAL CON 120.8

TOWER 132.35 (Rwy 07-25) 135.3 (Rwy 16L-34R, Rwy 16R-34L) 133.3 (Rwy 17R-35L) 124.3 (Rwy 08-26 and 17L-35R)

GND CON 127.5 (Rwy 07-25, Rwy 16L-34R and Rwy 16R-34L) 121.85 (Rwys 08-26, 17L-35R and 17R-35L) CLNC DEL 118.75

Ⓡ DEP CON 128.25 (East) 127.05 (North) 126.1 (West) 128.45 (South)

AIRSPACE: CLASS B See VFR Terminal Area Chart.



CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

(H) VORW/DME 117.9	DEN	Chan 126	N39°48.75' W104°39.65'	338° 3.0 NM to fld. 5440/11E.
ILS/DME 111.1	I-LTT	Chan 48	Rwy 16L.	
ILS/DME 111.1	I-OUF	Chan 48	Rwy 34R.	Class IIIE.
ILS/DME 111.9	I-DQQ	Chan 056	Rwy 16R.	
ILS/DME 111.9	I-DXU	Chan 056	Rwy 34L.	Class IIIE.
ILS/DME 108.9	I-FUI	Chan 26	Rwy 08.	
ILS/DME 108.9	I-JOY	Chan 26	Rwy 26.	Class IE.
ILS/DME 108.5	I-ACX	Chan 22	Rwy 17R.	Class IE.
ILS/DME 108.5	I-AQD	Chan 22	Rwy 35L.	
ILS/DME 110.15	I-BXP	Chan 38(Y)	Rwy 17L.	Class IE.
ILS/DME 110.15	I-DPP	Chan 38(Y)	Rwy 35R.	
ILS/DME 111.55	I-DZG	Chan 52(Y)	Rwy 07.	
ILS/DME 111.55	I-ERP	Chan 52(Y)	Rwy 25.	Class IE.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

FRONT RANGE (FTG) 19 E UTC-7(-6DT) N39°47.12' W104°32.59'

5512 B S4 FUEL 100LL, JET A OX 1, 2 TPA-6500(988) NOTAM FILE FTG

DENVER

H-5A, L-10F, A

IAP, AD

RWY 08-26: H8000X100 (ASPH) S-28, D-40 HIRL

RWY 08: REIL. PAPI(P2L)—GA 3.0° TCH 50'. Rgt tfc. 0.5% up.

RWY 26: MALSR. PAPI(P2L)—GA 3.0° TCH 50'. 0.4% down.

RWY 17-35: H8000X100 (ASPH) S-34, D-46 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 50'. 0.5% up.

RWY 35: MALSR. PAPI(P4L)—GA 3.0° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0400Z†. For svc after hrs call 303-208-8536. 24 hr credit card 100LL self fueling station.

Noise sensitive areas SE, S and SW of arpt. Avoid flights blo 1,000 ft over populated areas. ACTIVATE MIRL Rwy 17-35, HIRL Rwy 08-26, PAPI Rwy 08, Rwy 26, Rwy 17 and Rwy 35 and REIL Rwy 08 and Rwy 17, MALSR Rwy 26 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (303) 261-9104.

COMMUNICATIONS: CTAF 120.2 ATIS 119.025 UNICOM 122.95.

DENVER APP/DEP CON 128.25 CLNC DEL 121.75 (0400-1400Z†)

TOWER 120.2 GND CON 124.7 (1400-0400Z†) CLNC DEL 124.7

AIRSPACE: CLASS D svc 1400-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.


DENVER (H) VORW/DME 117.9	DEN	Chan 126	N39°48.75'
W104°39.65'	096° 5.7 NM to fld. 5440/11E.		

SKIPI NDB (LOM) 321 FT N39°47.51' W104°26.05' 255° 5.1 NM to fld.

ILS/DME 109.3 I-FTG Chan 30 Rwy 26. LOM SKIPI NDB. ILS unmonitored.

ILS/DME 110.9 I-VWT Chan 46 Rwy 35.

ILS/DME 110.9 I-FZR Chan 46 Rwy 17.



CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

(H) VORW/DME 117.9	DEN	Chan 126	N39°48.75' W104°39.65'	338° 3.0 NM to fld. 5440/11E.
ILS/DME 111.1	I-LTT	Chan 48	Rwy 16L.	
ILS/DME 111.1	I-OUF	Chan 48	Rwy 34R.	Class IIIE.
ILS/DME 111.9	I-DQQ	Chan 056	Rwy 16R.	
ILS/DME 111.9	I-DXU	Chan 056	Rwy 34L.	Class IIIE.
ILS/DME 108.9	I-FUI	Chan 26	Rwy 08.	
ILS/DME 108.9	I-JOY	Chan 26	Rwy 26.	Class IE.
ILS/DME 108.5	I-ACX	Chan 22	Rwy 17R.	Class IE.
ILS/DME 108.5	I-AQD	Chan 22	Rwy 35L.	
ILS/DME 110.15	I-BXP	Chan 38(Y)	Rwy 17L.	Class IE.
ILS/DME 110.15	I-DPP	Chan 38(Y)	Rwy 35R.	
ILS/DME 111.55	I-DZG	Chan 52(Y)	Rwy 07.	
ILS/DME 111.55	I-ERP	Chan 52(Y)	Rwy 25.	Class IE.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

FRONT RANGE (FTG) 19 E UTC-7(-6DT) N39°47.12' W104°32.59'

5512 B S4 FUEL 100LL, JET A OX 1, 2 TPA-6500(988) NOTAM FILE FTG

DENVER

H-5A, L-10F, A

IAP, AD

RWY 08-26: H8000X100 (ASPH) S-28, D-40 HIRL

RWY 08: REIL. PAPI(P2L)—GA 3.0° TCH 50'. Rgt tfc. 0.5% up.

RWY 26: MALSR. PAPI(P2L)—GA 3.0° TCH 50'. 0.4% down.

RWY 17-35: H8000X100 (ASPH) S-34, D-46 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 50'. 0.5% up.

RWY 35: MALSR. PAPI(P4L)—GA 3.0° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0400Z†. For svc after hrs call 303-208-8536. 24 hr credit card 100LL self fueling station.

Noise sensitive areas SE, S and SW of arpt. Avoid flights blo 1,000 ft over populated areas. ACTIVATE MIRL Rwy 17-35, HIRL Rwy 08-26, PAPI Rwy 08, Rwy 26, Rwy 17 and Rwy 35 and REIL Rwy 08 and Rwy 17, MALSR Rwy 26 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (303) 261-9104.

COMMUNICATIONS: CTAF 120.2 ATIS 119.025 UNICOM 122.95.

DENVER APP/DEP CON 128.25 CLNC DEL 121.75 (0400-1400Z†)

TOWER 120.2 GND CON 124.7 (1400-0400Z†) CLNC DEL 124.7

AIRSPACE: CLASS D svc 1400-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.


DENVER (H) VORW/DME 117.9	DEN	Chan 126	N39°48.75'
W104°39.65'	096° 5.7 NM to fld. 5440/11E.		

SKIPI NDB (LOM) 321 FT N39°47.51' W104°26.05' 255° 5.1 NM to fld.

ILS/DME 109.3 I-FTG Chan 30 Rwy 26. LOM SKIPI NDB. ILS unmonitored.

ILS/DME 110.9 I-VWT Chan 46 Rwy 35.

ILS/DME 110.9 I-FZR Chan 46 Rwy 17.



ROCKY MOUNTAIN METROPOLITAN (BJC) 9 NW UTC-7(-6DT) N39°54.53' W105°07.03'

DENVER

5673 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 Class II, ARFF Index A
NOTAM FILE BJC

H-3E, 5A, L-10F, A
IAP, AD

RWY 11L-29R: H9000X100 (ASPH-GRVD) S-55, D-75, ST-95 MIRL

RWY 11L: REIL. VASI(V4L)—GA 3.0° TCH 42'. 0.9% down.

RWY 29R: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. Rgt tfc. 1.2% up.

RWY 11R-29L: H7002X75 (ASPH) S-12.5 MIRL 1.1% up NW

RWY 11R: REIL. PAPI(P2L)—GA 3.0° TCH 41'. Rgt tfc.

RWY 29L: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 02-20: H3600X75 (ASPH) S-40, D-45, DT-65 MIRL
0.4% up S

RWY 02: PAPI(P2L)—GA 3.0° TCH 30'.

RWY 20: PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Birds and other wildlife on and in/ovf rwy. Watch for wildlife on or near rwy. Construction equipment/cranes on and in/ovf arpt at various times. Helicopters arr/dep from rwy. Pilots are requested to avoid flight over Stanley Lake blo 8000' MSL. Jeffco VOR 150° 3.0 DME due to nesting eagles. Voluntary noise abatement procedure in effect ctc arpt manager 303-271-4850. U.S. Customs user fee arpt. Right traffic not indicated on segmented circle for Rwy 11R, 29R and 20. Twy C, Twy D, Twy G, Twy H and Twy J marked with reflectors. Approved runup areas at A1, A17. North terminal ramp slope exceeds FAA recommended stds. Unlgt'd windcone on apch Rwy 11L. Air carrier opr use lgtd windcone on Rwy 11R for apch. When twr closed ACTIVATE MIRL Rwy 02-20, Rwy 11R-29L and Rwy 11L-29R, MALSR Rwy 29R, PAPI Rwy 11R, Rwy 29L, Rwy 02, Rwy 20 and Rwy 29R, VASI Rwy 11L, REIL Rwy 11L, Rwy 11R and Rwy 29L—CTAF. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: AWOS-3 (720) 887-8067.

COMMUNICATIONS: CTAF 118.6 ATIS 126.25 (303) 466-8744

DENVER APP/DEP CON 126.1

METRO TOWER 118.6 (1300-0500Z±) GND CON 121.7

AIRSPACE: CLASS D svc 1300-0500Z± other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE BJC.

JEFFCO (H) VORW/DME 115.4 BJC Chan 101 N39°54.78' W105°08.34'

093° 1 NM to fld. 5728/11E.

ILS 111.7 I-BJC Rwy 29R. Unmonitored when twr closed.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

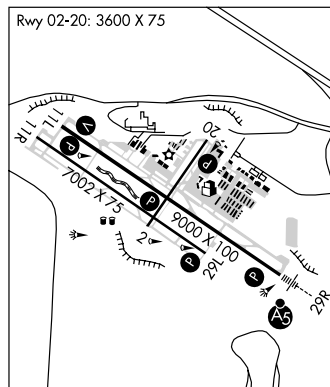

DENVER N39°34.21' W104°50.96'

DENVER

RCO 122.35 122.2 122.0 (DENVER RADIO)

H-3E, 5A, L-10F, A

DOVE CREEK (8V6) 1 E UTC-7(-6DT) N37°45.89' W108°53.34'

DENVER

6975 TPA-7700(725) NOTAM FILE DEN

RWY 01-19: 4200X50 (DIRT)

RWY 01: Fence.

RWY 19: Road.

AIRPORT REMARKS: Unattended. Arpt CLOSED when snow covered. Rwy 01-19 has -3' ditch along both sides rwy.

Rwy 01-19 soft when wet. Unlimited vehicle use on arpt. Rwy 19 +12' ground 258' right of centerline parallel to extended centerline first 500'.

COMMUNICATIONS: CTAF 122.9

DOVE CREEK N37°48.53' W108°55.88' NOTAM FILE DEN.

DENVER

(H) VORTACW 114.6 DVC Chan 93 277° 21.2 NM to Monticello, UT. 6990/14E.

H-3D, L-9D

RCO 122.5 (DENVER RADIO)

DURANGO**ANIMAS AIR PARK** (ØØC) 4 S UTC-7(-6DT) N37°12.19' W107°52.15'


6684 S4 FUEL 100LL, JET A OX 1 TPA-7484(800) NOTAM FILE DEN

DENVER
H-4J, L-8I, 9E**RWY 01-19:** H5010X50 (ASPH) MIRL (NSTD)**RWY 01:** Rgt tfc. **RWY 19:** Tree.

AIRPORT REMARKS: Attended dalgt hours. Rwy 01-19 minus 1' to minus 2' drainage ditches 35' from centerline along west side and 30' from centerline along east side. Rwy 01-19 several rwy and thld lights are broken or missing lights are shielded by weeds. Rwy 01, 120' from and parallel thld, 200' dropoff. +10' road 105' W of rwy centerline full length. +4' fence 87' W of Rwy 01-19 parallel to centerline full length. Rwy 01 has +8' terrain with +8' bushes 75' left of centerline for first 250'. +8' fence and 15' trees 1817' from Rwy 01 end 105' left of centerline. Rwy 01-19 thld lgts N end located 162' from pavement end. ACTIVATE MIRL using 122.9, click 3 times on/off for Rwy 01-19.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE DRO.

DURANGO (L) VORW/DME 108.2 DRO Chan 19 N37°09.20' W107°44.98' 284° 6.5 NM to fld. 6660/14E.

**DURANGO-LA PLATA CO** (DRO) 10 SE UTC-7(-6DT) N37°09.09' W107°45.23'

6685 B S4 FUEL 100LL, JET A OX 4 Class I, ARFF Index B NOTAM FILE DRO


DENVER
H-4J, L-8I, 9E
IAP**RWY 03-21:** H9201X150 (ASPH-GRVD) S-95, D-150, ST-175, DT-210 HIRL**RWY 03:** MALSR. VASI(V4L)—GA 3.0° TCH 57'. 0.8% up.**RWY 21:** REIL. VASI(V4L)—GA 3.0° TCH 51'. 0.7% down.

AIRPORT REMARKS: Attended Nov-Mar Sun-Fri 1300-0500Z†, Sat 1300-0400Z†, Apr-Oct 1300-0500Z†. For after hrs svc call 970-259-7400 or 970-749-6186. PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 970-247-8143. No snow removal provided at ngt between last scheduled air carrier flight until the first air carrier flight the following morning. ACTIVATE HIRL Rwy 03-21, VASI Rwy 03 and Rwy 21, REIL Rwy 21 and MALSR Rwy 03 —CTAF.

WEATHER DATA SOURCES: ASOS 120.625 (970) 259-3579.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO** 122.35 (DENVER RADIO)**DENVER CENTER APP/DEP CON** 118.575**AIRSPACE:** CLASS E svc 1300-0300Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE DRO.**(L) VORW/DME** 108.2 DRO Chan 19 N37°09.20'

W107°44.98' at fld. 6660/14E.

DME unusable 070°-090° byd 30NM blo 12,500', 140°-185° byd 25 NM blo 13,000'.

ILS/DME 109.1 I-DRO Chan 19 Rwy 03.

EADS MUNI (9V7) 1 W UTC-7(-6DT) N38°28.52' W102°48.64'

WICHITA

4245 NOTAM FILE DEN

L-106

RWY 17-35: H3860X60 (ASPH) MIRL

RWY 17: Road. **RWY 35:** Road.


AIRPORT REMARKS: Unattended. Rwy 17 has +17' railroad 530' from thld centerline, -4' ditch 375' from thld centerline. Apron area is milled asph. Twy unmarked.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

LAMAR (H) VORTAC 116.9 LAA Chan 116 N38°11.83'

W102°41.25' 329° 17.7 NM to fld. 3944/12E.



EAGLE CO RGNL (EGE) 4 W UTC-7(-6DT) N39°38.57' W106°54.96'

DENVER

6548 B S4 FUEL 100LL, JET A1, A1+ OX 1, 3 Class I, ARFF Index C NOTAM FILE EGE

H-3E, L-9E

RWY 07-25: H9000X150 (ASPH-GRVD) S-75, D-140, ST-175, DT-225 HIRL

IAP, AD

RWY 07: REIL. Tree. Rgt tfc. 0.9% up.


RWY 25: MALSR. PAPI(P4R)—GA 3.0° TCH 55'. Thld dsplcd 1000' 1.1% down.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-9000 TODA-8000 ASDA-9000 LDA-9000

RWY 25: TORA-9000 TODA-9000 ASDA-9000 LDA-9000

AIRPORT REMARKS: Attended 1300-0400Z†. CLOSED to unscheduled air carrier operations with more than 30 passenger seats except PPR call arpt manager 970-524-9490. High unmarked terrain all quadrants. Critical acft are Category D IV, B757-200 equivalent and lower. Ngt ops discouraged to pilots unfamiliar with arpt. Recommend all acft departing Rwy 25 initiate a left turn as soon as altitude and safety permit to avoid high terrain. Extensive military helicopter training operations surface to 1000' AGL within 25 NM radius Eagle Co Arpt 1330-0500Z†. No snow removal between midnight and 1300Z†. Air carrier acft should not leave or enter Twy A east of Twy C-2. Rwy 25 PAPI only visible to 6° left of centerline due to terrain. After 0200Z† ACTIVATE HIRL Rwy 07-25, REIL Rwy 07, and MALSR Rwy 25—CTAF. PAPI Rwy 25 operates 24 hours. U.S. Customs user fee arpt: regular office hrs Thu-Mon 1600-0000Z†. After hrs service avbl. Office 970-524-0490. After hrs 303-472-1125. Three hr advance notice required.



WEATHER DATA SOURCES: AWOS-3 135.575 (970) 524-7386.

COMMUNICATIONS: CTAF 119.8 ATIS 135.575

RCO 122.2 (DENVER RADIO)

DENVER CENTER APP/DEP CON 128.65 CLNC DEL 124.75

TOWER 119.8 (1400-0200Z†) **GND CON 121.8 CLNC DEL 121.8**

AIRSPACE: CLASS D svc 1400-0200Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

SNOW (L) VOR/DME 109.2 SXW Chan 29 N39°37.77' W106°59.47' 066° 3.5 NM to fld. 8060/12E.

Unmonitored 0600-1300Z†.

EASTON (VALLEY VIEW) (See GREELEY)

ELLICOTT**COLORADO SPRINGS EAST** (A50) 3 NW UTC-7(-6DT) N38°52.47' W104°24.60'**DENVER**
L-10F


6145 S2 FUEL 100LL NOTAM FILE DEN

RWY 17R-35L: H4500X42 (ASPH) RWY LGTS (NSTD)**RWY 17R:** Tree. **RWY 35L:** VASI (NSTD) Rgt tfc. Road.**RWY 17L-35R:** 4500X40 (GRVL)**RWY 35R:** Road.**RWY 08-26:** 3440X60 (GRVL)**RWY 08:** Fence. Rgt tfc.**RWY 26:** Road.

AIRPORT REMARKS: Attended 1500-0000Z+. **Rwy 17R-35L** lgts on E side of rwy only. **Rwy 17R-35L** CLOSED to helicopters. **Rwy 08** +35' p-line 1500' from thld 0° both sides of centerline. **Rwy 17R-35L** has 6' asphalt shoulder both sides full length. **Rwy 17R** has +4' fence 375' from rwy end on both sides. -2' terrain 280' from rwy end on both sides. Recommend acft land past **Rwy 35L** connector twy. **Rwy 17R-35L** marked on both sides with white reflectors. For NSTD rwy lgts call 719-243-2083. **Rwy 35L** NSTD one-box VASI located right side of thld OTS indef. Fee for commercial acft ctc arpt manager 719-243-2083.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.

BLACK FOREST (L) VORTACW 112.5 BRK Chan 72 N38°56.67' W104°38.01' 099° 11.3 NM to fld. 6930/13E.

**ELLICOTT-USAF ACADEMY BULLSEYE AUX AIRSTRIP** N38°45'28" W104°18'28" (C090)**DENVER**
L-10F

ASOS 118.325 (719) 683-3346.

EMPIRE N39°47.67' W105°45.78'/12493 (0C0)**DENVER**
L-9E

AWOS-3 134.325

ERIE MUNI (EIK) 3 S UTC-7(-6DT) N40°00.61' W105°02.88'**CHEYENNE**
L-10F, A
IAP

5130 B S4 FUEL 100LL, JET A, MOGAS OX 1, 2 NOTAM FILE DEN

RWY 15-33: H4700X60 (CONC) S-12.5 MIRL 0.9% up S**RWY 15:** REIL. PAPI(P2L). Tree. Rgt tfc.**RWY 33:** PAPI(P2L). Road.**RWY 09-27:** H2250X50 (ASPH) S-12.5 2.1% up E**RWY 09:** P-line.


AIRPORT REMARKS: Attended Mon-Sat 1500-0000Z+, Sun 1500-2100Z+. After hrs emerg ctc 303-870-5659. Self svc credit card fuel avbl 24 hrs. **Rwy 09-27** CLOSED indef. **Rwy 09-27** W of **Rwy 15-33** unavbl for taxiing. **Rwy 15** has -2' to -6' ditches within 700' of rwy end at various locations. **Rwy 33** has -6' to -12' ditch 60' left of centerline parallel to first 750' of rwy. **Rwy 15-33** -2' terrain 60' to 70' E of rwy centerline, full length. **Rwy 09** connector twy not recommended for use by acft, surface very rough and uneven. Twy marked with blue reflectors. ACTIVATE MIRL **Rwy 15-33** PAPI **Rwy 15** and **Rwy 33** and REIL **Rwy 15**-CTAF.

WEATHER DATA SOURCES: AWOS-3 133.825 (303) 604-4339.**COMMUNICATIONS:** CTAF/UNICOM 123.0

® DENVER APP/DEP CON 126.1

RADIO AIDS TO NAVIGATION: NOTAM FILE BJC.

JEFFCO (H) VORW/DME 115.4 BJC Chan 101 N39°54.78' W105°08.34' 025° 7.2 NM to fld. 5728/11E.

**FALCON** N39°41.41' W104°37.26' NOTAM FILE DEN.**DENVER**
H-3E, 5A, L-10G, A

(H) VORTACW 116.3 FQF Chan 110 225° 12.8 NM to Centennial. 5780/11E. VORTAC unusable 068°-088° byd 10 NM blo 11,500'.

FORT CARSON (See BUTTS AAF)

FORT COLLINS/LOVELAND

FORT COLLINS-LOVELAND MUNI

(FNL) 9 SE UTC-7(-6DT) N40°27.11' W105°00.68'
 5016 B S4 FUEL 100LL, JET A OX 1, 2 Class I, ARFF Index B NOTAM FILE FNL
 RWY 15-33: H8500X100 (ASPH-GRVD) S-50, D-65, ST-82, DT-130 HIRL

CHEYENNE
 H-3E, 5A, L-10F
 IAP

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 50'. 0.5% up.
 RWY 33: MALSR. PAPI(P4L)—GA 3.0° TCH 51'. 0.5% down
 RWY 06-24: H2273X40 (ASPH)

AIRPORT REMARKS: Attended 1300-0500Z+. Parachute Jumping. 24 hr PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 970-962-2852. HIRL Rwy 15-33 preset low ints, to increase ints and ACTIVATE parallel twy lights, REIL Rwy 15 MALSR Rwy 33 and PAPI Rwy 33—CTAF. Rwy 15 PAPI on continuous.

WEATHER DATA SOURCES: AWOS-3 135.075 (970) 669-9187.

COMMUNICATIONS: CTAF/UNICOM 122.7

FT. COLLINS-LOVELAND RCO 122.4 (DENVER RADIO)

GILL RCO 122.65 (DENVER RADIO)

DENVER APP/DEP CON 134.85 CLNC DEL 120.25


RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

GILL (H) VORTACW 114.2 GLL Chan 89 N40°30.23'

W104°33.18' 249° 21.2 NM to fld. 4910/13E.

COLLN NDB (LOM) 400 FN N40°21.79' W104°58.28' 332° 5.6 NM to fld.

ILS 109.5 I-FNL Rwy 33. Class IT. LOM COLLN NDB (ILS unmonitored when arpt unattended).



FORT MORGAN MUNI

(FMM) 5 N UTC-7(-6DT) N40°20.04' W103°48.24'
 4569 B S2 FUEL 100LL, JET A1 TPA-5600(1031) NOTAM FILE DEN
 RWY 14-32: H5219X60 (CONC) S-30 MIRL

CHEYENNE
 H-5A, L-10F

RWY 14: PAPI(P2L)—GA 3.0° TCH 23'. Ground. RWY 32: REIL. Road.

RWY 17-35: 3800X30 (DIRT-TURF)

RWY 17: Ground.

RWY 08-26: 2467X100 (TURF)

RWY 08: Road.

RWY 26: Road.

AIRPORT REMARKS: Attended Mon-Sat 1500-0000Z+. For fuel after hours phone 970-768-0553 or 970-467-8304.

Rwy 8 has 20' haystacks 30' left of rwy, 150' from rwy thld. Rwy 08-26 used for severe crosswind conditions only. Rwy 08-26 rise at intersection of Rwy 14-32. Rwy 32 150' aligned twy—for taxiing only. ACTIVATE MIRL Rwy 14-32—CTAF. NOTE: See Special Notice—Aerobatic Operations in Colorado.

WEATHER DATA SOURCES: AWOS-3 132.95 (970) 867-4823.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE AKO.

AKRON (H) VORW/DME 114.4 AKO Chan 91 N40°09.33' W103°10.79' 278° 30.6 NM to fld. 4620/13E.

FREMONT CO (See CANON CITY)

FRONT RANGE (See DENVER)

GARFIELD CO RGNL (See RIFLE)

GEBAUER (See AKRON)

GILL N40°30.23' W104°33.18' NOTAM FILE DEN.

CHEYENNE
 H-5A, L-10F

(H) VORTACW 114.2 GLL Chan 89 249° 21.2 NM to Fort Collins-Loveland Muni. 4910/13E.

RCO 122.65 (DENVER RADIO)

GLENWOOD SPRINGS MUNI (GWS) 3 S UTC-7(-6DT) N39°30.36' W107°18.55'**DENVER**

5916 S4 FUEL 100LL NOTAM FILE DEN

L-9E**RWY 14-32:** H3305X50 (ASPH) S-15**RWY 14:** Trees.**RWY 32:** PAPI (P2L)—4.0° TCH 30'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z+. Fuel avbl 24 hrs via self-serve credit card pump. Arpt Manager on call at 970-618-0778 or 970-928-9876. Gusty winds frequently in vicinity of arpt. Animals on and in vicinity of arpt. Numerous +25'-50' buildings, equipment and tie downs approximately 200' from centerline both sides of rwy full length. Paragliding ops vicinity 1 to 2 miles northwest of arpt up to 18,000' MSL. Rwy 14-32 has +3" to 5" lip off edge in various locations. **NOISE ABATEMENT:** When wind and weather permit use Rwy 32 for arrival and Rwy 14 for departure. No touch and go lds.

COMMUNICATIONS: CTAF/UNICOM 123.0**RCO** 122.2 (DENVER RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.

RED TABLE (H) VORW/DME 113.0 DBL Chan 77 N39°26.36' W106°53.68' 270° 19.7 NM to fld.
11800/12E.

GRANBY-GRAND CO (GNB) 1 NE UTC-7(-6DT) N40°05.38' W105°55.03'**CHEYENNE**

8203 B FUEL 100LL, JET A NOTAM FILE DEN


Not insp.

H-3E, 5A, L-9E**RWY 09-27:** H5095X70 (ASPH) S-10 MIRL (NSTD)**RWY 09:** REIL. APAP(PNIR)—GA 3.0° TCH 50'.**RWY 27:** APAP(PNLL)—GA 3.0° TCH 50'. Terrain. Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 09:** TORA-4959 LDA-4959**RWY 27:** TORA-4959 LDA-4959

AIRPORT REMARKS: Unattended. Fuel 24 hr self svc. Recommended tkf to E only by experienced pilots. Rwy 09 has 6' dropoff 150' from rwy thld. High ground rises quickly to the E. Ultralight activity 3 miles S of arpt, dalgt hrs surface to 2000' AGL. Runup pad at Rwy 27 ends in abrupt drop-off. **ACTIVATE MIRL** Rwy 09-27 and REIL Rwy 09—CTAF.

WEATHER DATA SOURCES: AWOS-1 119.925 (970) 887-1803.**COMMUNICATIONS:** CTAF/UNICOM 123.0**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.

KREMMLING (H) VORW/DME 113.8 RLG Chan 85 N40°00.16'
W106°26.55' 064° 24.8 NM to fld. 9370/14E.




GRAND JUNCTION RGNL (GJT) 3 NE UTC-7(-6DT) N39°07.35' W108°31.60'
 4858 B S4 FUEL 100LL, JET A OX 1 Class I, ARFF Index B NOTAM FILE GJT
 RWY 11-29: H10501X150 (ASPH-GRVD) S-110, D-180, ST-175, DT-260 HIRL

DENVER
 H-3E, L-9D
 IAP, AD

RWY 11: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. 0.4% up.
 RWY 29: REIL. VASI(V4L)—GA 3.0° TCH 50'. 0.3% down.
 RWY 04-22: H5502X75 (ASPH—GRVD) S-26, D-26 MIRL 1.3% up NE

RWY 04: REIL. PAPI(P4L)—GA 3.0° TCH 40'. RWY 22: REIL.

AIRPORT REMARKS: Attended continuously. For fuel after hrs call 970-243-7500. RWY 04-22 is CLOSED from 0500-1300Z. During spring, migration of bird flocks on and invof arpt. Noise abatement procedures in effect, etc arpt manager for details at 970-244-9100. ARFF provided only during scheduled Part 121 air carrier ops except by PPR, call arpt manager for details at 970-244-9100. JP4 available. Liquid oxygen servicing avbl. Twy C1 and C, 150' either side of the intersection of Twy C1 not visible from twr. Four helipads located on arpt. Touchdown rwy visual range avbl Rwy 11. After twr clsd ACTIVATE HIRL Rwy 11-29, MALSR Rwy 11 and twy lights, PAPI Rwy 11, VASI Rwy 29—CTAF. RWY 04 PAPI on continuously only during twr hrs. RWY 04 PAPI turned off all other times.



WEATHER DATA SOURCES: ASOS (970) 245-7881.

COMMUNICATIONS: CTAF 118.1 ATIS 118.55 UNICOM 122.95

WALKER FLD RCO 122.6 (DENVER RADIO)

Ⓡ DENVER APP/DEP CON 119.7 (1300-0500Z) Ⓡ DENVER CENTER APP/DEP CON 134.5 (0500-1300Z)

TOWER 118.1 (1300-0500Z) GND CON 121.7

VFR ADVSY SVC ctc TOWER.

AIRSPACE: CLASS D svc 1300-0500Z other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

(H) VOR/DME 112.4 JNC Chan 71 N39°03.57' W108°47.56' 058° 13.0 NM to fld. 7100/15E.

ILS/DME 110.3 I-GJT Chan 40 Rwy 11. Class IT.

LDA/DME 109.7 I-ACD Chan 34 Rwy 29.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr. (MSAW) minimum safe altitude warning advisories unavailable within 35 NM of Grand Junction VORTAC blo 14,000' MSL.

GRAND MESA N39°05.03' W108°13.24'
 RCO 122.2 (DENVER RADIO)

DENVER
 L-9E

GREELEY

EASTON (VALLEY VIEW) (11V) 7 SE UTC-7(-6DT) N40°19.83' W104°36.53'

CHEYENNE

4820 S4 FUEL 100LL, JET A NOTAM FILE DEN

RWY 08-26: 4000X25 (TURF-DIRT)

RWY 08: Road. RWY 26: Road.

RWY 14-32: 2400X65 (TURF-DIRT)

RWY 14: Road.

AIRPORT REMARKS: Attended dalgt hrs. RWY 14-32 condition fair S of model acct flight area. N of this area rwy is unmaintained, use of rwy is not recommended. Unlimited vehicular access to rwys and twys. Ops are primarily helicopter or agricultural ops. Twy not maintained, not recommended for taxi. RWY 08 +35' trees 1200' from thld 130' right. RWY 08 end rough with grass encroachment along edges for 1150'. +2' cable 20' east of RWY 08-26 crossing centerline. RWY 08-26 and RWY 14-32 all surfaces soft when wet. RWY 08 +35' p-lines parallel to thld 1140' from thld. RWY 26 +3' cable at and parallel to thld. RWY 32 has 60' ball field backstop 100' from rwy end and 300' right of centerline. RWY 14-32 has 4' fence 43' right of rwy 14 full length and 4' fence 40' left of rwy first half of rwy. RWY 14 has -15' ditch 15' from rwy end on both sides of centerline.

COMMUNICATIONS: CTAF 122.9

GREELEY-WELD CO (GXY) 3 E UTC-7(-6DT) N40°26.25' W104°37.99'

CHEYENNE

4697 B S4 FUEL 100LL, JET A OX 3, 4 TPA-5497(800) NOTAM FILE GXY

H-3E, 5A, L-10F

RWY 16-34: H10000X100 (ASPH) S-30, D-45 MIRL

IAP, AD

RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 42'. 0.6% down.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 47'. Thld dsplcd 1100'. 0.4% up.

RWY 09-27: H5801X100 (ASPH) S-18, D-30 MIRL 0.3% up NW

RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 43'.

RWY 27: REIL. VASI(V4L)—GA 3.0° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended 1300-0200Z†. For attendance after hours call 970-336-3010. Wildlife on and invof rwy. Oil drilling rigs up to 120' AGL on and invof arpt. Rwy 34 preferred use when wind less than 5 knots. Rwy 34 preferred for touch and go landing. ACTIVATE MIRL Rwy 09-27 and Rwy 16-34, REIL Rwy 09, Rwy 27, Rwy 16 and Rwy 34—CTAF. PAPI Rwy 09, PAPI Rwy 16, PAPI Rwy 34 and VASI Rwy 27 opr 24hrs.

WEATHER DATA SOURCES: AWOS-3 135.175 (970) 352-3511.**COMMUNICATIONS:** CTAF/UNICOM 122.8

GILL RC0 122.65 (DENVER RADIO)

⑧ DENVER APP/DEP CON 134.85 CLNC DEL 126.65

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

GILL (H) VORTACW 114.2 GLL Chan 89 N40°30.23'


W104°33.18' 210° 5.4 NM to fld. 4910/13E.

BUFFS NDB (LOM) 348 DC N 40° 20.08' W104° 37.57' 346° 6.2 NM to fld.

ILS/DME 110.3 I-DCI Chan 40 Rwy 34 LOM Bluffs NDB.

• • • • •
HELIPAD H1: H20X20 (CONC)

HELIPAD H2: H20X20 (CONC)

**GUNNISON-CRESTED BUTTE RGNL** (GUC) 1 SW UTC-7(-6DT) N38°32.04' W106°55.98'

DENVER

7680 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 Class I, ARFF Index B NOTAM FILE GUC

H-3E, L-9E

RWY 06-24: H9400X150 (ASPH-GRVD) S-75, D-160, DT-250 HIRL

IAP

RWY 06: MALSF. PAPI(P4L)—GA 3.2° TCH 55'. Rgt tfc. 0.3% up.

RWY 24: REIL. PAPI(P4L)—GA 3.1° TCH 50'.

RWY 17-35: 3000X150 (TURF-GRVL) 0.6% up N

RWY 17: Tree. Rgt tfc. RWY 35: Thld dsplcd 200'. Trees.

AIRPORT REMARKS: Attended dalgt hours. Rwy 17-35 CLOSED Dec 1-May 1. CLOSED to unscheduled operations with more than 30 passenger seats except PPR. Call arpt manager 970-641-2304. High terrain all quadrants. Rotating bcn opr dark-0530Z† and 1300Z†-SR. HIRL Rwy 06-24 and REIL Rwy 24 operates 1300-0530Z†. ACTIVATE MALSF Rwy 06 and PAPI Rwy 06—CTAF. PAPI Rwy 24 operates 24 hrs.

WEATHER DATA SOURCES: AWOS-3 135.075 (970) 641-3240.**COMMUNICATIONS:** CTAF/UNICOM 122.7

DENVER CENTER APP/DEP CON 125.35


RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLUE MESA (H) VORW/DME 114.9 HBU Chan 96 N38°27.13'

W107°02.39' 032° 7.0 NM to fld. 8730/14E.

ILS/DME 110.5 I-GUC Chan 42 Rwy 06. Class IE.

Glideslope unmonitored. LOC unusable byd 20° left of course.

**HARRIET ALEXANDER FLD** (See SALIDA)

HAXTUN MUNI (17V) 2 SE UTC-7(-6DT) N40°37.50' W102°36.19'

CHEYENNE

4035 TPA-5035(1000) NOTAM FILE DEN

L-10G

RWY 08-26: H3860X40 (ASPH) LIRL (NSTD)

RWY 08: Road. **RWY 26:** Road.

RWY 17-35: 1650X30 (TURF-DIRT)

RWY 17: Building. **RWY 35:** Road.

AIRPORT REMARKS: Unattended. Rwy 17-35 not maintained, very rough.

Rwy 17-35 multiple cracks. Gravel road parallels both rwys

45-55' from centerlines. Rwy 08-26 multiple cracks. Rwy 08-26

NSTD LIRL. No thld lgts. Edge lgts begin 250' of Rwy 08 end. Rwy 08

has +3' pole 3' from left edge 500' from rwy end. Rwy 08 has


+3' pole from left edge 500' from rwy end.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SNY.

SIDNEY (H) VORTAC 115.9 SNY Chan 106 N41°05.80'

W102°58.98' 135° 33.2 NM to fld. 4300/13E.



HAYDEN N40°31.21' W107°18.29' NOTAM FILE DEN.

CHEYENNE

(H) **VORW/DME** 115.6 CHE Chan 103 106° 4.6 NM to Yampa Valley. 7269/14E.

H-3E, L-9E, 11E

RCO 122.25 (DENVER RADIO)

HAYDEN

YAMPA VALLEY (HDN) 2 SE UTC-7(-6DT) N40°28.87' W107°13.06'

CHEYENNE

6606 B **FUEL** 100LL, JET A OX 3, 4 ARFF Index-See Remarks NOTAM FILE HDN

H-3E, L-9E, 11E

RWY 10-28: H9998X150 (ASPH-GRVD) S-75, D-170, DT-260 HIRL

IAP

RWY 10: MALSF. PAPI(P4L)-GA 3.0° TCH 55'. Thld dsplcd 509'.

Rgt tfc.

RWY 28: REIL. PAPI(P4L)-GA 3.5° TCH 55'. P-line. 0.3% down

AIRPORT REMARKS: Attended 1300-0300Z. Class I, ARFF Index C from

Dec-Mar. ARFF Index B from Apr-Nov. Possible severe winter

conditions from Nov-Apr. Check NOTAMS for arpt conditions. No

arpt information nor snow removal guaranteed during hours of

nonattendance. CLOSED to unscheduled air carrier ops with more

than 30 passenger seat except PPR, call arpt manager

970-276-5000. Large flocks of sandhill cranes around arpt in

spring. All acft report 10 minutes prior to tkf/lbg on

123.0-monitor frequency 24 hrs, PAEW on rwy. Between

1300-0300Z ctc UNICOM prior to all tkfs and lgds for PAEW

advisories. PPR for escort to-from active rwy during normal

business hrs. During snow season ctc UNICOM. Request all acft

departing Rwy 28 make right or left turnout as soon as safety

permits after tkf to avoid town of Hayden and comply with noise

abatement procedures. Ldg fee for acft 11,000 pounds and over.

ACTIVATE HIRL Rwy 10-28, REIL Rwy 28, PAPI Rwy 10 and MALSF

Rwy 10-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (970) 276-3690.

COMMUNICATIONS: CTAF/UNICOM 123.0

HAYDEN RCO 122.25 (DENVER RADIO)


DENVER CENTER APP/DEP CON 120.475

AIRSPACE: CLASS E svc 1400-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

HAYDEN (H) VORW/DME 115.6 CHE Chan 103 N40°31.21' W107°18.29' 106° 4.6 NM to fld. 7269/14E.

ILS/DME 109.9 I-HDN Chan 36 Rwy 10. Class IB.



HOLLY (K08) 1 S UTC-7(-6DT) N38°02.00' W102°07.03'**WICHITA**3390 **FUEL** 100LL NOTAM FILE DEN**RWY 17-35:** 4140X40 (GRVL) LIRL (NSTD)**RWY 17:** TRCV(TRIL)—GA 3.0°. Fence.**RWY 35:** TRCV(TRIL)—GA 3.0°. Fence.**AIRPORT REMARKS:** Attended on call. For attendant call town of Holly 719-537-6622 Lamar dispatch 719-336-3995.


For fuel call town of Holly 719-537-6622. Lamar dispatch 719-336-3995. Rwy soft when wet. Rwy 17-35 has +30' powerlines 800' north of rwy end 150' left and right of centerline. Rwy 17-35 has +4' fence 120' from centerline on both sides. Rwy 17-35 has NSTD edge lgts 30' from rwy edge, lgts at varying heights. **ACTIVATE** LIRL Rwy 17-35 and VASI Rwy 17 and 35—CTAF. TRIL Rws 17 and 35 OTS indef.

COMMUNICATIONS: CTAF/UNICOM 122.8**HOLYOKE** (HEQ) 1 SE UTC-7(-6DT) N40°34.17' W102°16.36'**CHEYENNE**3730 **B FUEL** 100LL NOTAM FILE DEN**H-5B, L-10G****RWY 14-32:** H5000X75 (ASPH) S-12.5 MIRL**IAP****RWY 14:** REIL. PAPI(P4L)—GA 3.0° TCH 40'.**RWY 32:** REIL. PAPI(P4L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended irregularly. For fuel call 970-854-3300 or ctc 122.7. Geese on and invof rwy. **ACTIVATE** MIRL Rwy 14-32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (970) 854-3679.**COMMUNICATIONS:** CTAF/UNICOM 122.7**DENVER CENTER APP/DEP CON** 118.475**RADIO AIDS TO NAVIGATION:** NOTAM FILE SNY.**SIDNEY (H) VORTAC** 115.9 SNY Chan 106 N41°05.80'

W102°58.98' 121° 45.2 NM to fld. 4300/13E.

**HOPKINS FLD** (See NUCLA)**HUDSON****PLATTE VALLEY AIRPARK** (18V) 3 NW UTC-7(-6DT) N40°06.17' W104°42.07'**CHEYENNE**4965 **S2 FUEL** 100LL NOTAM FILE DEN**L-10F, A****RWY 15-33:** H4100X40 (ASPH) LIRL**RWY 33:** Ground.**RWY 09-27:** 2500X90 (TURF-GRVL)**RWY 09:** Ground.**RWY 27:** Road.

AIRPORT REMARKS: Attended daylight hours. 24 hr credit card svc avbl. Rwy 09-27 has -3' ditch 45' north of rwy edge full length. Rwy 09 has a detention pond 110' left of centerline and 175' east of the thld. Twy intersects Rwy 09-27 midfield. **ACTIVATE** LIRL Rwy 15-33—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.**MILE HIGH (H) VORTACW** 114.7 DVV Chan 94 N39°53.68' W104°37.46' 333° 13.0 NM to fld. 5270/11E.**HUGO** N38°49.05' W103°37.28' NOTAM FILE DEN.**WICHITA****(H) VORTACW** 112.1 HGO Chan 58 344° 27.5 NM to Limon Muni. 5233/12E.**H-5A, L-10F****IRONHORSE** N38°40.70' W104°45.20' NOTAM FILE FCS.**DENVER****NDB (MHW)** 335 IHS at Butts AAF (Fort Carson). Unmonitored Jan 1 and Dec 25.**L-10F**

NDB unusable 210°-300° byd 20 NM blo 20,000'.

JEFFCO N39°54.78' W105°08.34' NOTAM FILE BJC

DENVER

(H) VORW/DME 115.4 BJC Chan 101 093° 1 NM to Rocky Mountain Metropolitan 5728/11E.

H-3E, 5A, L-10F, A

VOR portion unusable:

226°-245° byd 36 NM blo 17,000'

246°-278° byd 30 NM blo 19,000'

279°-300° byd 34 NM blo 18,000'

DME portion unusable:

246°-278° byd 30 NM

JULESBURG MUNI (7V8) 3 SW UTC-7(-6DT) N40°58.22' W102°18.92'

CHEYENNE

3495 B NOTAM FILE DEN

L-10G, 12G

RWY 13-31: H4100X60 (ASPH) S-12 MIRL

RWY 13: Thld dsplcd 284'. Antenna.

AIRPORT REMARKS: Unattended. For svc and assistance call Sheriffs office 303-474-3355. City Clerks Office after hours phone 970-474-2124. Wildlife on and invof arpt. Rwy 13-31 used for drag racing Apr-Sep. Rwy 13 has +4' fence 350' from dsplcd thld, +18' road 410' from dsplcd thld. 3' railing 112' north side of rwy, full length. Twy clsd use rwy for back taxi. MIRL Rwy 13-31 preset medium ints dusk-dawn.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SNY.

SIDNEY (H) VORTAC 115.9 SNY Chan 106 N41°05.80' W102°58.98' 091° 31.3 NM to fld. 4300/13E.

KIT CARSON CO (See BURLINGTON)

KREMMLING N40°00.16' W106°26.55' NOTAM FILE DEN.

CHEYENNE

(H) VORW/DME 113.8 RLG Chan 85 034° 4.6 NM to Mc Elroy Airfield. 9370/14E.

H-3E, 5A, L-9E, 11E

DME unusable 285°-305° byd 34 NM blo 16,300'

RCO 122.3 (DENVER RADIO)

KREMMLING

MC ELROY AIRFIELD (2ØV) 1 E UTC-7(-6DT) N40°03.22' W106°22.14'

CHEYENNE

7411 B S2 FUEL 100LL, JET A NOTAM FILE 20V

H-3E, 5A, L-9E, 11E

RWY 09-27: H5540X75 (ASPH) S-46, D-68 MIRL 0.3% up E

IAP

RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.

RWY 27: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Mountain. Rgt tfc.

AIRPORT REMARKS: Attended 1500-0030Z±. 24 hr fuel svc—credit card. Rwy 27 +8' wildlife fence parallel to rwy 270' left of centerline. Mountain terrain surrounds arpt. ACTIVATE MIRL Rwy 09-27 and PAPI and REIL Rwy 09 and Rwy 27—CTAF. Overngt tiedown fee.

WEATHER DATA SOURCES: AWOS-3 118.425 (970) 724-9659.

COMMUNICATIONS: CTAF/UNICOM 122.8


KREMMLING RCO 122.3 (DENVER RADIO)

DENVER CENTER APP/DEP CON 128.65

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

KREMMLING (H) VORW/DME 113.8 RLG Chan 85 N40°00.16'

W106°26.55' 034° 4.6 NM to fld. 9370/14E.



LA JUNTA MUNI (LHX) 3 N UTC-7(-6DT) N38°03.00' W103°30.59'

WICHITA

4229 B FUEL 100LL, JET A NOTAM FILE LHX

H-5A, L-10F

RWY 08-26: H6849X75 (ASPH) S-30, D-50, DT-90 MIRL

IAP

1.1% up W

RWY 08: REIL. VASI(V4L)—GA 3.0° TCH 45'.

RWY 26: REIL. PAPI(P2L)—GA 3.0° TCH 43'.

RWY 12-30: H5803X60 (ASPH-CONC) S-50, D-65, DT-100

0.5% up NW

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†, Sat-Sun 1400-2300Z†. Antelope on and in/ov arpt. Rwy 12-30 surface raveling with foreign object damage potential. Rwy 12-30 has loose asph material in primary surface west side of rwy full length. Heavy Air Guard ops during summer months. Rwy 12-30 edge undefined, marked with orange flags. Heavy agricultural ops during summer months. Rwy 08 REIL OTS indef. Rwy 26 PAPI OTS indef. ACTIVATE MIRL Rwy 08-26, VASI Rwy 08, PAPI Rwy 26 and REIL Rwy 08 and Rwy 26—CTAF.

WEATHER DATA SOURCES: ASOS 135.525 (719) 384-5961.**COMMUNICATIONS:** CTAF/UNICOM 123.0


RCO 122.6 (DENVER RADIO)

DENVER CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

LAMAR (H) VORTAC 116.9 LAA Chan 116 N38°11.83' W102°41.25' 245° 39.9 NM to fld. 3944/12E.

HELIPAD H1: H145X145 (ASPH)

**LAKE CO** (See LEADVILLE)**LAMAR MUNI** (LAA) 3 SW UTC-7(-6DT) N38°04.18' W102°41.31'

WICHITA

3706 B S4 FUEL 100LL, JET A OX 1, 3 ARFF Index Ltd. NOTAM FILE LAA

H-5A, L-10G

RWY 18-36: H6304X100 (CONC-GRVD) S-45, D-55, DT-100 MIRL 0.4% up S

IAP

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 41'. Road.

RWY 36: REIL. PAPI (P4L). Hill.

RWY 08-26: H5001X60 (ASPH-PFC) S-35, D-50, DT-95 MIRL

RWY 08: PAPI(P2L)—GA 3.0°. Road.

RWY 26: PAPI(P2L)—GA 3.0°. Fence.

AIRPORT REMARKS: Attended 1500-0100Z†. For svc after hours phone 719-336-7701. Rwy 18-36 now has distance remaining signs. Twr 500' AGL 4.5 mile SE unlighted. ACTIVATE MIRL Rwy 08-26 and Rwy 18-36—CTAF. NOTE: See Special Notice—Aerobatic Operations in Colorado.

WEATHER DATA SOURCES: ASOS 135.625 (719) 336-3854.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.1R 116.9T (DENVER RADIO)

DENVER CENTER APP/DEP CON 133.4

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

(H) VORTAC 116.9 LAA Chan 116 N38°11.83'

W102°41.25' 168° 7.6 NM to fld. 3944/12E.

**LAS ANIMAS****CITY OF LAS ANIMAS-BENT COUNTY** (7V9) 1 S UTC-7(-6DT) N38°03.24' W103°14.31'

WICHITA

3915 S4 NOTAM FILE DEN

L-10F

RWY 08-26: H3870X40 (ASPH) S-5

RWY 08: Fence.

RWY 26: Road.

AIRPORT REMARKS: Attended Monday-Saturday 1500-0000Z†. Rwy 26 has +30' poles 105' from thld 210' left of extd rwy centerline, +15' tank 321' from rwy end 270' right of centerline. Thld lghts NSTD; three lghts each end. Thld lghts OTS indef. Rwy 08 thld lghts 23' from thld. Rwy 26 thld lghts 12' from thld. Rwy 08 numbers located 216' from pavement end, Rwy 08-26 numbers smaller than standard, no centerline markings.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE LAA.

LAMAR (H) VORTAC 116.9 LAA Chan 116 N38°11.83' W102°41.25' 240° 27.5 NM to fld. 3944/12E.

LA VETA**CUCHARA VALLEY AT LA VETA** (Ø7V) 1 N UTC-7(-6DT) N37°31.43' W105°00.56'**DENVER**

7153 B FUEL 100LL, JET A NOTAM FILE DEN

H-5A, L-10F, 15A

RWY 06-24: H5798X60 (ASPH) MIRL (NSTD)

RWY 06: Thld displcd 250'.

RWY 24: Thld displcd 198'. Fence.

AIRPORT REMARKS: Attended on call. For attendant call 719-742-3291 or 3747. Wildlife on and invof Rwy 06-24, higher occurrence during Jun-Oct. Rwy 06-24 has severe cracking on ramp and rwy. NSTD MIRL, Rwy 06 first 96' unlighted, Rwy 24 first 92' unlighted. ACTIVATE MIRL Rwy 06-24-122.7.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE ALS.

ALAMOSA (H) VORTACW 113.9 ALS Chan 86 N37°20.95' W105°48.93' 062° 39.9 NM to fld. 7535/13E.

LA VETA PASS (VTP) N37°30.72' W105°10.23'/10216.**DENVER**

AWOS-3 119.925 (719) 587-3120

L-10F, 15A

LEACH (See CENTER)**LEADVILLE****LAKE CO** (LXV) 2 SW UTC-7(-6DT) N39°13.22' W106°19.00'**DENVER**

9927 B FUEL 100LL, JET A NOTAM FILE LXV

H-3E, 5A, L-9E

RWY 16-34: H6400X75 (ASPH) S-20, D-20 MIRL

IAP

RWY 16: PAPI(P2L)—GA 3.0° TCH 45'. Rgt tfc.

RWY 34: PAPI(P2L)—GA 3.0° TCH 45'.

AIRPORT REMARKS: Attended May-Oct 1430-0100Z, Nov-Apr 1500-0000Z. For svc after hrs call sheriff dispatch 719-486-1249. Rwy 34 has +50' power lines 750' from right of threshold. Deer on and invof rwy. All taxiways and new ramp area marked with blue and white reflectors. Twy turnoff have lgts and blue reflectors. PPR for svc after hours call 719-486-2627.

ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: ASOS 118.375 (719) 486-2735.**COMMUNICATIONS:** CTAF/UNICOM 122.8**DENVER CENTER APP/DEP CON** 119.85**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.


RED TABLE (H) VORW/DME 113.0 DBL Chan 77 N39°26.36'

W106°53.68' 104° 29.9 NM to fld. 11800/12E.

• • • • •

HELIPAD H1: H150X100 (CONC)

HELIPORT REMARKS: Rwy H1 has 6-8 inch lip all around edges, concrete has longitudinal and corner cracking. Edge falling apart. Rwy H1 has 20' to 30' trees 90° east of pad.

**LIMON MUNI** (LIC) 1 NE UTC-7(-6DT) N39°16.49' W103°39.95'**WICHITA**

5374 B S2 FUEL 100LL NOTAM FILE LIC

L-10F

RWY 16-34: H4700X60 (CONC) S-12.5 MIRL

RWY 16: PAPI(P2L) Trees.

RWY 34: PAPI(P2L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Unattended. For fuel svc call Limon Police Dept at 719-775-2346/9211. Deer on and invof arpt. Uncontrolled vehicle access to fld. Rwy 16 has 3000' twy leading into the South end. Twy marked with blue reflectors. ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34—CTAF.


WEATHER DATA SOURCES: ASOS 121.125 (719) 775-0515.**COMMUNICATIONS:** CTAF 122.9

RCO 122.475 (DENVER RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

HUGO (H) VORTACW 112.1 HGO Chan 58 N38°49.05'

W103°37.28' 344° 27.5 NM to fld. 5233/12E.



LONGMONT**VANCE BRAND** (LMO) 3 SW UTC-7(-6DT) N40°09.86' W105°09.82'

5055 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE DEN

RWY 11-29: H4800X75 (CONC) S-30 MIRL 0.5% up NW

RWY 11: VASI(V4L)—GA 3.0° TCH 37'. Road.

RWY 29: VASI(V4L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended dalgt hours. Parachute Jumping.

Parajumping on and in/ovf arpt primarily S of rwy, avoid overflights midfield. Ultralight and helicopter activity on and in/ovf arpt. Prairie dogs on and in/ovf rwy. Rwy 29 has +15' highway 702' from thld, +25' to 35' buildings/tanks approximately 1300' left of thld.

ACTIVATE MIRL Rwy 11-29 and VASI Rwy 11 and 29—CTAF.


WEATHER DATA SOURCES: AWOS-3 120.0 (303) 684-7545.**COMMUNICATIONS:** CTAF/UNICOM 122.975

Ⓡ DENVER APP/DEP CON 126.1

RADIO AIDS TO NAVIGATION: NOTAM FILE BJC.

JEFFCO (H) VORW/DME 115.4 BJC Chan 101 N39°54.78'

W105°08.34' 345° 15.1 NM to fld. 5728/11E.

CHEYENNE
L-10F, A
IAP**MACK MESA** (C07) 3 N UTC-7(-6DT) N39°16.08' W108°51.86'

4724 S4 FUEL 100LL NOTAM FILE DEN

RWY 07-25: H2600X60 (ASPH)

AIRPORT REMARKS: Attended dalgt hours.**COMMUNICATIONS:** CTAF 122.9

DENVER

MC ELROY AIRFIELD (See KREMLING)**MEADOW LAKE** (See COLORADO SPRINGS)**MEEKER** (EEO) 2 E UTC-7(-6DT) N40°02.93' W107°53.16'

6421 B S4 FUEL 100LL, JET A OX 1, 2 NOTAM FILE EEO

RWY 03-21: H6500X60 (ASPH) S-21, D-27 MIRL 0.6% up NE

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Deer and elk and waterfowl in/ovf arpt, wildlife fence surrounds arpt. Mountains surround arpt.

ACTIVATE MIRL Rwy 03-21, PAPI and REIL Rwy 03—CTAF.

WEATHER DATA SOURCES: ASOS 135.525 (970) 878-5036.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.15 (DENVER RADIO)

DENVER CENTER APP/DEP CON 134.5

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

(H) VORW/DME 115.2 EKR Chan 99 N40°04.05'

W107°55.49' 107° 2.1 NM to fld. 7620/15E.

CHEYENNE
H-3E, L-9E, 11E
IAP**MERTZ** N38°17.04' W104°38.82' NOTAM FILE PUB.

NDB (LOM) 302 PU 076° 7.1 NM to Pueblo Mem.

DENVER

MILE HIGH N39°53.68' W104°37.46' NOTAM FILE DEN.

(H) VORTACW 114.7 DVV Chan 94 211° 2.9 NM to Denver Intl. 5270/11E.

DENVER
H-3E, 5A, L-10F, A**MINERAL CO MEM** (See CREEDE)

MONARCH PASS (MYP) N38°29.83' W106°19.18'/12030.

AWOS-3 124.175 (719) 539-4436

DENVER

L-9E

MONTE VISTA MUNI (MVI) 5 SE UTC-7(-6DT) N37°31.71' W106°02.76'

DENVER

H-3E, 5A, L-8J, 9E

IAP

7611 B FUEL 100LL, JET A NOTAM FILE DEN

RWY 02-20: H5900X60 (ASPH) S-12.5 MIRL

RWY 02: PAPI(P2L).

RWY 20: PAPI(P2L). Bldg.

RWY 16-34: 2449X30 (DIRT)

RWY 16: Antenna. RWY 34: Fence.

RWY 10-28: 1731X45 (DIRT)

RWY 10: Road.

RWY 28: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†, Sat-Sun on call. For svc after hours call 719-852-3241. Unlimited vehicle use on arpt. Rwy 02 has a 4' fence 280' from rwy end 4' below rwy end elevation. Rwy 10-28 and Rwy 16-34 has +4' weeds on both sides of rwy, 4' weeds at intersection of Rwy 34 and Rwy 28. Rwy 10-28 has +1 to +2' dirt windrow along N edge. Rwy 10-28 use for extreme crosswind conditions only, rwy not maintained. Rwy 16-34 sandy and soft and Rwy 10-28 soft when wet. Rwy 02-20 has soft shoulders. Rwy 16-34 has loose and soft sand surface. Rwy 16 +25' bin 875' from thld 30' rgt. Ctc arpt manager 719-852-3386 prior to use. Used by crop dusters. 50' antenna located N side of rwy, immediately E of apch surface. ACTIVATE MIRL Rwy 02-20 and PAPI Rwy 02 and Rwy 20—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

ALAMOSA RCO 122.15 (DENVER RADIO)

DENVER CENTER APP/DEP CON 128.375

RADIO AIDS TO NAVIGATION: NOTAM FILE ALS.

ALAMOSA (H) VORTACW 113.9 ALS Chan 86 N37°20.95' W105°48.93' 301° 15.4 NM to fld. 7535/13E.



MONTROSE RGNL (MTJ) 1 NW UTC-7(-6DT) N38°30.59' W107°53.66'

DENVER

H-3E, L-9E

IAP

5759 B S4 FUEL 100LL, JET A+ OX 1, 3 Class I, ARFF Index B NOTAM FILE MTJ

RWY 17-35: H10000X150 (ASPH-GRVD) S-75, D-190, DT-265 HIRL

RWY 17: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. 0.5% up.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 41'. 0.3% down.

RWY 13-31: H7500X100 (ASPH-GRVD) S-65, D-90,

DT-150 HIRL

RWY 13: REIL. VASI(V4L)—GA 3.0° TCH 42'. Tree. 0.8% up.

RWY 31: REIL. VASI(V4L)—GA 3.0° TCH 40.7'.

AIRPORT REMARKS: Attended Apr 1-Dec 15 1230-0400Z†, Dec 16-Mar 31 1200-0400Z†. Migratory birds and wildlife on and in/ov arpt. 24 hour PPR for unscheduled acft ops with more than 30 passenger seats call arpt manager 970-249-7953. Twy B clsd to acft over 12,500 lbs. Air carrier acft requested to access terminal ramp via Twy C, outbound traffic Twy D. Ramp connector adjacent to T hangar row clsd indef. Twy E, E6 clsd except acft with wingspan less than 78'. Preferred tkt Rwy 31 and Rwy 35 and ldg Rwy 13 and Rwy 17. Rwy 17-35 preferred rwy for acft with approach speed greater than 121 kts. ACTIVATE HIRL Rwy 17-35 and Rwy 13-31, MALSR Rwy 17, and REIL Rwy 13, Rwy 31 and Rwy 35—CTAF. REIL Rwy 13 OTS indef.

WEATHER DATA SOURCES: ASOS 135.225 (970) 249-1534.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.65 (DENVER RADIO)

® DENVER CENTER APP/DEP CON 125.35

AIRSPACE: CLASS E svc 1300-0400Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE MTJ.

(H) VOR/DME 117.1 MTJ Chan 118 N38°30.39' W107°53.96' at fld. 5710/12E.

VOR unusable 205°-230° byd 30 NM blo 13,000'.


DME unusable 005°-090° byd 33 NM blo 16,000'.

115°-120° byd 31 NM blo 17,500'.

200°-217° byd 25 NM blo 15,000'.

217°-245° byd 25 NM blo 14,000'.

ILS 111.3 I-MTJ Rwy 17.



MONUMENT HILL (MNH) N39°13.13' W104°38.43'/7060.

AWOS-3 134.375 (303) 648-3479

DENVER

L-10F

MOUNT WERNER (3MW) N40°26.95' W106°44.95'/10384.

AWOS-3 127.125 (970) 871-5640

DENVER

L-9E

MOVIE MANOR (See MONTE VISTA)

NORTH FORK VALLEY (See PAONIA)

NUCLA

HOPKINS FLD (AIB) 2 SW UTC-7(-6DT) N38°14.33' W108°33.80'

DENVER

5940 B S2 FUEL 100LL, JET A NOTAM FILE DEN

L-9D

RWY 05-23: H4600X75 (ASPH) S-9 MIRL 0.9% up NE

IAP

RWY 11-29: 4000X80 (TURF-DIRT) 0.7% up SE

RWY 11: Road. RWY 29: Fence.

AIRPORT REMARKS: Attended 1500-0000Z+. +30' p-lines in hangar area. Migratory birds, wildlife and deer on and in/ovf arpt. Twy is marked with blue reflectors. Lgt'd twy signs. Rwy 29 +30' hill 408' from thld on extended centerline, -75' terrain at thld.

WEATHER DATA SOURCES: AWOS-3 132.525 (970) 864-2325.

COMMUNICATIONS: CTAF/UNICOM 122.8

DENVER APP/DEP CON 125.35

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

DOVE CREEK (H) VORTACW 114.6 DVC Chan 93 N37°48.53' W108°55.88' 020° 31.1 NM to fld. 6990/14E.

COMM/NAV/WEATHER REMARKS: UNICOM answered by Sheriff Dispatch, avbl 24 hrs.

PAGOSA SPRINGS

STEVENS FLD (PSO) 3 NW UTC-7(-6DT) N37°17.18' W107°03.36'

DENVER

7664 B S4 FUEL 100LL, JET A OX1 NOTAM FILE DEN

H-4J, L-8I, 9E

RWY 01-19: H8100X100 (ASPH) S-59, D-70 MIRL

IAP

RWY 01: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 19: REIL. PAPI(P4R)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended 1500-0000Z+. Wildlife on and in/ovf arpt. Balloon ops in/ovf arpt. Twy B clsd to acft 12,500 pounds and over. Twy A2 connector to north ramp clsd. Tie downs ltd, call FBO 970-731-2127 for availability. +60' to 75' trees along sides of Rwy 01-19 outside primary surface. ACTIVATE MIRL Rwy 01-19 PAPI and REIL Rwy 19—CTAF.

WEATHER DATA SOURCES: AWOS-3 127.175 (970) 731-0365

COMMUNICATIONS: CTAF/UNICOM 122.7

DENVER CENTER APP/DEP CON 118.575

RADIO AIDS TO NAVIGATION: NOTAM FILE DRO.

DURANGO (L) VORW/DME 108.2 DRO Chan 19 N37°09.20' W107°44.98' 062° 34.2 NM to fld. 6660/14E.

PAONIA

NORTH FORK VALLEY (7V2) 3 SW UTC-7(-6DT) N38°49.88' W107°38.75'

DENVER

5798 S4 FUEL 100LL TPA-6598(800) NOTAM FILE DEN

L-9E


RWY 05-23: H4500X60 (ASPH) S-21 LIRL (NSTD)

AIRPORT REMARKS: Attended Mon-Fri 1500-0100Z+, Sat-Sun irregularly. 24 hr self serve fuel avbl. Deer on and in vicinity of rwy. Rwy 05-23 CLOSED to touch and go landings. Rwy 05-23 has -50' to 75' terrain dropoff on both sides at various locations the entire length of rwy. Rwy 23 has -60' drop off at thld and within 30' of centerline at various locations. Two clear lgts indicate apron turnoff. Rwy 05-23 NSTD LIRL ops from dusk-0800Z+. Rwy 05-23 NSTD LIRL-bulbs in clear glass jars, NSTD thld lgts 2 clear thld lgts at each rwy end.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

BLUE MESA (H) VORW/DME 114.9 HBU Chan 96 N38°27.13' W107°02.39' 295° 36.4 NM to fld. 8730/14E.



PETET N38°41.66' W104°42.98' NOTAM FILE COS.
NDB (MHW/LOM) 407 CO 354° 6.7 NM to City of Colorado Springs Muni.

DENVER
L-10F

PUEBLO MEM (PUB) 5 E UTC-7(-6DT) N38°17.35' W104°29.79'

DENVER
H-5A, L-10F
IAP. AD

4726 B S4 FUEL 100LL, JET A Class II, ARFF Index A NOTAM FILE PUB

RWY 08L-26R: H10496X150 (ASPH-PFC) S-75, D-170, ST-175, DT-250 HIRL

RWY 08L: MALSR. PAPI(P4L)—GA 3.0° TCH 63'.

RWY 26R: REIL. PAPI(P4L)—GA 3.0° TCH 59'. 0.4% up.

RWY 17-35: H8308X150 (ASPH-PFC) S-93, D-110, ST-140,
DT-170 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 50'. 0.9% down.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 45'. 1.0% up.

RWY 08R-26L: H3767X75 (ASPH) S-20 0.3% up W

RWY 08R: Rgt tfc. RWY 26L: Gnd.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 17	08L-26R	5850
RWY 26R	17-35	8300

AIRPORT REMARKS: Attended 1300-0500Z+. For fuel after hours call 719-948-4560/2447 or use 100LL self-svc. Frequent usage of Rwy 08R-26L after SS by unlgtd mil tran acft. Rwy 08R-26L avbl to acft under 12,500 pounds during dalght hours. High volume training DA-20 acft Mon-Fri SR-SS. Overhead pat during training. Extensive use of training area 12-28 DME north to southwest of aprt 500' AGL to 8500' MSL Mon-Fri SR-SS. Rwy 08R-26L unlighted and unavbl at ngt. Rwy 08R-26L has blue twy edge lgts Rwy 08L-26R, MIRL Rwy 17-35, MALSR Rwy 08L, PAPI Rwy 08L, and Rwy 17-CTAF.

WEATHER DATA SOURCES: ASOS (719) 948-2803.

COMMUNICATIONS: CTAF 119.1 ATIS 125.25

UNICOM 122.95

RCO 122.2 (DENVER RADIO)

® DENVER APP/DEP CON 120.1 (1300-0500Z±)

® DENVER CENTER APP/DEP CON 128.375 (0500-1300Z±)

TOWER 119.1 (1300-0500Z±) GND CON 121.9 CLNC DEL 120.9

AIRSPACE: CLASS D svc effective 1300-0500Z± other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE PUB.

(H) **VORTACW** 116.7 PUB Chan 114 N38°17.66' W104°25.77' 251° 3.2 NM to fld. 4760/13E.


MERTZ NDB (LOM) 302 PU N38°17.04' W104°38.82' 076° 7.1 NM to fld.

ARUBA NDB (MHW/LOM) 373 TF N38°17.45' W104°21.30' 258° 6.7 NM to fld.

ILS 108.3 I-TFR Rwy 26R. Class IE. LOM ARUBA NDB.

ILS 109.5 I-PUB Rwy 08L. Class IE. LOM MERTZ NDB. Unmonitored when twr closed.

ASR (1300-0500Z±)



RANGELY (4VØ) 2 E UTC-7(-6DT) N40°05.64' W108°45.78'

5275 B FUEL 100LL NOTAM FILE DEN

RWY 06-24: H6408X75 (ASPH) S-28, D-28 MIRL

RWY 06: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 300'.

Road. Rgt tfc.

RWY 24: REIL. Road.

AIRPORT REMARKS: Attended continuously. Self-service fuel avbl with credit card. For svc call 970-675-2316. Minor emergency services upon request. Monitor 123.5 for training ops at arpt. Three flashing hazard bcns outline obstruction hills east. Rwy 06-24 shoulders soft when wet. Deer periodically on and in vicinity of arpt. +60 trees 2300' from Rwy 06. Twy marked with yellow reflectors. ACTIVATE MIRL Rwy 06-24 and REIL Rwy 06 and Rwy 24—CTAF. PAPI Rwy 06 opr continuously.

WEATHER DATA SOURCES: AWOS-3 122.8 (617) 262-3825. OTS indef.


COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.65 (DENVER RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

MEEKER (H) VORW/DME 115.2 EKR Chan 99 N40°04.05'

W107°55.49' 258° 38.6 NM to fld. 7620/15E.



CHEYENNE

H-3E, L-9D, 11E

RED TABLE N39°26.36' W106°53.68' NOTAM FILE DEN.

(H) VORW/DME 113.0 DBL Chan 77 356° 12.3 NM to Eagle Co. Rgnl. 11800/12E.

DENVER

H-3E, L-9E

RED TABLE MOUNTAIN N39°26.61' W106°54.16'

RCO 122.4 (DENVER RADIO)

DENVER

L-9E

RIFLE N39°31.69' W107°42.98' NOTAM FILE RIL.

(L) VORW/DME 110.6 RIL Chan 43 at Garfield Co Rgnl 5529/12E.

DENVER

H-3E, L-9E

VOR portion unusable:

051°-100° byd 30 NM blo 14,000'

101°-190° byd 30 NM blo 15,000'

191°-230° byd 30

DME portion unusable:

Byd 30 NM

041°-220° byd 20 NM blo 14,000'

221°-260° byd 20 NM blo 12,000'

231°-324° byd 30 NM blo 15,000'

325°-050° byd 30 NM blo 16,000'

261°-280° byd 20 NM blo 13,000'

281°-040° byd 20 NM blo 12,000'

RCO 122.5 (DENVER RADIO)

RIFLE

GARFIELD CO RGNL (RIL) 3 E UTC-7(-6DT) N39°31.58' W107°43.62'

5548 B S4 FUEL 100LL, JET A OX 1, 4 NOTAM FILE RIL

RWY 08-26: H7011X100 (ASPH-GRVD) S-70, D-85, ST-108, DT-137 MIRL 1.2% up E

RWY 08: REIL. VASI(V2L)—GA 3.0° TCH 51'.

RWY 26: ODALS. REIL. VASI(V2L)—GA 3.5° TCH 51'. Hill. Rgt tfc.

AIRPORT REMARKS: Attended continuously. Fuel avbl 24 hrs, self-service. Rwy 08-26 slick when wet, arpt manager recommends ldg uphill on Rwy 08 when able. After winter snow storms arpt opens before all twys are clear. User fee for acct 12,500 lbs or more. Overnight parking fee. ACTIVATE MIRL Rwy 08-26, ODALS Rwy 26, and REIL Rwy 08 and Rwy 26 and VASI Rwy 08 and Rwy 26—CTAF.

WEATHER DATA SOURCES: ASOS 135.275 (970) 625-2206.

COMMUNICATIONS: CTAF/UNICOM 122.8


DENVER CENTER APP/DEP CON 134.5

RADIO AIDS TO NAVIGATION: NOTAM FILE RIL.

RIFLE (L) VORW/DME 110.6 RIL Chan 43 N39°31.69'

W107°42.98' at fld. 5529/12E.

ILS/DME 110.9 I-RIL Chan 46 Rwy 26.



DENVER

H-3E, L-9E

IAF

ROBERT N40°27.82' W106°52.34' NOTAM FILE DEN. **CHEYENNE**
(L) VORW/DME 112.2 BQZ Chan 59 352° 3.2 NM to Steamboat Springs/Bob Adams Fld. 8254/13E. **L-9E, 11E**
 VOR portion unusable:
 010°-036° byd 30 NM blo 16,000' 037°-090° byd 30 NM blo 14,500'
 DME portion unusable:
 010°-036° byd 30 NM 090°-135° byd 25 NM blo 15,000'
 037°-090° byd 20 NM

ROCKY MOUNTAIN METROPOLITAN (See DENVER)

SAGUACHE MUNI (Ø4V) 2 NW UTC-7(-6DT) N38°05.95' W106°10.46' **DENVER**
 7826 NOTAM FILE 04V
RWY 10-28: 7745X55 (GRVL)
RWY 10: Road. **RWY 28:** Road.
AIRPORT REMARKS: Unattended. Wildlife on and in/ovf arpt. Unlimited vehicle use on arpt. Rwy 28 has -5' ditch 288' from thld OB and -4' terrain 70' left of centerline at thld. Dirt hills +8' to +15' 215' north of rwy. Numerous prairie dog holes on rwy edge near Rwy 28 end. Rwy 10-28 has +2' bushes along rwy edge in various places. Rwy 10-28 soft when wet. For current arpt conditions ctc arpt manager 719-655-2321. Rwy 10-28 has rwy numbers 55' by 75' asph pads on each rwy end.
WEATHER DATA SOURCES: AWOS-3 118.625 (719) 655-2229.
COMMUNICATIONS: CTAF 122.9

SALIDA

HARRIET ALEXANDER FLD (ANK) 2 W UTC-7(-6DT) N38°32.30' W106°02.92' **DENVER**
 7523 B **FUEL** 100LL, JET A NOTAM FILE DEN **H-3E, 5A, L-9E**
RWY 06-24: H7347X75 (ASPH) S-30, D-60 MIRL 1.9% up W **IAP**
RWY 24: VASI(V2L)—GA 3.2° TCH 55'.
AIRPORT REMARKS: Attended 1500-0000Z±. Fuel avbl with credit card. Hang-gliding ops in the Mt Princeton area and 6 miles E of arpt along the ridge. During high wind conditions downdrafts approaching Rwy 24. Rwy 24 recommended for landing, Rwy 06 for departure weather and tfc permitting. 6-7 inch lip at pavement edges on apron west of fuel pumps. Rwy 06 +60' Powerline marked with orange balls 630' from thld, 435' left of rwy extended centerline. ACTIVATE MIRL Rwy 06-24 and VASI Rwy 24—CTAF.
WEATHER DATA SOURCES: AWOS-3 133.85 (719) 539-5268.
COMMUNICATIONS: CTAF/AUNICOM 122.7
DENVER CENTER APP CON 128.375
DENVER CENTER DEP CON 119.85
RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.
BLUE MESA (H) VORW/DME 114.9 HBU Chan 96 N38°27.13' W107°02.39' 069° 47.0 NM to fld. 8730/14E.
 • • • • •
HELIPAD H1: H36X36 (CONC)

SAN LUIS VALLEY RGNL/BERGMAN FIELD (See ALAMOSA)

SILVER WEST (See WESTCLIFFE)

SKIPI N39°47.51' W104°26.05' NOTAM FILE DEN. **DENVER**
NDB (LOM) 321 FT 255° 5.1 NM to Front Range.

SNOW N39°37.77' W106°59.47' NOTAM FILE DEN. **DENVER**
(L) VORW/DME 109.2 SXW Chan 29 066° 3.5 NM to Eagle Co Rgnl. 8060/12E. **L-9E**
 VOR/DME unmonitored 0600-1300Z±.
 VOR/DME unusable 115°-135°
 VOR portion unusable 310°-355°

SPANISH PEAKS AIRFIELD (See WALSENBURG)

SPRINGFIELD MUNI (8V7) 4 N UTC-7(-6DT) N37°27.52' W102°37.08'

WICHITA

4390 B OX 2, 4 NOTAM FILE DEN

H-5A, L-106, 15B

RWY 17-35: H5000X60 (CONC) S-12.5 MIRL

RWY 17: PAPI(P2L)—GA 3.0° TCH 30'.

RWY 35: PAPI(P2L)—GA 3.0° TCH 30'.

AIRPORT REMARKS: Unattended. PAEW in close proximity to rwy. Twy marked with blue and yellow reflectors. ACTIVATE

MIRL and PAPI Rwy 17-35—CTAF.

WEATHER DATA SOURCES: AWOS-3 122.9 (617) 262-3825. OTS indef.**COMMUNICATIONS:** CTAF 122.9

DENVER CENTER APP CON 133.4

ALBUQUERQUE CENTER DEP CON 127.85

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

LAMAR (H) VORTAC 116.9 LAA Chan 116 N38°11.83' W102°41.25' 164° 44.4 NM to fld. 3944/12E.

STEAMBOAT SPRINGS/BOB ADAMS FLD (SBS) 3 NW UTC-7(-6DT) N40°30.98' W106°51.98'

CHEYENNE

6882 B S2 FUEL 100LL, JET A OX 1, 2, 3, 4 NOTAM FILE SBS

L-9E, 11E

RWY 14-32: H4452X100 (ASPH-GRVD) S-50, D-60 HIRL

IAP

RWY 32: PAPI(P2L)—GA 4.0° TCH 40'. Thld dsplcd 600'. REIL.

RUNWAY DECLARED DISTANCE INFORMATION:

RWY 14: TORA-4452 TODA-4452 ASDA-3852 LDA-3852

RWY 32: TORA-4452 TODA-4452 ASDA-4452 LDA-3852

AIRPORT REMARKS: Attended Nov-Apr 1300-0100Z†, May-Oct

1400-0100Z†. Wildlife on and invof arpt. Hang glider activity on

and in vicinity of arpt. Rwy 32 has -180' dropoff 2000' from pavement end. Sharp dropoffs on sides and ends of runway. Rwy

32 PAPI only visible to 5.5' left of rwy centerline due to high terrain. CAUTION—snow removal equipment may be on rwy during

snow season; for information ctc UNICOM prior to ldg. ACTIVATE

HIRL Rwy 14-32, PAPI Rwy 32 and REIL Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (970) 879-7794.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.2 (DENVER RADIO)

DENVER CENTER APP/DEP CON 120.475

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

ROBERT (L) VORW/DME 112.2 BQZ Chan 59 N40°27.82'

W106°52.34' 352° 3.2 NM to fld. 8254/13E.

**STERLING MUNI** (STK) 3 W UTC-7(-6DT) N40°36.92' W103°15.89'

CHEYENNE

4040 B FUEL 100LL, JET A TPA-5040(1000) NOTAM FILE DEN

L-106

RWY 15-33: H4708X75 (CONC) S-30 MIRL 0.3% up NW

IAP

RWY 15: PAPI(P2L)—GA 3.0° TCH 44'. Thld dsplcd 408'. Road.

RWY 33: PAPI(P2L)—GA 3.0° TCH 44'.

RWY 03-21: 2500X150 (TURF-GRVL) 0.3% up NE

RWY 03: Road. RWY 21: Building.

AIRPORT REMARKS: Attended 1500-0000Z†. For after hours svc call

970-520-2325. Aerobatic ops on and invof arpt. Taxiways and

terminal tiedown area marked with blue reflectors. Rwy 03 has +4' fence 155' fm thld. Rwy 03-21 ends marked with red/green

reflectors. Varmint holes near Rwy 03 end. MIRL preset low ints to increase ints—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (970) 526-3009.**COMMUNICATIONS:** CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 118.475


RADIO AIDS TO NAVIGATION: NOTAM FILE AKO.

AKRON (H) VORW/DME 114.4 AKO Chan 91 N40°09.33'

W103°10.79' 339° 27.8 NM to fld. 4620/13E.

BATTEN NDB (MHW) 392 BAJ N40°31.92' W103°13.81' 331°

5.2 NM to fld. NOTAM FILE DEN.

**STEVENS FLD** (See PAGOSA SPRINGS)**SUNLIGHT MOUNTAIN** (5SM) N39°25.53' W107°22.75'/10603.

DENVER

AWOS-3 126.075 (970) 384-3380 AWOS visibility unreliable indef.

L-9E

TELLURIDE RGNL (TEX) 5 W UTC-7(-6DT) N37°57.23' W107°54.51' **DENVER**
 9078 B **FUEL** 100, JET A OX 1, 2, 3, 4 TPA-10492(1414) Class I, ARFF Index A **H-3E, L-9E**
 NOTAM FILE TEX **IAP**
RWY 09-27: H6870X100 (ASPH-GRVD) S-45, D-62 MIRL
RWY 09: REIL. PAPI(P4L)-GA 3.5° TCH 45'. Hill. Rgt tfc. **RWY 27:** REIL. PAPI(P4L)-GA 4.0° TCH 45'. Hill.
AIRPORT REMARKS: Attended 1400-sunset plus 30 minutes. Arpt CLOSED 30 minutes after SS until 1300Z± or 30 minutes before SR whichever is later. Pilots operating after curfew will be prosecuted. Rising terrain all quadrants. Arpt on 1000' mesa, strong vertical turbulence in area of mesa edge. Rwy 09-27 grade -1.9% to near midpoint then +1.9%. Rwy 09-27 recommended tkf Rwy 27, land Rwy 09. ARFF restricted to FAR 139 design groups AI, AII, AIII, BI and BII. Glider, hang glider and helicopter ops on and invof arpt. No snow removal at ngt. Noise abatement procedures in effect for details call arpt management 970-728-5313. Arpt designed for acft with apch speed of 121 knots or less. ACTIVATE MIRL Rwy 09-27, PAPI Rwy 09 and REIL Rwy 09 and Rwy 27-CTAF. Approach light system emergency use only 30 minutes after SS-1300Z± or 30 minutes before SR, whichever is later. Arpt lighting system emerg use only 30 minutes after sunset-1300Z± or 30 minutes before sunrise (whichever is later). Ldg fee.
WEATHER DATA SOURCES: AWOS-3 118.325 (970) 728-1534.
COMMUNICATIONS: CTAF/UNICOM 123.0
RCO 122.15 (DENVER RADIO)
DENVER APP/DEP CON 125.35
RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.
CONES (L) VORW/DME 110.2 ETL Chan 39 N38°02.42' W108°15.52' 095° 17.4 NM to fld. 8460/12E. Unmonitored.
ILS/DME 109.3 I-TEX Chan 30 Rwy 09. Localizer only. LOC unusable from 1 DME to thld. LOC unusable byd 20° either side of course.

THURMAN N39°41.90' W103°12.90' NOTAM FILE DEN. **WICHITA**
 (L) **VORTACW 112.9** TXC Chan 76 207° 33.0 NM to Limon Muni. 4893/12E. **H-5A, L-10G**

TOBE N37°15.52' W103°36.00' NOTAM FILE DEN. **WICHITA**
 (L) **VORTACW 111.2** TBE Chan 49 258° 35.5 NM to Perry Stokes. 5730/12E. **H-5A, L-15A**

TRINIDAD

PERRY STOKES (TAD) 10 NE UTC-7(-6DT) N37°15.56' W104°20.44' **DENVER**
 5762 B **FUEL** 100LL, JET A NOTAM FILE TAD **H-5A, L-10F, 15A**
RWY 09-27: 5500X100 (TURF-GRVL) **IAP**
RWY 09: Tree.
RWY 03-21: H5498X100 (ASPH) S-37, D-50 MIRL 0.4% up SW
RWY 03: PAPI(P2L) GA 3.0° TCH 36. **RWY 21:** PAPI(P2L) GA 3.0° TCH 38. Trees.
AIRPORT REMARKS: Attended Mon-Sat 1500-0100Z±. Rwy 09-27 has +3'-6' bushes on edge both sides of rwy along entire length, +40' trees 846' from thld Rwy 09 and 137' right. Rwy 09 +4' bushes, +3' posts within 100' of rwy end on both sides of center. Rwy 09-27 has rough and uneven asphalt at intersection with Rwy 03-21. Rwy 09-27 soft when wet. Rwy 03-15 terrain within 50' on both sides of rwy. Rwy 09-27 various prairie dog holes throughout rwy. Twys have blue/white reflectors at pavement edge. ACTIVATE MIRL Rwy 03-21 and PAPI Rwy 03 and Rwy 21-CTAF. PPR.
WEATHER DATA SOURCES: ASOS 119.025 (719) 845-1156.
COMMUNICATIONS: CTAF/UNICOM 122.8
DENVER CENTER APP/DEP CON 128.375
TRINIDAD RCO 122.2 (DENVER RADIO)
RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.
TOBE (L) VORTACW 111.2 TBE Chan 49 N37°15.52' W103°36.00' 258° 35.5 NM to fld. 5730/12E.
TRINIDAD NDB (HW) 329 TAD N37°18.37' W104°20.00' 177° 2.8 NM to fld. NOTAM FILE TAD. Unmonitored 0100-1500Z±.

TRINIDAD N37°18.37' W104°20.00' NOTAM FILE TAD. **DENVER**
NDB (HW) 329 TAD 177° 2.8 NM to Perry Stokes. Unmonitored 0100-1500Z±. **L-10F, 15A**
RCO 122.2 (DENVER RADIO)

USAF ACADEMY AFLD (AFF) N38°58.18' W104°48.77' NOTAM FILE DEN. **DENVER**
AIRSPACE: CLASS D airspace operates from Mon-Fri SR-SS. Sat 1400-2100Z±. Closed Sun and holidays. **L-10F**
 Other times class G.

VANCE BRAND (See LONGMONT)

WALDEN—JACKSON CO (33V) 1 NE UTC-7(-6DT) N40°45.02' W106°16.29'

CHEYENNE

8153 B FUEL JET A NOTAM FILE DEN

H-3E, 5A, L-9E, 11E

RWY 04-22: H5901X75 (ASPH) S-25 MIRL

IAP

RWY 17-35: 4020X100 (TURF)

RWY 17: Fence. RWY 35: Road.

AIRPORT REMARKS: Attended on call. Phone 970-723-4660 or 970-723-4481 or 970-846-6971. Rwy 04 +20' powerline 660' from rwy end 750' left of extended centerline. Rwy 04 has -50' dropoff 450' from thld. Radio controlled model acft opr on arpt at SE corner. Occasional deer and antelope on rwys. Rwy 35 +4' fence at thld on centerline, tops of fence posts painted yellow. Rwy 17-35 marked with inoperable rwy edge lgts and orange cones. Rwy 22 number located 125' from pavement end. Restrooms avbl May-Sep on arpt. ACTIVATE MIRL Rwy 04-22—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.625 (970) 723-4513.**COMMUNICATIONS:** CTAF 122.9

DENVER CENTER APP/DEP CON 126.5

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

KREMMLING (H) VORW/DME 113.8 RLG Chan 85 N40°00.16' W106°26.55' 356° 45.5 NM to fld. 9370/14E.

WALKER FIELD N39°07.53' W108°31.25'

RCO 122.6 (DENVER RADIO)

WALSENBURG
SPANISH PEAKS AIRFIELD (4V1) 5 N UTC-7(-6DT) N37°41.80' W104°47.11'

DENVER

6047 FUEL 100LL NOTAM FILE DEN

L-10F, 15A

RWY 08-26: H4896X60 (ASPH) S-5 LIRL (NSTD)

RWY 08: Thld dsplcd 419'. Road. RWY 26: Fence.

RWY 03-21: 2500X40 (TURF-DIRT)

RWY 03: Road.

AIRPORT REMARKS: Attended irregularly. 24 hr credit card fuel avbl. Arpt CLOSED to acft over 12,500 pounds. Rwy 03-21 CLOSED except PPR ctc arpt manager prior to use 719-742-5323 or 719-859-5323. Rwy 03 first 1000' has ruts and bumps. Rwy 03 rough and not well maintained. Rwy 08-26 NSTD MIRL 4509' lighted. ACTIVATE NSTD LIRL Rwy 08-26—CTAF.

WEATHER DATA SOURCES: AWOS-3 123.6 (719) 738-1053.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE PUB.

PUEBLO (H) VORTACW 116.7 PUB Chan 114 N38°17.66' W104°25.77' 192° 39.6 NM to fld. 4760/13E.

WESTCLIFFE
SILVER WEST (C08) 9 SE UTC-7(-6DT) N38°00.67' W105°22.37'

DENVER

8290 FUEL 100LL NOTAM FILE DEN

H-3E, 5A, L-10F

RWY 13-31: H7000X55 (ASPH)

RWY 31: Ground.

AIRPORT REMARKS: Unattended. 24 hr self serve fuel. Occasional deer and elk on Rwy 13-31. Rwy 13-31 has varying terrain heights from -5 to +12' along full length of rwy inside of primary surface. Rwy 13-31 has +15' Highway 120' W of and parallel to centerline full length, +4' fence 100' W of and parallel to centerline full length.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE ALS.

ALAMOSA (H) VORTACW 113.9 ALS Chan 86 N37°20.95' W105°48.93' 015° 44.9 NM to fld. 7535/13E.

WESTWINDS (See DELTA)

WILKERSON PASS (4BM) N39°02.93' W105°30.73'/112.79

DENVER

AWOS-3 134.375 (541) 386-2386

L-10F

WOLF CREEK PASS (CPW) N37°27.87' W106°48.27'/11760.

DENVER

AWOS-3 121.125 (970) 264-2180

L-9E

WRAY MUNI (2V5) 2 NW UTC-7(-6DT) N40°06.02' W102°14.46' **CHEYENNE**
 3667 B S4 **FUEL** 100LL NOTAM FILE DEN **H-5A, L-10G**
RWY 17-35: H5400X75 (ASPH) S-16 MIRL 0.7% up N **IAP**
RWY 17: REIL. PAPI(P2L)—GA 3.0° TCH 40'. **RWY 35:** REIL. PAPI(P2L)—GA 3.0° TCH 40'.
AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†, Sat 1500-1900Z†. 24 hr self serve fuel avbl. Putting greens and 4' fences 50' right and 75' left of rwy centerline. Twy marked with blue reflectors. ACTIVATE MIRL Rwy 17-35 CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8
 Ⓡ **DENVER CENTER APP/DEP CON** 132.7
RADIO AIDS TO NAVIGATION: NOTAM FILE GLD.
GOODLAND (H) VORTACW 115.1 GLD Chan 98 N39°23.27' W101°41.54' 317° 49.7 NM to fld. 3650/12E.
HIWAS

YAMPA VALLEY (See HAYDEN)

YUMA MUNI (2V6) 1 SE UTC-7(-6DT) N40°06.25' W102°42.78' **CHEYENNE**
 4136 B S4 **FUEL** 100LL NOTAM FILE DEN **L-10G**
RWY 16-34: H4200X75 (CONC) MIRL S-12.5
RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 40'. **RWY 34:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road. Rgt tfc.
RWY 12-30: 2900X40 (ASPH-GRVL)
RWY 12: Road. Rgt tfc. **RWY 30:** Road.
AIRPORT REMARKS: Attended Mon-Sat dalgt hours. Rwy 12-30 soft when wet. Center 360' Rwy 12-30 asphalt. Remainder gravel. Rwy 12 has +20' bldg 90' from thld, 213' right. Rwy 30 has -2' ditch at thld, +4' fence 50' from thld. Twys marked with blue and yellow reflectors. MIRL Rwy 16-34 preset med ints dusk-dawn, ACTIVATE PAPI Rwy 16, PAPI Rwy 34 and REIL Rwy 16, REIL Rwy 34—CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE AKO.
AKRON (H) VORW/DME 114.4 AKO Chan 91 N40°09.33' W103°10.79' 085° 21.7 NM to fld. 4620/13E.

ALAMO LANDING FLD (L92) 2 W UTC-8(-7DT) N37°21.75' W115°11.67'

LAS VEGAS

3719 NOTAM FILE RNO

RWY 14-32: 5000X120 (DIRT)**RWY 14:** Brush. **RWY 32:** Berm.**RWY 15-33:** 2500X70 (DIRT)**RWY 15:** Berm. **RWY 33:** Berm.**AIRPORT REMARKS:** Unattended. Uncontrolled vehicle access. No line of sight between rwy ends. Rws 15-33 and Rwy 14-32 livestock in vicinity of rws.**COMMUNICATIONS:** CTAF 122.9**AUSTIN** (9U3) 4 SW UTC-8(-7DT) N39°28.08' W117°11.72'

LAS VEGAS

H-3C, L-9B

5730 B NOTAM FILE RNO

RWY 18-36: H6000X75 (ASPH) S-30 MIRL**RWY 18:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. **RWY 36:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.**AIRPORT REMARKS:** Unattended. Military acft opr in vicinity of arpt. ACTIVATE MIRL Rwy 18-36, PAPI Rws 18 and 36, REIL Rwy 18 and 36—CTAF.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**MINA (H) VORTAC** 115.1 MVA Chan 98 N38°33.92' W118°01.97' 019° 66.8 NM to fld. 7860/17E.

HIWAS.

BATTLE MOUNTAIN (BAM) 3 SE UTC-8(-7DT) N40°35.94' W116°52.46'

SALT LAKE CITY

H-3C, L-9B, 11B

IAP

4532 B S4 **FUEL** 100LL, JET A NOTAM FILE RNO**RWY 12-30:** H7300X100 (ASPH) S-30, D-104, ST-159 MIRL**RWY 03-21:** H7299X150 (ASPH) S-30, D-125, ST-132 MIRL**RWY 03:** VASI(V2R)—GA 3.0° TCH 26'.**RWY 21:** PAPI(P4L)—GA 3.0° TCH 45'.**AIRPORT REMARKS:** Attended Oct-May 1500-0100Z†, Jun-Sep 1500-0200Z†. After hrs call 775-635-2245. ACTIVATE MIRL Rwy 03-21 and Rwy 12-30, and perimeter lgts H1—CTAF.**WEATHER DATA SOURCES:** AWOS-3 119.45 (775) 635-8419.**COMMUNICATIONS:** CTAF/UNICOM 122.8**MT LEWIS RCO** 122.65 (RENO RADIO)**SALT LAKE CENTER APP/DEP CON** 132.25**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**(H) VORTACW** 112.2 BAM Chan 59 N40°34.15'

W116°55.34' 033° 2.8 NM to fld. 4536/18E.

VORTAC unusable:


050°-060° byd 30 NM blo 12,000'

115°-165° byd 15 NM blo 12,000'

255°-290° byd 15 NM blo 12,000'

DME unusable 246°-255° byd 34 NM blo 14,000'

.

HELIPAD H1: H60X60 (CONC)**HELIPAD H2:** H60X60 (CONC)**HELIPORT REMARKS:** Rwy H1 perimeter lights. ACTIVATE MIRL Rwy 03-21 and Rwy 12-30, and perimeter lgts H1—CTAF.

BEATTY (BTY) 3 SW UTC-8(-7DT) N36°51.66' W116°47.22'

LAS VEGAS

3170 B NOTAM FILE RNO

H-4H, L-9B

RWY 16-34: H5600X60 (ASPH) S-15, D-30 MIRL

AIRPORT REMARKS: Unattended. Low flying military aircraft in vicinity of arpt. Terrain rises at constant rate of approximately 35-1 for 2 miles to base of mountain. ACTIVATE MIRL Rwy 16-34—CTAF.

WEATHER DATA SOURCES: HIWAS 114.7 BTY.

COMMUNICATIONS: CTAF 122.9

RCO 122.1R 114.7T (RENO RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

(H) VORTAC 114.7 BTY Chan 94 N36°48.04'

W116°44.86' 313° 4.5 NM to fld. 2925/16E. HIWAS.

VORTAC unusable:


325°-089° beyond 9 NM

195°-210° beyond 33 NM below 10,500'

265°-305° beyond 30 NM below 10,200'

305°-325° beyond 28 NM below 9000'

360°-060° byd 12 NM

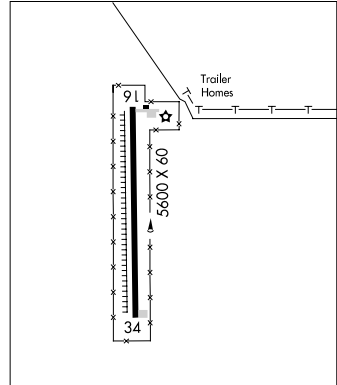

BOULDER CITY N35°59.75' W114°51.82' NOTAM FILE RNO.

LAS VEGAS

(H) VORTACW 116.7 BLD Chan 114 163° 2.9 NM to Boulder City Muni. 3650/15E. HIWAS.

H-4I, L-7E

BOULDER CITY MUNI (BVU) 1SW UTC-8(-7DT) N35°56.85' W114°51.67'

LAS VEGAS

2201 B S4 FUEL 100LL, JET A NOTAM FILE RNO

L-7E

RWY 09R-27L: H4800X75 (ASPH) S-12.5 MIRL

RWY 09R: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 27L: REIL. PAPI(P2L)—GA 3.0° TCH 40'. P-line.

RWY 15-33: H3850X75 (ASPH) S-12.5 MIRL

RWY 15: REIL. Rgt tfc.

RWY 33: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 09L-27R: H2200X60 (ASPH) S-12.5

RWY 27R: Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z+. Parachute Jumping.


Skydive drop zone adjacent arpt north side. Ultralight activity 2 miles southwest of arpt invof dry lake bed. Rwy 09L-27R rwy in poor condition due to multiple 2" wide cracks. Sage brush and uneven terrian in the rwy safety areas. Soft shoulders adjacent to all rwys and twys. Dep Rwy 33 not recommended. Rwy 33 steep rwy gradient, rising terrain, obstacles off dep end. Rwy 27L preferred lgt wind conditions. Helicopters cross active rwys and twys. Large number of Grand Cnayon tour acft ops in vicinity. Power lines all quadrants. 1'-5' drainage ditch around all runways and taxiways. 10' drainage channel 50' from thld crossing centerline Rwy 09L. Steep rising terrain north of arpt. Avoid overflight of Boulder City residential areas. ACTIVATE MIRL Rwy 09R-27L and Rwy 15-33—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.475 (702) 293-1532. HIWAS 116.7 BLD.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

(H) VORTACW 116.7 BLD Chan 114 N35°59.75' W114°51.82' 163° 2.9 NM to fld. 3650/15E. HIWAS.

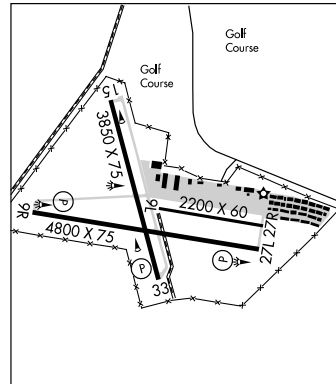

BULLION N40°45.58' W115°45.68' NOTAM FILE EKO.

SALT LAKE CITY

(L) VORW/DME 114.5 BQU Chan 92 324° 4.2 NM to Elko Rgnl. 6464/17E.

L-9B, 11B

VOR unusable 088°-110° byd 20 NM blo 12,900' 110°-130° byd 32 NM blo 12,900'.

DME unusable 088°-110° byd 20 NM 110°-130° byd 32 NM

CAL NEV ARI**KIDWELL** (1L4) 0 S UTC-8(-7DT) N35°18.33' W114°52.97'**PHOENIX**

2605 NOTAM FILE RNO

RWY 15-33: 4140X65 (DIRT) LIRL (NSTD)**RWY 15:** Fence. **RWY 33:** Road.**AIRPORT REMARKS:** Attended continuously. Ultralight activity on and in/ov arpt. Arpt is residential airpark. Be alert to automobile t/c on Rwy 15-33. +70' twr 350' left of centerline Rwy 15 and adjacent to the thld. Rwy 15-33 center 4075' lgtd. Rwy 15-33 NSTD LIRL thld lgts 6 green lgts.**COMMUNICATIONS:** CTAF 122.9**CARSON CITY****CARSON** (CXP) 3 NE UTC-8(-7DT) N39°11.53' W119°44.07'**SAN FRANCISCO**4697 B S4 **FUEL** 100, 100LL, JET A OX 1, 3 TPA-5497(800) NOTAM FILE CXP**H-3B, L-9A****RWY 09-27:** H5906X75 (ASPH) S-30 MIRL**RWY 09:** PVASI(NSTD)—GA 4.0° TCH 35'. Road. Rgt t/c. **RWY 27:** VASI(V2L)—GA 3.0° TCH 26'.**AIRPORT REMARKS:** Attended Jun-Sep 1500-0400Z, Oct-May 1600-0300Z. Fuel self-service 24 hrs. Ultralight activity on and in/ov arpt. Rwy 09 non-standard PSIL single box left side. Fee for tiedown only.**WEATHER DATA SOURCES:** AWOS-3 119.925 (775) 884-4708.**COMMUNICATIONS:** CTAF/UNICOM 123.0Ⓡ **RENO APP/DEP CON** 119.2**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**MUSTANG (H) VORTAC** 117.9 FMG Chan 126 N39°31.88' W119°39.37' 174° 20.7 NM to fld. 5949/16E.**PARKER CARSON** (2Q5) 5 E UTC-8(-7DT) N39°12.10' W119°41.01'**SAN FRANCISCO**

4939 NOTAM FILE RNO

RWY 06-24: 1700X40 (GRVL)**RWY 06:** Road. **RWY 24:** Hill.**AIRPORT REMARKS:** Unattended. Power lines north, south and west of arpt. Rwy 24 ground rises immediately to 15%. +2' sage brush on rwy edges full length.**COMMUNICATIONS:** CTAF 122.9**COALDALE** N38°00.20' W117°46.23' NOTAM FILE RNO.**LAS VEGAS**(H) **VORTAC** 117.7 OAL Chan 124 67° 32.6 NM to Tonopah. 4800/17E.**H-3B, L-9A**

VOR unusable 060°-075° beyond 15 NM below 16,000'.

DME unusable 060°-075° beyond 15 NM below 16,000'.

VORTAC unusable:

150°-180° beyond 15 NM below 15,500'

305°-015° beyond 25 NM below 15,500'

RCO 122.1R 117.7T (RENO RADIO)**CREECH AFB** (INS) N36°35.23' W115°40.40' NOTAM FILE RNO.**LAS VEGAS****AIRSPACE:** CLASS D svc Mon-Fri 1330-0530Z, clsd weekends and holidays, Opr hr vary based on**L-9B**

Nellis AFB Wing reg. ASOS 121.125 (702) 652-0667 DSN 682-0667.

CRESCENT VALLEY (U74) 1 E UTC-8(-7DT) N40°24.96' W116°33.81'**SALT LAKE CITY**

4787 NOTAM FILE RNO

RWY 05-23: 5424X60 (DIRT)**RWY 05:** Road. **RWY 23:** Road.**RWY 14-32:** 4650X75 (DIRT)**RWY 14:** Tree.**AIRPORT REMARKS:** Unattended. Cattle on and in/ov rws. Rwy 05-23 first 1600' of Rwy 23 rough surface.

Uncontrolled vehicle access all runways. Rwy 14-32 +2' earth ridges along rwy edges and 3' berm along both sides of rwy. Rwy 05-23 -1' drainage ditch both sides rwy, +2' earth ridges along rwy edges.

COMMUNICATIONS: CTAF 122.9**CURRANT** N38°40.25' W115°36.07'**LAS VEGAS****RCO** 122.3 (RENO RADIO)**L-9B**

CURRENT RANCH (9U7) 1 SW UTC-8(-7DT) N38°44.16' W115°28.82'

LAS VEGAS

5181 NOTAM FILE RNO

RWY 03-21: 5100X80 (TURF-DIRT)

RWY 21: Road.

AIRPORT REMARKS: Unattended. Rwy 03-21 has unlimited vehicle access to acft movement area. Wind permitting land Rwy 03 tkr Rwy 21 to avoid overflying town. Space for tiedown, but no ropes or chains.

COMMUNICATIONS: CTAF 122.9

DAYTON/CARSON CITY
DAYTON VALLEY AIRPARK (A34) 2 E UTC-8(-7DT) N39°14.31' W119°33.33'

SAN FRANCISCO

4414 NOTAM FILE RNO

Not insp.

H-3B, L-9A

RWY 05-23: H5343X75 (ASPH) S-30, D-70

RWY 05: Thld displcd 991'. Tower. Rgt tfc.

AIRPORT REMARKS: Unattended. For field information call 775-246-7620. Noise abatement: small acft ¾ NM S at 5414' MSL-1000' AGL; Jets and large acft 1¾ NM S at 6414' MSL-2000' AGL; extend tkfs beyond schools and residential areas.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.

MUSTANG (H) VORTACW 117.9 FMG Chan 126 N39°31.88' W119°39.37' 149° 18.2 NM to fld. 5949/16E.

DENIO JUNCTION (E85) 3 SE UTC-8(-7DT) N41°57.24' W118°37.86'

KLAMATH FALLS

4202 FUEL MOGAS NOTAM FILE RNO

RWY 02-20: 3320X42 (DIRT)

RWY 02: Hill. RWY 20: Road.

RWY 13-31: 3430X90 (DIRT)

RWY 31: Trees.

RWY 07-25: 3100X100 (DIRT)

RWY 25: P-line.

AIRPORT REMARKS: Unattended. MOGAS avbl dalgt hrs at adjacent cafe 775-941-0371. Rwy 25 and Rwy 31 thlds marked with white tires. Rwy may be soft during winter months.

COMMUNICATIONS: CTAF 122.9

DERBY FLD (See LOVELOCK)

DUCKWATER (Ø1U) 6 SE UTC-8(-7DT) N38°51.10' W115°38.02'

LAS VEGAS

5124 NOTAM FILE RNO

RWY 15-33: 3400X80 (DIRT)

RWY 33: Road.

RWY 03-21: 2700X75 (DIRT)

RWY 03: Road. RWY 21: Road.

AIRPORT REMARKS: Unattended. Arpt CLOSED indef. Rwy 03-21 and Rwy 15-33 overgrown unsuitable for acft use.

Watch, for livestock on rwy. Rwy 03-21 and Rwy 15-33 uncontrolled vehicle access. Rwy 03-21 + 1' berm full length north side, - 2' ditch full length south side. Rwy 15-33 + 1' berm both sides of rwy. Rwy 03, 2 stakes N edge of rwy, 135' from rwy end, + 4' high. Rwy 33 P-line 1500' from rwy end + 35' both sides of centerline, marked with orange ball, 42:1 slope.

COMMUNICATIONS: CTAF 122.9

DYER (2Q9) 6 SE UTC-8(-7DT) N37°36.58' W118°00.39'

SAN FRANCISCO

4899 S4 NOTAM FILE RNO

RWY 12-30: 2870X50 (DIRT)

RWY 12: Pole. RWY 30: Trees.

AIRPORT REMARKS: Unattended. Emerg fuel only call 775-572-3059. Rwy 12 p-line marked with orange balls. Rwy 12-30 +1' berms both sides of rwy. Rwy 12-30 thld marked by white tires. NW end Rwy 12-30 width varies due to weeds. Apch Rwy 12 has weeds to 5 inches.

COMMUNICATIONS: CTAF 122.9

ECHO BAY (See OVERTON)

ELKO RGNL (EKO) 1 W UTC-8(-7DT) N40°49.50' W115°47.50'

SALT LAKE CITY

5140 B S4 FUEL 100, JET A TPA—See Remarks. Class II, ARFF Index A

H-3C, L-9B, 11B

NOTAM FILE EKO

IAP, AD

Rwy 05-23: H7214X150 (ASPH-GRVD) S-78, D-105, ST-133, DT-170 MIRL 0.3% up NE **Rwy 05:** VASI(V4L)—GA 3.0° TCH 43'. Road. Rgt tfc.

Rwy 23: MALSR. VASI(V4L)—GA 3.25° TCH 34'. Thld dsplcd 795'. Lgt d pole.

Rwy 12-30: H2871X60 (ASPH) S-12 2.0% up NW

Rwy 12: Pole. Rgt tfc. **Rwy 30:** Pole.

RUNWAY DECLARED DISTANCE INFORMATION

Rwy 05: TORA-7214 TODA-7214 ASDA-7214 LDA-7214

Rwy 23: TORA-7211 TODA-8211 ASDA-7211 LDA-6410

AIRPORT REMARKS: Attended 1300-0300Z†. VASI Rwy 23 not to be used beyond 4 NM due to obstruction. PPR for all acft operations over 100,000 pounds call 775-777-7190. Rwy 23 7211' for dep; 6401' for ldg; Rwy 05 7211' for dep and ldg. TPA-6140(1000), jet acft 6640(1500). ACTIVATE MIRL Rwy 05-23, VASI Rwy 05 and Rwy 23, REIL and MALSR Rwy 23—122.7.

WEATHER DATA SOURCES: ASOS 119.275 (775) 778-9639.

COMMUNICATIONS: CTAF/UNICOM 123.0


RCO 122.6 (RENO RADIO)

SALT LAKE CENTER APP/DEP CON 132.25

RADIO AIDS TO NAVIGATION: NOTAM FILE EKO.

BULLION (L) VORW/DME 114.5 BQU Chan 92 N40°45.58' W115°45.68' 324° 4.2 NM to fld. 6464/17E.

LDA/DME 108.5 I-EKO Chan 22 Rwy 23. DME unusable byd 13 NM blo 9,000'.

**ELY ARPT (YELLAND FLD)** (ELY) 3 NE UTC-8(-7DT) N39°17.98' W114°50.51'

LAS VEGAS

6259 B S4 FUEL 100LL, JET A OX 3 Class II, ARFF Index A NOTAM FILE ELY

H-3C, L-9B

Rwy 18-36: H6018X150 (ASPH-PFC) S-70, D-85, DT-130 MIRL 0.6% up S

IAP

Rwy 18: REIL. PAPI(P4L)—GA 3.0° TCH 50'.

Rwy 36: REIL. PAPI(P4L)—GA 3.0° TCH 50'.

Rwy 12-30: H4814X60 (ASPH) S-15 MIRL 0.4% up SE

Rwy 30: Tree.

AIRPORT REMARKS: Attended 1600-0100Z†. Soft shoulders adjacent all runways and taxiways. Rwy 12-30 not avbl for acft over 30 passenger seats. Svc charge for fuel after hours. Ultralight acft operating on Rwy 12 and in vicinity of arpt daltg hours. ACTIVATE MIRL Rwy 12-30 and Rwy 18-36, PAPI Rwy 18 and Rwy 36, REIL Rwy 18 and Rwy 36—CTAF.

WEATHER DATA SOURCES: ASOS 120.625 (775) 289-4466.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.2 (RENO RADIO)

Ⓡ SALT LAKE CENTER APP/DEP CON 133.45

RADIO AIDS TO NAVIGATION: NOTAM FILE ELY.

(H) **VORW/DME** 110.6 ELY Chan 43 N39°17.90'

W114°50.90' at fld. 6254/14E.


VOR/DME unusable:

008°-142° byd 10 NM blo 17,500'

008°-142° byd 20 NM

142°-163° byd 20 NM blo 11,500'

163°-293° byd 16 NM



293°-343° blo 13,000'

293°-343° byd 22 NM blo 14,000'

293°-343° byd 26 NM

343°-008° byd 21 NM blo 12,000'

EMPIRE (1A8) 1 W UTC-8(-7DT) N40°34.68' W119°21.16'

KLAMATH FALLS

3990 NOTAM FILE RNO

Rwy 18-36: 3770X42 (DIRT)

Rwy 18: Rgt tfc. P-line.

Rwy 07-25: 3170X48 (DIRT)

Rwy 07: Rgt tfc. **Rwy 25:** Thld dsplcd 800'. P-line.

AIRPORT REMARKS: Unattended. No tkf Rwy 07 due to p-line and ball fld lghts +50'. Rwy 25 dsplcd thld marked by 8 white tires. Rwy 18-36 thlds marked with white tires. 1' berms around all runways.

COMMUNICATIONS: CTAF 122.9

EUREKA (Ø5U) 6 NW UTC-8(-7DT) N39°36.25' W116°00.30'

LAS VEGAS

5954 B S4 FUEL 100LL, JET A NOTAM FILE RNO

H-3C, L-9B

RWY 17-35: H7300X60 (ASPH-AFSC) S-30 HIRL

RWY 17: PAPI(P2L)—GA 3.0° TCH 45'.

RWY 35: PAPI(P2L)—GA 3.0° TCH 40'. P-line.

AIRPORT REMARKS: Attended 1600-0100Z†. After hrs call out 775-237-6100. HIRL Rwy 17-35 preset low ints dusk-dawn, to increase ints ACTIVATE—CTAF.


COMMUNICATIONS: CTAF 122.9

RCD 122.3 (RENO RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE EKO.

BULLION (L) VORW/DME 114.5 BQU Chan 92 N40°45.58'

W115°45.68' 172° 70.2 NM to fld. 6464/17E.



FALLON MUNI (FLX) 2 NE UTC-8(-7DT) N39°29.95' W118°44.93'

SAN FRANCISCO

3963 B S4 FUEL 100, JET A OX 4 TPA-4763(800) NOTAM FILE RNO

H-3B, L-9A

RWY 03-21: H5703X75 (ASPH) S-17 MIRL

IAP

RWY 03: PAPI(P2L)—GA 3.0° TCH 49'. Thld dsplcd 100'. Road.

RWY 21: PAPI(P2L)—GA 3.0° TCH 40'.

RWY 13-31: 4207X100 (DIRT)

RWY 13: Trees.

RWY 31: Fence.

AIRPORT REMARKS: Attended 1600-0100Z†. Ultralight activity invof arpt.

COMMUNICATIONS: CTAF/UNICOM 122.8

HAZEN RCD 122.1R 114.1T (RENO RADIO)


® NAVY FALLON APP/DEP CON 120.85 (Mon thru Fri 1515-0645Z†, Sat 1800-0200Z†, Sun 2000-0200Z†) exc holidays.

® OAKLAND CENTER APP/CON 128.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

HAZEN (L) VORTAC 114.1 HZN Chan 88 N39°30.99'

W118°59.86' 078° 11.6 NM to fld. 4080/17E.

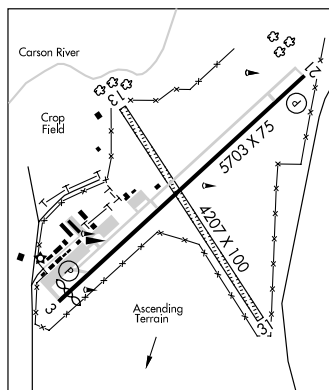

FALLON NAS (VAN VOORHIS FLD) (NFL)(KNFL) NAS 3 NE UTC-8(-7DT) **SAN FRANCISCO**
 N39°25.00' W118°42.06'
 3934 B TPA—See Remarks NOTAM FILE NFL Not insp.
RWY 31R-13L: H14005X201 (PEM) PCN 45 R/C/W/T HIRL
RWY 13R: PAPI(P4L)—GA 3.0° TCH 48'. **RWY 31L:** PAPI(P4L)—GA 3.5° TCH 55'.
RWY 13L-31R: H11079X200 (CONC) PCN 70 R/C/W/T HIRL
RWY 13L: OLS. PAPI(P4L). **RWY 31R:** OLS.
RWY 07-25: H7004X154 (PEM) PCN 44 R/D/W/T HIRL
RWY 25: OLS.
ARRESTING GEAR/SYSTEM
RWY 13R HOOK E28(B) (1804') **HOOK E28(B)** (1897') **RWY 31L**
RWY 13L HOOK E28(B) (952') **HOOK E28(B)** (954') **RWY 31R**
RWY 07 HOOK E28(B) (1300') **HOOK E28(B)** (1293') **RWY 35**
MILITARY SERVICE: LGT Rwy 07-25 Portable. **A-GEAR** E-28(B) apch end Rwy 31R normally derigged.
JASU 1 (GTC-85) 1(NCNP-105) 2(NC-8A) **FUEL** J8. 4 hr prior notice rqr for acft req hot refuel.
FLUID SP LOX TRAN ALERT No transient maintenance/hanger space or de-ice avbl.
MILITARY REMARKS: Opr Mon-Fri 1515-0645Z, Sat 1800-0200Z, Sun 2000-0200Z, clsd holidays. See FLIP AP/1
 Supplementary Arpt Remark. **RSTD** PPR 24 hr in advance for transient svc except MEDEVAC, Search and Rescue,
 deployed squadrons/CVV or scheduled logistics flight. PPR valid only 4 hr byd estimated time of arrival unless
 rescheduled, DSN 890-3415/3479, C775-426-3415/3479. **CAUTION** Rwy 13R centerline opr only due to
 Foreign Object Damage hazard. Radar twr 1.1 NM SW of control twr 167' AGL. Large multi-engine acft full
 stop/touch and go land past E-28 A-Gear at apch ends. Twy C, S apron to apch end Rwy 25 varies in width
 tapering to 50' wide E of Rwy 13R-31L. Twy D, S apron to apch end Rwy 07 50' wide. Extensive bird activity
 within approximately 15 NM of arpt from surface to approximately 3000' AGL. General aviation acft opr from
 Fallon Muni arpt 5 NM NNW. **TFC PAT** All acft activate ldg/taxi lgt while on apch. Reduced rwy separation standard
 in effect for USN/USMC acft. TPA—Initial all rwys 7600(3666), overhead break 5500(1566) no overhead for Rwy
 07 pattern altitude 5000(1066). Due to extensive traffic acft req practice apch expect lengthy delays.
NS ABTMT When dep Rwy 31L turn rgt, heading 040°, over dep end. All a cft ctc Operations Duty Officer, DSN
 890-2419/2458, C775-426-2419/2458, prior to filing VFR, for noise sensitive area briefing. **MISC** Schedule of
 FRTC airspace outside of published airfield hrs will be allowed only after approval has been granted by the NAS
 Fallon Ops Officer to extd/modify published airfield hrs. Base OPS DSN 890-2419/2458, C775-426-2458.
 Logistics acft expect ASR/PAR apch.
COMMUNICATIONS: SFA ATIS 370.925 (Mon-Fri 1515-0645Z, Sat 1800-0200Z, Sun 2000-0200Z, clsd
 holidays.)
 (R) **NAVY FALLON APP/DEP CON** 120.85 360.2 (Mon-Fri 1515-0645Z, Sat 1800-0200Z, Sun 2000-0200Z, clsd
 holidays.), other times ctc (R) **OAKLAND CENTER APP/DEP CON** 128.8 285.5
NAVY FALLON TOWER 119.25 340.2 (Mon-Fri 1515-0645Z, Sat 1800-0200Z, Sun 2000-0200Z, clsd holidays.)
GND CON 251.15 **CLNC DEL** 353.55
PMSV METRO 327.4 **BASE OPS** 238.0 **DESERT CON** 126.2 322.35 (Acft transient, using Fallon Range check in
 and out—call Desert Control.)
AIRSPACE: CLASS D svc Mon-Fri 1515-0645Z, Sat 1800-0200Z, Sun 2000-0200Z except holidays other times
 CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.
HAZEN (L) VORTAC 114.1 HZN Chan 88 N39°30.99' W118°59.86' 096° 15.0 NM to fld. 4080/17E.
(H) TACAN Chan 82 NFL (113.5) N39°25.01' W118°42.29' at fld. 3929/16E.
ASR/PAR
COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima. Inbound transient helicopter ctc Tower 5 min
 prior to entering CLASS D airspace for entry procedure.

FERNLEY

TIGER FLD (N58) 3S UTC-8(-7DT) N39°33.58' W119°14.49' **SAN FRANCISCO**
 4346 NOTAM FILE RNO **L-9A**
RWY 15-33: H3974X40 (ASPH)
RWY 15: Rgt tfc. **RWY 33:** Hill.
RWY 05-23: 2750X40 (GRVL)
RWY 05: Road. **RWY 23:** Hill.
AIRPORT REMARKS: Unattended. Rwy 15-33 multiple cracks wider than 3 inches on rwy.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.
HAZEN (L) VORTAC 114.1 HZN Chan 88 N39°30.99' W118°59.86' 266° 11.6 NM to fld. 4080/17E.

GABBS (GAB) 4 NW UTC-8(-7DT) N38°55.45' W117°57.54'

LAS VEGAS

4700 B NOTAM FILE RNO

RWY 08-26: 5900X65 (DIRT)

RWY 16-34: 2800X65 (DIRT)

AIRPORT REMARKS: Unattended. Rwy 08-26 and Rwy 16-34 no line of sight between runways. Recommend land Rwy 08, takeoff Rwy 26 wind permitting. Rwy 08-26 weeds +1' full length of rwy. Rwy 16-34 weeds +1' full length of rwy.

COMMUNICATIONS: CTAF 122.9

GOLDFIELD

LIDA JUNCTION (ØL4) 14 S UTC-8(-7DT) N37°29.15' W117°11.45'

LAS VEGAS

4684 NOTAM FILE RNO

RWY 18-36: 6100X80 (DIRT)

RWY 18: Tree.

AIRPORT REMARKS: Unattended. Rwy 18-36 has uncontrolled vehicle access. +30' pole 408' from thld Rwy 18 on centerline extended. Rwy 18-36 edges marked with white tires.

COMMUNICATIONS: CTAF 122.9

HAWTHORNE INDUSTRIAL (HTH) 1 N UTC-8(-7DT) N38°32.66' W118°38.06'

SAN FRANCISCO

H-3B, L-9A

4215 B FUEL 100, JET A NOTAM FILE HTH

RWY 10-28: H6000X100 (ASPH) S-53, D-93, ST-118, DT-160

MIRL

RWY 10: REIL. RWY 28: REIL. PAPI(P2L)—GA 3.0° TCH 49'.

RWY 15-33: 3500X130 (DIRT)

RWY 15: Railroad.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Rwy 33 starts at north edge Rwy 10-28. ACTIVATE MIRL Rwy 10-28—CTAF 122.8.

WEATHER DATA SOURCES: AWOS-3 120.225 (775) 945-0727.


COMMUNICATIONS: CTAF/UNICOM 122.8

HAZEN RCO 122.1R 114.1T (RENO RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

MINA (H) VORTAC 115.1 MVA Chan 98 N38°33.92'

W118°01.97' 251° 28.3 NM to fld. 7860/17E. HIWAS.



HAZEN N39°30.99' W118°59.86' NOTAM FILE RNO.

SAN FRANCISCO

H-3B, L-9A

(L) VORTAC 114.1 HZN Chan 88 078° 11.6 NM to Fallon Muni. 4080/17E.

VOR unusable 300°-320° beyond 30 NM below 9500'.

RCO 122.1R 114.1T (RENO RADIO)

HENDERSON EXECUTIVE (See LAS VEGAS)

JACKPOT/HAYDEN FLD (Ø6U) 0 E UTC-7(-6DT) N41°58.56' W114°39.49'

SALT LAKE CITY

H-3C, L-11C

5213 B FUEL 100LL NOTAM FILE RNO

RWY 15-33: H6200X60 (ASPH) S-12.5 MIRL

RWY 15: Building. RWY 33: VASI(V2L)—GA 3.5° TCH 55'. Hill.

AIRPORT REMARKS: Attended on call. Attended by Casino on call at 775-755-6595 or use frequency 122.8. For fuel call 775-755-6595 or use frequency 122.8. Bird hazard east of arpt at ponds. Bcn visibility lgtd from west. ACTIVATE MIRL Rwy 15-33—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.5 (RENO RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE TWF.

TWIN FALLS (L) VORTACW 115.8 TWF Chan 105 N42°28.79' W114°29.37' 176° 31.1 NM to fld. 4140/18E.

JEAN (ØL7) 1 S UTC-8(-7DT) N35°46.10' W115°19.78' **LAS VEGAS**
 2832 B **FUEL** 100LL, JET A TPA-3632(800) NOTAM FILE RNO **L-7E**
RWY 02L-20R: H4600X75 (ASPH) S-12.5 MIRL
RWY 02L: Pole. **RWY 20R:** Road. Rgt tfc.
RWY 02R-20L: H3700X60 (ASPH) S-12.5
RWY 02R: Rgt tfc. **RWY 20L:** Pole.
AIRPORT REMARKS: Unattended. Self-svc fuel 24 hours. Parachute Jumping. Skydiving drop zone 4 miles south.
 Ultralight activity on arpt. Aerobatic activities 2 miles W. Power acft use tfc pattern West of rwy; make entry from
 West. Power acft parking W side of fld. Glider parking E side of fld. ACTIVATE MIRL Rwy 02L-20R-CTAF. NOTE:
 See Special Notice—Aerobatic Practice Area Jean Airport, Jean, NV.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.
LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' 189° 20.4 NM to fld.
 2141/15E.

KIDWELL (See CAL NEV ARI)

KINGSTON (N15) 2 E UTC-8(-7DT) N39°12.18' W117°03.87' **LAS VEGAS**
 5950 E NOTAM FILE RNO
RWY 07-25: 3700X80 (GRVL-DIRT)
RWY 16-34: 3072X60 (GRVL-DIRT)
RWY 16: P-line. **RWY 34:** P-line. Rgt tfc.
AIRPORT REMARKS: Unattended. Rwy 07-25 edge and thld marked by white tires. Rwy 16 thld marked by white tires.
 Rwy 16-34 surface covered with weeds and grass to 1'.
COMMUNICATIONS: CTAF 122.9

LAKE TAHOE (See SOUTH LAKE TAHOE, CA)

LAS VEGAS N36°04.78' W115°09.59' NOTAM FILE LAS. **LAS VEGAS**
(H) VORTACW 116.9 LAS Chan 116 at McCarran Intl. 2141/15E. **H-4H, L-7E**
 VORTAC unusable:
 025°-160° byd 20 NM blo 6,000' 220°-245° byd 35 NM blo 15,000'
 160°-200° byd 20 NM blo 9,000' 245°-260° byd 35 NM blo 14,000'
 200°-220° byd 15 NM blo 9,000' 260°-275° byd 35 NM blo 14,000'
 200°-025° byd 25 NM blo 11,000' 275°-310° byd 35 NM blo 16,500'
RCD 122.4 (RENO RADIO)

LAS VEGAS**HENDERSON EXECUTIVE** (HND) 11 S UTC-8(-7DT) N35°58.37' W115°08.07'

2492 B FUEL 100LL, JET A OX 1, 2 TPA-3492(1000) NOTAM FILE HND

LAS VEGAS

H-4H, L-7E

RWY 17R-35L: H6501X100 (ASPH) S-30, D-60 MIRL 1.4% up S IAP, AD

RWY 17R: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 35L: REIL. PAPI(P4L)—GA 3.5° TCH 40'. Road.

RWY 17L-35R: H5001X75 (ASPH) S-30, D-30 MIRL 1.4% up S

RWY 17L: REIL. PAPI(P4L)—GA 3.0°.

RWY 35R: REIL. PAPI(P4L)—GA 3.5°. Hill.

AIRPORT REMARKS: Attended 1300-0600Z±. Self-svc fuel 100LL 24 hrs. Rwy 17L-35R is CLOSED 0400-1500Z±. Extensive commercial air tour traffic arriving from SE at different times during dalgt hours. Acft departure Rwy 17R or Rwy 35L should verify that they are taking off from the rwy and not the parallel twy. PAPI Rwy 17L and Rwy 35R OTS indef. PAPI Rwy 35L OTS indef. MIRI Rwy 17L-35R OTS unless Rwy 17R-35L is clsd. ACTIVATE MIRL Rwy 17R-35L and Rwy 17L-35R, PAPI Rwy 17R and Rwy 35L, PAPI Rwy 17L and Rwy 35R REIL Rwy 17R and 35L REIL Rwy 17L and 35R and twy—CTAF. REIL Rwy 17L and 35R avbl only when Rwy 17R and 35L clsd.

WEATHER DATA SOURCES: ASOS 120.775 (702) 614-4537.**COMMUNICATIONS:** CTAF 125.1 ATIS 120.775 (702) 614-4537

UNICOM 122.95


MOUNT POTOSI RCO 122.35 (RENO RADIO)

® LAS VEGAS APP/DEP CON 118.4

TOWER 125.1 (1400-0400Z±) GND CON 127.8

AIRSPACE: CLASS D svc 1400-0400Z± other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.

BOULDER CITY (H) VORTACW 116.7 BLD Chan 114 N35°59.75' W114°51.82' 249° 13.3 NM to fld.
3650/15E. HIWAS.

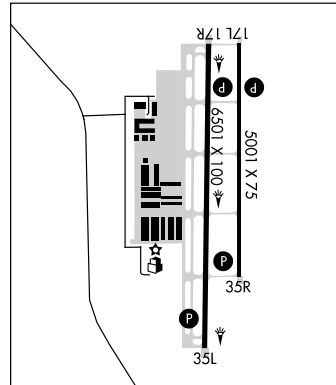

McCARRAN INTL (LAS) 5 S UTC-8(-7DT) N36°04.80' W115°09.14'
 2181 B S4 FUEL 100, 100LL, JET A1 + OX 1, 2, 3 LRA Class I, ARFF Index E
 NOTAM FILE LAS

LAS VEGAS
 H-41, L-7E
 IAP, AD

RWY 07L-25R: H14510X150 (ASPH-PFC) S-23, D-220, ST-175, DT-633, DDT-877 HIRL

RWY 07L: PAPI(P4L)—GA 3.0° TCH 75'. Thld dspcd 2139'. Hangar.

1.1% down.

RWY 25R: MALSR. PAPI(P4L)—GA 3.0° TCH 84'. Thld dspcd 1397'.

0.9% up.

RWY 07R-25L: H10526X150 (ASPH-PFC) S-23, D-220, ST-175,

DT-633, DDT-914 HIRL

RWY 07R: REIL. PAPI(P4L)—GA 3.0° TCH 64'. Pole. 1.1% down.

RWY 25L: MALSF. PAPI(P4L)—GA 3.0° TCH 84'. 0.9% up.

RWY 01R-19L: H9775X150 (CONC-GRVD) S-23, D-220, ST-175,

DT-633, DDT-877 MIRL

RWY 01R: REIL. PAPI(P4L)—GA 3.0° TCH 75'. Thld dspcd 491'.

Railroad. Rgt tfc. 1.1% down.

RWY 19L: REIL. PAPI(P4L)—GA 3.0° TCH 75'. Thld dspcd 878'.

Pole. 0.9% up.

RWY 01L-19R: H8985X150 (CONC-GRVD) S-30, D-145, ST-175,

DT-460, DDT-833 HIRL

RWY 01L: REIL. MALSF. PAPI(P4L)—GA 3.40° TCH 57'. Thld dspcd

584'. Railroad. 1.1% down.

RWY 19R: REIL. PAPI(P4L)—GA 3.0° TCH 75'. Fence. Rgt tfc. 1.0%

up.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 01R: TORA-9775 TODA-10172 ASDA-9441 LDA-8681

RWY 19L: TORA-9775 TODA-10175 ASDA-9685 LDA-8745


RWY 01L: TORA-8985 TODA-8985 ASDA-8985 LDA-8401

RWY 19R: TORA-8985 TODA-9397 ASDA-8397 LDA-8397

RWY 07L: TORA-14510 TODA-15099 ASDA-14099 LDA-11966

RWY 25R: TORA-14510 TODA-15155 ASDA-14155 LDA-12755

AIRPORT REMARKS: Attended continuously. Large numbers of birds and bats invof arpt btn SS-SR. Lgtd golf range 1400' south of Rwy 01R-19L and Rwy 01L-19R. Extensive glider/soaring ops weekends and holidays, SR-SS, LAS 187/020, altitudes up to but not including FL 180. Gliders remain clear of the terminal control area but otherwise opr within the entire southwest quadrant of the terminal control area Veil. Acft may experience reflection of sun from glass hotels located northwest of arpt. Reflection may occur at various altitudes, headings and distances from arpt. Numerous helicopter ops on W side of arpt. Rwy 01L-19R 496,000 lbs GWT for L-1011, 555,000 lbs GWT for DC-10, 602,500 lbs GWT for MD-11. Acft using full length dep on Rwy 07L use minimal power until passing the power-up point on rwy. Power-up point is 348' east of blast pad and marked with sign and standard markings for beginning of rwy. Turbojet dep not permitted Rwy 01R-19L or Rwy 01L-19R 0400-1600Z++. Exception for weather or operational necessity. All non-standard rwy ops PPR from Department of Aviation. Acft taxiing westbound on Twy B near Twy E use caution not to enter the rwy on Twy Y, acft taxiing westbound on Twy W near Twy E use caution not to enter the rwy on Twy W. Twy C no centerline lgts west of Twy B4, has edge lgts on south side of twy in this area. Directional twy signs will be incomplete due to construction. Acft larger than B757 PPR from Department of Aviation to use Twy H. Ops all terminal gates and cargo ramp controlled by Department of Aviation 1400-1000Z+. All acft ctc ramp control on freq 129.175 for ops at A, B, C gates and charter intl gates, ctc Ramp Con on freq 127.9 for ops at D gates and cargo ramp prior to entering ramp or pushing back from gate or parking spot. From 1000-1400Z+ ctc Gnd Con on freq 121.1 for ops at all gates and cargo ramp. Aircraft operating near the intersection of Twys S, D, G and the north end of Twy Z should be alert as there are closely aligned twy centerlines and radius turns. Acft that dep full length of Rwy 01L and Rwy 07L must hold at the same hold line, as there is no room to hold between the rwy ends, and such acft should verify that they are on the correct rwy. Acft dep Rwy 19R use minimal power passing the rwy thld. Rwy 19R thld has std rwy markings and is 780' south of the blast pad. Landing Rights Airport: Customs avbl to general aviation acft 1600-0600Z+, all other times PPR call 702-261-5539. General aviation acft requiring immigration/customs services must ctc Department of Aviation for parking arrangements minimum 2 hrs prior to arrival 702-261-3500 1500-0000Z++, all other times 702-261-4411. General aviation parking very limited. For parking availability ctc either FBO 702-736-1830 or 702-739-1100. Rotating bcn not visible 115°-240° southeast to southwest from twr. Rwy 07R REIL OTS indef. Tiedown fee. General aviation customs and immigration located west side of airfield between FBO's. Flight Notification Service (ADUCS) avbl. NOTE: See Special Notices—Intersection Departures During Period of Darkness.



CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

WEATHER DATA SOURCES: ASOS (702) 736-1416.

COMMUNICATIONS: D-ATIS 132.4 (702) 736-0950. UNICOM 122.95

(R) LAS VEGAS APP CON 125.025

(R) LAS VEGAS DEP CON 125.9 (South)

LAS VEGAS TOWER 119.9 (Rwy 07L-25R and Rwy 07R-25L) 118.75 (Rwy 01L-19R and Rwy 01R-19L)

GND CON 121.9 (West of Rwy 01R-19L) 121.1 (East of Rwy 01R-19L) CLNC DEL 118.0

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' at fld. 2141/15E.

ILS/DME 110.3 I-LAS Chan 40 Rwy 25R.

ILS 111.75 I-RLE Rwy 25L. Class IT. LOC unusable byd 19° south of course.

ILS 110.1 I-CUA Chan 38 Rwy 01L Class IB. LOC unusable byd 30° left of course. LOC unusable within .2 NM from thld.

NORTH LAS VEGAS

(VGT) 3 NW UTC-8(-7DT) N36°12.64' W115°11.67'

2205 B S4 FUEL 100LL, JET A TPA-3005(800) Class III, ARFF Index A.

LAS VEGAS

H-4H, L-7E

IAP, AD

NOTAM FILE VGT

RWY 07-25: H5004X75 (ASPH) S-30 MIRL 0.6% up W

RWY 07: PAPI(P4L)—GA 3.0° TCH 37'. Pole.

RWY 25: PAPI(P4L)—GA 3.0° TCH 36'.

RWY 12R-30L: H5000X75 (ASPH) S-30 MIRL 0.8% up NW

RWY 12R: PAPI(P4L)—GA 3.0° TCH 25'. Building.

RWY 30L: MIRL. PAPI(P4L)—GA 3.0° TCH 45'. P-line.

RWY 12L-30R: H4202X75 (ASPH) S-30 MIRL 1.0% up NW

RWY 12L: PAPI(P4L)—GA 3.0° TCH 40'. Bldg.

RWY 30R: PAPI(P4L)—GA 3.0° TCH 40'. Thld dsplcd 202'. P-line.

LAND AND HOLD SHORT OPERATIONS

LANDING HOLD SHORT POINT DIST AVBL

RWY 25 12R-30L 4000

RWY 30L 07-25 4000

AIRPORT REMARKS: Attended 1400-0600Z†. Rwy 07-25 and Rwy 12L-30R and Rwy 12R-30L have aiming point marking at 1000' on all runways. Rwy guard lights at all intersections. When twr clsd ACTIVATE MIRL Rwy 07-25 and Rwy 12L-30R and twy lgts.—CTAF. Rwy 12L and 30R PAPI OTS indef.

WEATHER DATA SOURCES: ASOS 118.05 (702) 648-6633. LAWRS.

COMMUNICATIONS: CTAF 125.7 ATIS 118.05 UNICOM 122.95

NELLIS APP CON 118.125 (Rwy 12)

LAS VEGAS DEP CON 119.4 (Rwy 12)

LAS VEGAS APP/DEP CON 119.4 (Rwy 30)


TOWER 125.7 (Oct-Mar 1400-0400Z†, Apr-Sep 1400-0500Z†) CLNC DEL 124.0 GND CON 121.7

AIRSPACE: CLASS D svc Oct-Mar 1400-0400Z†, Apr-Sep 1400-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' 333° 8.2 NM to fld. 2141/15E.

ILS/DME 110.7 I-HWG Chan 44 Rwy 12L. Class IT. ILS unmonitored when twr clsd.



LIDA JUNCTION (See GOLDFIELD)

LINCOLN CO (See PANACA)

LOVELOCK N40°07.49' W118°34.66' NOTAM FILE LOL.

KLAMATH FALLS

(L) VORTACW 116.5 LLC Chan 112 155° 3.6 NM to Derby Fld. 4784/16E. HIWAS.

H-3B, L-9A, 11A

VORTAC unusable:

225°-235° byd 25 NM blo 9,600'

260°-305° byd 25 NM blo 13,000'

235°-260° byd 15 NM blo 15,500'

340°-360° byd 25 NM blo 10,500'

RCO 122.4 (RENO RADIO)

CONTINUED FROM PRECEDING PAGE

WEATHER DATA SOURCES: ASOS (702) 736-1416.

COMMUNICATIONS: D-ATIS 132.4 (702) 736-0950. UNICOM 122.95

Ⓡ LAS VEGAS APP CON 125.025

Ⓡ LAS VEGAS DEP CON 125.9 (South)

LAS VEGAS TOWER 119.9 (Rwy 07L-25R and Rwy 07R-25L) 118.75 (Rwy 01L-19R and Rwy 01R-19L)

GND CON 121.9 (West of Rwy 01R-19L) 121.1 (East of Rwy 01R-19L) CLNC DEL 118.0

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' at fld. 2141/15E.

ILS/DME 110.3 I-LAS Chan 40 Rwy 25R.

ILS 111.75 I-RLE Rwy 25L. Class IT. LOC unusable byd 19° south of course.

ILS 110.1 I-CUA Chan 38 Rwy 01L Class IB. LOC unusable byd 30° left of course. LOC unusable within .2 NM from thld.

NORTH LAS VEGAS (VGT) 3 NW UTC-8(-7DT) N36°12.64' W115°11.67'

2205 B S4 FUEL 100LL, JET A TPA-3005(800) Class III, ARFF Index A.

LAS VEGAS

H-4H, L-7E

IAP, AD

NOTAM FILE VGT

RWY 07-25: H5004X75 (ASPH) S-30 MIRL 0.6% up W

RWY 07: PAPI(P4L)—GA 3.0° TCH 37'. Pole.

RWY 25: PAPI(P4L)—GA 3.0° TCH 36'.

RWY 12R-30L: H5000X75 (ASPH) S-30 MIRL 0.8% up NW

RWY 12R: PAPI(P4L)—GA 3.0° TCH 25'. Building.

RWY 30L: MIRL. PAPI(P4L)—GA 3.0° TCH 45'. P-line.

RWY 12L-30R: H4202X75 (ASPH) S-30 MIRL 1.0% up NW

RWY 12L: PAPI(P4L)—GA 3.0° TCH 40'. Bldg.

RWY 30R: PAPI(P4L)—GA 3.0° TCH 40'. Thld dsplcd 202'. P-line.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 25	12R-30L	4000
RWY 30L	07-25	4000

AIRPORT REMARKS: Attended 1400-0600Z†. Rwy 07-25 and Rwy 12L-30R and Rwy 12R-30L have aiming point marking at 1000'

on all runways. Rwy guard lights at all intersections. When twr clsd ACTIVATE MIRL Rwy 07-25 and Rwy 12L-30R and twy lgts.—CTAF.

Rwys 12L and 30R PAPI OTS indef.

WEATHER DATA SOURCES: ASOS 118.05 (702) 648-6633. LAWRS.

COMMUNICATIONS: CTAF 125.7 ATIS 118.05 UNICOM 122.95

NELLIS APP CON 118.125 (Rwy 12)

LAS VEGAS DEP CON 119.4 (Rwy 12)

LAS VEGAS APP/DEP CON 119.4 (Rwy 30)


TOWER 125.7 (Oct-Mar 1400-0400Z†, Apr-Sep 1400-0500Z†) CLNC DEL 124.0 GND CON 121.7

AIRSPACE: CLASS D svc Oct-Mar 1400-0400Z†, Apr-Sep 1400-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' 333° 8.2 NM to fld. 2141/15E.

ILS/DME 110.7 I-HWG Chan 44 Rwy 12L. Class IT. ILS unmonitored when twr clsd.



LIDA JUNCTION (See GOLDFIELD)

LINCOLN CO (See PANACA)

LOVELOCK N40°07.49' W118°34.66' NOTAM FILE LOL.

KLAMATH FALLS

(L) VORTACW 116.5 LLC Chan 112 155° 3.6 NM to Derby Fld. 4784/16E. HIWAS.

H-3B, L-9A, 11A

VORTAC unusable:

225°-235° byd 25 NM blo 9,600'

260°-305° byd 25 NM blo 13,000'

235°-260° byd 15 NM blo 15,500'

340°-360° byd 25 NM blo 10,500'

RCO 122.4 (RENO RADIO)

LOVELOCK**DERBY FLD** (LOL) 8 SW UTC-8(-7DT) N40°03.99' W118°33.91'

3904 B FUEL 100LL TPA-4704(800) NOTAM FILE LOL

RWY 01-19: H5529X75 (ASPH) S-30 MIRL

RWY 01: REIL. VASI (V2L)—GA 3.0° TCH 40'.

RWY 19: REIL. VASI(V2L)—GA 3.0° TCH 40'. Fence.

RWY 07-25: H4922X75 (ASPH) S-17

RWY 25: Thld displcd 120'. Fence

AIRPORT REMARKS: Unattended. Fuel 24 hr self svc. Rwy 01-19 no line of sight between runways. ACTIVATE MIRL Rwy 01-19, and REIL Rwy 01 and Rwy 19—CTAF.

WEATHER DATA SOURCES: ASOS 120.675 HIWAS 116.5 LLC.**COMMUNICATIONS:** CTAF/UNICOM 122.8

LOVELOCK RCO 122.4 (RENO RADIO)

OAKLAND CENTER APP/DEP CON 128.8

RADIO AIDS TO NAVIGATION: NOTAM FILE LOL.


LOVELOCK (L) VORTACW 116.5 LLC Chan 112 N40°07.49'

W118°34.66' 155° 3.6 NM to fld. 4784/16E. HIWAS.

KLAMATH FALLS

H-3B, L-9A, 11A

IAP

**McCARRAN INTL** (See LAS VEGAS)**MERCURY** N36°37.65' W116°01.65' NOTAM FILE RNO.**LAS VEGAS**

NDB (HW) 326 MCY 275° 39.2 NM to Beatty. SHUTDOWN.

L-9B

NDB unusable 290°-070°.

MESQUITE (67L) 2N UTC-8(-7DT) N36°49.99' W114°03.35'**LAS VEGAS**

1978 B FUEL 100LL, JET A NOTAM FILE RNO

H-41, L-9C

RWY 01-19: H5121X75 (ASPH) S-30 MIRL

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY: 19: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Hill.

AIRPORT REMARKS: Attended 1500-0100Z±. Credit card fuel avbl.

Parachute Jumping. Rwy 01-19 severe drop off -20' 90' right and parallel to centerline. Golf courses and driving ranges within 1000' of rwy centerline. Noise abatement procedure avoid flying over downtown Mesquite located 2NM SW of arpt. ACTIVATE MIRL Rwy 01-19—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

® L.A. CENTER APP/DEP CON 124.2

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

MORMON MESA (L) VORTAC 114.3 MMM Chan 90 N36°46.16'

W114°16.65' 054° 11.3 NM to fld. 2120/16E. HIWAS.

.....

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

• • • • •


• • • • •

• • • • •

• • • • •

• • • • •

• • • • •

**MINA** N38°33.92' W118°01.97' NOTAM FILE RNO.**SAN FRANCISCO**

(H) VORTAC 115.1 MVA Chan 98 251° 28.3 NM to Hawthorne Industrial. 7860/17E. HIWAS.

H-3B, L-9A

VORTAC unusable 130°-160° beyond 28 NM below 10,700'.

RCO 122.1R 115.1T (RENO RADIO)

MINA (3Q00) 0 SE UTC-8(-7DT) N38°23.00' W118°06.06'**SAN FRANCISCO**

4552 NOTAM FILE RNO

RWY 13-31: 4600X165 (DIRT)

AIRPORT REMARKS: Unattended. Remote controlled acft invof arpt. Rwy 13-31 has uncontrolled vehicle access.

Ultralights on and invof arpt. Mountains 1 mile E of fld. Rwy 13 and Rwy 31 thld marked with white tires. Rwy 13-31 has 2' berms on both sides full length of rwy.

COMMUNICATIONS: CTAF 122.9

MINDEN-TAHOE (MEV) 4 N UTC-8(-7DT) N39°00.06' W119°45.12'

SAN FRANCISCO

4722 B S4 FUEL 100LL, JET A OX 1, 3 NOTAM FILE MEV

H-3B, L-9A

RWY 16-34: H7400X100 (ASPH) S-30, D-50 MIRL

IAP

RWY 16: VASI(V4R)—GA 3.0° TCH 31'. Rgt tfc.

RWY 34: VASI(V4L)—GA 3.0° TCH 31'.

RWY 12-30: H5300X75 (ASPH) S-30, D-50 0.4% up SE

RWY 12: Pole. Rgt tfc.

RWY 12G-30G: 2200X60 (DIRT)

RWY 12G: Brush.

AIRPORT REMARKS: Attended 1600-0000Z±. Parachute Jumping. Deer and flocks of large birds on and in vicinity of arpt. Rwy 12G-30G thld marked with orange and white panels. Ultralight and balloon activity on and in vof arpt. Parachute jumping and Glider activity on and in vof arpt. For emergencies after 0000Z± hrs ctc 775-782-9911. Trees 1,000' from apch end Rwy 12. Ditch in obstacle free zone adjacent SW end Twy C. PAEW occasionally on rwys and twys. Noise abatement procedures in effect, for information ctc 775-782-9871. Sailplane tfc pattern Rwy 30 and Rwy 34 rgt tfc. Snow removal during daigt hours only. Rwy 30G lds only; no txf or ldg Rwy 12G. ACTIVATE MIRL Rwy 16-34, VASI Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.325 (775) 782-6264.


COMMUNICATIONS: CTAF/UNICOM 123.05

RENO APP/DEP CON 119.2

RADIO AIDS TO NAVIGATION: NOTAM FILE MEV.

MUSTANG (H) VORTACW 117.9 FMG Chan 126 N39°31.88' W119°39.37' 172° 32.1 NM to fld. 5949/16E.

COMM/NAV/WEATHER REMARKS: For clnc del call Reno apch con on (775) 348-8840.

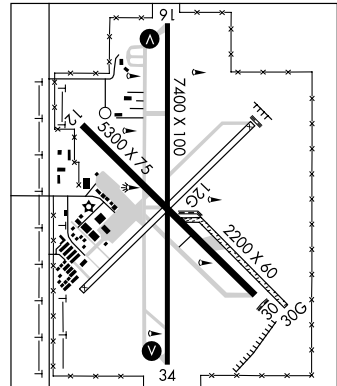

MORMON MESA N36°46.16' W114°16.65' NOTAM FILE RNO.

LAS VEGAS

(L) VORTAC 114.3 MMM Chan 90 198° 14.5 NM to Perkins Fld. 2120/16E. HIWAS.

H-4I, L-9B

VORTAC unusable:

060°-075° beyond 27 NM below 9500'

110°-135° beyond 10 NM

075°-110° beyond 32 NM below 9600'

280°-335° beyond 22 NM below 9000'

RCO 122.1R 114.3T (RENO RADIO)

MOUNT LEWIS N40°24.18' W116°52.09'

SALT LAKE CITY

RCO 122.65 (RENO RADIO)

H-3C, L-9B

MOUNT POTOSI N35°56.65' W115°29.87'

LAS VEGAS

RCO 122.35 (RENO RADIO)

L-7D

MUSTANG N39°31.88' W119°39.37' NOTAM FILE RNO.

SAN FRANCISCO

(H) VORTACW 117.9 FMG Chan 126 234° 5.5 NM to Reno/Tahoe Intl. 5949/16E.

H-3B, L-9A

VORTAC unusable 200-230° beyond 30 NM below 13,000'

NELLIS AFB (LSV)(KLSV) AF 7 NE UTC-8(-7DT) N36°14.17' W115°02.06' **LAS VEGAS**
 1870 B TPA—See Remarks NOTAM FILE LSV Not Insp. **H-41, L-7E**
RWY 03L-21R: H10123X200 (CONC) **DIAP, AD**
 PCN 43 R/C/W/T HIRL
RWY 03L: PAPI—GA 3.0°. **RWY 21R:** PAPI—GA 3.0°. Rgt tfc. 0.3% down.
RWY 03R-21L: H10055X150 (CONC) PCN 52 R/C/W/T HIRL
RWY 03R: ALSF1. PAPI—GA 3.0°. **RWY 21L:** ALSF1. PAPI—GA 3.0°. Rgt tfc. 0.4% down.
ARRESTING GEAR/SYSTEM
RWY 03L HOOK BAK-12B(B) (40' OVRN) HOOK BAK-12B(B) (1210')
 HOOK BAK-12B(B) (1452') HOOK BAK-12B(B) (42' OVRN) **RWY 21R**
RWY 03R HOOK BAK-12(B) (37' OVRN) HOOK BAK-12B(B) (1225')
 HOOK BAK-12B(B) (1199') HOOK BAK-12B(B) (46' OVRN) **RWY 21L**
MILITARY SERVICE: LGT All rwy thld lgts gated. Rwy 21L PAPI Rwy Reference Point and ILS Rwy Point of Intercept not coincidental. All sequence flashing lgts on Rwy 21L. 1.5' to right of extended centerline. **A-GEAR** All BAK-12B extended and in raised position, rqr 15 minute prior notice for removal. **JASU** No starter unit or starting capability for F4B, F4J acft. No starter probe for USN acft. 2(MA-1A) **FUEL** J8. Fuel will not be ordered until acft is parked. **FLUID** W. Expect 2-3 hr delay. SP PRESAIR LHOX LOX **OIL** O-123-128-132-133-148-156 SOAP **TRAN ALERT** Opr 1430-0630Z†, no quick turn Fri-Sun. No military fleet svc avbl, limited transient svc avbl. No transient acft can arr/dep prior to 1430Z† and must arr/dep no later than 0600Z†. Fleet svc is avbl from Signature Flight Support C702-261-3583/3529, 48 hr prior notice rqr. Progressive taxi avbl.
MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** PPR all except Distinguished Visitor code 7 or abv and emergency AIREVAC, PPR issued 1430-0630Z†. Remain overnight req good for one night only. Acft must adhere to PPR arr block +/- 60 minutes of scheduled ldg. Extensive Large Force Exercise (LFE) activity. PPR arr not authorized during Red Flag (RF) or LFE launch/recovery period, check NOTAM for date/time. No PPR arr during night RF/LFE opr. Multi apch not authorized during RF/LFE or after official SS unless approved by 57 WG SOF. PPR's may be obtained up to 7 days prior to planned arr. Req for additional acft from a base that has met the maximum allowed (4) will be considered 3 days prior to scheduled arr, support and space permission. During RF/LFE periods, PPR's may be req up to 7 days prior to arr but issued no earlier than 24 hrs prior to planned arr. All inbound passenger/cargo and Distinguished Visitor acft must ctc Command Post no later than 30 min prior to ldg. PPR for transient fighter/Distinguished Visitor acft ctc AM OPS DSN 682-4600/01, C702-652-4600. PPR for exercise, deployment, C130 and larger acft ctc Nellis Support Center DSN 682-5250/5231 Mon-Fri 1430-0030Z†. Sun and holiday tfc expect arr from N, dep N winds permitting with tfc pattern towards E (Sunrise Mt). Acft with VIP 7 or higher ctc PTD when 100 NM out. Opr rstd during Bird Watch Condition Moderate (tkf or ldg permission only when dep and arr avoid identified bird activity, no local IFR/VFR tfc pattern activity) and Severe (tkf and ldg prohibited without OG/CC or designated official approval). Hot Cargo Pad unlit and rstd to daylight/VFR ops. **CAUTION** Parachute Jumping. Steeply rising terrain S and E of centerline rwy 03R-21L. Rwy 03L-21R has high potential for hydroplaning. 200' cranes N of dep end Rwy 03L. Acft taxiing on Twy D between Twy F and Rwy 21R use caution, 4'8" high distance remaining marker located 125' N Twy D centerline. **TFC PAT TPA**—Rectangular 3000(1130), overhead 3500(1630). Acft dep will not climb above 3000' until past the dep end of rwy. **NS ABTMT** ACC quiet hr policy in effect 0630-1400Z†. **MISC** First 1320' Rwy 21R and first 920' Rwy 03L grooved concrete. Mid 7879' Rwy 03L-21R center 80' concrete, balance asphalt. Acft dep on radar vectors must maintain 300' per NM minimum climb. E side 9000'-1000' distance remaining markers Rwy 21L not avbl. Transient acft shall communicate with Nellis ATC facility on UHF to the maximum extent possible due to heavy concentration of acft in the VFR pattern. Reduced Same Runway Separation will be applied to base assign/deployed acft in accordance with NAFBI 11-250, see (<https://www.mil.nellis.af.mil/units/99cs/scs/>) see NAFBI 11-250.pdf. Wx opr 0700Z† Mon thru 2300Z† Fri, clsd weekends and holidays. Wx obsn view of Rwy 03R and 03L apch end rstd by flight facility; obsn view rstd fr 190°-330° by flightline facility and buildings; night obsn ltd due to high ints ramp lgt. Wx brief for tran aircrews byd normal opr hr avbl via 25 Operational Wx Squadron at Davis Monthan AFB DSN: 228-6598/6599, C(520)228-6598/6599. Bldgs (and floodlights at night) block the wx forecaster's view of the AER 03. No classified material storage available at AM ops. All classified must be stored in the Nellis AFB command post. For CSTMS and AG, ctc Nellis Support Center for C-130 and larger framed acft at DSN 682-5250 or ctc Base Ops for all other acft at DSN 682-4600 24 hrs prior to arrival.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

COMMUNICATIONS: SFA ATIS 270.1 PTD 139.3 372.2 (Unreliable 085°–155° byd 35 NM at FL200, 315°–005° byd 40 NM at FL200, 230°–290° byd 55 NM at FL200.)

① APP CON 118.125 124.95 273.55 291.725

TOWER 132.55 327.0 GND CON 121.8 275.8

① DEP CON 135.1 385.4 CLNC DEL 120.9 289.4

ACC COMD POST (RAYMOND 22) 320.0 381.3 (381.3 Have quick timing avbl.) ALCE AMC 257.35 259.95 (Opr only during Red Flag deployment/change over/redeployment and other exercises.) PMSV METRO 323.9 (Full service avbl during wx station opr hrs otherwise not avbl. PMSV unreliable 085°–155° byd 35 NM at or below FL200, 315°–005° byd 40 NM at or below FL200, 230°–290° byd 55 NM at or below FL200.) SOF (BULLSEYE SOF) 305.6

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' 018° 11.2 NM to fld.

2141/15E. No NOTAM MP Sat 1600–1800Z†.

(L) TACAN Chan 12 LSV (135.5) N36°14.68' W115°01.50' at fld. 1864/15E. NOTAM FILE RNO. No NOTAM MP Wed 0900–1100Z†.

TACAN unusable:

360°–020° byd 20 NM blo 8,000' 285°–350° byd 20 NM blo 11,000'

360°–020° byd 26 NM blo 12,000' 285°–350° byd 26 NM blo 15,000'

020°–035° byd 30 NM blo 8,000' 285°–350° byd 33 NM

035°–080° byd 20 NM 350°–360° byd 20 NM blo 9,000'

080°–155° byd 5 NM blo 10,000' 350°–360° byd 26 NM blo 15,000'

080°–155° byd 15 NM

ILS/DME 109.1 I-DIQ Chan 12 Rwy 21L. No NOTAM MP: ILS Tue and Thu 0900–1100Z†. ILS 21L

DME from LSV TACAN.

NORTH FORK

STEVENS–CROSBY (Ø8U) 3 NW UTC–8(–7DT) N41°30.94' W115°51.59'

SALT LAKE CITY

6397 NOTAM FILE RNO

RWY 01–19: 3600X50 (DIRT)

RWY 19: Fence.

AIRPORT REMARKS: Unattended. Rwy 01–19 has 6 to 8" ruts north 1500' of rwy. First 500' of Rwy 01 rough, uneven and rutted. Rwy 01 terrain drops off 100' end of rwy. Rwy 01–19 has uncontrolled vehicle and livestock access.

COMMUNICATIONS: CTAF 122.9

NORTH LAS VEGAS (See LAS VEGAS)

OVERTON

ECHO BAY (ØL9) 14 S UTC–8(–7DT) N36°18.67' W114°27.83'

LAS VEGAS

1535 NOTAM FILE RNO

L–7E

RWY 06–24: H3400X50 (ASPH) S–12.5

RWY 06: Fence. RWY 24: Fence. Rgt tfc.


AIRPORT REMARKS: Attended on call. Monitor unicom 122.8 for taxi svc to resort area. Livestock on and in vicinity of arpt. Parallel twy rough and infrequently used.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BOULDER CITY (H) VORTACW 116.7 BLD Chan 114 N35°59.75'

W114°51.82' 031° 27.3 NM to fld. 3650/15E. HIWAS.



CONTINUED FROM PRECEDING PAGE

COMMUNICATIONS: SFA ATIS 270.1 PTD 139.3 372.2 (Unreliable 085°–155° byd 35 NM at FL200, 315°–005° byd 40 NM at FL200, 230°–290° byd 55 NM at FL200.)

① APP CON 118.125 124.95 273.55 291.725

TOWER 132.55 327.0 GND CON 121.8 275.8

① DEP CON 135.1 385.4 CLNC DEL 120.9 289.4

ACC COMD POST (RAYMOND 22) 320.0 381.3 (381.3 Have quick timing avbl.) ALCE AMC 257.35 259.95 (Opr only during Red Flag deployment/change over/redeployment and other exercises.) PMSV METRO 323.9 (Full service avbl during wx station opr hrs otherwise not avbl. PMSV unreliable 085°–155° byd 35 NM at or below FL200, 315°–005° byd 40 NM at or below FL200, 230°–290° byd 55 NM at or below FL200.) SOF (BULLSEYE SOF) 305.6

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' 018° 11.2 NM to fld.

2141/15E. No NOTAM MP Sat 1600–1800Z†.

(L) TACAN Chan 12 LSV (135.5) N36°14.68' W115°01.50' at fld. 1864/15E. NOTAM FILE RNO. No NOTAM MP Wed 0900–1100Z†.

TACAN unusable:

360°–020° byd 20 NM blo 8,000' 285°–350° byd 20 NM blo 11,000'

360°–020° byd 26 NM blo 12,000' 285°–350° byd 26 NM blo 15,000'

020°–035° byd 30 NM blo 8,000' 285°–350° byd 33 NM

035°–080° byd 20 NM 350°–360° byd 20 NM blo 9,000'

080°–155° byd 5 NM blo 10,000' 350°–360° byd 26 NM blo 15,000'

080°–155° byd 15 NM

ILS/DME 109.1 I-DIQ Chan 12 Rwy 21L. No NOTAM MP: ILS Tue and Thu 0900–1100Z†. ILS 21L

DME from LSV TACAN.

NORTH FORK

STEVENS–CROSBY (Ø8U) 3 NW UTC–8(–7DT) N41°30.94' W115°51.59'

SALT LAKE CITY

6397 NOTAM FILE RNO

RWY 01–19: 3600X50 (DIRT)

RWY 19: Fence.

AIRPORT REMARKS: Unattended. Rwy 01–19 has 6 to 8" ruts north 1500' of rwy. First 500' of Rwy 01 rough, uneven and rutted. Rwy 01 terrain drops off 100' end of rwy. Rwy 01–19 has uncontrolled vehicle and livestock access.

COMMUNICATIONS: CTAF 122.9

NORTH LAS VEGAS (See LAS VEGAS)

OVERTON

ECHO BAY (ØL9) 14 S UTC–8(–7DT) N36°18.67' W114°27.83'

LAS VEGAS

1535 NOTAM FILE RNO

L–7E

RWY 06–24: H3400X50 (ASPH) S–12.5

RWY 06: Fence. RWY 24: Fence. Rgt tfc.


AIRPORT REMARKS: Attended on call. Monitor unicom 122.8 for taxi svc to resort area. Livestock on and in vicinity of arpt. Parallel twy rough and infrequently used.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BOULDER CITY (H) VORTACW 116.7 BLD Chan 114 N35°59.75'

W114°51.82' 031° 27.3 NM to fld. 3650/15E. HIWAS.



PERKINS FLD (UØ8) 2 N UTC-8(-7DT) N36°34.08' W114°26.60'

LAS VEGAS

1358 B FUEL 100 TPA-2158(800) NOTAM FILE RNO

L-7E

RWY 13-31: H4800X75 (ASPH) S-30 MIRL

RWY 13: Fence. RWY 31: Road. Rgt tfc.


AIRPORT REMARKS: Attended Thu-Mon dalgt hrs. Tues and Wed svc avbl on call 702-397-8457. Ultralight activity on and infov arpt.

ACTIVATE MIRL Rwy 13-31-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

MORMON MESA (L) VORTAC 114.3 MMM Chan 90 N36°46.16' W114°16.65' 198° 14.5 NM to fld. 2120/16E. HIWAS.



OWYHEE (1ØU) 4 W UTC-8(-7DT) N41°57.19' W116°11.26'

SALT LAKE CITY

5374 NOTAM FILE RNO

RWY 02-20: 6700X60 (ASPH-GRVL)

AIRPORT REMARKS: Unattended. Livestock on and infov arpt. Be alert to acft parked on thld of Rwy 02-20. Rwy 02-20 weeds to +5' both sides of rwy. Rwy 02-20 rough. Rwy 02-20 unrestricted motor vehicle access on rwy. Rwy 02-20 snow and ice on rwy during winter months.

COMMUNICATIONS: CTAF 122.9

PANACA

LINCOLN CO (1L1) 2 W UTC-8(-7DT) N37°47.25' W114°25.30'

LAS VEGAS

4828 B TPA-5628(800) NOTAM FILE RNO

L-9B

RWY 17-35: H4620X60 (ASPH) S-12.5 MIRL


RWY 17: Hiil.

AIRPORT REMARKS: Attended continuously. ACTIVATE MIRL Rwy 17-35-122.8.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

WILSON CREEK (H) VORTAC 116.3 ILC Chan 110 N38°15.01' W114°23.66' 167° 27.8 NM to fld. 9318/16E.



PARKER CARSON (See CARSON CITY)


PERKINS FLD (See OVERTON)

RENO**RENO/STEAD** (RTS) 10 NW UTC-8(-7DT) N39°40.09' W119°52.59'**SAN FRANCISCO**5050 B S4 **FUEL** 100LL, JET A OX 1, 3 TPA—See Remarks NOTAM FILE RNO**H-3B, L-9A, 11A****RWY 14-32:** H9000X150 (ASPH-GRVD) S-65, D-85, ST-108 HIRL**IAP****RWY 14:** REIL. PAPI(P4L)—GA 3.0° TCH 40'.**RWY 32:** REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dspcd 1200'.
Rgt tfc.**RWY 08-26:** H7608X150 (ASPH-GRVD) S-60, D-90, ST-114

HIRL 0.8% up E

RWY 08: REIL. PAPI(P4L)—GA 3.0° TCH 40'.**RWY 26:** REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended 1600-0100Z†. Attendant on call 24 hours 775-328-6600. Parachute Jumping. Ultralight activity on and invof arpt. Military parachute ops north of arpt. C-130 night parachute ops and low level flight training on arpt. Extensive army guard helicopter ops invof arpt. Be alert for balloon traffic NW quadrant of arpt. PAEW occasionally on rwys and twys. Extensive tanker ops during fire season. TPA—5850(800), 6250(1200) heavy/high performance acft, 6050 (1000) glider acft left tfc to south side of Rwy 26 on dirt shoulder. Avoid overflight of housing areas east and west of airfield. Heliport on fld. Glider opr daily. Rwy 08 and Rwy 14 PAPI OTS indef. 0100-1700Z† ACTIVATE HIRL Rwy 08-26 and Rwy 14-32—CTAF. 1700-0100Z† HIRL Rwy 08-26 and Rwy 14-32 opr continuously.

WEATHER DATA SOURCES: AWOS-A 135.175 (775) 677-0589. Plus visibility.**COMMUNICATIONS:** CTAF/UNICOM 122.7**® RENO APP/DEP CON** 126.3**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**MUSTANG (H) VORTACW** 117.9 FMG Chan 126 N39°31.88' W119°39.37' 293° 13.1 NM to fld. 5949/16E.**ILS/DME** 111.9 I-RTS Chan 56 Rwy 32. Class I.

RENO/TAHOE INTL (RNO) 3 SE UTC-8(-7DT) N39°29.95' W119°46.09'

SAN FRANCISCO

4415 B S4 FUEL 100LL, JET A1 + OX 1, 2, 3, 4

H-38, L-9A

TPA—See Remarks LRA Class I, ARFF Index C NOTAM FILE RNO

IAP, AD

RWY 16R-34L: H11002X150 (CONC-GRVD) S-75, D-185, ST-175, DT-350, DDT-850 PCN 88 R/B/W/T HIRL CL

RWY 16R: MALSR. PAPI(P4L)—GA 3.1° TCH 105'. Thld dsplcd 999'.

RWY 34L: PAPI(P4L)—GA 3.0° TCH 75'. Thld dsplcd 990'. Ground.

RWY 16L-34R: H9000X150 (CONC-GRVD) S-75, D-209, ST-175, DT-407, DDT-850 PCN 88 R/B/W/T HIRL CL

RWY 16L: REIL. PAPI (P4L)—GA 3.0° TCH 75'.

RWY 34R: REIL. PAPI(P4L)—GA 3.0° TCH 75'.

RWY 07-25: H6102X150 (CONC-GRVD) S-60, D-170, ST-175, DT-260 PCN 72 R/B/W/T MIRL

RWY 07: REIL. PAPI(P4L)—GA 3.2° TCH 48'. Pole.

RWY 25: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-5854 TODA-5854 ASDA-6302 LDA-5854

RWY 25: TORA-6102 TODA-6102 ASDA-6302 LDA-6102

AIRPORT REMARKS: Attended continuously. **CAUTION:** Intensive glider

activity in/ov arpt and surrounding areas up to 18,000'. Waterfowl

all quadrants all seasons. Concentrated NW of Rwy 16R and E of

Rwy 16L. Rwy 25 PAPI not to be used byd 2 NM due to rapidly

rising mountainous terrain. Rwy 34L and Rwy 34R PAPI not to be used beyond 6 NM due to high terrain.

Construction 1/4 mile east midpoint Rwy 16L, structure 193' AGL. Twy A between N Twy B and Twy D closed to

acft with wingspan greater than 149'. Twy C between Twy L and Twy D clsd to air carrier acft. Twy C between Twy

L and Twy D restricted to acft 60,000 pounds or less. TPA—5215(800) single engine, 5415(1000) larger/high

performance acft. Noise sensitive area all quadrants. All commercial acft ctc ground control for advisories prior

to push back on the terminal ramp. Pilots of turbojet acft use recommended noise abatement procedures, avbl

on request. Pilots of non-turbojet acft use best abatement procedures and settings. Avoid as much as feasible

flying over populated areas. Pure jet touch and go low apch and practice instrument approaches are prohibited;

acft over 12500 lbs require prior written approval for training flights; for further information ctc arpt ops

1-877-736-6359. 24 hours PPR for transient acft parking with wingspans greater than 75'. LRA PPR call

775-784-5585, no after hours ldg without prior arrangement. Glider/soaring ops 30-50 miles S of arpt during

visual flight rule weather and mountain wave wind conditions 1900Z± to SS. For MIRL Rwy 07-25

0600-1330Z±, HIRL Rwy 16L-34R and centerline lgts 0800-1330Z± ctc twr. Touchdown rwy visual range and

rwy visibility value Rwy 16R. Flight Notification Service (ADCUS) avbl. **NOTE:** See Special

Notices—Glider/Soaring Activities around the Reno-Tahoe Intl Arpt.

WEATHER DATA SOURCES: ASOS (775) 324-6659.

COMMUNICATIONS: D-ATIS 135.8 (775) 348-1550 **UNICOM** 122.95

RENO RCO 122.2 122.5 (RENO RADIO)

Ⓡ **RENO APP CON** 126.3 (FMG 220°-035°) Rwy 16 119.2 (FMG 036°-255°) Rwy 34

Ⓡ **RENO DEP CON** 126.3 (FMG 256°-035°) Rwy 34 119.2 (FMG 036°-219°) Rwy 16

RENO TOWER 118.7 **GND CON** 121.9 **CLNC DEL** 124.9

AIRSPACE: CLASS C svc continuous ctc **APP CON**


RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

MUSTANG (H) VORTACW 117.9 FMG Chan 126 N39°31.88' W119°39.37' 234° 5.5 NM to fld. 5949/16E.

ILS/DME 109.9 I-AGY Chan 36 Rwy 34L. Class IE. LOC front course unusable inside DUYEP (3.6

NM) above 8,500' MSL at thld avb 6,400' MSL.

ILS/DME 110.9 I-RNO Chan 46 Rwy 16R. Class ID. LOC backcourse unusable byd 20° left of course.

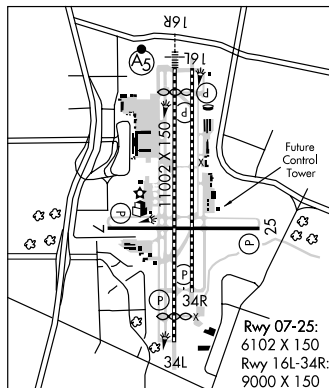

SPANISH SPRINGS (N86) 7 N UTC-8(-7DT) N39°39.99' W119°43.39'

SAN FRANCISCO

4600 FUEL 100LL NOTAM FILE RNO

RWY 16-34: 3540X71 (DIRT) **RWY LGTS(NSTD)**

RWY 16: Building. **RWY 34:** Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy 16-34 hazardous when wet. Ultralight activity on and in/ov arpt. No line of site between ends of rwy. Mountains West and North. Uncontrolled vehicle access across rwys. Rwy 16 gradient 2.5% up first 500'. Rwy 16 thresholds marked with 4 white cement pads flush to the ground. Rwy edge marked with reflectors.

COMMUNICATIONS: CTAF 122.9

ROSASCHI AIR PARK (See SMITH)

SANDY VALLEY**SKY RANCH** (3L2) 2 SW UTC-8(-7DT) N35°47.72' W115°37.63'**LAS VEGAS**

2599 FUEL 100LL NOTAM FILE RNO

L-7D**RWY 03-21:** H3340X45 (ASPH) **RWY LGTS** (NSTD)**RWY 03:** Rgt tfc. **RWY 21:** Thld dsplcd 180'. Road.**RWY 12-30:** 3300X105 (DIRT) **RWY 12:** Rgt tfc.

AIRPORT REMARKS: Attended irregularly. Low flying military acft in area. Ultralight activity on and in/ovf arpt. Occasional livestock on and in vicinity of acft movement areas. Rwy 03-21 obstacle free area limited to 96' either side of centerline. Rwy 12 first 1000' soft sand spots. Power poles, lines northwest, southeast of taxiway. Power poles/lines NW/SE of Rwy 03-21. No line of sight between rwy ends. Arpt is a residential airport, auto traffic is on and across rwy. Avoid noise sensitive residential area 1.5 miles NW of arpt. Rwy 21 dsplcd thld marked with 8' white lines. Rwy 03-21 thld lgts only. Rwy edges marked with reflectors. Rwy 12-30 thld not marked.

COMMUNICATIONS: CTAF/UNICOM 123.0**RADIO AIDS TO NAVIGATION:** NOTAM FILE LAS.**LAS VEGAS (H) VORTACW** 116.9 LAS Chan 116 N36°04.78' W115°09.59' 218° 28.4 NM to fld. 2141/15E.**SEARCHLIGHT** (1L3) 2 S UTC-8(-7DT) N35°26.67' W114°54.57'**PHOENIX**

3410 NOTAM FILE RNO

H-4I, L-7E**RWY 16-34:** H5040X70 (ASPH)**RWY 16:** Fence.

AIRPORT REMARKS: Unattended. Ground rises at constant rate north of arpt for approximately 2 miles. Unlighted 165' p-line located approximately 3.2 miles south of rwy blo thld. Rwy 16-34 thlds marked with 6 green reflectors.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RAL.**GOFFS (L) VORTAC** 114.4 GFS Chan 91 N35°07.87' W115°10.59' 020° 22.9 NM to fld. 4000/15E.**SILVER SPRINGS** (SPZ) 2 SW UTC-8(-7DT) N39°24.18' W119°15.07'**SAN FRANCISCO**

4269 NOTAM FILE RNO

H-3B, L-9A**RWY 05-23:** H5998X75 (ASPH-GRVD) S-30 MIRL**RWY 23:** Rgt tfc.**AIRPORT REMARKS:** Unattended. Ultralight activity on and in/ovf arpt. ACTIVATE MIRL Rwy 05-23—CTAF.**WEATHER DATA SOURCES:** AWOS-3 122.9 (617) 262-3825.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**HAZEN (L) VORTAC** 114.1 HZN Chan 88 N39°30.99' W118°59.86' 223° 13.6 NM to fld. 4080/17E.**SKY RANCH ESTATES** (See SANDY VALLEY)**SMITH****ROSASCHI AIR PARK** (N59) 2 N UTC-8(-7DT) N38°50.36' W119°20.29'**SAN FRANCISCO**

4809 FUEL 100LL NOTAM FILE RNO

L-9A**RWY 07-25:** H4800X32 (ASPH)**RWY 17-35:** 3700X64 (DIRT)**RWY 35:** Building.

AIRPORT REMARKS: Unattended. For fuel 24 hr prior notice required call 775-465-2417. Numerous severe cracks entire length of Rwy 07-25.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RNO.**HAZEN (L) VORTAC** 114.1 HZN Chan 88 N39°30.99' W118°59.86' 184° 43.6 NM to fld. 4080/17E.

WILSON CREEK N38°15.01' W114°23.66' NOTAM FILE RNO.

(H) VORTAC 116.3 ILC Chan 110 167° 27.8 NM to Lincoln Co. 9318/16E.

RCO 122.1R 116.3T (RENO RADIO)

LAS VEGAS

H-3C, L-9B

WINNEMUCCA MUNI (WMC) 5 SW UTC-8(-7DT) N40°53.80' W117°48.35'

KLAMATH FALLS

4308 B S4 FUEL 100LL, JET A TPA-5108(800) NOTAM FILE WMC

H-3B, L-11B

RWY 14-32: H7000X100 (ASPH) S-75, D-125, ST-159, DT-200 MIRL

IAP

RWY 14: VASI(V2L)-GA 3.0° TCH 40'. P-line.

RWY 02-20: H4800X75 (ASPH) S-28 MIRL

RWY 20: Road.

AIRPORT REMARKS: Attended Nov-May 1500-0100Z† Jun-Oct 1500-0200Z†. After hours on call at 775-304-1350. Mountains in SW quadrant. Full strength pavement areas include N 1000' of parallel twy (Rwy 14-32 to Twy A), W 1000' of Twy A, 600' of N/S twy (from Twy A). MIRL Rwy 14-32 preset low ints, to increase ints ACTIVATE-CTAF.

WEATHER DATA SOURCES: ASOS 120.175 (775) 625-2200.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (RENO RADIO)

SALT LAKE CENTER APP/DEP CON 132.25

RADIO AIDS TO NAVIGATION: NOTAM FILE WMC.

(T) VORW/DME 108.2 INA Chan 19 N40°53.96' W117°48.73' at fld. 4302/16E.


VOR/DME unusable:

050°-110° beyond 15 NM below 11,300'

110°-130° beyond 20 NM below 10,800'

150°-190° beyond 15 NM below 10,200'

190°-210° beyond 20 NM below 11,800'

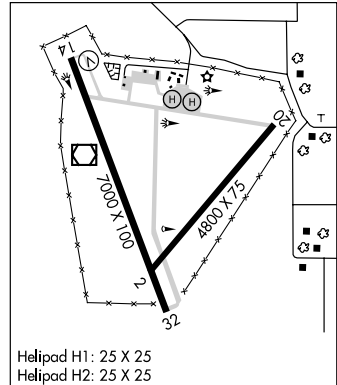

HELIPAD H1: H25X25 (CONC)

HELIPAD H2: H25X25 (CONC)

YERINGTON MUNI (043) 1 N UTC-8(-7DT) N39°00.25' W119°09.48'

SAN FRANCISCO

4378 B S4 FUEL 100LL TPA-5178(800) NOTAM FILE RNO

H-3B, L-9A

RWY 01-19: H5800X75 (ASPH) S-24, D-32 MIRL

RWY 01: PAPI(P2L)-GA 3.0° TCH 40'.


RWY 19: REIL. PAPI(P2L)-GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1500-0200Z†, Sat-Sun irregularly. Rwy 19 REIL OTS indef. ACTIVATE MIRL Rwy 01-19-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

HAZEN (L) VORTAC 114.1 HZN Chan 88 N39°30.99' W118°59.86' 177° 31.6 NM to fld. 4080/17E.

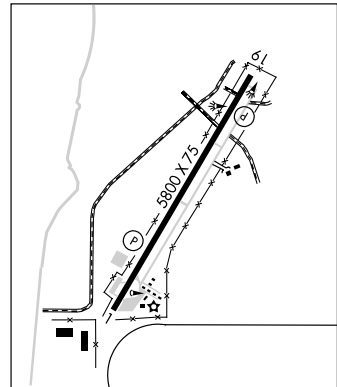

ALAMOGORDO-WHITE SANDS RGNL (ALM) 4 SW UTC-7(-6DT)

ALBUQUERQUE

H-4K, L-6F

IAP

N32°50.40' W105°59.44'

4200 B S4 FUEL 100LL, JET A, A1 + OX 1 NOTAM FILE ALM

RWY 03-21: H7006X150 (ASPH-PFC) S-54, D-74, ST-94,


DT-120 MIRL 0.8% up NE

RWY 03: REIL. PAPI(P4R)—GA 3.0° TCH 60'. Rgt tfc.**RWY 21:** REIL. VASI(V4L)—GA 3.0° TCH 39'.**RWY 16-34:** 3512X200 (DIRT)**RWY 16:** P-line.**RWY 34:** Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 03:** TORA-7005 TODA-7005 ASDA-7005 LDA-7005**RWY 21:** TORA-7005 TODA-7005 ASDA-7005 LDA-7005

AIRPORT REMARKS: Attended 1400-0100Z†. For acft svc after hours, call 575-437-4330/9198/3922. 8000' mountains 4 NM east of arpt. Use Rwy 21 when winds less than 5 kt. Ultralight and glider activity on and in/ov arpt. Recommend that VFR flights between El Paso and Alamogordo-White Sands follow Hwy 54 and the adjacent RR tracks remaining clear of restricted airspace. Rwy 16-34 not avbl for air carrier ops. IFR standby svc avbl on 30 minute recall 575-572-7575. MIRL Rwy 03-21 preset low ints to increase ints and ACTIVATE VASI Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 127.825 (575) 439-4112.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO** 122.15 (ALBUQUERQUE RADIO)

® **HOLLOMAN APP/DEP CON** 120.6 (Mon-Thur 1300-0700Z†, Fri 1300-0400Z†), Sat 1500-2300Z†. Clsd Sun and holidays, other times ctc **ALBUQUERQUE CENTER APP/DEP CON** 132.65

RADIO AIDS TO NAVIGATION: NOTAM FILE ALM.**BOLES (L) VORW/DME** 109.6 BWS Chan 33 N32°49.28' W106°00.79' 035° 1.6 NM to fld. 4100/11E.

ALBUQUERQUE**ALBUQUERQUE INTL SUNPORT**

(ABQ) 3 SE UTC-7(-6DT) N35°02.41' W106°36.55'


ALBUQUERQUE5355 B S4 FUEL 100LL, JET A, A1, A1+ OX 1, 2, 3, 4 LRA ARFF Index—See Remarks H-4K, L-81
NOTAM FILE ABQ IAP, AD**Rwy 08-26:** H13793X150 (CONC-GRVD) S-100, D-210, ST-175, DT-360, DDT-720 HIRL CL**Rwy 08:** MALSR. TDZL. VASI(V6L)—GA 2.95° TCH 54'. Thld dsplcd 1000'. Rgt tfc.**Rwy 26:** REIL. VASI(V6L)—GA 3.0° TCH 47'. 0.5% down.**Rwy 17-35:** H10000X150 (ASPH-CONC-GRVD) AUW-12.5, MIRL**Rwy 17:** REIL. VASI(V4L)—GA 3.0° TCH 53'. Thld dsplcd 890'. Road. Rgt tfc.**Rwy 35:** REIL. VASI(V4L)—GA 3.0° TCH 55'.**Rwy 03-21:** H10000X150 (CONC-GRVD) S-100, D-210, ST-175, DT-360, DDT-720 HIRL CL**Rwy 03:** MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 62'. Rgt tfc.**Rwy 21:** PAPI(P4L).**Rwy 12-30:** H6000X150 (CONC-GRVD) S-65, D-120, DT-155 MIRL**Rwy 12:** Rgt tfc.**Rwy 30:** REIL. PAPI(P4L)—GA 3.0° TCH 40'.**RUNWAY DECLARED DISTANCE INFORMATION****Rwy 03:** TORA-10000 TODA-10000 ASDA-10000 LDA-10000**Rwy 21:** TORA-10000 TODA-10000 ASDA-10000 LDA-10000**Rwy 08:** TORA-13793 TODA-13793 ASDA-13793 LDA-12793**Rwy 26:** TORA-13793 TODA-13793 ASDA-13793 LDA-13793**Rwy 12:** TORA-6000 TODA-6000 ASDA-6000 LDA-6000**Rwy 30:** TORA-6000 TODA-6000 ASDA-6000 LDA-6000**Rwy 17:** TORA-10000 TODA-10000 ASDA-10000 LDA-9110**Rwy 35:** TORA-9110 TODA-10110 ASDA-9110 LDA-9110**ARRESTING GEAR/SYSTEM****Rwy 03 BAK-14 BAK-12A(B) (1062')****Rwy 08 BAK-14 BAK-12A(B) (1000')****HOOK MB 60(B) (52'OVN) Rwy 26**

AIRPORT REMARKS: Attended continuously. Bird hazard Oct-Dec, and Mar-May. Heavy student copter traffic, control firing area S of arpt. Fighter acft depart S only, no military depart on Rwy 35. 200' AGL unlgtd water tower 1.5 miles S of Rwy 35. Rwy 03 and Rwy 08 touchdown runway visual range avbl. Rwy 08-26 and Rwy 17-35 Rwy 03-21 and Rwy 12-30 grooved 130' wide. Use extreme care taxiing north on Twy E-1 to Rwy 08, holding position for Rwy 08-26 collocated with Rwy 12-30 holding position prior to Rwy 12 thld. Rwy 03-21 centerline lgts are not bi-directional, centerline lgts on Rwy 03 only. Rwy 08-26 centerline lgts are not bi-directional, centerline lgts on Rwy 08 only. Class I, ARFF Index C. ARFF protection provided by USAF exceeds Index E capability. Noise abatement procedures in effect for jet and turbo-prop tfc, depart on Rwy 08 expect left turn at 13.5 DME. Between the hrs 0400-1400Z weekdays and Sat and Sun 0400-1600Z expect right turn on departure from Rwy 08. Departures on Rwy 03 or Rwy 35 and arrivals on Rwy 17 are restricted and rqr prior coordination with twr. Recessed arresting cables on Rwy 03 1062' NE of thld and Rwy 08 1000' east of thld, Air carrier ground handling not avbl btn the hrs of 0800-1130Z. Twy D north of Twy B clsd indef. Twy H military use only. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (505) 242-4044. LLWAS. HIWAS 113.2 ABQ. WSP.**COMMUNICATIONS:** D-ATIS 118.0 (505) 856-4928 UNICOM 122.95**RCO 122.55 122.0 (ALBUQUERQUE RADIO)**

① **APP CON** 124.4 (on or N of V12 and W of Sandia Mtns) 134.8 (S of V12 and W of Manzano Mtns) 123.9 (S of V12 and E of Manzano Mtns) 127.4 (on or N of V12 and E of Sandia Mtns) 126.3

① **DEP CON** 127.4 (on or N of V12 and E of Sandia Mtns) 124.4 (on or N of V12 and W of Sandia Mtns) 123.9 (S of V12 and E of Manzano Mtns) 134.8 (S of V12 and W of Manzano Mtns)

TOWER 120.3 123.775 **GND CON** 121.9 **CLNC DEL** 119.2**AIRSPACE:** CLASS C svc continuous ctc **APP CON****RADIO AIDS TO NAVIGATION:** NOTAM FILE ABQ.(H) **VORTACW** 113.2 ABQ Chan 79 N35°02.63' W106°48.98' 078° 10.2 NM to fld. 5743/13E. **HIWAS.****ILS/DME** 111.9 I-SPT Chan 56 Rwy 08.**ILS** 111.5 I-BZY Rwy 03. Class IE.**ASR**

DOUBLE EAGLE II (AEG) 7 NW UTC-7(-6DT) N35°08.71' W106°47.71'

ALBUQUERQUE

5837 B S4 FUEL 100LL, JET A, A7 OX 3 NOTAM FILE AEG

H-4J, L-8I

RWY 04-22: H7398X100 (ASPH) S-30 MIRL 0.4% up SW

IAP

RWY 04: PAPI(P4L)—GA 3.0° TCH 44'.

RWY 22: MALSR. Rgt ttc.

RWY 17-35: H5993X100 (ASPH-PFC) S-30 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 44'.

RWY 35: REIL. Rgt ttc.

AIRPORT REMARKS: Attended 1200-0400Z±. Wildlife on and in/ov arpt.

When twr clsd ACTIVATE MIRL Rwy 04-22 and Rwy 17-35, REIL

Rwy 17 and Rwy 35, MALSR Rwy 22, PAPI Rwy 04 and Rwy

17—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (505) 842-2009.**COMMUNICATIONS:** CTAF 120.15

① ALBUQUERQUE APP/DEP CON 127.4 CLNC DEL 124.8

TOWER 120.15 (1300-0500Z±) GND CON 121.625

AIRSPACE: CLASS D svc 1300-0500Z± other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE ABQ.


ALBUQUERQUE (H) VORTACW 113.2 ABQ Chan 79 N35°02.63'

W106°48.98' 357° 6.2 NM to fld. 5743/13E. HIWAS.

DUDLE NDB (LOM) 351 AE N35°13.04' W106°42.77' 212°

5.9 NM to fld.

ILS 110.1 I-AEG Rwy 22 LOM DUDLE NDB. ILS unmonitored.

**ALEXANDER MUNI** (See BELEN)**ANTON CHICO** N35°06.70' W105°02.40' NOTAM FILE ABQ.

ALBUQUERQUE

(H) VORTAC 117.8 ACH Chan 125 105° 22.3 NM to Santa Rosa Route 66. 5450/12E.

H-4K, 6F, L-8J

RCO 122.1R 117.8T (ALBUQUERQUE RADIO)

ANGEL FIRE (AXX) 1 NW UTC-7(-6DT) N36°25.32' W105°17.40'

DENVER

8380 B FUEL 100LL, JET A NOTAM FILE ABQ

H-4K, 6F, L-8J

RWY 17-35: H8900X100 (ASPH) S-30, D-45 MIRL

IAP

RWY 17: PVASI(PSIL). Ground. 0.6% up.

RWY 35: Road.

AIRPORT REMARKS: Attended 1400-0100Z±. Airport located in mountain valley, rising terrain in all directions.

Ultralight activity on and in/ov arpt. Deer and elk on and in/ov arpt. 6-8 inch drop offs east side of rwy. Avoid

overflight of Taos Pueblo World Heritage site west of arpt. ACTIVATE rotating bcn, MIRL Rwy 17-35—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.025 (575) 377-0526.**COMMUNICATIONS:** CTAF/UNICOM 122.8

ALBUQUERQUE CENTER APP/DEP CON 132.8.

RADIO AIDS TO NAVIGATION: NOTAM FILE SKX.

TAOS (L) VORTAC 117.6 TAS Chan 123 N36°36.53' W105°54.38' 097° 31.9 NM to fld. 7860/13E.

COMM/NAV/WEATHER REMARKS: AWOS-3 ceiling unavbl.**APACHE CREEK****JEWETT MESA** (13Q) 10 N UTC-7(-6DT) N34°00.20' W108°40.69'

ALBUQUERQUE

7681 NOTAM FILE ABQ

RWY 06-24: 5200X45 (DIRT)

RWY 06: P-line.

RWY 24: Road.

AIRPORT REMARKS: Unattended. Arpt open May-Sep; other times CLOSED. Wildlife and livestock on runway. Rwy

06-24 recommend visual inspection before using, infrequent maintenance and poor condition. Rwy 06-24 has

large rocks on rwy, surface deeply rutted. Rwy 06 marked with tires on +4' posts at rwy end. Rwy 24 marked

with single tire either side.

COMMUNICATIONS: CTAF 122.9

ARTESIA MUNI (ATS) 3 W UTC-7(-6DT) N32°51.15' W104°28.06'

ALBUQUERQUE

3541 B S4 FUEL 100LL, JET A1 NOTAM FILE ATS

H-6F, L-6G

RWY 03-21: H6301X150 (ASPH-PFC) S-40, D-57 MIRL 0.3% up SW

IAP

RWY 03: P-line.

RWY 21: PVASI(PSIL)—GA 3.0° TCH 25'. Road.

RWY 12-30: H5390X150 (ASPH-PFC) S-40, D-57 MIRL 0.5%

up NW

RWY 12: Brush.

AIRPORT REMARKS: Attended 1400-0000Z†. Fuel on call after hours call 575-748-3206. Fee charged. ACTIVATE MIRL Rwy 03-21 and Rwy 12-30—CTAF.

WEATHER DATA SOURCES: AWOS-3 126.725 (575) 748-2103.**COMMUNICATIONS:** CTAF/UNICOM 123.075


Ⓡ ROSWELL APP/DEP CON 119.6 (1300-0400Z‡)

Ⓡ ALBUQUERQUE CENTER APP/DEP CON 132.65 (0400-1300Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE ROW.

CHISUM (H) VORTACW 116.1 CME Chan 108 N33°20.25' W104°37.28' 153° 30.1 NM to fld. 3772/12E. **HIWAS.**

NDB (MHW) 414 ATS N32°51.16' W104°27.70' at fld. NOTAM FILE ATS.

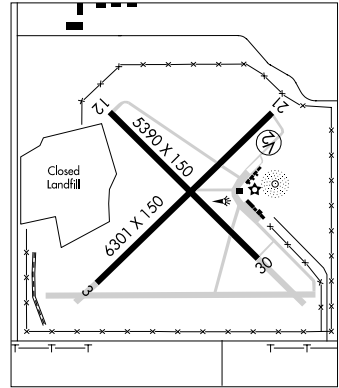**AZTEC MUNI** (N19) 2 NW UTC-7(-6DT) N36°50.08' W108°01.70'

DENVER

5877 B FUEL 100LL, MOGAS NOTAM FILE ABQ

L-81

RWY 08-26: H4300X50 (ASPH) S-10

RWY 08: ODALS (NSTD). APAP (PNIL)—GA 3.5° TCH 30'. Thld dsplcd 210'.

RWY 26: REIL (NSTD) PVASI(PSIL)—GA 3.0° TCH 20'. Thld dsplcd 210'.

RWY 04-22: H2850X40 (ASPH) S-8

AIRPORT REMARKS: Attended continuously. For arpt attendant when not avbl call 505-320-2021. Rwy 26 preferred for ngt ops. Arpt located atop Mesa, ground drops approximately 60-280' beyond rwy end. Rwy 04-22 pavement has numerous large cracks and loose rocks. Rwy end 04 not visible from Rws 08 or 26. No line of sight between the ends of Rwy 08-26. Rwy 08-26 edge lgtg retro-reflective. Rwy 08 NSTD ODALS due to 4 NSTD lgts on extended rwy centerline on less than standard spacing. Rwy 26 NSTD REIL-2 omni strobes on each side, 1 omni strobe on left of centerline 15' from end of rwy. Rotating bcn oprs dusk-0700Z†. ACTIVATE ODALS Rwy 08 and REIL Rwy 26—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE FMN.

RATTLESNAKE (H) VORTACW 115.3 RSK Chan 100 N36°44.90' W108°05.93' 019° 6.2 NM to fld. 5823/14E. **HIWAS.**

BELÉN**ALEXANDER MUNI** (E80) 3 W UTC-7(-6DT) N34°38.71' W106°50.02'

ALBUQUERQUE

5194 B S4 FUEL 100LL, JET A1+ NOTAM FILE ABQ

H-4J, L-81

RWY 03-21: H6601X60 (ASPH) S-12.5 MIRL 0.3% up SW

IAP

RWY 03: Fence.

RWY 21: PVASI(PSIL)—GA 3.0° TCH 50'.


AIRPORT REMARKS: Attended 1500-0000Z†. Parachute Jumping. For fuel after dusk call 505-864-0195/6277. ACTIVATE MIRL Rwy 03-21 and PVASI Rwy 21—CTAF.

COMMUNICATIONS: CTAF 122.9

Ⓡ ALBUQUERQUE APP/DEP CON 123.9

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

SOCORRO (H) VORTAC 116.8 ONM Chan 115 N34°20.33' W106°49.23' 345° 18.4 NM to fld. 4910/13E.

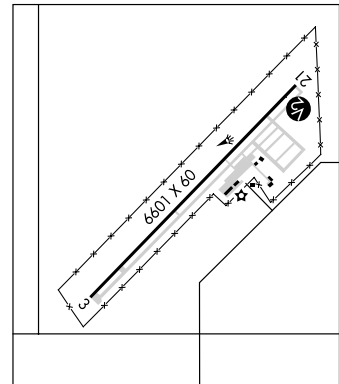**BLACK ROCK** (See ZUNI PUEBLO)

BOLES N32°49.28' W106°00.79'. NOTAM FILE ALM.**ALBUQUERQUE**(L) **VORW/DME** 109.6 BWS Chan 33 035° 1.6 NM to Alamogordo-White Sands Rgnl.
4100/11E.**L-6F**

VORW/DME unusable: 065°-100° beyond 15 NM.

CANNON AFB (CVS)(KCVS) AF 5 W UTC-7(-6DT) N34°22.97' W103°19.33'**ALBUQUERQUE**

4295 B TPA—See Remarks NOTAM FILE CVS Not insp.

H-66, L-66**RWY 04-22:** H1000X150 (CONC) PCN 62 R/C/W/T HIRL**DIAP, AD****RWY 04:** ALSF1. PAPI(P4L)—GA 2.5° TCH 34'.**RWY 22:** ALSF1. PAPI(P4L)—GA 2.6° TCH 35'.**RWY 13-31:** H8200X150 (PEM) PCN 47 R/B/W/T HIRL**RWY 13:** SSALR. PAPI(P4L)—GA 3.0° TCH 37'.**RWY 31:** SSALR. PAPI(P4L).**MILITARY SERVICE:** LGT Gated thld lgt on all rwy for fighter acft. Rwy 4-22 and Rwy 13-31 ILS GS/Runway Point ofIntercept and PAPI GS/Runway Reference Point not coincidental. **JASU** (MD-3) (AM32A-60A) **FUEL J8****FLUID SP PRESAIR** LPOX LOX **OIL** 0-148 SOAP**TRAN ALERT** Avbl during opr hr. AM32A-60 support equipment incompatible with EA6 acft.

MILITARY REMARKS: Attended Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; clsd Sun and holidays. Aerodrome Official Business Only (OBO). See FLIP AP/1 Supplementary Arpt Remark. **RSTD** No less than 24 hr prior and no more than 15 days prior, ctc DSN 681-2801, C575-784-2801, fax extension 4658. Heavy acft expect right 180° turn Rwy 22 and Rwy 31 and left 180° turn Rwy 04 and Rwy 13. Dep acft restricted to 5300' until passing dep end of rwy. No touch-and-go for tran acft C135 and larger due to Foreign Object Damage. **CAUTION** Clovis Muni 13 NM NE. Portales Muni 14 NM SSW. Bird hazard: Sewage lagoon and lake located ½ NM SE of Rwy 22 apch end. Bird Aircraft Strike Hazard Phase II in effect Oct 1-Nov. 10, Mar 12-Apr 22 and Jun 1-Jul 31. Vehicle t/c on road (15' AGL), approximately 1200' from apch end Rwy 13. Approximately 20' AGL AG irrigation equipment located approximately 2000' from Rwy 13-31 apch ends. Potential exists for hydroplaning on Rwy 13-31 asphalt interior portion. For all rwy expect 30-45 min rwy suspension after heavy acft arr/dep due to Foreign Object Damage on rwy. **TFC PAT** TPA—VFR jet rectangular 5800(1505), tran jet overhead 6300(2005). **MISC** WX briefing for tran aircrew byd normal opr hr avbl via 25 OW5 at DAVIS-MONTHAN AFB DSN 228-6598/6599/6588 C520-228-6598/6599. Aflid WX obsn sent by AN/FMQ19 automated obsn system; augmented by human observer during aflid opr hrs, ltd on weekends. Obsn site ltd 000-070 degrees due bldgs; ngt obsn ltd due hi intensity ramp lgt. The 1st 1200' Rwy 13-31 concrete, mid 5800' asphaltic concrete. 1st 1200' Rwy 13 has rough concrete. Fire-fighting capability ltd to Cat 8 and 10 acft. Recommend units ask for current capability when req PPRs.

COMMUNICATIONS: **SFA** **ATIS** 119.1 269.9 (Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; clsd Sun and holidays) **PPD** 139.3 372.2

Ⓡ **APP CON** 125.5 352.1 (Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; Sat 1700-0100Z; clsd Sun and holidays), other times ctc

Ⓡ **ALBUQUERQUE CENTER APP CON** 126.85 285.6.

TOWER 120.4 270.25. (Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; clsd Sun and holidays) **GNC CON** 121.9 275.8.**CLNC DEL** 120.2 293.225.

Ⓡ **DEP CON** 121.05 307.175 (Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; clsd Sun and holidays), other times ctc

Ⓡ **ALBUQUERQUE CENTER DEP CON** 126.85 285.6

COMD POST (TRAILBOSS) 311.0 11175 (11175 24 hr primary HF. Have Quick timing avbl.) **PMSV METRO** 343.1
Weather DSN 681-2749. Alternate PMSV is Dyess AFB 383.25.

AIRSPACE: **CLASS D** svc Mon-Thu 1600-0800Z; Fri-Sat 1600-0001Z; clsd Sun and holidays, other times Class E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE ABQ.(L) **TACAN** Chan 53 CVS (111.6) N34°22.83' W103°19.35' at fld. 4820/10E. Unmonitored outside published opr hr and when radar facility is not manned. No NOTAM MP Tue 1100-1330Z.**ILS** 108.5 I-GLO Rwy 04. No NOTAM MP Wed 1100-1300Z.**ILS** 109.7 I-CVS Rwy 22. No NOTAM MP Mon 1100-1300Z.**ILS** 108.3 I-BNN Rwy 31. Class IE. No NOTAM MP Wed 0700-0930Z.**ILS** 110.35 I-OVI Rwy 13. No NOTAM MP Mon 0700-0930Z. GS critical area unprotected, ILS/GS unusable when ceiling blo 800' or visibility less than 2 sm.**ASR** No NOTAM MP Mon, Wed 0700-1100Z; Thu, Fri 0600-1300Z.**COMM/NAV/WEATHER REMARKS:** Radar see Terminal FLIP for Radar Minima.**CAPITAN** N33°29.39' W105°24.26'. NOTAM FILE SRR.**ALBUQUERQUE****NDB (MHW)** 278 **CEP** 246° 6.7 NM to Sierra Blanca Rgnl. Unusable byd 25 NM blo 14,500'.**L-6F**

CARLSBAD N32°15.40' W104°13.56' NOTAM FILE CNM.

ALBUQUERQUE

(L) VORTACW 116.3 CNM Chan 110 327° 5.2 NM to Cavern City Air Terminal. 3250/12E.

L-66

RCO 122.65 (ALBUQUERQUE RADIO)

CARLSBAD

CAVERN CITY AIR TERMINAL (CNM) 5 SW UTC-7(-6DT) N32°20.25' W104°15.80'

ALBUQUERQUE

3295 B FUEL 100LL, JET A1+ Class II, ARFF Index A NOTAM FILE CNM

H-6F, L-66

RWY 03-21: H7854X150 (ASPH-PFC) S-62, D-88, ST-112, DT-140 MIRL 0.6% up SW IAP

RWY 03: MALSR. Road.

RWY 21: VASI(V4L)—GA 3.0°TCH 58'. Road.

RWY 14R-32L: H5839X100 (ASPH) S-30, D-45 MIRL

RWY 14R: PAPI(P4L)—GA 4.0° TCH 69'. Road. Rgt tfc.

RWY 32L: PAPI(P4L). Thld dspcd 385'. Road.

RWY 08-26: H5333X75 (ASPH) S-19 MIRL 0.6% up W

RWY 08: Road. RWY 26: Fence.

RWY 14L-32R: H4615X150 (ASPH) S-8, D-12.5

RWY 32R: Thld dspcd 616'. Road. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-7854 TODA-7854 ASDA-7854 LDA-7854

RWY 21: TORA-7854 TODA-7854 ASDA-7854 LDA-7854

RWY 08: TORA-5333 TODA-5333 ASDA-5333 LDA-5333

RWY 26: TORA-5333 TODA-5333 ASDA-5333 LDA-5333

RWY 14R: TORA-5839 TODA-5839 ASDA-5839 LDA-5839

RWY 32L: TORA-5839 TODA-5839 ASDA-5839 LDA-5454

RWY 14L: TORA-4615 TODA-4615 ASDA-4615 LDA-4615

RWY 32R: TORA-4615 TODA-4615 ASDA-4615 LDA-3999

AIRPORT REMARKS: Attended Mon-Fri 1230-0130Z†, Sat-Sun on call.

For fuel after hrs. Sat and Sun call 575-887-1500. 24 hrs PPR for air carrier ops with more than 30 passenger seats ctc airport manager 575-887-3060. Rwy 14L-32R not avbl for air carrier ops. Oil derricks invof arpt.

MIRL Rwy 03-21, Rwy 08-26 and Rwy 14R-32L preset low ints, to increase ints and ACTIVATE MALSR Rwy 03—CTAF. NOTE: See Special Notices—Natural Gas Flare.

WEATHER DATA SOURCES: ASOS 118.375 (575) 887-6858.

COMMUNICATIONS: CTAF/UNICOM 122.95

CARLSBAD RCO 122.65 (ALBUQUERQUE RADIO)


Ⓡ ALBUQUERQUE CENTER APP/DEP CON 135.875

RADIO AIDS TO NAVIGATION: NOTAM FILE CNM.

CARLSBAD (L) VORTACW 116.3 CNM Chan 110 N32°15.40' W104°13.56' 327° 5.2 NM to fld. 3250/12E.

CARLZ NDB (LOM) 402 CV N32°16.01' W104°20.31' 032° 5.7 NM to fld. Unmonitored.

ILS 111.9 I-CVD Rwy 03. Class IE. LOM CARLZ NDB. ILS and LOM unmonitored.

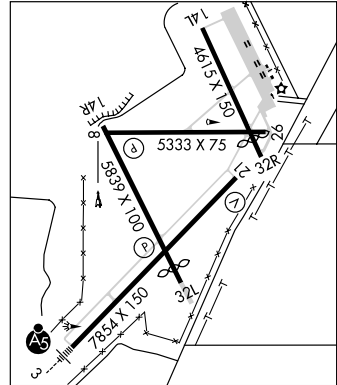

CARLZ N32°16.01' W104°20.31' NOTAM FILE CNM.

ALBUQUERQUE

NDB (LOM) 402 CV 032° 5.7 NM to Cavern City Air Terminal. Unmonitored.

CARRIZOZO MUNI (F37) 1 NW UTC-7(-6DT) N33°38.93' W105°53.74'

ALBUQUERQUE

5371 B S2 FUEL 100LL NOTAM FILE ABQ

L-6F

RWY 06-24: H4900X75 (ASPH) S-12 MIRL

RWY 06: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Road.

RWY 24: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Trees.

RWY 15-33: 2500X90 (DIRT)

RWY 15: Fence. RWY 33: Antenna.

AIRPORT REMARKS: Attended continuously. ACTIVATE MIRL Rwy 06-24, PAPI Rwy 06 and Rwy 24, and REIL Rwy 06 and Rwy 24—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

SOCORRO (H) VORTAC 116.8 ONM Chan 115 N34°20.33' W106°49.23' 119° 61.9 NM to fld. 4910/13E.

CAVERN CITY AIR TERMINAL (See CARLSBAD)

CHISUM N33°20.25' W104°37.28' NOTAM FILE ROW.

ALBUQUERQUE

(H) VORTACW 116.1 CME Chan 108 103° 5.0 NM to Roswell Intl Air Center. 3772/12E.

H-6F, L-66

HIWAS.

DME unusable 060°-140° byd 20 NM blo 7,000', 141°-215° byd 20 NM blo 8,000'.

CIMARRON N36°29.48' W104°52.32' NOTAM FILE RTN.

DENVER

(H) VORTAC 116.4 CIM Chan 111 037° 23.3 NM to Raton Muni/Crews Fld. 6550/13E. HIWAS. H-4K, 6F, L-15A
 VOR portion unusable 340°-010° beyond 32 NM below 12,000'.
 VORTAC unusable 230°-290° beyond 20 NM below 18,000'.

RCO 122.1R 116.4T (ALBUQUERQUE RADIO)

CLAYTON MUNI ARPK (CAO) 2 E UTC-7(-6DT) N36°26.77' W103°09.00'

WICHITA

4965 B FUEL 100LL, JET A NOTAM FILE CAO

H-6G, L-15A

RWY 02-20: H6300X75 (ASPH) S-16.5 MIRL

IAP

RWY 02: Thld dsplcd 380'.

RWY 12-30: H4100X60 (ASPH) MIRL 0.5% up NW

AIRPORT REMARKS: Attended 1500-0000Z+. ACTIVATE MIRL Rwy 02-20
 and Rwy 12-30—CTAF.

WEATHER DATA SOURCES: ASOS 120.625 (575) 374-2565.


COMMUNICATIONS: CTAF/UNICOM 122.8

ALBUQUERQUE CENTER APP/DEP CON 127.85

RADIO AIDS TO NAVIGATION: NOTAM FILE DHT.

DALHART (L) VORTACW 112.0 DHT Chan 57 N36°05.49'
 W102°32.68' 294° 36.3 NM to fld. 4020/12E. HIWAS.

NDB (MHW) 332 CAO N36°26.64' W103°08.96' at fld.
 NOTAM FILE CAO.

**CLINES CORNERS** N35°00.20' W105°39.73'

ALBUQUERQUE

RCO 122.3 (ALBUQUERQUE RADIO)

L-8J

CLINES CORNERS (CQC) N35°00.00' W105°40.00'/7102.

ASOS (575) 472-4551

CLOVIS MUNI (CVN) 6 E UTC-7(-6DT) N34°25.51' W103°04.76'

ALBUQUERQUE

4216 B S4 FUEL 100LL, JET A TPA-5016(800) Class III, ARFF Index A NOTAM FILE CVN H-66, L-6H
 RWY 04-22: H6200X150 (ASPH-AFSC) S-45, D-57 MIRL 0.3% up NE IAP

RWY 04: MALSR. PAPI(P4L)—GA 3.0° TCH 41'. Thld displcd 799'.
 Road.

RWY 22: VASI(V4L)—GA 3.0° TCH 48'. Road.

RWY 12-30: H5697X150 (ASPH) S-42, D-50 MIRL
 0.5% up NW

RWY 12: REIL. Road.

RWY 30: REIL. PVASI(P5IL)—GA 3.0° TCH 75'. Road.

RWY 08-26: 2442X75 (TURF)

RWY 08: P-line.

AIRPORT REMARKS: Attended 1500-0030Z†. 100LL avbl northwest end
 Twy B daily after hrs call 505-389-1224. For fuel after hrs main
 ramp call 505-389-1272. Jet A avbl on Sun only by appointment
 call 505-389-1272. Heavy jet tfc Cannon AFB 13 NM SW.
 Extensive agricultural acft activity on and invof arpt. Rwy 22
 preferred rwy for calm wind. Rwy 12 REIL OTS indef. Rwy 30 REIL
 OTS indef. PAPI Rwy 04 unusable byd 7° rgt of centerline.
 ACTIVATE PAPI and MALSR Rwy 04—CTAF. MIRL Rwy 04-22
 preset low ints dusk-dawn. MIRL Rwy 12-30 preset low ints
 Mon-Thu dusk-0530Z† and Fri-Sun dusk-0700Z†, to increase
 ints Rwy 04-22 and ACTIVATE MIRL Rwy 12-30—CTAF.

WEATHER DATA SOURCES: AWOS-3 135.375 (575) 389-1056.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.5 (ALBUQUERQUE RADIO)

① CANNON APP/DEP CON 125.5 (Mon-Thu 1600-0800Z†, Fri-Sat 1600-0001Z†, clsd Sun and holidays) other times
 ctc


② ALBUQUERQUE CENTER APP/DEP CON 126.85 CANNON CLNC DEL 119.0

RADIO AIDS TO NAVIGATION: NOTAM FILE FTW.

TEXICO (H) VORTACW 112.2 TXO Chan 59 N34°29.71' W102°50.38' 240° 12.6 NM to fld. 4060/11E.

HISAN NDB (LOM) 335 CV N34°21.04' W103°10.46' 038° 6.5 NM to fld.

ILS 108.9 I-CVN Rwy 04 LOM HISAN NDB.

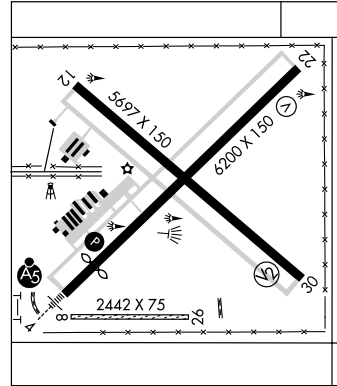**COLUMBUS** N31°49.15' W107°34.47' NOTAM FILE ABQ.

EL PASO

(L) VORW/DME 111.2 CUS Chan 49 332° 27.6 to Deming Muni. 4008/12E. Unmonitored.

L-6E

VOR portion unusable 335°-342° beyond 30 NM below 10,500'.

CONCHAS DAM**CONCHAS LAKE** (E89) 1 SW UTC-7(-6DT) N35°21.86' W104°10.90'

ALBUQUERQUE

L-15A

4230 B NOTAM FILE ABQ

RWY 09-27: H4790X60 (ASPH) S-13

RWY 09: ODALS (NSTD). Trees.

RWY 27: ODALS (NSTD). Fence.


AIRPORT REMARKS: Unattended. Rwy 09-27 edge lgtg retro-reflective.

Rwy 09 and Rwy 27 NSTD ODALS due to 4 NSTD lgts on extended
 rwy centerline on less than standard spacing. ACTIVATE
 retro-reflective lgts Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE TCC.

TUCUMCARI (H) VORTACW 113.6 TCC Chan 83 N35°10.93'
 W103°35.91' 279° 30.7 NM to fld. 4070/12E. HIWAS.

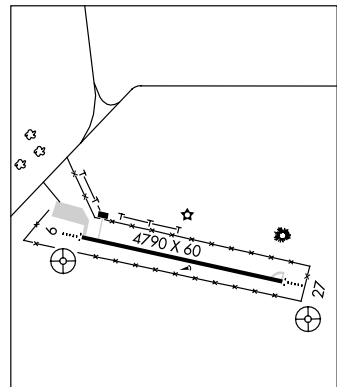

DOMAN N35°33.32' W106°08.41' NOTAM FILE SAF. ALBUQUERQUE
NDB (LOM) 341 SG 022° 4.5 NM to Santa Fe Muni. Unmonitored. L-81

DONA ANA CO AT SANTA TERESA (See SANTA TERESA)

DOUBLE EAGLE II (See ALBUQUERQUE)

DUDLE N35°13.04' W106°42.77' NOTAM FILE ABQ. ALBUQUERQUE
NDB (LOM) 351 AE 212° 5.9 NM to Double Eagle II.

DULCE

JICARILLA APACHE NATION (24N) 10 S UTC-7(-6DT) N36°49.71' W106°53.05' DENVER
7618 B NOTAM FILE ABQ H-41, L-81
RWY 17-35: H7500X75 (ASPH) S-12.5 MIRL
RWY 17: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Tree. RWY 35: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Tree.
AIRPORT REMARKS: Unattended. Rising terrain in all directions. Wildlife on and in/ovf arpt. Main gate locked at all times, ctc arpt manager to enter/exit 505-759-4310. Gate combination 1995. Wind sock lgts OTS indef.
ACTIVATE MIRL Rwy 17-35, REIL and PAPI Rwy 17 and Rwy 35—CTAF.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE FMN.
RATTLESNAKE (H) VORTACW 115.3 RSK Chan 100 N36°44.90' W108°05.93' 071°58.7 NM to fld.
5823/14E. HIWAS.

EDGEWOOD

SANDIA AIRPARK ESTATES EAST (1N1) 2 NE UTC-7(-6DT) N35°05.67' W106°10.03' ALBUQUERQUE
6550 B S4 FUEL 100LL NOTAM FILE ABQ L-81
RWY 09-27: H4830X30 (ASPH) LIRL
AIRPORT REMARKS: Attended Mon-Sat 1400-0000Z. Self svc fuel with credit card. For rotg bcn call 505-281-0322
ACTIVATE LIRL Rwy 09-27—CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE SAF.
SANTA FE (L) VORTACW 110.6 SAF Chan 43 N35°32.45' W106°03.90' 178° 27.2 NM to fld. 6263/13E.


ESPANOLA

OHKAY OWINGEN (E14) 3 NE UTC-7(-6DT) N36°01.57' W106°02.72' DENVER
5790 B NOTAM FILE ABQ H-4K, 6F, L-81
RWY 16-34: H5007X75 (ASPH) S-18 MIRL
RWY 16: Thld displcd 324'. RWY 34: Fence.
AIRPORT REMARKS: Unattended. Main gate locked at all times. Airport access gate combination-5790. Call Pueblo or arpt manager to enter/exit 505-747-0700 or 505-660-6113. ACTIVATE MIRL Rwy 16-34—CTAF.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE SAF.
SANTA FE (L) VORTACW 110.6 SAF Chan 43 N35°32.45' W106°03.90' 349° 29.3 NM to fld. 6263/13E.

ESTANCIA MUNI (E92) 1 E UTC-7(-6DT) N34°45.80' W106°02.48' ALBUQUERQUE
6100 NOTAM FILE ABQ
RWY 08-26: 4000X50 (GRVL)
RWY 08: ODALS. Pole. RWY 26: ODALS. Hill.
AIRPORT REMARKS: Unattended. Cattle and birds on and in/ovf rwy. Rwy 08-26 soft when wet. Rwy 08 NSTD ODALS-1 flashing lgt on rwy centerline and 2 at rwy thld. Rwy 26 ODALS OTS indef. Rwy 26 NSTD ODALS-3 NSTD lgts on extended rwy centerline on less than standard spacing flash in sequence. Rwy 08-26 thld and edge lighting retro-reflective.
COMMUNICATIONS: CTAF 122.9

FARMINGTON**FOUR CORNERS RGNL** (FMN) 1 NW UTC-7(-6DT) N36°44.48' W108°13.80'**DENVER**5506 B S4 **FUEL** 100LL, JET A1, A1+ OX 2, 4 Class III, ARFF Index A NOTAM FILE FMN H-4J, L-8H**RWY 07-25:** H6704X100 (ASPH-PFC) S-50, D-90, ST-114 MRL 0.4% up E IAP, AD**RWY 07:** VASI(V4L)—GA 3.0° TCH 52'. Thld dsplcd 239'.**RWY 25:** REIL. VASI(V4L)—GA 3.0° TCH 52'. Thld dsplcd 188'.**RWY 05-23:** H6500X150 (ASPH-PFC) S-47, D-66, ST-84

MRL 0.5% up NE

RWY 05: VASI(V4R)—GA 3.0° TCH 61'.**RWY 23:** REIL. VASI(V4R)—GA 3.0° TCH 52'. Thld dsplcd 124'.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 05:** TORA-6500 TODA-6900 ASDA-6375 LDA-6375**RWY 23:** TORA-6500 TODA-7500 ASDA-6500 LDA-6375**RWY 07:** TORA-6704 TODA-7704 ASDA-6518 LDA-6277**RWY 25:** TORA-6704 TODA-6704 ASDA-6463 LDA-6277**AIRPORT REMARKS:** Attended 1300-0500Z†. When twr clsd MRL Rwy 07-25 and REIL Rwy 25 preset low ints, to increase ints and ACTIVATE MRL Rwy 05-23 and REIL Rwy 23—CTAF.**WEATHER DATA SOURCES:** ASOS (505) 324-6252. LAWRS. SAWRS.**COMMUNICATIONS:** CTAF 118.9 ATIS 127.15 UNICOM 122.95**FARMINGTON RCO** 122.4 (ALBUQUERQUE RADIO)⑧ **DENVER CENTER APP/DEP CON** 118.575**TOWER** 118.9 (1300-0500Z†) **GND CON** 121.7**AIRSPACE:** CLASS D svc 1300-0500Z† other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE FMN.**RATTLESNAKE (H) VORTACW** 115.3 RSK Chan 100 N36°44.90' W108°05.93' 252° 6.3 NM to fld. 5823/14E.**HIWAS.****ILS/DME** 111.9 I-FMN Chan 56 Rwy 25. Class IE.**FARMINGTON** N36°44.22' W108°11.63'**DENVER****RCO** 122.4 (ALBUQUERQUE RADIO) H-4J, L-8H**FORT SUMNER MUNI** (FSU) 2 NE UTC-7(-6DT) N34°29.00' W104°13.03'**ALBUQUERQUE**

4165 B NOTAM FILE ABQ

RWY 03-21: H5800X75 (ASPH) S-25 MRL**Rwy 21:** PVASI (PSIL).**RWY 08-26:** H5300X50 (ASPH) S-17 MRL**RWY 08:** Road. **Rwy 26:** PVASI (PSIL). Brush.**AIRPORT REMARKS:** Unattended. Gate code is 8845. ACTIVATE MRL Rwy 8-26—CTAF. MRL Rwy 03-21 preset low ints dusk-0500Z†. After 0500Z† ACTIVATE—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE TCC.**TUCUMCARI (H) VORTACW** 113.6 TCC Chan 83 N35°10.93' W103°35.91' 204° 51.8 NM to fld. 4070/12E.**HIWAS.****FORT UNION** N35°39.45' W105°08.14' NOTAM FILE LVS**ALBUQUERQUE****(H) VORTACW** 117.3 FTI Chan 120 at Las Vegas Muni. 6870/13E. **HIWAS.** H-4K, 6F, L-8J**FOUR CORNERS RGNL** (See FARMINGTON)

GALLUP MUNI (GUP) 3 SW UTC-7(-6DT) N35°30.66' W108°47.36'

6472 B S4 FUEL 100LL, JET A1 + OX 3 NOTAM FILE GUP

RWY 06-24: H7316X100 (ASPH) S-45, D-55 MIRL

RWY 06: PAPI(P2L)—GA 3.0° TCH 46'. Tree.

RWY 24: REIL. PAPI(P2L)—GA 3.0° TCH 44'. Berm.

AIRPORT REMARKS: Attended continuously. ACTIVATE MIRL Rwy 06-24 and REIL Rwy 24—CTAF.

WEATHER DATA SOURCES: ASOS 118.375 (505) 726-8232.

COMMUNICATIONS: CTAF/UNICOM 122.95

RCO 122.1R 115.1T (ALBUQUERQUE RADIO) RCO 122.6 (ALBUQUERQUE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE GUP.


(H) VORTAC 115.1 GUP Chan 98 N35°28.56' W108°52.36' 049° 4.6 NM to fld. 7053/14E. VOR unusable 040°-050° beyond 10 NM below 10,500'.

ILS/DME 111.7 I-GUP Chan 54 Rwy 06. LOC only. Unmonitored.

ALBUQUERQUE

H-4J, L-8H

IAP

**GLENWOOD-CATRON CO** (E94) 3 NE UTC-7(-6DT) N33°21.17' W108°52.04'

5428 NOTAM FILE ABQ

RWY 01-19: 3700X84 (DIRT)

RWY 01: Tree. RWY 19: Fence.

AIRPORT REMARKS: Unattended. Soft when wet. Large rocks on south 300' edges of rwy. Two pvt strips NE. Livestock and deer on arpt. Mountains surround arpt. Windsock missing. Access road not useable after rain.

COMMUNICATIONS: CTAF 122.9

ALBUQUERQUE

GRANT CO (See SILVER CITY)**GRANTS-MILAN MUNI** (GNT) 3 NW UTC-7(-6DT) N35°10.04' W107°54.12'

6537 B S2 FUEL 100LL, JET A1+ NOTAM FILE GNT

RWY 13-31: H7172X75 (ASPH) S-12 MIRL 0.3% up NW

RWY 13: PAPI(P2L)—GA 3.0° TCH 40'. Ground.

RWY 31: PAPI(P2L)—GA 3.0° TCH 40'.

RWY 08-26: 2350X40 (DIRT) 0.6% up W

RWY 08: Hill. RWY 26: Fence.

AIRPORT REMARKS: Attended 1500-0000Z+. For svc after hours call 505-287-4700. Self svc fuel with credit card. Rwy 08-26 used for lds only. PAPI Rwy 31 OTS indef. ACTIVATE MIRL Rwy 13-31—CTAF.

WEATHER DATA SOURCES: ASOS (505) 287-7909.

COMMUNICATIONS: CTAF/UNICOM 122.8

ALBUQUERQUE CENTER APP/DEP CON 124.325


RADIO AIDS TO NAVIGATION: NOTAM FILE GUP.

GALLUP (H) VORTAC 115.1 GUP Chan 98 N35°28.56' W108°52.36' 097° 51.1 NM to fld. 7053/14E.

ALBUQUERQUE

H-4J, L-8I

IAP



HATCH MUNI (E05) 3 SW UTC-7(-6DT) N32°39.66' W107°11.88'

ALBUQUERQUE

4080 B NOTAM FILE ABQ

L-6E

RWY 11-29: H4110X60 (ASPH) S-9

RWY 11: ODALS (NSTD). APAP (PNIL).

RWY 29: ODALS (NSTD). APAP (PNIL). Pole.

AIRPORT REMARKS: Unattended. ACTIVATE ODALS Rwy 11 and Rwy 29—CTAF. Rwy 11 and Rwy 29 APAP lgtd.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE DMN.

DEMING (L) VORTACW 108.6 DMN Chan 23 N32°16.53' W107°36.33' 030° 31.0 NM to fld. 4210/12E.
HIWAS.

HAWKE N32°13.14' W106°50.18' NOTAM FILE LRU.

ALBUQUERQUE

NDB (LOM) 206 LR 303° 6.1 NM to Las Cruces Intl.

L-6F

HISAN N34°21.04' W103°10.46' NOTAM FILE CVN.

ALBUQUERQUE

NDB (LOM) 335 CV 038° 6.5 NM to Clovis Muni.

HOBBS

LEA CO RGNL (HOB) 4 W UTC-7(-6DT) N32°41.25' W103°13.02'

ALBUQUERQUE

3661 B FUEL 100LL, JET A NOTAM FILE HOB

H-66, L-66

RWY 03-21: H7398X150 (ASPH-PFC) S-65, D-100, ST-127 HIRL

IAP, AD

RWY 03: MALSR.

RWY 21: ODALS. VASI(V4L)—GA 3.0° TCH 44'. Tree.

RWY 12-30: H6002X150 (ASPH) S-90, D-120, ST-157

MIRL 0.4% up NW

RWY 12: VASI(V4L)—GA 3.0° TCH 49'.

RWY 30: PAPI(P4R)—GA 3.0° TCH 44'.

RWY 17-35: H4998X100 (ASPH) S-32, D-50

RWY 17: Thld dsplcd 492'. P-line.

RWY 08-26: H3512X150 (ASPH) S-12

RWY 08: Fence.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-7398 TODA-7398 ASDA-7398 LDA-7398

RWY 21: TORA-7398 TODA-7398 ASDA-7398 LDA-7398

RWY 08: TORA-3512 TODA-3512 ASDA-3512 LDA-3512

RWY 26: TORA-3512 TODA-3512 ASDA-3512 LDA-3512

RWY 12: TORA-6001 TODA-6001 ASDA-6001 LDA-6001

RWY 30: TORA-6001 TODA-6001 ASDA-6001 LDA-6001

RWY 17: TORA-4998 TODA-4998 ASDA-4998 LDA-4506

RWY 35: TORA-4998 TODA-4998 ASDA-4998 LDA-4998

AIRPORT REMARKS: Attended 1300-0100Z†. Rwy 08-26 CLOSED indefinitely. Rotating bcn OTS indef. Twy E clsd west of Twy C and east of Twy D indef. When twr clsd HIRL Rwy 03-21 and MIRL Rwy 12-30 preset low intensity; to increase intensity and ACTIVATE twy lgts—CTAF. ACTIVATE MALSR Rwy 03 and ODALS Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.75 (575) 393-8418. LAWRS.

COMMUNICATIONS: CTAF 120.65 ATIS 119.75 OTS indef. UNICOM 122.95

HOBBS RCO 122.2 (ALBUQUERQUE RADIO)

FORT WORTH CENTER APP/DEP CON 133.1


HOBBS TOWER 120.65 (1300-0100Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1300-0500Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE HOB.

HOBBS (L) VORTACW 111.0 HOB Chan 47 N32°38.29' W103°16.16' 031° 4.0 NM to fld. 3660/11E

ILS/DME 108.5 I-HOB Chan 22 Rwy 03 Class IE. Unmonitored. LOC BC unusable 20° left of LOC course. LOC BC unusable byd 14 NM. LOC BC unusable byd 20° right side of course.



HOBBS N32°38.29' W103°16.16' NOTAM FILE HOB

ALBUQUERQUE

(L) VORTACW 111.0 HOB Chan 47 031° 4.0 NM to Lea Co Rgnl 3660/11E.

L-66

RCO 122.2 (ALBUQUERQUE RADIO)

HOLLOMAN AFB (HMN)(KHMN) AF (A) 6 SW UTC-7(-6DT) N32°51.15' W106°06.39' **ALBUQUERQUE**
 4093 B TPA—See Remarks NOTAM FILE HMN Not insp. **H-4K, L-6F**
RWY 07-25: H12917X150 (PEM) PCN 56 R/B/W/T HIRL **DIAP, AD**
RWY 07: 0.3% up. **RWY 25:** PAPI(P2L)—GA 3.0°.
RWY 16-34: H12131X150 (PEM) PCN 58 R/B/W/T HIRL
RWY 16: ALSF1. PAPI(P2L)—GA 3.0° TCH 44'. **RWY 34:** PAPI(P2L)—GA 2.5° TCH 43'. 0.3% up.
RWY 04-22: H10575X300 (PEM) PCN 58 R/B/W/T HIRL
RWY 04: 0.3% up. **RWY 22:** ALSF1. PAPI(P2L)—GA 3.0° TCH 53'.

ARRISTING GEAR/SYSTEMS
RWY 07 ← BAK-15 CHAG (2276' OVRN) HOOK BAK-12B(B) (1500') HOOK BAK-12B(B) (1617') **RWY 25**
RWY 16 ← BAK-15 (NI) UNK (121' OVRN) ← HOOK BAK-12B (61' OVRN) HOOK BAK-12B(B) (1500')
 HOOK BAK-12B(B) (1505') HOOK BAK-9 (63' OVRN) → BAK-15 (NI) UNK (123' OVRN) **RWY 34**
RWY 04 HOOK BAK-12B(B) (1450') HOOK BAK-12B(B) (5287') HOOK BAK-12B(B) (1500') **RWY 22**

MILITARY SERVICE: LGT Gated thld lgt all rwy. Rwy 22 sequenced flashing lgts not avbl. **A-Gear** Primary A-Gear
 engagement is apch end BAK-12B. Rwy 04-22 BAK-12B (mid fld) and Rwy 25 apch BAK 12-B 30 min prior
 notice. When Rwy 16 in use, departure/landing will be toward raised BAK-15 on departure end Rwy 16. When
 Rwy 34 in use, departure/landing will be toward raised BAK-15 on departure end Rwy 34. Rwy 07 apch BAK12
 cable only has four tie downs. When winds greater than 35 kts and temps less than 85°F, BAK-15 nets in down
 position. When winds greater than 35 kts and temps greater than 85°F, BAK-15 nets in up position during T-38
 ops. Nets avbl to be raised as req. **JASU** 2(MD-3) 2(MA-1A) 3(MC-1) 1(MC-1A) 1(M32A-60) **FUEL J8**
FLUID SP LHOX LOX OIL 0-128-133-148-156 SOAP **TRAN ALERT** Opr 1300-0600Z. No priority basis.

MILITARY REMARKS: Opr Mon-Thu 1300-0700Z, Fri 1300-0400Z, Sat 1500-2300Z, clsd Sun and holidays.
 APP/DEP, control twr, AM OPS and Tran Alert svc unmanned other times, standby svc avbl thru Comd Post DSN
 572-7575, C575-7572-7575. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD**, PPR, etc Afld Ops DSN
 572-5411/5412. Minimum 24 hr ntc rqr and no more than 7 days prior. Rwy 16-34 clsd to acft over 200'
 wingspan. PPR good for +/- 30 min PPR time. Coordination of PPR outside of block time by fone is rqr or PPR
 number will be considered cancelled. ACCT quiet hr policy 0530-1300Z, standby svc avbl. Heavy acft should
 expect to land Rwy 22. Heavy acft prohibited from departure or arrival Rwy 07-25. Fighter acft opr on Rwy 07-25
 rstd to less than 79,000 lbs maximum gross weight. All acft, exc T38 and Aero Club, are prohibited from
 completing 180° turns on Rwy 07-25. **CAUTION** Mountainous terrain 10 NM east and 20 NM west. Uncontrolled
 vehicles on movement area. Uncontrolled afld ops (UAO) in effect during outside published afld hrs. UAO only
 authorized for flying units listed in HAFBI 13-204. Ctc Comd Post DSN 572-7575, (575) 572-7575 for current
 UAO status. Portions of arpt not visible from twr. Potential exists for reduced braking performance on apch end
 Rwy 16, Rwy 22 and Rwy 04 when sfc wet. Exit Rwy 22 on Twy R hold short Twy G. Helicopter arr/dep avoid
 hover over unprepared surface. 1" depression located 1800' fm Rwy 16 thld, 30' either side rwy centerline for
 approximately 40'. Pavement markings throughout afld faded and non-reflective. **TFC PAT** TPA—Overhead
 6100(2007)/300 knots. Air Combat Command Reduced same Rwy separation applied to Air Combat Command
 acft only. 10' tall electric power station and equipment located NE corner of North Ramp pavement edge. **NS**
ABTMT Straight-in full stop only Rwy 16-34 after 0300Z and at all times Sat, Sun and holidays. Multi apch
 authorized Rwy 22. Dep Rwy 25 at all times. Arrival on Rwy 25 and Rwy 34 permission only when Rwy 16 and
 Rwy 22 not avbl, winds permitting. Aero Club and flight check exam. **CSTMS/AG/IMG** CSTMS/AG/IMM svc conducted
 at KHMN by personnel from Port of Entry Santa Teresa NM with 24 hr prior notice. Contact AM Ops DSN
 572-5411, C575-7572-5411 to coordinate. **MISC** VFR hold lines located at intersections Rwy 07-25 (4 each),
 and Rwy 04-22 (2 each). Acft given clnc to land or tkf shall disregard hold lines at the intersections during
 ldg and tkf roll. Land and hold short ops not auth. Wx opr and automated obsn are avbl during afld closure and
 augmented obsn, when afld open. Transient acft last priority on refueling due to refueling mechanical problems,
 expect delays. Rqr afld signs installed incorrectly and/or missing throughout the afld. No F16 transient support
 avbl for acft with GE F110 engine due to magnetic chip detector inspection unavailability. NOTE: wind data is
 accurate. Wx obsn site limited 130°-220° due to bldg; ngt obsn limited due to high ints lgts. Svc not avbl when
 afld NOTAM clsd. Wx DSN 572-3924/5 (575) C572-3924/5. For standby svc during non-opr hr ctc 25 ows DSN
 228-6674. Std ACC RSRs applied, non-ACC assigned acft rqr written approval. Radar monitoring not avbl all
 rwy. First 1850' Rwy 34, first 1700' Rwy 16 conc, mid 8581' asph. Rwy 04-22 has 1000X300 conc thld,
 remaining rwy 8575X300 asph. Rwy 04-22 marked 10,575X150. First 1000' Rwy 25 conc, west of Twy F middle
 75' concrete over 37.5' weight bearing asphalt. Twy G width 150' weight bearing.
 A Opr Mon-Fri 1415-2300Z.

COMMUNICATIONS: SFA ATIS 273.5 (Limited byd 15 NM 020°-140°) (1300-0300Z) **PTD** 372.2
APP CON 120.6 269.225 (Limited 020°-140° byd 15 NM) (Mon-Thu 1300-0700Z, Fri 1300-0400Z, Sat
 1500-2300Z, clsd Sun and holidays), other times ctc **ALBUQUERQUE CENTER APP CON** 132.65 257.6
TOWER 119.3 255.9 (Limited 020°-140° byd 15 NM) (Mon-Thu 1300-0700Z, Fri 1300-0400Z, Sat
 1500-2300Z, clsd Sun and holidays), **GND CON** 127.05 275.8 **CLNC DEL** 126.7 289.4
DEP CON 128.1 284.0 (Limited 020°-140° byd 15 NM) (Mon-Thu 1300-0700Z, Fri 1300-0400Z, Sat
 1500-2300Z, clsd Sun and holidays), other times ctc **ALBUQUERQUE CENTER DEP CON** 132.65 257.6
COMD POST (RAYMOND 14) 381.3 (Have Quick timing avbl. Limited 020°-140° byd 15 NM) **PMSV METRO** 346.55
 (Limited 020°-140° byd 15 NM) **ARMY AVIATION** 229.3 (Limited 020°-140° byd 15 NM)
CHEROKEE-MISSION 126.9 305.5

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE HMN.

(L) **TACAN** Chan 92 HMN (114.5) N32°51.73' W106°06.55' at fld. 4120/10E. Unmonitored when Radar Approach Control clsd. Unusable 030°–120° byd 30 NM blo 15,000'. No NOTAM MP Tue 1200–1400Z‡.

ILS 108.9 I–MUK Rwy 16. Unmonitored outside published opr hr and when Radar facility not manned. No NOTAM MP Fri 1200–1400Z‡, Glide Slope Thu 1200–1400Z‡.

ILS 111.7 I–HMN Rwy 22. Unmonitored outside published opr hrs. No NOTAM MP Mon 1200–1400Z‡, Glide Slope Wed 1200–1400Z‡.

JAL

LEA CO (JAL) (E26) 3 NE UTC–7(–6DT) N32°07.87' W103°09.29'

ALBUQUERQUE

3118 B S2 NOTAM FILE ABQ

L–66

RWY 01–19: H4704X60 (ASPH) S–23 MIRL

AD

RWY 01: P-line. **RWY 19:** Trees.

RWY 09–27: H2604X50 (ASPH) S–12

RWY 09: Thld dsplcd 40'. Brush. **RWY 27:** Thld dsplcd 45'. P-line.

AIRPORT REMARKS: Unattended. Extensive oil well drilling activity on and in/ov arpt. +20' pump jack 990' fm thld 50' right of centerline. Rwy 09–27 +4–7' brush 60' fm centerline both sides length of rwy. 5' line of sight not avbl between Rwy 01–19 and Rwy 09–27 ends. For airframe/powerplant service call 505–396–6719. MIRL Rwy 01–19 preset low ints, to increase ints ACTIVATE—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE INK.

WINK (H) VORTACW 112.1 INK Chan 58 N31°52.49' W103°14.62' 005° 16.0 NM to fld. 2860/11E.

JEWETT MESA (See APACHE CREEK)

JICARILLA APACHE NATION (See DULCE)

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE HMN.

(L) TACAN Chan 92 HMN (114.5) N32°51.73' W106°06.55' at fld. 4120/10E. Unmonitored when Radar Approach Control clsd. Unusable 030°–120° byd 30 NM blo 15,000'. No NOTAM MP Tue 1200–1400Z‡.

ILS 108.9 I-MUK Rwy 16. Unmonitored outside published opr hr and when Radar facility not manned. No NOTAM MP Fri 1200–1400Z‡, Glide Slope Thu 1200–1400Z‡.

ILS 111.7 I-HMN Rwy 22. Unmonitored outside published opr hrs. No NOTAM MP Mon 1200–1400Z‡, Glide Slope Wed 1200–1400Z‡.

JAL

LEA CO (JAL) (E26) 3 NE UTC–7(–6DT) N32°07.87' W103°09.29'

ALBUQUERQUE

3118 B S2 NOTAM FILE ABQ

L-66

RWY 01–19: H4704X60 (ASPH) S–23 MIRL

AD

RWY 01: P-line. RWY 19: Trees.

RWY 09–27: H2604X50 (ASPH) S–12

RWY 09: Thld dsplcd 40'. Brush. RWY 27: Thld dsplcd 45'. P-line.

AIRPORT REMARKS: Unattended. Extensive oil well drilling activity on and in/ov arpt. +20' pump jack 990' fm thld 50' right of centerline. Rwy 09–27 +4–7' brush 60' fm centerline both sides length of rwy. 5' line of sight not avbl between Rwy 01–19 and Rwy 09–27 ends. For airframe/powerplant service call 505–396–6719. MIRL Rwy 01–19 preset low ints, to increase ints ACTIVATE—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE INK.

WINK (H) VORTACW 112.1 INK Chan 58 N31°52.49' W103°14.62' 005° 16.0 NM to fld. 2860/11E.

JEWETT MESA (See APACHE CREEK)

JICARILLA APACHE NATION (See DULCE)

LAS CRUCES INTL (LRU) 8 W UTC-7(-6DT) N32°17.37' W106°55.32'

ALBUQUERQUE

4456 B S4 FUEL 100LL, JET A1 + OX 1, 3 TPA-5456 (1000) Class IV, ARFF Index A

H-4J, L-6F

NOTAM FILE LRU

IAP

RWY 04-22: H7499X100 (ASPH) S-30, D-30, DT-30, DDT-30 MIRL

RWY 22: VASI(V4L)—GA 3.0° TCH 48'.

RWY 12-30: H7499X100 (ASPH) S-70, D-120, ST-152 MIRL

0.3% up NW

RWY 30: MALSR.

RWY 08-26: H6069X100 (ASPH) S-70, D-120, ST-152 MIRL

RWY 08: VASI(V2L)—GA 3.0° TCH 55'.

RWY 26: VASI(V2L)—GA 3.0° TCH 41'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-7499 TODA-7499 ASDA-7499 LDA-7499

RWY 22: TORA-7499 TODA-7499 ASDA-7499 LDA-7499

RWY 08: TORA-6069 TODA-6069 ASDA-6069 LDA-6069

RWY 26: TORA-6069 TODA-6069 ASDA-6069 LDA-6069

RWY 12: TORA-7499 TODA-7499 ASDA-7499 LDA-7499

RWY 30: TORA-7499 TODA-7499 ASDA-7499 LDA-7499

AIRPORT REMARKS: Attended continuously. Rwy 04-22 CLOSED to acft over 30,000 lbs. Birds on and inofv arpt Sep-Mar. Unmanned aerial vehicle training ops on the arpt. PPR 48 hrs for acft with more than 30 passenger seats, call arpt manager 575-541-2471 or 575-541-2473. Rwy 04-22 not avbl for air carrier ops. Rwy 30 designated calm wind rwy. ACTIVATE MIRL Rwy 04-22, Rwy 12-30 and MALSR Rwy 30—CTAF. MIRL Rwy 08-26 preset low ints, to increase ints ACTIVATE—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (575) 526-4831.**COMMUNICATIONS:** CTAF/UNICOM 122.7


⑧ ALBUQUERQUE CENTER APP/DEP CON 128.2

RADIO AIDS TO NAVIGATION: NOTAM FILE DMN.

DEMING (L) VORTACW 108.6 DMN Chan 23 N32°16.53' W107°36.33' 076° 34.8 NM to fld. 4210/12E. HIWAS.

HAWKE NDB (LOM) 206 LR N32°13.14' W106°50.18' 303° 6.1 NM to fld.

ILS/DME 109.3 I-LRU Chan 30 Rwy 30. Class IE. LOM HAWKE NDB.

**LAS VEGAS MUNI** (LVS) 5 NE UTC-7(-6DT) N35°39.25' W105°08.54'

ALBUQUERQUE

6877 B FUEL 100LL, JET A1 NOTAM FILE LVS

H-4K, 6F, L-8J

RWY 14-32: H8198X75 (ASPH) S-20 MIRL

IAP

RWY 14: 0.6% up. RWY 32: 0.3% down.

RWY 02-20: H5004X75 (ASPH) S-20 MIRL

RWY 02: NSTD ODALS. PVASI(PSIL)—GA 3.0° TCH 40'.

RWY 20: NSTD ODALS. PVASI(PSIL)—GA 3.5° TCH 55'.

AIRPORT REMARKS: Attended 1500-0000Z±. If arpt attendant unavailable call 505-425-7504 (emergency) or 505-425-4866 (pager). Be alert for heavy concentrations of birds on and in vicinity of arpt. Rwy 02 NSTD ODALS-3 NSTD lgts on extended rwy centerline on less than standard spacing. Rwy 20 NSTD ODALS-3 NSTD lgts on extended rwy centerline on less than standard spacing. ACTIVATE MIRL Rwy 14-32 and Rwy 02-20—CTAF.

WEATHER DATA SOURCES: ASOS 118.525 (505) 454-4645. HIWAS 117.3 LVS.

COMMUNICATIONS: CTAF/UNICOM 122.8


RCO 122.6 (ALBUQUERQUE RADIO)

⑧ ALBUQUERQUE CENTER APP/DEP CON 132.8

AIRSPACE: CLASS E svc 1500-2300Z± other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE LVS.

FORT UNION (H) VORTACW 117.3 FTI Chan 120 N35°39.45'

W105°08.14' at fld. 6870/13E. HIWAS.

**LEA CO RGNL** (See HOBBS)**LEA CO (JAL)** (See JAL)**LEA CO-ZIP FRANKLIN MEM** (See LOVINGTON)

LINDRITH AIRPARK (E32) 1 SW UTC-7(-6DT) N36°17.48' W107°03.37'
 7202 NOTAM FILE ABQ
RWY 07-25: 3300X75 (DIRT)
RWY 25: Trees.

DENVER

AIRPORT REMARKS: Unattended. Beware of windshear Rwy 25 with south winds. Cattle and deer on and invof arpt.
 Steep drop-offs Rwy 07 end and N rwy edges. Rwy 07 +1' mounds of dirt 250' from thld. Rwy 07-25 soft when wet.

COMMUNICATIONS: CTAF 122.9

LORDSBURG MUNI (LSB) 1 SE UTC-7(-6DT) N32°20.00' W108°41.50'
 4289 B S2 **FUEL** 100LL, JET A NOTAM FILE ABQ
RWY 12-30: H5011X75 (ASPH) MIRL
RWY 12: Road. **RWY 30:** Brush.
RWY 01-19: 3250X50 (DIRT)

ALBUQUERQUE

H-41, L-5D

RWY 01: Hill. **RWY 19:** P-line.

AIRPORT REMARKS: Attended 1500-0000Z+. Rwy 01 thld marked with tires in shape of an arrow. Rwy 19 thld marked with tires in shape of an arrow. Rwy 01-19 soft when wet and needs periodic rolling and grading. ACTIVATE MIRL Rwy 12-30—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

SAN SIMON (H) VORTACW 115.4 SSO Chan 101 N32°16.16' W109°15.79' 069° 29.3 NM to fld.
 3600/13E. **HIWAS.**

LOS ALAMOS (LAM) 1 E UTC-7(-6DT) N35°52.79' W106°16.17'
 7171 B S4 **FUEL** 100LL NOTAM FILE LAM
RWY 09-27: H5550X113 (ASPH-PFC) S-43 MIRL 1.5% up NW
RWY 09: Tree.

DENVER

H-4K, 6F, L-8I

IAP

RWY 27: REIL. VASI(V2L)—GA 2.75° TCH 50'. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1300-2300Z+. For arpt attendant after hrs and weekends call 505-412-9869. Strong gusty crosswinds. Radio communication required before entering tfc pattern. VFR ldg tfc remain 5 miles east of the arpt until turning final for Rwy 27 to avoid rstd area south of the arpt. Rwy 09-27 all landings to the West and all take offs to the East. No touch and go landings. Rwy 27 make rgt turn on go-around or missed apch, restricted area adjacent to south side of arpt. Blast barrier AER 09. ACTIVATE MIRL Rwy 09-27 and REIL Rwy 27—CTAF.


WEATHER DATA SOURCES: AWOS-3 124.175 (505) 662-8423.

COMMUNICATIONS: CTAF/UNICOM 123.0

ALBUQUERQUE CENTER APP/DEP CON 132.8

RADIO AIDS TO NAVIGATION: NOTAM FILE SAF.

SANTA FE (L) VORTACW 110.6 SAF Chan 43 N35°32.45'
 W106°03.90' 321° 22.7 NM to fld. 6263/13E.



LOS LUNAS

MID VALLEY AIRPARK (E98) 3 S UTC-7(-6DT) N34°45.59' W106°44.72'
 4830 B S4 **FUEL** 100LL NOTAM FILE ABQ
RWY 18-36: H4340X37 (ASPH) S-12.5 LIRL
RWY 18: Thld dsplcd 200'. Road. **RWY 36:** Thld dsplcd 535'. Trees.

ALBUQUERQUE

L-8I

AIRPORT REMARKS: Attended continuously. Fuel avbl 24 hrs self service with major credit card. 6' ditch 60' W and parallel to Rwy 18-36. Acft radio required. +40' unlighted utility pole 120' W of Rwy 18-36 near midpoint. Residential airport. Uncontrolled vehicle pedestrian tfc on and around afld. Recommended no wind Rwy 36. PPR for glider ops call 505-565-1041. ACTIVATE rotating bcn—CTAF. NSTD LIRL, 2 thld lgts each side of rwy at displacement. ACTIVATE LIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

ALBUQUERQUE (H) VORTACW 113.2 ABQ Chan 79 N35°02.63' W106°48.98' 155° 17.4 NM to fld.
 5743/13E. **HIWAS.**

LOVINGTON**LEA CO—ZIP FRANKLIN MEM** (E06) 3 W UTC-7(-6DT) N32°57.24' W103°24.53'**ALBUQUERQUE**

3979 B NOTAM FILE ABQ


H-6G, L-6G

RWY 03-21: H6000X75 (ASPH) S-12 MIRL

IAP, AD

RWY 03: PVASI(PSIL)—GA 3.0° TCH 42'. P-line.**RWY 21:** PVASI(PSIL)—GA 3.0° TCH 42'. Tree.**RWY 12-30:** H4409X60 (ASPH) S-12 MIRL**RWY 12:** Fence. **RWY 30:** P-line.**AIRPORT REMARKS:** Unattended. Extensive oil well drilling activity on and invof arpt. MIRL Rwy 03-21 and MIRL Rwy 12-30 preset low ints, to increase ints **ACTIVATE—CTAF.****COMMUNICATIONS:** CTAF/UNICOM 122.8® **FORT WORTH CENTER APP/DEP CON 133.1.****RADIO AIDS TO NAVIGATION:** NOTAM FILE HOB.**HOBBS (L) VORTACW 111.0** HOB Chan 47 N32°38.29'

W103°16.16' 329° 20.2 NM to fld. 3660/11E.

**MAGDALENA** (N29) 3 W UTC-7(-6DT) N34°05.67' W107°17.87'**ALBUQUERQUE**

6727 NOTAM FILE ABQ

RWY 02-20: 5650X50 (DIRT-GRVL)**RWY 02:** REIL(NSTD). Fence. **RWY 20:** REIL(NSTD).**AIRPORT REMARKS:** Unattended. Private dirt airstrip 600' west of aprt. Small arms fire W arpt sfc 2000' AGL first and third Sat 2000-2300Z± indef. Rwy 02-20 sfc treated with flyash, firm but dusty with some large rocks. Rwy 02-20 edge lgtg retro-reflective. Rwy 02 and Rwy 20 NSTD REIL each end, 2 strobes at rwy ends flash alternately with single strobes 200' from rwy end on centerline, **ACTIVATE—122.9.****COMMUNICATIONS:** CTAF 122.9**MAXWELL** N36°42.04' W104°32.38' NOTAM FILE RTN.**DENVER****NDB (MHW) 284** MXR 026° 3.1 NM to Raton Muni/Crews Fld. Unmonitored 0000-1400Z±.

L-15A

MID VALLEY AIRPARK (See LOS LUNAS)**MORIARTY** (ØEØ) 2 SE UTC-7(-6DT) N34°59.14' W106°00.57'**ALBUQUERQUE**6199 B S4 **FUEL 100LL, JET A** TPA-7199(1000) NOTAM FILE ABQ

H-4K, 6F, L-8I

RWY 08-26: H7700X75 (ASPH) MIRL**RWY 08:** REIL. **RWY 26:** REIL.**AIRPORT REMARKS:** Attended 1500-0300Z±. For Jet A after hours and holidays call 505-832-2222, 100LL avbl 24 hrs self service with major credit card. For emerg repairs call 505-269-8234. Extensive glider activity.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SAF.**SANTA FE (L) VORTACW 110.6** SAF Chan 43 N35°32.45' W106°03.90' 162° 33.4 NM to fld. 6263/13E.**MOSQUERO EMERGENCY SERVICES HELIPORT** (N01) 1 N UTC-7(-6DT)**ALBUQUERQUE**

N35°46.95' W103°57.48'

5590 B NOTAM FILE ABQ

Not insp.

HELIPAD H1: H65X65 (CONC) PERIMETER LGTS**HELIPORT REMARKS:** Unattended. 35' p-lines marked 367' SW of H1 pad. **ACTIVATE** rotating bcn—122.8. **ACTIVATE** perimeter lgts H1—122.8.**COMMUNICATIONS:** CTAF/UNICOM 122.8**MOUNTAINAIR MUNI** (M1Ø) 2 NE UTC-7(-6DT) N34°32.00' W106°13.43'**ALBUQUERQUE**

6492 NOTAM FILE ABQ

RWY 08-26: 2578X50 (DIRT)**RWY 08:** Thld dsplcd 200'. Road.**AIRPORT REMARKS:** Unattended. Rwy 08-26 soft, unusable when wet; 2'-4' berms on edges. Infrequent maintenance, may be hazardous; recommend visual inspection prior to using.**COMMUNICATIONS:** CTAF 122.9

NAVAJO DAM**NAVAJO LAKE** (1VØ) 3 NE UTC-7(-6DT) N36°48.50' W107°39.09'**DENVER**
L-81


6475 B NOTAM FILE ABQ

RWY 06-24: H4995X60 (ASPH) S-12**RWY 06:** ODALS (NSTD) APAP (PNIL).**RWY 24:** ODALS (NSTD) APAP (PNIL).

AIRPORT REMARKS: Unattended. Arpt CLOSED at night. Arpt CLOSED during winter months. Livestock on arpt. No snow removal, PPR when snow or ice on rwy call 505-476-0941. Gate always locked, combination set to fld elevation. Rwy 06-24 edge lgtg retro-reflective. Rwy 06 VASI retro-reflective panel glide slope indicator. ODALS Rwy 06 and Rwy 24 OTS indef. Rwy 06 NSTD ODALS-3 NSTD lghts on extended rwy centerline on less than standard spacing. Rwy 24 VASI retro-reflective panel glide slope indicator. Rwy 24 NSTD ODALS-1 flashing lgt on rwy centerline and 2 at rwy thld.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DRO.

DURANGO (L) VORW/DME 108.2 DRO Chan 19 N37°09.20'
W107°44.98' 153° 21.2 NM to fld. 6660/14E.

**NAVAJO LAKE** (See NAVAJO DAM)**OKAY OWINGEH** (See ESPANOLA)**OTTO** N35°04.34' W105°56.16' NOTAM FILE ABQ.**ALBUQUERQUE**
L-4G, L-81

(L) VORW 114.0 OTO 200° 6.2 NM to Moriarty.

PINON N32°31.75' W105°18.32' NOTAM FILE ABQ.**ALBUQUERQUE**
L-6F

(L) VORW/DME 110.4 PIO Chan 41 159° 34.4 NM to Dell City Muni, TX. 6580/12E.

PORTALES MUNI (PRZ) 4 SW UTC-7(-6DT) N34°08.73' W103°24.62'**ALBUQUERQUE**
H-6G, L-6G
IAP

4078 B S4 FUEL 100LL, JET A NOTAM FILE ABQ

RWY 01-19: H5700X60 (ASPH) MIRL 0.6% up S**RWY 19:** PVASI(PNIL)—GA 3.5° TCH 40'.**RWY 08-26:** H4560X60 (ASPH) MIRL**RWY 26:** PVASI(PNIL)—GA 3.0° TCH 48'. P-line.

AIRPORT REMARKS: Attended 1400-2300Z†. For arpt attendant after hrs, Sat and Sun call 505-760-4312 or 505-714-3797. MIRL Rwy 01-19 preset low ints; to increase ints and ACTIVATE MIRL Rwy 08-26—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.175 (575) 478-2864.**COMMUNICATIONS:** CTAF/UNICOM 122.8Ⓡ **CANNON APP/DEP CON** 125.5 (Mon-Thu 1600-0800Z†, Fri-Sat


1600-0001Z†, clsd Sun and holidays) other times ctc

Ⓡ **ALBUQUERQUE CENTER APP/DEP CON** 126.85 **CANNON CLNC DEL** 119.0**RADIO AIDS TO NAVIGATION:** NOTAM FILE FTW.**TEXICO (H) VORTACW** 112.2 TXO Chan 59 N34°29.71'

W102°50.38' 223° 35.3 NM to fld. 4060/11E.

NDB (MHW) 407 PRZ N34°09.08' W103°24.37' at fld.

NOTAM FILE ABQ.

**QUESTA MUNI NR 2** (N24) 6 N UTC-7(-6DT) N36°48.02' W105°35.85'**DENVER**
H-4K, 5A, L-8J

7700 B NOTAM FILE ABQ

RWY 17-35: H6861X75 (ASPH) S-12.5 MIRL

AIRPORT REMARKS: Unattended. Elk on and invof arpt. Rwy 17 preferred calm wind rwy. For access on and off airfield ctc village office at 575-586-0694. ACTIVATE MIRL Rwy 17-35—123.6.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SKX.

TAOS (L) VORTAC 117.6 TAS Chan 123 N36°36.53' W105°54.38' 039° 18.8 NM to fld. 7860/13E.

RATON MUNI/CREWS FLD (RTN) 10 SW UTC-7(-6DT) N36°44.49' W104°30.13'**DENVER**

6352 B S2 FUEL 100LL, JET A1 + NOTAM FILE RTN

H-6F, L-15A

RWY 02-20: H6328X75 (ASPH-PFC) S-18 MIRL 0.3% up NE

IAP

RWY 02: PVASI(P SIL)—GA 3.0° TCH 25'.


RWY 07-25: H4404X75 (ASPH-PFC) S-12 MIRL 0.7% W

AIRPORT REMARKS: Attended 1400-0000Z†. Elk on and invof arpt. Rwy 02-20 porous friction courses on S 5295'. MIRL Rwy 02-20 and 07-25 preset low intensity dusk-0600Z†, to increase intensity

ACTIVATE—CTAF. After 0600Z† ACTIVATE—CTAF.

WEATHER DATA SOURCES: ASOS 118.375 (505) 445-9207.**COMMUNICATIONS:** CTAF/UNICOM 122.8④ **ALBUQUERQUE CENTER APP/DEP CON** 132.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE RTN.**CIMARRON (H) VORTAC** 116.4 CIM Chan 111 N36°29.48'W104°52.32' 037° 23.3 NM to fld. 6550/13E. **HIWAS.****MAXWELL NDB (MHW)** 284 MXR N36°42.04' W104°32.38'

026° 3.1 NM to fld. Unmonitored 0000-1400Z†.

**RATTLESNAKE** N36°44.90' W108°05.93' NOTAM FILE FMN.**DENVER**(H) **VORTACW** 115.3 RSK Chan 100 252° 6.3 NM to Four Corners Rgnl. 5823/14E. **HIWAS.**

H-4J, L-8I

RED RIVER HELIPORT (NO2) 0 W UTC-7(-6DT) N36°42.59' W105°25.14'**DENVER**

8617 B NOTAM FILE ABQ

Not insp.

HELIPAD H1: H55X55 (CONC)

HELIPORT REMARKS: Unattended. 493' to 2,675' terrain in all directions 1,320 to 5,280 fm H1 pad, 353' p-lines 2,434' NE of H1 pad. ACTIVATE rotating bcn—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RESERVE** (T16) 5 SW UTC-7(-6DT) N33°41.65' W108°50.97'**ALBUQUERQUE**

L-50

6360 B NOTAM FILE ABQ

RWY 06-24: H4800X50 (ASPH) S-12.5 MIRL

RWY 06: Tree.


RWY 24: PVASI(P SIL)—GA 4.0° TCH 40'. Trees.

AIRPORT REMARKS: Unattended. Elk on and invof arpt. Rwy 06-24 gradient 2% up W. Obstruction lgts located on mountain peaks opr dusk-dawn. Obstruction lgts on mountain peaks OTS indef.

ACTIVATE MIRL Rwy 06-24—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SJN.**ST. JOHNS (H) VORTAC** 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 149° 45.8 NM to fld. 6840/12E.



ROSWELL INTL AIR CENTER (ROW) 3 S UTC-7(-6DT) N33°18.09' W104°31.83'**ALBUQUERQUE**

3671 B S2 FUEL 100LL, JET A, A1 + OX 2 ARFF Index—See Remarks NOTAM FILE ROW H-6F, L-6G

RWY 03-21: H13001X150 (ASPH-CONC) S-100, D-200, ST-175, DT-400 MRL (NSTD)

IAP, AD

RWY 03: VASI(V6L)—GA 3.0° TCH 50'. Rgt tfc. 0.3% down.**RWY 21:** MALSR. 0.3% up.**RWY 17-35:** H9999X100 (ASPH-GRVD) S-77, D-104, ST-132, DT-165 MRL**RWY 17:** VASI(V4L)—GA 3.0° TCH 50'. Rgt tfc.**RWY 35:** PAPI(P4L)—GA 3.0° TCH 50'.**RWY 12-30:** H7425X200 (ASPH-CONC) S-40, D-60, ST-76, DT-120**RWY 12:** Rgt tfc.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 03:** TORA-13001 TODA-13001 ASDA-13001 LDA-13001**RWY 21:** TORA-13001 TODA-13001 ASDA-13001 LDA-13001**RWY 17:** TORA-9999 TODA-9999 ASDA-9999 LDA-9999**RWY 35:** TORA-9999 TODA-9999 ASDA-9999 LDA-9999**RWY 12:** TORA-7425 TODA-7425 ASDA-7425 LDA-7425**RWY 30:** TORA-7425 TODA-7425 ASDA-7425 LDA-7425**AIRPORT REMARKS:** Attended 1300-0400Z†. For attendant after hrs call

575-347-2054 or 575-626-3697. For fuel after hrs call

575-347-2054. Rwy 12-30 CLOSED indef. Be alert for birds on

and invof arpt. Class I, ARFF Index A. PPR avbl for air carrier ops with more than 30 passenger seats. Call arpt

manager 505-347-5703 or 505-626-1827, 2 hours notice required. ARFF Index B avbl. To exit ramp/FBO area

after hrs use lgtd pedestrian gate W side of terminal. To enter gate call 575-626-1827. Rwy 12-30 pavement

spalling, vegetation in cracks and longitudinal cracking. ASPH ramp clsd to large skid mounted helicopters.

Helicopter parking on general aviation ramp at west end of terminal building. Rwy 03-21 center 100' CONC,

100' ASPH either side. Twy S non-movement area. Rwy 03-21 NSTD MRL. MRL located 75' from rwy edges.

Rwy 03-21 MRL avbl on med ints only when tower clsd. ACTIVATE MRL Rwy 17-35 and MALSR Rwy 21—CTAF.

PAPI Rwy 35, VASI Rwy 03 and Rwy 17 opr continuously. U.S. Customs user fee arpt.

WEATHER DATA SOURCES: ASOS (575) 347-0040.**COMMUNICATIONS:** CTAF 118.5 ATIS 128.45 UNICOM 122.95


RCO 122.45 (ALBUQUERQUE RADIO)

Ⓡ **APP/DEP CON** 119.6 (1300-0400Z†) (East of V291) 120.35 (West of V291)Ⓡ **ALBUQUERQUE CENTER APP/DEP CON** 132.65 (0400-1300Z†)**TOWER** 118.5 (1300-0400Z†) **GND CON** 121.9 **CLNC DEL** 132.875**AIRSPACE:** CLASS D svc 1300-0400Z† other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE ROW.**CHISUM (H) VORTACW** 116.1 CME Chan 108 N33°20.25' W104°37.28' 103° 5.0 NM to fld. 3772/12E.

HIWAS.

TOPAN NDB (LOM) 305 RO N33°21.92' W104°26.53' 219° 5.9 NM to fld.**ILS/DME** 109.9 I-ROW Chan 36 Rwy 21. Class IT. LOM TOPAN NDB Certified for Category II training.

Unmonitored when twr clsd.

**RUIDOSO** N33°27.70' W105°31.55'**ALBUQUERQUE**

RCO 122.25 (ALBUQUERQUE RADIO)

L-6F

SIERRA BLANCA RGNL (SRR) 15 NE UTC-7(-6DT) N33°27.77' W105°32.09'
6814 B S7 **FUEL** 100LL, JET A OX 3 Class II, ARFF Index A NOTAM FILE SRR
RWY 06-24: H8099X100 (ASPH-PFC) S-60, D-115 MRL

ALBUQUERQUE
H-4K, 6F, L-6F
IAP

RWY 06: VASI(V2L)—GA 2.5°. 0.7% down.

RWY 24: PVASI(PSIL)—GA 2.5°. 0.8% up.

RWY 12-30: H6500X75 (ASPH) S-12.5 MIRL

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06: TODA-8099 TORA-8099 ASDA-8099 LDA-8099

RWY 24: TODA-8099 TORA-8099 ASDA-8099 LDA-8099

RWY 12: TODA-6500 TORA-6500 ASDA-6500 LDA-6500

RWY 30: TODA-6500 TORA-6500 ASDA-6500 LDA-6500

AIRPORT REMARKS: Attended continuously. CLOSED to air carriers using
acft with more than 30 passenger seats except 24 hrs PPR ctc
arpt manager 575-336-8111. Rwy 12-30 not avbl for air carrier
ops with more than 30 passenger seats. ACTIVATE MIRL Rwy
06-24 and Rwy 12-30—CTAF.

WEATHER DATA SOURCES: AWOS-3 126.475 (575) 336-8455.

COMMUNICATIONS: CTAF/UNICOM 122.8

RUIDOSO RQ 122.25 (ALBUQUERQUE RADIO)

ALBUQUERQUE CENTER APP/DEP CON 132.65


RADIO AIDS TO NAVIGATION: NOTAM FILE ROW

CHISUM (H) VORTACW 116.1 CME Chan 108 N33°20.25'

W104°37.28' 268° 46.5 NM to fld. 3772/12E. HIWAS.

CAPITAN NDB (MHW) 278 CEP N33°29.39' W105°24.26' 246° 6.7 NM to fld. NOTAM FILE SRR. NDB unusable bvd 25 NM blo 14.500'.

ILS/DME 110.7 I-SRR Chan 44 Rwy 24. Class IE. LOC unusable byd 25 degrees rgt of course.



SANTA FE MUNI (SAF) 9 SW UTC-7(-6DT) N35°37.03' W106°05.37'

ALBUQUERQUE
H-4K, 6F, L-8I
IAP. AD

6348 B S6 FUEL 100LL, JET A1, A1 + OX 1, 2, 3, 4 TPA—See Remarks

Class I, ARFF Index A NOTAM FILE SAF

RWY 02-20: H8342X150 (ASPH-PFC) S-48, D-65, ST-83, DT-105
MIRI

RWY 02: VASI(V4L)—GA 3.0°TCH 54. Hill. 0.9% up.

RWY 20: REIL. VASI(V4L)—GA 3.0°TCH 54'. 0.9% down.

RWY 15-33: H6307X100 (ASPH-GRVD) S-48, D-65, DT-105
MIRL 0.7% up NW

RWY 15: REIL PVASI(PSIL)—GA 3.0° TCH 33'.

RWY 33: REIL. VASI(V4R)—GA 3.0°TCH 62'.

RWY 10-28: H6300X75 (ASPH-PFC) S-30 0.3% up SE
RWY 28: Road.

AIRPORT REMARKS: Attended 1300-0500Z. For svc after hours call 505-471-2525/2700. PPR 24 hrs for air carrier ops with more than 30 passenger seats call arpt manager at 505-955-2900. Dogs and wildlife activity on and in/ovt arpt. Rotary wing TPA-7000 (652). Rwy 33 VASI OTS indef. When twr clsd MRL Rwy 02-20 preset low ints to increase ints and ACTIVATE MRL Rwy 15-33-CTAF.

WEATHER DATA SOURCES: ASOS (505) 474-3117.

COMMUNICATIONS: CTAF 119.5 ATIS 128.55 UNICOM 122.95

RCO 122.2 (ALBUQUERQUE RADIO)

ALBUQUERQUE CENTER APP/DEP CON 132.8

TOWER 119.5 (1400-0400Z±) GND CON 121.7

AIRSPACE: CLASS D svc 1400-0400Z± other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE SAF.

(L) VORTACW 110.6 SAF Chan 43 N35°32.45' W106°03.90' 332° 4.7 NM to fld. 6263/13E.

VORTAC unusable 015°–030° beyond 30 NM below 14,600'

DOMAN NDB (LOM) 341 SG N35°33.32' W106°08.41' 022° 4.5 NM to fld. Unmonitored.

ILS/DME 111.7 I-SGB Chan 54 Rwy 02. Class IE. LOM DDMAN NDB. Unmonitored when twr clsd.
LOM unmonitored.



SANTA ROSA ROUTE 66 (SXU) 3 E UTC-7(-6DT) N34°56.14' W104°38.55' **ALBUQUERQUE**
 4792 B FUEL 100LL, JET A NOTAM FILE ABQ **H-6F, L-15A**
RWY 01-19: H5013X75(ASPH) S-12.5 MIRL
RWY 01: Trees. **RWY 19:** PVASI(PSIL)—GA 3.0° TCH 26'. Road.
RWY 08-26: H4294X60 (ASPH) S-11.5 MIRL
RWY 08: Brush. **RWY 26:** PVASI(PSIL)—GA 3.85° TCH 27'. Thld displcd 118'. Road.
AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with major credit card. Wildlife on and invof arpt. Gate access code 4492. Emerg phone Santa Rosa Police Department 505-472-3605. MIRL Rwy 01-19 and Rwy 08-26 preset med ints 1300-0500Z±, to incr ints ACTIVATE—CTAF. After 0500Z± ACTIVATE—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.1 (575) 472-9943.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.
ANTON CHICO (H) VORTAC 117.8 ACH Chan 125 N35°06.70' W105°02.40' 106° 22.2 NM to fld. 5450/12E.

SANTA TERESA

DONA ANA CO AT SANTA TERESA (5T6) 4 NW UTC-7(-6DT) N31°52.86' W106°42.29' **EL PASO**
 4112 B S4 FUEL 100LL, JET A1+ OX 1, 2, 3, 4 LRA NOTAM FILE ABQ **H-4K, L-6F**
RWY 10-28: H8500X100 (ASPH) S-20 MIRL
RWY 10: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Railroad. **RWY 28:** REIL.PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.
AIRPORT REMARKS: Attended 1330-0100Z±. U.S. Customs user fee arpt. Parachute Jumping. MIRL Rwy 10-28 preset med ints only dusk-dawn.
COMMUNICATIONS: CTAF/AUNICOM 122.725
ALBUQUERQUE CENTER APP/DEP CON 128.2
RADIO AIDS TO NAVIGATION: NOTAM FILE ELP.
EL PASO (H) VORTACW 115.2 ELP Chan 99 N31°48.95' W106°16.91' 268° 22.0 NM to fld. 4020/12E.

SHIPROCK AIRSTRIP (5V5) 5 S UTC-7(-6DT) N36°41.87' W108°42.07' **DENVER**
 5270 NOTAM FILE ABQ **L-8H**
RWY 02-20: H4840X75 (ASPH) S-11
RWY 02: P-line.
AIRPORT REMARKS: Unattended. Shallow drainage ditch entire length NW side of rwy. Combination for arpt access is 5248.
COMMUNICATIONS: CTAF 122.9
RADIO AIDS TO NAVIGATION: NOTAM FILE FMN.
RATTLESNAKE (H) VORTACW 115.3 RSK Chan 100 N36°44.90' W108°05.93' 250° 29.2 NM to fld. 5823/14E. HIWAS.

SIERRA BLANCA RGNL (See RUIDOSO)

SILVER CITY N32°38.26' W108°09.66' NOTAM FILE SVC. **ALBUQUERQUE**
 (L) VORTAC 110.8 SVC Chan 45 at Grant Co. 5423/13E. **L-5D**
 RCO 122.1R 110.8T (ALBUQUERQUE RADIO)

SILVER CITY**GRANT CO** (SVC) 10 SE UTC-7(-6DT) N32°38.19' W108°09.38'**ALBUQUERQUE**5446 B **FUEL** 100LL, JET A1 Class III, ARFF Index A NOTAM FILE SVC


H-4J, L-5D

RWY 08-26: H6802X100 (ASPH) S-75, D-100, ST-127 MIRL

IAP

RWY 08: REIL. PAPI(P4L)—GA 3.0° TCH 44'.**RWY 26:** MALS. PAPI(P4L)—GA 3.0° TCH 45'.**RWY 17-35:** 5473X75 (DIRT) 1.1% up N**RWY 17:** Thld dsplcd 109'. Fence. **RWY 35:** P-line.**RWY 12-30:** 4675X75 (DIRT) 1.1% up NW**RWY 12:** Fence. **RWY 30:** Tower.**RWY 03-21:** 4537X80 (DIRT) 0.6% up NE**RWY 03:** Pole.**RWY 21:** Fence.

AIRPORT REMARKS: Attended 1500-0000Z†. For fuel after hours call 888-723-5946. Self-service 100LL also avbl at FBO 24 hrs. Acft may be parked near Rwy 17. Cattle and wildlife on and invof arpt. 5490' MSL cranes located east of Rwy 26 thld. Rwy 17 dsplcd thld marked by tires in 'L' pattern. MIRL Rwy 08-26 preset low ints dusk-dawn. ACTIVATE MIRL Rwy 08-26 and MALS Rwy 26—CTAF.

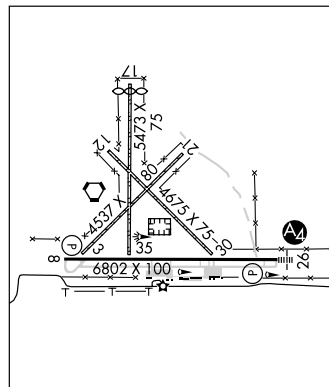WEATHER DATA SOURCES: AWOS-3 126.725 (575) 388-5947.**COMMUNICATIONS:** CTAF/UNICOM 122.8**SILVER CITY RCO** 122.1R 110.8T (ALBUQUERQUE RADIO)® **ALBUQUERQUE CENTER APP/DEP CON** 134.45**RADIO AIDS TO NAVIGATION:** NOTAM FILE SVC.**SILVER CITY (L) VORTAC** 110.8 SVC Chan 45 N32°38.26' W108°09.66' at fld. 5423/13E.**COZEY NDB (LOM)** 251 SV N32°37.92' W108°03.80' 261° 4.7 NM to fld.**ILS/DME** 111.7 I-SVC Chan 54 Rwy 26. LOM COZEY NDB. LOC only. LOC unmonitored.**COMM/NAV/WEATHER REMARKS:** AWOS-3 ceiling unreliable.**WHISKEY CREEK** (94E) 4 E UTC-7(-6DT) N32°45.72' W108°12.50'**DENVER**6126 B S4 **FUEL** 100LL, JET A OX 4 NOTAM FILE ABQ

H-4J, L-5D

RWY 17-35: H5400X50 (ASPH) LIRL (NSTD)**RWY 35:** REIL. Brush

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†. Rwy 17-35 CLOSED to acft over 8,000 lbs. Ditch on east side of rwy 18' from edge and 2' lower. Drop off at Rwy 17 end 18' from end of pavement. Rwy 35 REIL single non-standard light. Rwy 17-35 no numbers or centerline. Rwy 17-35 NSTD LIRL, non-frangible posts. For LIRL Rwy 17-35 key—123.0 6 times.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE SVC.**SILVER CITY (L) VORTAC** 110.8 SVC Chan 45 N32°38.26' W108°09.66' 329° 7.8 NM to fld. 5423/13E.**SKI** N36°27.46' W105°40.60' NOTAM FILE SKX.**DENVER****NDB (MHW)** 414 SKX at Taos Rgnl. SHUTDOWN.

L-8J

SOCORRO MUNI (ONM) 3 S UTC-7(-6DT) N34°01.35' W106°54.19'

ALBUQUERQUE

4875 B FUEL 100LL NOTAM FILE ABQ

H-4J, L-6F

RWY 15-33: H5841X100 (ASPH) S-50, D-75, ST-95 MIRL 0.9% up NW

IAP

RWY 15: VASI(V2L)—GA 4.0° TCH 25'. Thld displcd 186'.

RWY 33: VASI(V2L)—GA 4.0° TCH 26'. Thld displcd 182'.

RWY 06-24: H4590X60 (ASPH) MIRL 1.8% up W

RWY 06: Ground.

AIRPORT REMARKS: Unattended. For fuel or emergency call

575-838-6357. VASI Rwy 15 OTS indef. VASI Rwy 33 OTS indef.

MIRL Rwy 15-33 preset low ints, to increase ints and ACTIVATE

MIRL Rwy 06-24 and VASI Rwy 15 and Rwy 33—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (575) 838-3993.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.1R 116.8T (ALBUQUERQUE RADIO)

ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

(H) VORTAC 116.8 ONM Chan 115 N34°20.33'

W106°49.23' 179° 19.4 NM to fld. 4910/13E

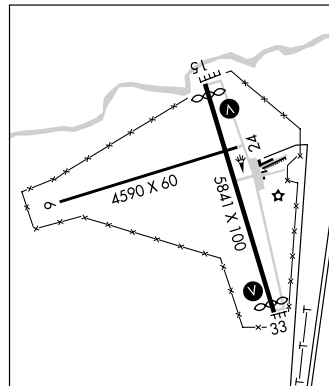**SPRINGER MUNI** (S42) 1 S UTC-7(-6DT) N36°19.62' W104°37.18'

DENVER

5891 B NOTAM FILE ABQ

H-6F L-15A

RWY 01-19: H5000X60 (ASPH) S-14.5 MIRL

RWY 01: Hiil.

AIRPORT REMARKS: Unattended. Airport road gates locked, for entry and

exit call 575-483-2404. No phone on arpt. Rwy 01-19 MIRL OTS


indef. MIRL Rwy 01-19 preset low ints, to increase ints

ACTIVATE—122.8.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RTN.

CIMARRON (H) VORTAC 116.4 CIM Chan 111 N36°29.48'

W104°52.32' 116° 15.7 NM to fld. 6550/13E. HIWAS.

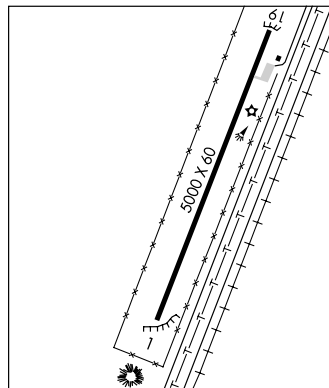

TAOS RGNL (SKX) 8 NW UTC-7(-6DT) N36°27.49' W105°40.35'7095 B **FUEL** 100LL, JET A1 + NOTAM FILE SKX**RWY 04-22:** H5803X75 (ASPH-PFC) S-24 MIRL 0.8% up NE**RWY 04:** REIL. PAPI(P2L).**RWY 22:** PAPI(P2L)—GA 3.5° TCH 30'.

AIRPORT REMARKS: Attended 1500-0000Z†. For fuel after hrs call 575-741-0800. Avoid overflight of Taos Pueblo World Heritage site 5 NM E of arpt. Rwy 04-22 parallel twy has retro-reflectors. ACTIVATE MIRL Rwy 04-22—CTAF.

WEATHER DATA SOURCES: AWOS-3 132.975 (575) 758-5663.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO 122.25** (ALBUQUERQUE RADIO)**RCO 122.1R 117.6T** (ALBUQUERQUE RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE SKX.


(L) **VORTAC** 117.6 TAS Chan 123 N36°36.53' W105°54.38'
116° 14.5 NM to fld. 7860/13E.

SKI NDB (MHW) 414 SKX N36°27.46' W105°40.60' at fld.
SHUTDOWN.

DENVER

H-4K, 6F, L-8J

IAP

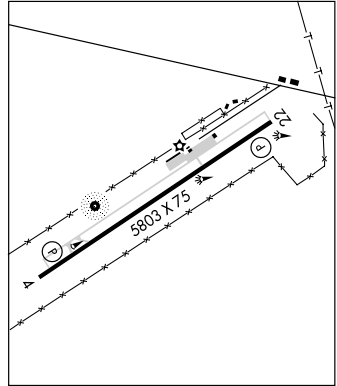**TOPAN** N33°21.92' W104°26.53' NOTAM FILE ROW.**NDB (LOM)** 305 RO 219° 5.9 NM to Roswell Intl Air Center.

ALBUQUERQUE

L-66


TRUTH OR CONSEQUENCES MUNI (TCS) 6 N UTC-7(-6DT) N33°14.22' W107°16.31'4853 B S2 **FUEL** 100LL, JET A1 + NOTAM FILE TCS**RWY 13-31:** H7200X75 (ASPH) S-12.5 MIRL 0.8% up NW**RWY 13:** PAPI(P2L)—GA 3.0° TCH 31'.**RWY 31:** PAPI(P2L)—GA 3.0° TCH 31'. Fence.**RWY 11-29:** 7108X150 (GRVL)**RWY 11:** Brush.**RWY 01-19:** 3301X130 (GRVL)**RWY 19:** Road.**RWY 15-33:** 2900X140 (GRVL)**RWY 15:** Road. **RWY 33:** Acft.**RWY 07-25:** 2932X130 (GRVL)**RWY 25:** Road.

AIRPORT REMARKS: Attended 1400-0000Z†. For fuel after hours call 575-894-6199. Traffic on other rwys may not be visible due to brush. Sharp drop-offs approach end Rwy 07 and Rwy 01. Ultralight ops 5 NM of arpt. Rwy 01-19 surface is rough containing large rocks. PAPI Rwy 13 OTS indef. PAPI Rwy 31 OTS indef. ACTIVATE MIRL Rwy 13-31—CTAF.

WEATHER DATA SOURCES: ASOS 120.675 (575) 894-2909. **HIWAS** 112.7 TCS.

COMMUNICATIONS: CTAF/UNICOM 122.8**RCO 122.2** (ALBUQUERQUE RADIO)**(R) ALBUQUERQUE CENTER APP/DEP CON 128.2****AIRSPACE:** CLASS E svc Mon-Fri 1500-2300Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE TCS.

(H) **VORTACW** 112.7 TCS Chan 74 N33°16.95' W107°16.83' 158° 2.8 NM to fld. 4905/13E. **HIWAS.**

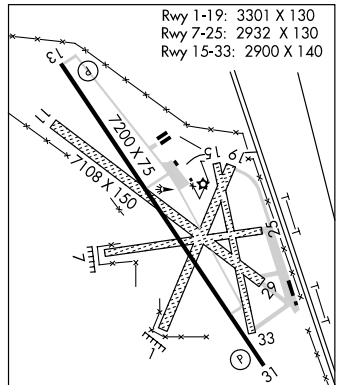

ALBUQUERQUE

H-4J, L-6E

IAP

TUCUMCARI MUNI (TCC) 6 E UTC-7(-6DT) N35°10.97' W103°36.19'

4065 B FUEL 100LL, JET A NOTAM FILE TCC

RWY 03-21: H7102X100 (ASPH) S-25 MIRL

RWY 21: VASI(V4L)—GA 3.0° TCH 52'.

RWY 08-26: H4599X60 (ASPH) S-12 MIRL 0.6% up W

RWY 08: Road.

AIRPORT REMARKS: Attended 1400-0000Z†. After 0500Z† ACTIVATE

MIRL Rwy 3-21 and Rwy 8-26—CTAF. ACTIVATE VASI

Rwy 21—CTAF.

WEATHER DATA SOURCES: ASOS 119.275 (575) 461-4940. HIWAS 113.6 TCC.

COMMUNICATIONS: CTAF/UNICOM 122.95

RCO 122.35 (ALBUQUERQUE RADIO)


ALBUQUERQUE CENTER APP/DEP CON 126.85

AIRSPACE: CLASS E svc 1500-2300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE TCC.

(H) VORTACW 113.6 TCC Chan 83 N35°10.93'

W103°35.91' at fld. 4070/12E. HIWAS.

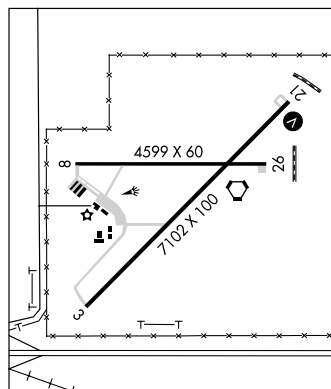

ALBUQUERQUE

H-6G, L-15A

IAP

VAUGHN MUNI (N17) 1 NE UTC-7(-6DT) N34°36.27' W105°11.51'

5928 B NOTAM FILE ABQ

RWY 09-27: H5150X60 (ASPH) S-12.5

RWY 09: SSALF Pole. RWY 27: SSALF Rgt t/c.

AIRPORT REMARKS: Unattended. Gate lock combination is arpt elevation. Rwy 09-27 edge lighting retro-reflective.

Rwy 09 and Rwy 27 SSALF OTS indef.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

CORONA (H) VORTAC 115.5 CNX Chan 102 046° 28.0 NM to fld. 6411/13E. HIWAS.

ALBUQUERQUE

H-4K, 6F, L-6G

WHISKEY CREEK (See SILVER CITY)

ZUNI PUEBLO

BLACK ROCK (ZUN) 3 NE UTC-7(-6DT) N35°04.99' W108°47.51'

6454 B NOTAM FILE ABQ

RWY 06-24: H4807X50 (ASPH) LIRL 0.3% up NE

RWY 06: Trees. RWY 24: Trees.

AIRPORT REMARKS: Unattended. Pedestrians and uncontrolled vehicular t/c crossing rwy. Large bumps at 1500' from East end of Rwy 24.

Rotating bcn OTS indef.

WEATHER DATA SOURCES: HIWAS 113.4 ZUN.

COMMUNICATIONS: CTAF 122.9

ZUNI RCO 122.05 (ALBUQUERQUE RADIO)


® ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.

ZUNI (H) VORTACW 113.4 ZUN Chan 81 N34°57.95'

W109°09.27' 054° 19.2 NM to fld. 6550/14E. Unmonitored.

HIWAS.

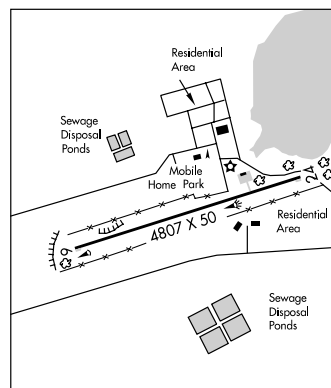

ALBUQUERQUE

L-8H

IAP

ZUNI N34°57.95' W109°09.27' NOTAM FILE ABQ.

(H) VORTACW 113.4 ZUN Chan 81 054° 19.2 NM to Black Rock. 6550/14E. Unmonitored.

RCO 122.05 (ALBUQUERQUE RADIO)

PHOENIX

HIWAS. H-4J, L-8H

ABAJO PEAK N37°50.35' W109°27.73'

RCO 122.55 (CEDAR CITY RADIO)

DENVER

L-9D

BEAVER MUNI (U52) 4 SW UTC-7(-6DT) N38°13.84' W112°40.53'

LAS VEGAS

5863 B FUEL 100LL NOTAM FILE CDC

L-9C

RWY 13-31: H4984X75 (ASPH) S-12.5 MIRL 1.5% up SE

IAP

RWY 13: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.

RWY 31: REIL. PAPI(P2R)—GA 4.0° TCH 59'.

RWY 07-25: 2150X50 (DIRT)

RWY 07: Gnd.


AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs, self svc credit card system. Birds invof arpt. ACTIVATE MIRL Rwy 13-31, REIL Rwy 13 and Rwy 31, and PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (435) 438-5829.**COMMUNICATIONS:** CTAF 122.9

SALT LAKE CITY APP/DEP 125.575

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

BRUCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 317° 36.9 NM to fld. 9040/15E.

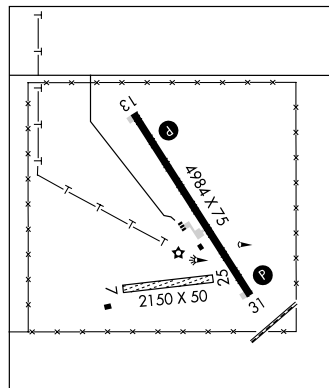**BLANDING MUNI** (BDG) 3 S UTC-7(-6DT) N37°35.00' W109°29.00'

DENVER

5868 B FUEL 100, 100LL, JET A NOTAM FILE CDC

H-3D, L-9D

RWY 17-35: H5781X75 (ASPH) S-27 MIRL 1.6% up N

IAP

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road.


AIRPORT REMARKS: Attended continuously. Fuel 24 hr credit card svc avbl. Ramp cracked and ravelling. ACTIVATE MIRL Rwy 17-35, REIL and PAPI Rws 17 and 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 127.75 (435) 678-2636.**COMMUNICATIONS:** CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 127.55

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

DOVE CREEK (H) VORTACW 114.6 DVC Chan 93 N37°48.53' W108°55.88' 229° 29.6 NM to fld. 6990/14E.

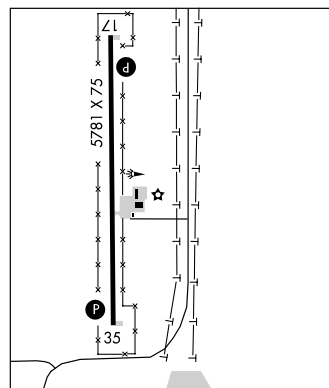**BLUFF** (66V) 4 SW UTC-7(-6DT) N37°15.00' W109°38.04'

DENVER

4476 NOTAM FILE CDC

L-8H, 9D

RWY 03-21: H3000X45 (ASPH)

RWY 21: Hill.

AIRPORT REMARKS: Unattended. 10' hill 450' off AER 21.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.

DOVE CREEK (H) VORTACW 114.6 DVC Chan 93 N37°48.53' W108°55.88' 211° 47.4 NM to fld. 6990/14E.

BOLINDER FLD—TOOELE VALLEY (See TOOELE)**BONNEVILLE** N40°43.57' W113°45.45' NOTAM FILE CDC.

SALT LAKE CITY


(H) VORTAC 112.3 BVL Chan 70 251° 12.5 NM to Wendover. 4220/17E.

H-3C, L-9C, 11C

RCO 122.1R 112.3T (CEDAR CITY RADIO)


BOUNTIFUL

SKYPARK (BTF) 3 SW UTC-7(-6DT) N40°52.16' W111°55.63'
 4234 B S4 **FUEL** 100LL, JET A TPA-5034(800) NOTAM FILE CDC
RWY 16-34: H4700X70 (ASPH) S-12.5 LIRL
RWY 16: VASI(V2L)—GA 3.0° TCH 11'. Thld displcd 390'. Tank.
RWY 34: VASI(V2L)—GA 3.0° TCH 11'. Thld displcd 390'. Tree. Rgt tfc.
AIRPORT REMARKS: Attended Mon-Sat 1400-0200Z†, Sun 1600-0000Z†. Self svc fuel avbl 24 hrs with credit card. Rwy 16-34 all dep will be to the E. ACTIVATE LIRL Rwy 16-34—CTAF. VASI Rwy 16 and Rwy 34 opr 24 hrs.
COMMUNICATIONS: CTAF/UNICOM 122.8
SALT LAKE CITY CLNC DEL 120.7
RADIO AIDS TO NAVIGATION: NOTAM FILE SLC.
WASATCH (H) VORTACW 116.8 TCH Chan 115 N40°51.02' W111°58.92' 049° 2.7 NM to fld. 4220/16E.

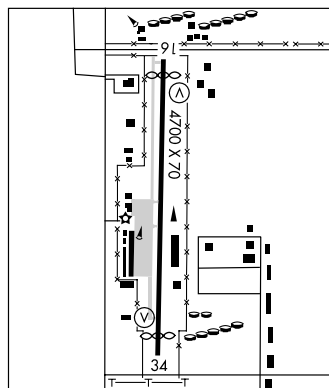

SALT LAKE CITY
COPTER
 L-9C, 11D

BRIGHAM CITY (BMC) 3 NW UTC-7(-6DT) N41°33.14' W112°03.73'
 4229 B S4 **FUEL** 100LL, JET A NOTAM FILE CDC
RWY 16-34: H7501X100 (ASPH) S-30 MIRL
RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 45'.
RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 45'.
AIRPORT REMARKS: Attended Mon-Sat 1500-0100Z†. Self svc 100LL avbl 24 hrs with credit card. Birds invof apch end of Rwy 16. Mid rwy dep not authorized from Rwy 16 or Rwy 34. ACTIVATE MIRL Rwy 16-34, REIL Rwy 16 and Rwy 34, and PAPI Rwy 16 and Rwy 34—CTAF.
WEATHER DATA SOURCES: AWOS-3 135.075 (435) 723-3852.
COMMUNICATIONS: CTAF/UNICOM 123.05
(R) SALT LAKE CITY APP/DEP CON 121.1 CLNC DEL 126.0 OTS indef.
RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.
(L) VORW/DME 112.9 LHO Chan 76 N41°47.57' W112°00.59' 175° 14.6 NM to fld. 5358/14E.

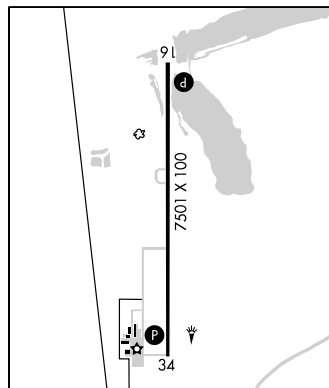

SALT LAKE CITY
 H-3D, L-11D
 IAP

VOR portion unusable:

010°-045° byd 20 NM blo 15,000'
 045°-070° byd 20 NM blo 16,000'
 070°-110° byd 20 NM blo 15,000'
 110°-155° byd 15 NM blo 12,000'
 155°-215° byd 15 NM blo 15,000'
 155°-215° byd 20 NM
 305°-320° byd 20 NM blo 15,000'

DME portion unusable:

010°-045° byd 20 NM blo 15,000'
 045°-070° byd 20 NM blo 16,000'
 070°-125° byd 20 NM blo 15,000'

155°-245° byd 15 NM
 245°-320° byd 20 NM blo 15,000'

NDB (MHW) 294 BMC N41°30.95' W112°04.69' 002° 2.3 NM to fld. Unusable 340°-150° byd 10 NM.

BRYCE CANYON (BCE) 4 N UTC-7(-6DT) N37°42.39' W112°08.75'

LAS VEGAS
H-3D, L-9C

7590 B S2 FUEL 100LL, JET A NOTAM FILE BCE

RWY 03-21: H7395X75 (ASPH-PFC) S-30 MIRL

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.

RWY 21: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended Mon-Sat 1430-0100Z†. Nov-Mar 1430-2330Z†, Apr-Oct 1430-0030Z†. For fuel after hrs call 435-834-5679, 435-327-0365 or 435-679-8684. ACTIVATE MIRL Rwy 03-21, PAPI and REIL Rwy 03 and Rwy 21—CTAF.


WEATHER DATA SOURCES: ASOS 135.475 (435) 834-5270.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.2 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

(H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 067° 7.6 NM to fld. 9040/15E.

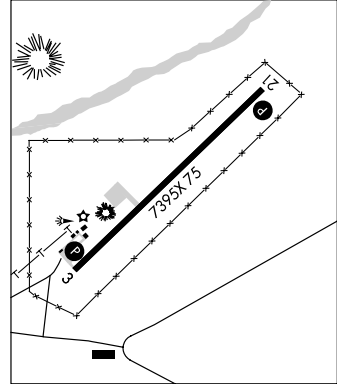

BULLFROG BASIN N37°32.75' W110°42.79'

DENVER
H-3D, L-9D

RCO 122.4 (CEDAR CITY RADIO)

BULLFROG BASIN (See GLEN CANYON NATL REC AREA)

CAL BLACK MEM (See HALLS CROSSING)

CANYONLANDS FLD (See MOAB)

CARBON CO RGNL/BUCK DAVIS FLD (See PRICE)

CEDAR CITY RGNL (CDC) 2 NW UTC-7(-6DT) N37°42.06' W113°05.93'
 5622 B S4 FUEL 100LL, JET A OX 3, 4 TPA-6399(777) Class I, ARFF Index A
 NOTAM FILE CDC

LAS VEGAS
 H-3C, L-9C
 IAP

RWY 02-20: H8653X150 (ASPH-PFC) S-75, D-100, ST-127, DT-150 HIRL

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 56'. 0.4% up.

RWY 20: MALSR. PAPI(P4L)—GA 3.0° TCH 53'. Rgt tfc.

RWY 08-26: H4822X60 (ASPH) S-16.5 MIRL 0.9% up E

RWY 08: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Pole.

RWY 26: REIL. Road. Rgt tfc.

AIRPORT REMARKS: Attended daltg hrs. For after hrs svc call 435-586-4504. 100LL fuel avbl 24 hrs self-svc credit card system. CLOSED to unscheduled air carrier ops with more than 30 passenger seats except 24 hr PPR call arpt manager 435-586-2964. General Aviation acft not permitted on Air Carrier ramp. Rwy 08-26 Twy B not avbl for air carrier acft with over 30 passenger seats. Designated calm wind rwy (blo 5 knots) is Rwy 20, rgt tfc. Recommend pilots circle arpt for altitude before departing eastbound due to fast rising terrain and high density altitude. Turbulence likely invof mountains and passes. Due to crown in Rwy 02-20 departing acft are unable to observe acft departing in opposite direction. ACTIVATE HIRL Rwy 02-20 and MIRL Rwy 08-26, MALSR Rwy 20, REIL Rwy 02 and Rwy 08 and Rwy 26—CTAF. PAPI Rwy 02, Rwy 20 and Rwy 08 opr continuously.

WEATHER DATA SOURCES: ASOS 119.025 (435) 867-0278.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.6 122.2 122.0 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

(H) **VORW/DME** 117.3 CDC Chan 120 N37°47.24' W113°04.09' 180° 5.4 NM to fld. 5464/16E.

VOR/DME unusable:

060°-100° byd 20 NM

100°-135° byd 15 NM


135°-175° byd 20 NM

215°-255° byd 35 NM blo 10,500'

MEGGI NDB (LOM) 217 EC N37°47.47' W113°01.29' 200° 6.5 NM to fld.

Unusable 070°-150° byd 8 NM blo 14,000'.

ILS 110.1 I-ECC Rwy 20. Class IE. LOM MEGGI NDB.

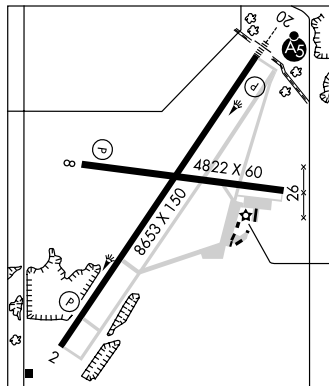

DELLE N40°50.88' W112°48.03'

RCO 122.5 (CEDAR CITY RADIO)

SALT LAKE CITY
 H-3D, L-9C, 11C

DELTA MUNI (DTA) 3 NE UTC-7(-6DT) N39°22.84' W112°30.46'

LAS VEGAS
 H-3D, L-9C
 IAP

4759 B FUEL 100LL, JET A NOTAM FILE CDC

RWY 12-30: H5935X85 (ASPH) S-21

RWY 12: Thld dsplcd 1060'.

RWY 30: Thld dsplcd 275'.

RWY 17-35: H5500X75 (ASPH) S-16 MIRL

RWY 17: REIL. PAPI(P2L)—GA 3.0° TCH 30'.

RWY 35: REIL. PAPI(P2L)—GA 3.0° TCH 30'.

AIRPORT REMARKS: Unattended. 24 hour self svc credit card fuel avbl. Rwy 17-35 15' knoll, unable to see acft on opposite end. ACTIVATE MIRL Rwy 17-35, PAPI Rwy 17 and Rwy 35 and REIL Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 127.75 (435) 864-4241.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.55 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

(H) **VORTACW** 116.1 DTA Chan 108 N39°18.14' W112°30.33' 343° 4.7 NM to fld. 4600/16E.

VOR unusable 045°-090° beyond 25 NM below 10,700'

DUCHESNE MUNI (U69) 2 NE UTC-7(-6DT) N40°11.51' W110°22.86'

SALT LAKE CITY

5826 B FUEL 100LL NOTAM FILE CDC

H-3D, L-9D, 11D

RWY 17-35: H5800X60 (ASPH) S-12.5 MIRL 0.9% up N

IAP

RWY 17: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.

RWY 35: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

08-26: 4390X75 (DIRT) 0.6% up W

RWY 08: Fence.

RWY 26: Tree.

AIRPORT REMARKS: Attended on call. Svcs are avbl by request

435-738-2464 Mon-Fri, 1600-0000Z† after hours call


435-738-5538. Rwy 08-26 CLOSED indef. Rwy 17-35 cracking and access ramp cracking with loose chips. Rwy 08-26 rough and rutty. ACTIVATE MIRL Rwy 17-35 and PAPI Rwy 17 and Rwy 35 and REIL Rwy 17 and Rwy 35—CTAF.

COMMUNICATIONS: CTAF/AUNICOM 122.8

MYTON RCO 122.1R 112.7T (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

MYTON (H) VORTAC 112.7 MTU Chan 74 N40°08.95' W110°07.66' 268° 11.9 NM to fld. 5396/14E.

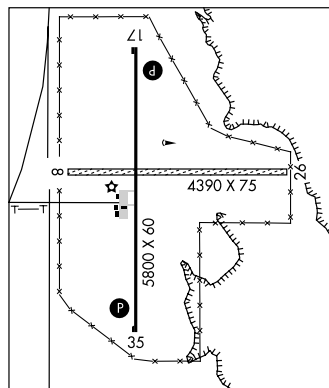**DUGWAY PROVING GROUND** (See MICHAEL AAF)**DUTCH JOHN** (33U) 1 SW UTC-7(-6DT) N40°55.06' W109°23.44'

SALT LAKE CITY

6561 NOTAM FILE CDC

H-3D, L-9D, 11D

RWY 11-29: H6600X60 (ASPH)

RWY 11: Pole.

RWY 29: Trees.

RWY 03-21: 4650X150 (TURF-DIRT)

RWY 07-25: 4450X100 (TURF-DIRT)

AIRPORT REMARKS: Unattended. Rwy 03-21 CLOSED indef. Rwy 07-25 CLOSED indef. Deer and elk on and invof arpt.

Aft in excess of 12,500 lbs maximum gross weight prohibited from using arpt. Two crossing dirt/turf rwys appear to be open but are CLOSED and not maintained. Rwy 11-29 several areas of damaged pavement located on the north edge of the rwy. Rwy 03-21 not maintained. Rwy 07-25 not maintained.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE VEL.

VERNAL (L) VORW/DME 108.2 VEL Chan 19 N40°22.74' W109°29.60' 353° 32.7 NM to fld. 5344/15E.

ESCALANTE MUNI (1L7) 2 SE UTC-7(-6DT) N37°44.72' W111°34.21'

LAS VEGAS

5733 B NOTAM FILE CDC

H-3D, L-9C

RWY 13-31: H5000X60 (ASPH) S-12.5 MIRL

RWY 13: Rgt t/c.

RWY 31: Hill.

AIRPORT REMARKS: Unattended. Rwy 13-31 has a dip approximately mid-field. Clsd landing strip is used for state highway mix, from air it looks like a rwy. Rwy 13-31 numerous rwy lgts broken. ACTIVATE MIRL Rwy 13-31—CTAF.**COMMUNICATIONS:** CTAF/AUNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE BCE.

BRYCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 069° 35.1 NM to fld. 9040/15E.

FAIRFIELD N40°16.49' W111°56.43' NOTAM FILE CDC.

SALT LAKE CITY

(H) VORTACW 116.6 FFU Chan 113 094° 10.7 NM to Provo Muni. 7690/16E.

COPTER

VORTAC unusable:

005°-040° byd 30 NM blo 12,900'

060°-090°byd 25 NM blo 12,600'

040°-060°byd 27 NM blo 13,250'

RCO 122.25 (CEDAR CITY RADIO)

H-3D, L-9C, 11D

FILLMORE MUNI (FOM) 2 W UTC-7(-6DT) N38°57.49' W112°21.79'

LAS VEGAS

4985 B NOTAM FILE CDC

H-30, L-9C

RWY 04-22: H5040X75 (ASPH) S-12.5 MIRL

RWY 04: PAPI(P2L). **RWY 22:** PAPI(P2L). Road.


AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 04-22 PAPI Rwy 04 and Rwy 22—CTAF.

WEATHER DATA SOURCES: AWOS-3 133.775 (435) 743-4182.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

DELTA (H) VORTACW 116.1 DTA Chan 108 N39°18.14' W112°30.33' 146° 21.7 NM to fld. 4600/16E.

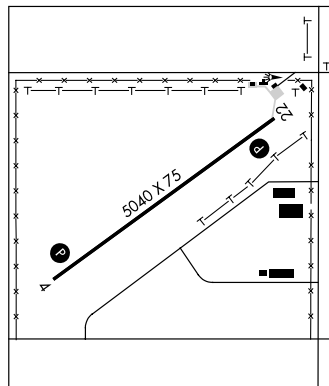

FRANCIS PEAK N41°01.98' W111°50.31'

SALT LAKE CITY

RCO 122.2 (CEDAR CITY RADIO)

COPTER

L-9C, 11C

GENERAL DICK STOUT FLD (See HURRICANE)

GLEN CANYON NATL REC AREA

BULLFROG BASIN (UØ7) 5 N UTC-7(-6DT) N37°32.75' W110°42.79'

DENVER

L-9C

4167 NOTAM FILE CDC

RWY 01-19: H3500X40 (ASPH) S-12.5

RWY 01: Thld dsplcd 82'. Hill. **RWY 19:** Thld dsplcd 65'. Hill.


AIRPORT REMARKS: Unattended. National Park Service acft frequently use NSTD tfc pattern monitor—CTAF. Rwy 01-19 NSTD markings solid rwy centerline, non-std line widths and configurations. Rwy 01-19 LIRL for National Park Service use only.

COMMUNICATIONS: CTAF 122.8 UNICOM 122.8 (1400-0200Z±)

RCO 122.4 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

BRYCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 081° 76.3 NM to fld. 9040/15E.

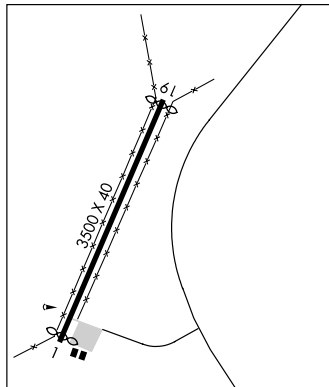

GREEN RIVER MUNI (U34) 4 SW UTC-7(-6DT) N38°57.68' W110°13.64'

DENVER

4225 B FUEL 100LL, JET A NOTAM FILE CDC

H-3D, L-9C

RWY 13-31: H5600X75 (ASPH) S-12 MIRL

RWY 13: REIL. PAPI(P2L)—GA 3.0° TCH 40'.


RWY 31: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 13-31, REIL Rwy 13 and Rwy 31, and PAPI Rwy 13 and Rwy 31—CTAF.

COMMUNICATIONS: CTAF/UNICOM: 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

HANKSVILLE (H) VORTACW 115.9 HVE Chan 106 N38°25.01' W110°41.98' 019° 39.5 NM to fld. 4430/15E.

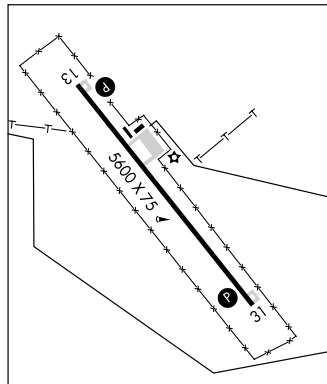

HALLS CROSSING N37°26.53' W110°34.18'.

DENVER

RCO 122.4 (CEDAR CITY RADIO)

L-9D

HALLS CROSSING

CAL BLACK MEM (U96) 10 E UTC-7(-6DT) N37°26.53' W110°34.18'

DENVER

H-3D, L-9D

4388 B FUEL 100LL, JET A NOTAM FILE CDC

RWY 01-19: H5700X60 (ASPH) S-12.5 MIRL

RWY 01: PAPI(P2L). Hill. RWY 19: PAPI(P2L).

AIRPORT REMARKS: Attended continuously. Acft in excess of 30,000 pounds maximum gross weight prohibited from using arpt. ACTIVATE MIRL Rwy 01-19 and PAPI Rwy 01 and Rwy 19—CTAF.

WEATHER DATA SOURCES: AWOS-3 134.375 (435) 684-2405.

COMMUNICATIONS: CTAF/UNICOM 123.0

HALLS CROSSING RCO 122.4 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.

PAGE (L) VORW/DME 117.6 PGA Chan 123 N36°55.86' W111°26.85' 041° 52.1 NM to fld. 4277/13E. HIWAS.

HANKSVILLE (HVE) 3 N UTC-7(-6DT) N38°25.08' W110°42.24'

DENVER

H-3D, L-9D

4444 B NOTAM FILE CDC

RWY 08-26: H5675X75 (ASPH) S-12.5 LIRL (NSTD)

RWY 08: Thld displcd 600'.

RWY 26: Thld displcd 600'. Road.

RWY 17-35: 2600X120 (DIRT)

RWY 35: Fence.

AIRPORT REMARKS: Unattended. Rwy 08-26 block cracking and weathering. Rwy 08-26 vegetation growing through cracks in pavement of rwy, twy, and ramp. Rwy 08-26 NSTD LIRL, Rwy lgts 200' from rwy edge. Blue lgts mark beginning of pavement. Rws 08 and 26 displcd thlds not lgtd. UNICOM OTS indef.

WEATHER DATA SOURCES: AWOS-3 120.0 (435) 542-1020.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.65 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

(H) VORTACW 115.9 HVE Chan 106 N38°25.01' W110°41.98' at fld. 4430/15E.

VORTAC unusable 030°-060° byd 25 NM blo 7500' 160°-180° byd 15 NM blo 9500'

HEBER CITY MUNI—RUSS MCDONALD FLD (36U) 1 S UTC-7(-6DT)

SALT LAKE CITY

COPTER

H-3D, L-9D, 11D

IAP

N40°28.91' W111°25.73'

5637 B S4 FUEL 100LL, JET A OX 1, 2 NOTAM FILE CDC

RWY 03-21: H6899X75 (ASPH) S-30 MIRL 0.8% up NE

RWY 03: Road. RWY 21: PAPI(P4L)—GA 4.0° TCH 45'.


AIRPORT REMARKS: Attended May-Oct 1400-0100Z†, Nov-Apr 1500-0000Z†. Fuel 24 hr credit card svc avbl. Glider activity on and invof arpt. Balloon activity on and invof arpt in summer months during morning hrs. Rwy 21 PAPI unusable byd 3.5 NM from thld and 6° from centerline. Acft departing south-southwest bound be aware of high tfc volume descending to 16,000' over SPANE intersection. ACTIVATE MIRL Rwy 03-21 and PAPI Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 124.825 (435) 657-0892.**COMMUNICATIONS:** CTAF/UNICOM 122.8

SALT LAKE CITY APP/DEP CON 119.95

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.**FAIRFIELD (H) VORTACW** 116.6 FFU Chan 113 N40°16.49'

W111°56.43' 046° 26.5 NM to fld. 7690/16E.

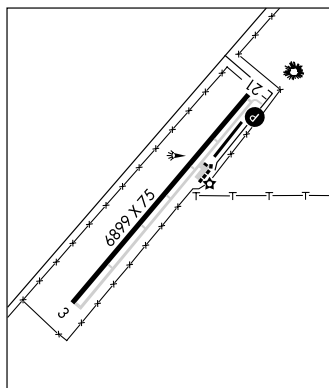

HILL AFB (HIF)(KHIF) AF 6 S UTC-7(-6DT) N41°07.44' W111°58.38'

SALT LAKE CITY

4789 B TPA—See Remarks Class I, ARFF Index Ltd. NOTAM FILE HIF Not insp.

COPTER

RWY 14-32: H13508X200 (Pems) PCN 68 R/B/W/T HIRL

H-3D, L-9C, 11D

RWY 14: ALSF2. REIL. PAPI(P4L).

RWY 32: ODALS. REIL. PAPI(P4L). Rgt tfc.

DIAP, AD

RUNWAY DECLARED DISTANCE INFORMATION

RWY 14: TORA—13508 TODA—13508

RWY 32: TORA—13508 TODA—13508

ARRESTING GEAR/SYSTEM

RWY 14 BAK-14 BAK-12B(B) (1250') **HOOK BAK-12B(B)** (2574')

HOOK BAK-12B(B) (2592') **BAK-14 BAK-12B(B)** (1258') **RWY 32**

MILITARY SERVICE: LGT PAPI rwy reference point and ILS rwy point of intercept not coincidental. Tallest lgt on Rwy 32 ODALS 31' AGL. ODALS Rwy 32 are NSTD 1460'. **A-GEAR BAK-12A** dep end active rwy in raised position, 15 minute (30 minute non-duty hr) prior notice rqr to erect on apch end of active rwy. BAK-12B/14 on req from twr.

JASU 4(MA-1A) 7(A/M32A-86) 5(AM32A-60) FUEL J8 FLUID SP PRESAIR LHOX LOX De-ice

OIL 0-128-133-148-156, JOAP-4 hr prior notice rqr DSN 777-1861. **TRAN ALERT** De-icing avbl all acft.

Limited fleet svc avbl (lavatory only) 24 hr prior notice.

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remark. **RSTD** Engine running offloads unauthorized. PPR all acft ctc Base OPS DSN 777-1861, C801-777-1861. Tran acft with unexpended live ordnance unauthorized without prior coordination. Lifeguard/MEDEVAC/Search and Rescue/Mission essential acft ctc Base OPS DSN 777-1861, C801-777-1861 fax extension 2221 as soon as possible prior to arrival to ensure coordination will be completed. VIP acft ctc PTD 30 min prior to ETA with firm block time. Twy D east of rwy is clsd. **CAUTION** Parachute Jumping exercises E of Ogden Arpt, 4 NM N of HIF 1 NM E of final. Heavy airline and civilian tfc on apch and dep. Strict adherence to ATC altitude and heading mandatory. Expect turbulence apch and ldg Rwy 14 during medium to high scf winds. Wind velocity may vary from apch to departure end of rwy. Do not mistake Ogden Arpt 4.5 NM N for Hill AFB. Acft departures should not exceed 6300' until past departure end of rwy to avoid overhead tfc pat. **TFC PAT** TPA—Rectangular 6300(1511), overhead 6800(2011), maintain 6800(2011) until turning base leg. USAF (AF, ANG, AFRC) fighter acft expect reduced rwy separation day, VFR—3000' between similar acft, 6000' between dissimilar acft. Variations exist for different type opr. Tran fighter acft must notify twr on initial ctc if reduced rwy separation is not desired. Right breaks for Rwy 32. **NS ABTMT** Strict adherence to NS ABTMT rqr. Tran acft restricted to straight-in full stop only on weekends, holiday, and on weekdays between 0000-1500Z daily. **CSTMS/AG/IMG** CSTMS/IMG avbl to ACC and AMC fit. **MISC** First 1500' Rwy 14 and first 1500' Rwy 32 concrete. Utah Test and Training Range OPS see CLOVER CONTROL. Obsn/forecast avbl Mon 1200Z-Fri 2300Z, clsd weekends. ctc Hill AFB wx DSN 777-2018.

COMMUNICATIONS: SFA ATIS 134.925 397.9 PTD 139.3 371.95

Ⓡ **SALT LAKE CITY APP/DEP CON** 121.1 319.25

TOWER 127.15 263.15 251.05 **GND CON** 121.6 275.8 **CLNC DEL** 124.1 335.8

HILL COMD POST (ACC-RAYMOND 23, others CONVOY.) 381.3 **PMSV METRO** 342.3 (Unusable 010°-100° byd 20

NM blo FL200, 101°-150° byd 25 NM blo 15000'. Wx observation not fully reported 120°-260°. Ceilings and visibility are frequently lower on the north end of the rwy.) Avbl Mon 1200Z-Fri 2300Z, clsd weekends. DMA HUB DSN 228-7647.

RADIO AIDS TO NAVIGATION: NOTAM FILE OGD.

OGDEN (L) VORTACW 115.7 OGD Chan 104 N41°13.45' W112°05.90' 123° 8.3 NM to fld. 4223/14E.

(L) TACAN Chan 49 HIF (111.2) N41°07.23' W111°57.82' at fld. 4806/14E. NOTAM FILE HIF.

TACAN unusable:

003°-123° byd 5 NM blo 13,500'

123°-138° byd 10 NM

003°-123° byd 10 NM

333°-003° byd 22 NM.

ILS 109.9 I-HIF Rwy 14.

HUNTINGTON MUNI (69V) 3 NE UTC-7(-6DT) N39°21.67' W110°55.02'

DENVER

5915 B FUEL 100LL NOTAM FILE CDC

L-9D

RWY 08-26: H4048X75 (ASPH) S-12.5 MIRL 0.8% up W

IAP

RWY 08: Thld dspld 214'. Fence. **RWY 26:** Fence.

RWY 12-30: 3640X70 (DIRT) S-6 1.2% up NW

RWY 12: Fence. **RWY 30:** Tree.

RWY 18-36: 2079X56 (DIRT) 0.6% up NE

AIRPORT REMARKS: Unattended. Fuel 24 hr credit card svc avbl. Rwy 08-26 no line of sight between rwy ends. Small amounts of vegetation on Rwy 12-30. Small amounts of vegetation on Rwy 18-36. **ACTIVATE** MIRL Rwy 08-26—122.8.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ **SALT LAKE CENTER APP/DEP CON** 133.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PUC.

CARBON (H) VORW/DME 115.5 PUC Chan 102 N39°36.19' W110°45.21' 194° 16.4 NM to fld. 5890/14E.

HURRICANE**GENERAL DICK STOUT FLD** (1L8) 3 S UTC-7(-6DT) N37°08.33' W113°18.38'

LAS VEGAS

3347 S4 FUEL 100LL, JET A NOTAM FILE CDC

L-9C


RWY 18-36: H3410X40 (ASPH) S-3

RWY 18: Rgt tfe. RWY 36: Fence.

AIRPORT REMARKS: Unattended. Fuel 24 hr credit card svc avbl.
Parachute Jumping. Rwy 18-36 undulating surface. Rwy
18-36—Pilots at end of rwy cannot see acft at other end.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE CDC.

ST. GEORGE (T) VORW/DME 109.8 OZN Chan 35 N37°05.28'
W113°35.51' 062° 14.1 NM to fld. 2901/15E.

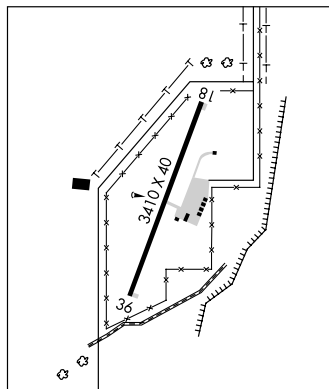**JUNCTION** (U13) 1 N UTC-7(-6DT) N38°15.00' W112°13.53'

LAS VEGAS

6069 NOTAM FILE CDC


L-9C

RWY 17-35: H4505X60 (ASPH)

RWY 17: Hill. RWY 35: Tree.

AIRPORT REMARKS: Unattended.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BCE.

BRYCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35'
W112°18.23' 351° 33.8 NM to fld. 9040/15E.

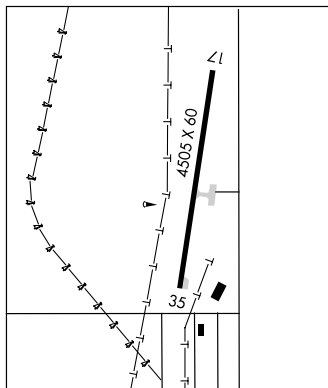

KANAB MUNI (KNB) 2 S UTC-7(-6DT) N37°00.67' W112°31.87'

LAS VEGAS

4868 B S4 FUEL 100LL, JET A NOTAM FILE CDC

H-41, L-9C

RWY 01-19: H6193X75 (ASPH) S-12.5 MIRL 0.7% up NE

IAP

RWY 01: PAPI(P2L)—GA 3.0° TCH 40'. RWY 19: Building.

AIRPORT REMARKS: Attended dawn-dusk. ACTIVATE MIRL Rwy 01-19 and PAPI Rwy 01—CTAF.

WEATHER DATA SOURCES: AWOS-3 133.175 (435) 644-2267.


COMMUNICATIONS: CTAF/UNICOM 122.8

L.A. CENTER APP/DEP CON 124.2

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

BRUCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35'

W112°18.23' 180° 42.1 NM to fld. 9040/15E.

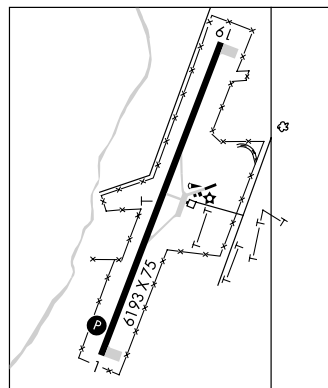

LOA

WAYNE WONDERLAND (38U) 3 SE UTC-7(-6DT) N38°21.75' W111°35.76'

LAS VEGAS

7023 B FUEL 100LL NOTAM FILE CDC

H-3D, L-9C

RWY 13-31: H5900X75 (ASPH) S-16 MIRL

RWY 31: Fence.

AIRPORT REMARKS: Unattended. For fuel call the arpt manager 435-836-2826/691-1045. ACTIVATE MIRL Rwy 13-31—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

HANKSVILLE (H) VORTACW 115.9 HVE Chan 106 N38°25.01' W110°41.98' 251° 42.4 NM to fld. 4430/15E.

LOGAN-CACHE (LGU) 3 NW UTC-7(-6DT) N41°47.47' W111°51.10'

SALT LAKE CITY

4457 B S4 FUEL 100LL, JET A OX 1, 2 Class IV ARFF Index A NOTAM FILE LGU

H-3D, L-11D

RWY 17-35: H9095X100 (ASPH) S-24, D-68 MIRL

IAP

RWY 17: MALS. REIL. PAPI(P2L)—GA 3.0° TCH 40'. Railroad.

RWY 35: REIL. PAPI(P2L)—GA 3.0° TCH 39'.

RWY 10-28: H5005X60 (ASPH) S-12

RWY 28: Thld displcd 215'. Railroad.

AIRPORT REMARKS: Attended 1500-0200Z+. 100LL fuel 24 hr credit card svc avbl. For fuel svc after hours call 435-753-2221 or 435-752-5955. Rwy 10-28 rutting, broken pavement and weeds growing through the asphalt on the rwy and twy. Rwy 10-28 horizontal and lateral cracking. ACTIVATE MIRL Rwy 17-35, PAPI Rwy 17 and Rwy 35 and REIL Rwy 17 and Rwy 35 and MALS. Rwy 17—CTAF.

WEATHER DATA SOURCES: ASOS 135.275 (435) 752-6941.

COMMUNICATIONS: CTAF/UNICOM 122.8

FRANCIS PEAK RCO 122.2 (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE LGU.

BRIGHAM CITY (L) VORW/DME 112.9 LHO Chan 76 N41°47.57'

W112°00.59' 077° 7.1 NM to fld. 5358/14E.


(T) VORW/DME 109.8 LGU Chan 35 N41°50.65'

W111°51.92' 153° 3.2 NM to fld. 4466/16E. Unmonitored.

VFR only. SHUTDOWN.

VOR portion unusable 355°-270° byd 12 NM; 270°-355° byd 15 NM.

ILS/DME 109.15 I-LGU Chan 28(Y) Rwy 17. Class IE. LOC unusable byd 5 NM abv 9000', abv 6000' at thld, byd 25° left of course.

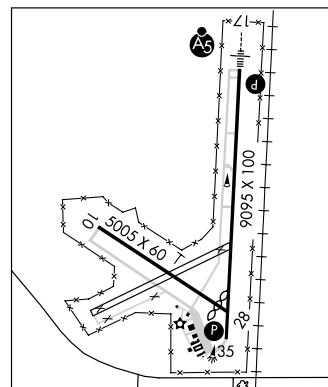

LUCIN N41°21.78' W113°50.44' NOTAM FILE CDC.

SALT LAKE CITY

(H) VORTAC 113.6 LCU Chan 83 at Lucin (Pvt). 4400/17E.


H-3C, L-11C

VORTAC unusable 180°-240° beyond 35 NM below 12,000'

RCO 122.1R 113.6T (CEDAR CITY RADIO)


MANILA (40U) 2 E UTC-7(-6DT) N40°59.16' W109°40.71'
 6175 B NOTAM FILE CDC
RWY 07-25: H5300X60 (ASPH) S-26 MIRL
RWY 07: Hiil.
AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 07-25—CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE VEL.
VERNAL (L) VORW/DME 108.2 VEL Chan 19 N40°22.74'
 W109°29.60' 332° 37.4 NM to fld. 5344/15E.

SALT LAKE CITY
 H-3D, L-9D, 11D



MANTI-EPHRAIM (41U) 4 NE UTC-7(-6DT) N39°19.75' W111°36.88'
 5500 B S2 NOTAM FILE CDC
RWY 03-21: H4584X75 (ASPH-PFC) S-24 MIRL
RWY 03: PAPI(P2L)—GA 3.0° TCH 40'. Road.
RWY 21: PAPI(P2L)—GA 3.0° TCH 40'. P-lines.
AIRPORT REMARKS: Unattended. For svcs call 435-851-2797.
 ACTIVATE MIRL Rwy 03-21 and PAPI Rwy 03 and Rwy 21—CTAF.
COMMUNICATIONS: CTAF/UNICOM 122.8
RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.
HANKSVILLE (H) VORTACW 115.9 HVE Chan 106 N38°25.01'
 W110°41.98' 307° 69.5 NM to fld. 4430/15E.

LAS VEGAS
 L-9C

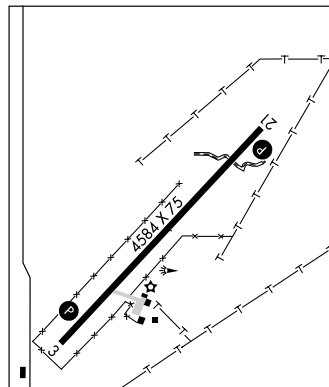

MEGGI N37°47.47' W113°01.29' NOTAM FILE CDC.
NDB (LOM) 217 EC 200° 6.5 NM to Cedar City Rgnl. Unusable 070°-150° byd 8 NM blo 14,000'.

LAS VEGAS

MICHAEL AAF (DUGWAY PROVING GROUND) (DPG)(KDPG) A 9 W UTC-7(-6DT)

SALT LAKE CITY

N40°11.84' W112°56.10'

H-3D, L-9C, 11C

4349 B TPA—See Remarks NOTAM FILE CDC Not insp.

DIAP, AD

RWY 12-30: H11000X150 (PEM-GRVD) PCN 73 R/B/W/T HIRL

RWY 12: SALS. PAPI(P4R). Thld dsplcd 1000'.

RWY 30: PAPI(P4L) AF OVRN. Thld dsplcd 1002'.

ARRESTING GEAR/SYSTEM

HOOK E5 (1965) → RWY 30

MILITARY SERVICE: LGT ACTIVATE HIRL Rwy 12-30, twy lgts—CTAF (VHF only). JASU 1(A/M32A-86)

1(A/M32A-60) FUEL J8. Identaplate rqr. TRAN ALERT Opr Mon-Thu 1400-0030Z except holidays.

MILITARY REMARKS: Attended Mon-Thu 1400-0030Z except holidays. See FLIP AP/1 Supplementary Arpt Information. RSTD PPR for ldg and fuel; ctc Base OPS DSN 789-5322, C435-831-5322. CAUTION Potential for wild animals to cross rwy and foreign object damage haz during high wind conditions. Bird activity monitored on request. TFC PAT TPA—Fixed wing 6000(1651), Rotary wing 5000(651).

COMMUNICATIONS: CTAF 126.2 270.3

RANGE CON 36.1 126.2 270.0 CLOVER CON SOUTH 134.1 363.5 FIRE STATION 126.2R

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

(T) TACAN Chan 79 MIJ (113.2) N40°11.51' W112°55.34' at fld. 4347/13E. No NOTAM MP Mon 1300-1500Z.

DUGWAY NDB (HW) 284 DPG N40°10.95' W112°56.25' at fld.

MILFORD MUNI/BEN AND JUDY BRISCOE FLD (MLF) 2 N UTC-7(-6DT)

LAS VEGAS

N38°25.60' W113°00.75'

H-3D, L-9C

5039 B FUEL 100LL, JET A NOTAM FILE MLF

IAP

RWY 16-34: H5000X75 (ASPH) S-26 MIRL 0.3% up S

RWY 16: VASI(V2L).

RWY 34: VASI(V2L).

AIRPORT REMARKS: Attended 1500-0000Z. For svc after hours call 435-463-9565. Pilots advise if doing touch and go ldg. ACTIVATE MIRL 16-34 and VASI Rwy 16 and Rwy 34—122.8.

WEATHER DATA SOURCES: ASOS 135.025 (435) 387-5201.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 112.1T (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE MLF.

(H) VORTAC 112.1 MLF Chan 58 N38°21.62' W113°00.79' 345° 4.0 NM to fld. 4980/16E.

VOR unusable:

010°-030° byd 35 NM blo 10,400'

030°-040° byd 26 NM blo 10,800'

040°-080° byd 23 NM blo 13,700'

080°-100° byd 17 NM blo 12,900'

100°-115° byd 16 NM blo 11,600'

115°-125° byd 22 NM blo 11,600'

235°-275° byd 30 NM blo 11,300'

275°-300° byd 25 NM blo 11,200'

300°-320° byd 30 NM blo 9,300'

DME unusable:

010°-030° byd 20 NM blo 15,000'


030°-055° byd 20 NM

055°-065° byd 10 NM

065°-080° byd 10 NM blo 14,000'

065°-080° byd 22 NM

080°-115° byd 10 NM

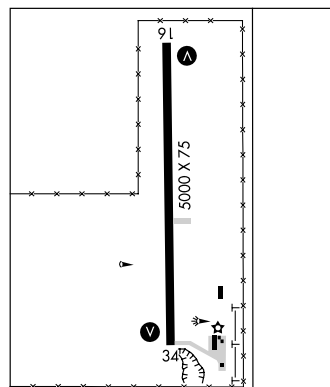

115°-125° byd 20 NM

225°-240° byd 20 NM blo 16,000'

240°-270° byd 15 NM blo 16,000'

270°-305° byd 20 NM blo 16,000'

305°-320° byd 20 NM blo 12,000'

MOAB**CANYONLANDS FLD** (CNY) 18 NW UTC-7(-6DT) N38°45.30' W109°45.29'**DENVER**

4557 B S2 FUEL 100LL, JET A Class III, ARFF Index A NOTAM FILE CNY

H-3D, L-9D

RWY 03-21: H7100X75 (ASPH-PFC) S-25 MIRL

IAP

RWY 03: REIL. PAPI(P2L)-TCH 40'.

RWY 21: REIL. PAPI(P2L)-TCH 40'. P-line.

AIRPORT REMARKS: Attended 1500-0000Z+. ACTIVATE MIRL Rwy 03-21

PAPI Rwy 03 and Rwy 21 and REIL Rwy 03 and Rwy 21—CTAF.

WEATHER DATA SOURCES: ASOS 118.525 (435)259-8576.**COMMUNICATIONS:** CTAF/UNICOM 122.8


MOAB RCO 122.3 (CEDAR CITY RADIO)

® DENVER CENTER APP/DEP CON 134.5

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

MOAB (T) VORW/DME 109.8 OAB Chan 35 N38°45.37'

W109°44.96' at fld. 4542/15E.

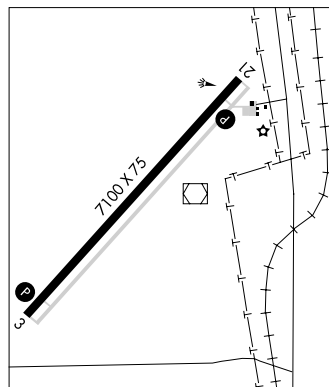**MOAB** N38°45.37' W109°44.96' NOTAM FILE CDC.**DENVER**

(T) VORW/DME 109.8 OAB Chan 35 at Canyonlands Fld. 4542/15E.

L-9D

VOR portion unusable 275°-287° blo 6,700 and 275°-290° byd 10 NM.

DME portion unusable 030°-045° byd 15 NM blo 9,000', 175°-185° byd 15 NM blo 10,000'.

RCO 122.3 (CEDAR CITY RADIO)

MONTICELLO (U43) 3 N UTC-7(-6DT) N37°56.23' W109°20.79'**DENVER**

6998 B FUEL 100LL, JET A NOTAM FILE CDC

L-9D

RWY 16-34: H4817X75 (ASPH) S-11 MIRL

RWY 16: PAPI(P2L)—GA 3.0° TCH 42'. Tree.

RWY 34: PAPI(P2L)—GA 3.0° TCH 42'

AIRPORT REMARKS: Unattended. 24 hr self svc credit card fuel facility.

Rwy 16-34 has 5' to 10' hill along W side entire length 100' from centerline. No line of sight between rwy ends. 15' drop off 165'


from Rwy 34 end. ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16

and Rwy 34 —CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE DEN.

DOVE CREEK (H) VORTACW 114.6 DVC Chan 93 N37°48.53'

W108°55.88' 277° 21.2 NM to fld. 6990/14E.

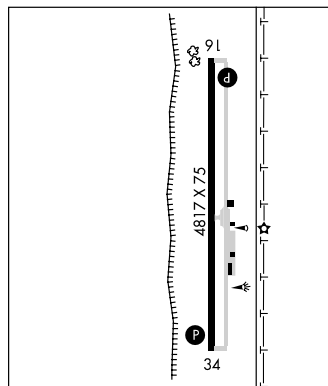

MORGAN CO (42U) 8 NW UTC-7(-6DT) N41°08.93' W111°46.00'

SALT LAKE CITY

5020 S2 OX 3 TPA-6000(980) NOTAM FILE CDC

COPTER

RWY 03-21: H3904X50 (ASPH)

L-9C, 110

RWY 03: Thld dsplcd 212'. Road.

RWY 21: Thld dsplcd 214'. Trees.


AIRPORT REMARKS: Attended Nov-Mar unattended, Apr-Oct Sun-Mon unattended Apr-Oct Tue-Sat 1700-0100Z+. Extensive glider and ultralight activity on and invof arpt. Deer and moose invof arpt. Trees, fences and hangers 125' from centerline both sides Rwy 03-21. Hangars north Rwy 03 thld, 5' fence 120' north Rwy 21 thld and trees north Rwy 03-21 midfield. Rwy 03-21 breaking action fair. Rwy may be slippery when warm or hot.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE OGD.

OGDEN (L) VORTACW 115.7 OGD Chan 104 N41°13.45'

W112°05.90' 096° 16 NM to fld. 4223/14E.



MOUNT PLEASANT (43U) 2 SW UTC-7(-6DT) N39°31.48' W111°28.51'

LAS VEGAS

5829 B NOTAM FILE CDC

L-90

RWY 02-20: H4260X60 (ASPH) MIRL

RWY 02: Brush.

RWY 20: Thld dsplcd 200'. Road.


AIRPORT REMARKS: Unattended. Extensive ultralight and model airplane activity on and invof arpt. No line of sight between rwy ends due to hump in rwy. ACTIVATE MIRL Rwy 02-20-CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

DELTA (H) VORTACW 116.1 DTA Chan 108 N39°18.14'

W112°30.33' 058° 49.7 NM to fld. 4600/16E.

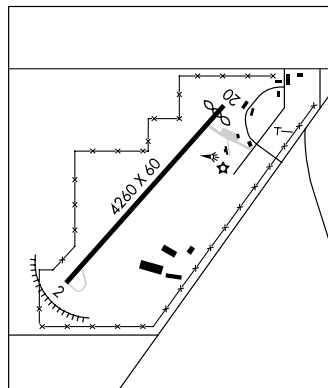

MYTON N40°08.95' W110°07.66' NOTAM FILE CDC.

SALT LAKE CITY

(H) VORTAC 112.7 MTU Chan 74 268° 11.9 NM to Duchesne Muni. 5396/14E.

H-3D, L-9D, 110

RCO 122.1R 112.7T (CEDAR CITY RADIO)

NEPHI MUNI (U14) 3 NW UTC-7(-6DT) N39°44.20' W111°52.20'

LAS VEGAS

H-3D, L-9C

5022 B FUEL 100LL, JET A NOTAM FILE CDC

RWY 16-34: H6298X100 (ASPH) S-21, D-30 MIRL

RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs, self svc credit card system. ACTIVATE MIRL Rwy 16-34, PAPI Rwy 16 and Rwy 34, and REIL Rwy 16 and Rwy 34—CTAF.


WEATHER DATA SOURCES: AWOS-3 118.275 (435) 623-1397.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE PVU.

PROVO (T) VORW/DME 108.4 PVU Chan 21 N40°12.90'

W111°43.28' 179° 29.5 NM to fld. 4493/15E.

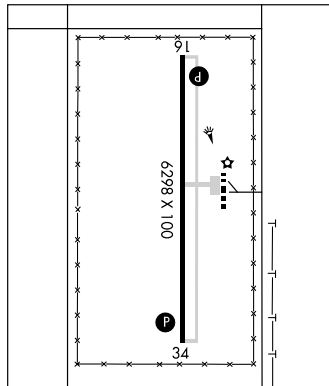

OGDEN-HINCKLEY (OGD) 3 SW UTC-7(-6DT) N41°11.74' W112°00.78'

SALT LAKE CITY

COPTER

H-3D, L-9C, 11D

IAP, AD

4473 B S4 FUEL 100, JET A1 + OX 1, 2 TPA—See Remarks Class I, ARFF Index B

NOTAM FILE OGD

RWY 03-21: H8103X150 (ASPH-GRVD) S-75, D-120, ST-152 HIRL

RWY 03: MALS. PAPI(P4L)—GA 3.0° TCH 56'. Trees. 0.8% down.

RWY 21: PAPI(P4L)—GA 3.0° TCH 50'. Thld displcd 851'. Sign. Rgt tfc. 0.6% up.

RWY 16-34: H5195X150 (ASPH-PFC) PCN 63 F/A/X/T

MIRL 0.4% up S

RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Ditch. Rgt tfc.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Sign.

RWY 07-25: H3618X150 (ASPH) S-12.5 0.4% up W

RWY 07: REIL. VASI(V4L)—GA 3.5° TCH 50'.

RWY 25: Rgt tfc.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 03	07-25	4700
RWY 07	03-21	3450
RWY 21	16-34	4550
RWY 34	07-25	3850

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03:	TORA-8103	TODA-8103	ASDA-7252	LDA-7252
RWY 07:	TORA-3618	TODA-3618	ASDA-3618	LDA-3618
RWY 16:	TORA-5194	TODA-5194	ASDA-5194	LDA-5194
RWY 21:	TORA-8103	TODA-8103	ASDA-8103	LDA-7253
RWY 25:	TORA-3618	TODA-3618	ASDA-3618	LDA-3618
RWY 34:	TORA-5195	TODA-5195	ASDA-5195	LDA-5195

AIRPORT REMARKS: Attended continuously. Parachute jumping on arpt between Rwy 21 and Rwy 25. No multiple approaches. Heavy volume of Military acft flying over Ogden Arpt at 5700'-6300' MSL enroute to Hill AFB. No practice approaches—full stop lds only from 0500-1400Z. Rwy 07-25 numerous large and deep cracks, break-outs and ravelling. Rwy 07-25 massive crack-sealing has obliterated much of the marking. CLOSED to acft ops with more than 30 passenger seats except PPR, minimum 60 min notice required, call arpt manager 801-629-8251/549-4081/625-5569. No snow removal after twr closes. Arpt sfc condition unmonitored 0300-1400Z. TPA-5200(727) rqr due to interfacing tfc from Hill AFB. When twr clsd ACTIVATE HIRL Rwy 03-21, MIRL Rwy 16-34 and twy lgts—CTAF. Rwy 07-25 not avbl when twr clsd.

WEATHER DATA SOURCES: ASOS 125.55 (801) 622-5600. LAWRS.


COMMUNICATIONS: CTAF 118.7 ATIS 125.55 UNICOM 122.95

RCO 122.45 (CEDAR CITY RADIO)

Ⓡ SALT LAKE CITY APP/DEP CON 121.1

TOWER 118.7 (1400-0300Z) GND CON 121.7

CONTINUED ON NEXT PAGE

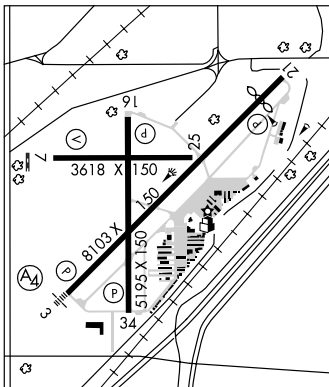

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1400-0300Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE OGD.

(L) VORTACW 115.7 OGD Chan 104 N41°13.45' W112°05.90' 100° 4.2 NM to fld. 4223/14E.

VOR portion unusable:

030°-070° byd 25 NM blo 17,000'

355°-030° byd 15 NM

070°-130° byd 15 NM

DME unusable:

255°-280° byd 30 NM blo 11,000'

355°-130° byd 15 NM

ILS/DME 111.7 I-OGD Chan 54 Rwy 03 Class IT. ILS/DME unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

PANGUITCH MUNI (U55) 3 NE UTC-7(-6DT) N37°50.71' W112°23.52'

LAS VEGAS

6763 B S2 NOTAM FILE CDC

H-3D, L-9C

RWY 18-36: H5700X75 (ASPH) S-20 MIRL

RWY 18: PAPI(P2L). RWY 36: PAPI(P2L).

AIRPORT REMARKS: Unattended. Antelope on and in vicinity of arpt during summer months. ACTIVATE MIRL Rwy 18-36 and PAPI Rwy 18 and PAPI Rwy 36—CTAF.

WEATHER DATA SOURCES: AWOS-3 133.125 (435) 676-8784.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

BRYCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 321° 10.2 NM to fld.
9040/15E.**PAROWAN** (1L9) 1 NE UTC-7(-6DT) N37°51.58' W112°48.96'

LAS VEGAS

5930 B S3 FUEL 100LL, JET A OX 1,2,4 NOTAM FILE CDC

H-3D, L-9C

RWY 04-22: H5000X75 (ASPH) S-12.5 MIRL


RWY 04: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.

RWY 22: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0000Z†. Prairie dog mounds and holes on rwy edges and twy. ACTIVATE MIRL Rwy 04-22, PAPI Rwy 04 and PAPI Rwy 22, REIL Rwy 04 and REIL Rwy 22—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

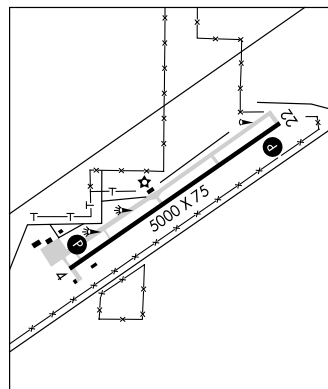CEDAR CITY (H) VORW/DME 117.3 CDC Chan 120 N37°47.24'
W113°04.09' 054° 12.8 NM to fld. 5464/16E.

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1400-0300Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE OGD.

(L) VORTACW 115.7 OGD Chan 104 N41°13.45' W112°05.90' 100° 4.2 NM to fld. 4223/14E.

VOR portion unusable:

030°-070° byd 25 NM blo 17,000'

355°-030° byd 15 NM

070°-130° byd 15 NM

DME unusable:

255°-280° byd 30 NM blo 11,000'

355°-130° byd 15 NM

ILS/DME 111.7 I-OGD Chan 54 Rwy 03 Class IT. ILS/DME unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

PANGUITCH MUNI (U55) 3 NE UTC-7(-6DT) N37°50.71' W112°23.52'

LAS VEGAS

6763 B S2 NOTAM FILE CDC

H-3D, L-9C

RWY 18-36: H5700X75 (ASPH) S-20 MIRL

RWY 18: PAPI(P2L). RWY 36: PAPI(P2L).

AIRPORT REMARKS: Unattended. Antelope on and in vicinity of arpt during summer months. ACTIVATE MIRL Rwy 18-36 and PAPI Rwy 18 and PAPI Rwy 36—CTAF.

WEATHER DATA SOURCES: AWOS-3 133.125 (435) 676-8784.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BCE.

BRYCE CANYON (H) VORTACW 112.8 BCE Chan 75 N37°41.35' W112°18.23' 321° 10.2 NM to fld.
9040/15E.**PAROWAN** (1L9) 1 NE UTC-7(-6DT) N37°51.58' W112°48.96'

LAS VEGAS

5930 B S3 FUEL 100LL, JET A OX 1,2,4 NOTAM FILE CDC

H-3D, L-9C

RWY 04-22: H5000X75 (ASPH) S-12.5 MIRL


RWY 04: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Fence.

RWY 22: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road. Rgt tfc.

AIRPORT REMARKS: Attended 1400-0000Z†. Prairie dog mounds and holes on rwy edges and twy. ACTIVATE MIRL Rwy 04-22, PAPI Rwy 04 and PAPI Rwy 22, REIL Rwy 04 and REIL Rwy 22—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

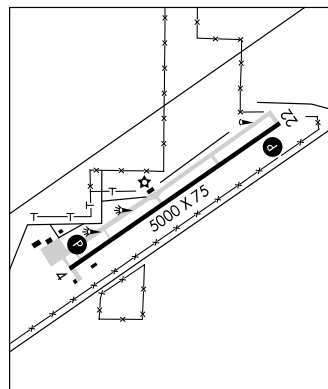CEDAR CITY (H) VORW/DME 117.3 CDC Chan 120 N37°47.24'
W113°04.09' 054° 12.8 NM to fld. 5464/16E.

RICHFELD MUNI (RIF) 1 SW UTC-7(-6DT) N38°44.19' W112°05.94'

LAS VEGAS

5301 B S4 FUEL 100LL, JET A NOTAM FILE CDC

H-3D, L-9C

RWY 01-19: H6600X75 (ASPH) S-19 MIRL 0.4% up SW

IAP

RWY 01: PAPI(P2L)—GA 3.5°. Tree. Rgt tfc.

RWY 19: PAPI(P2L)—GA 3.5°. Pole.

AIRPORT REMARKS: Attended 1530-0000Z†. For fuel after hours call 435-896-8918 or 435-896-3053. ACTIVATE MIRL Rwy 01-19 and PAPI Rwy 01 and Rwy 19—CTAF.

WEATHER DATA SOURCES: AWOS-3 133.375 (435) 896-1775.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.5 (CEDAR CITY RADIO)

SALT LAKE CENTER APP/DEP CON 133.6

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

DELTA (H) VORTACW 116.1 DTA Chan 108 N39°18.14'

W112°30.33' 135° 38.9 NM to fld. 4600/16E.

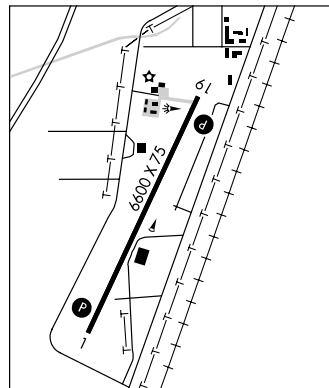**ROOSEVELT MUNI** (74V) 3 SW UTC-7(-6DT) N40°16.70' W110°03.08'

SALT LAKE CITY

5172 B S4 FUEL 100LL, JET A NOTAM FILE CDC

H-3D, L-9D, 11D

RWY 07-25: H6500X75 (ASPH) S-12 MIRL 1.0% up W

IAP

RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Brush. RWY 25: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended Mon-Fri 1600-0100Z†. For svc call 435-724-0539 or 435-722-5001. Fuel 24 hr credit card svc avbl. ACTIVATE MIRL Rwy 07-25, PAPI Rwy 07 and Rwy 25 and REIL Rwy 07 and Rwy 25—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.975 (435) 722-4201.**COMMUNICATIONS:** CTAF/UNICOM 122.8

MYTON RCO 122.1R 112.7T (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

MYTON (H) VORTAC 112.7 MTU Chan 74 N40°08.95' W110°07.66' 010° 8.7 NM to fld. 5396/14E.

ST GEORGE MUNI (SGU) 1 W UTC-7(-6DT) N37°05.44' W113°35.58'

LAS VEGAS

2941 B S4 FUEL 100LL, JET A OX 2 Class III, ARFF Index A NOTAM FILE SGU

H-4I, L-9C

RWY 16-34: H6606X100 (ASPH-GRVD) S-26 MIRL 1.1% up N

IAP

RWY 16: REIL. PAPI(P2L)—GA 4.0° TCH 44'. Thld dspcd 195'.

Road.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 43'.

RUNWAY DECLARE DISTANCE INFORMATION

RWY 16: TORA-6606 TODA-6606 ASDA-6606 LDA-6411

RWY 34: TORA-6411 TODA-6411 ASDA-6411 LDA-6411

AIRPORT REMARKS: Attended 1300-0600Z†. 100LL fuel avbl 24 hrs via self serve credit card pump. CLOSED to Air Carrier ops with more than 30 passenger seat except PPR. Call arpt ops 435-703-0805. ACTIVATE MIRL Rwy 16-34 and REIL Rwy 16 and 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 135.075 (435) 634-0940.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.5 (CEDAR CITY RADIO)

L.A. CENTER CLNC DEL 133.3

AIRSPACE: CLASS E svc 24 hrs.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CDC.


(T) VOR/DME 109.8 OZN Chan 35 N37°05.28'

W113°35.51' at fld. 2901/15E.

VOR/DME unusable:

210°-235° beyond 15 NM below 8,500'

235°-270° beyond 15 NM below 9,700'

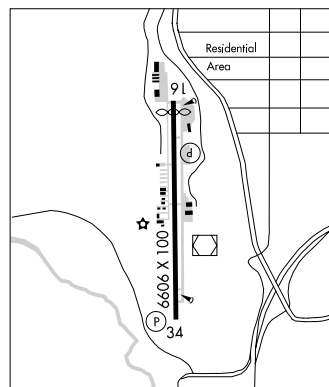

270°-350°

350°-020° beyond 10 NM below 14,000'.

SALINA-GUNNISON (44U) 5 NE UTC-7(-6DT) N39°01.75' W111°50.30'

LAS VEGAS

5159 B NOTAM FILE CDC

L-9C

Rwy 02-20: H3855X60 (ASPH) S-6 MIRL


AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 02-20—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

DELTA (H) VORTACW 116.1 DTA Chan 108 N39°18.14'

W112°30.33' 102° 35.2 NM to fld. 4600/16E.

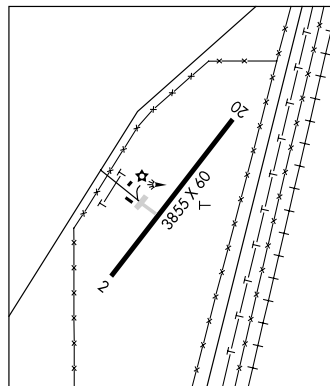

SALT LAKE CITY

SALT LAKE CITY INTL (SLC) 3 W UTC-7(-6DT) N40°47.30' W111°58.67'

SALT LAKE CITY

4227 B S4 **FUEL** 80, 100, 100LL, JET A1 OX 1, 2, 3, 4 LRA Class I, ARFF Index E

COPTER

NOTAM FILE SLC

Rwy 16L-34R: H12004X150 (ASPH-GRVD) S-60, D-200, ST-175, DT-350, DDT-850 HIRL CL

H-3D, L-9C, 11D

Rwy 16L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 70'.

IAP, AD

Rwy 34R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'.

Rwy 16R-34L: H12000X150 (CONC-GRVD) S-60, D-200, ST-175,

DT-350, DDT-850 HIRL CL

Rwy 16R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'.

Rwy 34L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'.

Rwy 17-35: H9596X150 (ASPH-GRVD) S-60, D-200, ST-175,

DT-350, DDT-850 HIRL CL

Rwy 17: TDZL. MALSR. PAPI(P4R)—GA 3.0° TCH 76'.

Rwy 35: TDZL. MALSR. PAPI(P4L)—GA 3.0° TCH 74'. Thld displcd

324'. Road.

Rwy 14-32: H4892X150 (ASPH-GRVD-PFC) S-60, D-200,

DT-350, DDT-850 HIRL

Rwy 14: PAPI(P4L)—GA 3.0° TCH 40'.

Rwy 32: REIL. PAPI(P4L)—GA 3.0° TCH 41'.

AIRPORT REMARKS: Attended continuously. CAUTION: Flocks of birds on

and in/ov arpt. Due to t/c volume, local departure and arrival ops

are discouraged and delays can be expected between

1700-1900Z† and 0300-0600Z†. Special VFR is not

recommended at the arpt, if req, expect delays. ASDE-X

Surveillance System in use: Pilots should opr transponders with Mode C on all twys and rwys. Touchdown,

midpoint and rollout rwy visual range Rwy 16L, Rwy 34R, Rwy 16R, Rwy 34L. Touchdown and rollout rwy visual

range Rwy 17, Rwy 35. Rwy 14-32 taxi ops only blo 1,200 ft RVR. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS (801) 328-3567. TDWR.

COMMUNICATIONS: D-ATIS 127.625 124.75 (801) 325-9749 UNICOM 122.95


RCO 122.4 (CEDAR CITY RADIO)

- ① **SALT LAKE CITY APP/DEP CON** 120.9 (S of 41° latitude below 8000') 121.1 (N of 41° latitude below 8000') 124.3 (110°-160° above 8,000') 124.9 (300°-340° above 8000') 126.25 (250°-300° above 8000') 128.1 (160°-250° above 8000') 135.5 (340°-110° above 8000').

TOWER 118.3 (Rwy 17-35 and Rwy 14-32) 119.05 (Rwy 16L-34R) 132.65 (Rwy 16R-34L)

GND CON 121.9 (Rwy 17-35 and Rwy 14-32) 133.65 (Rwy 16R-34L and Rwy 16L-34R) **CLNC DEL** 127.3

PRE-TAXI CLNC 127.3 **PRE-DEP CLNC** 127.3

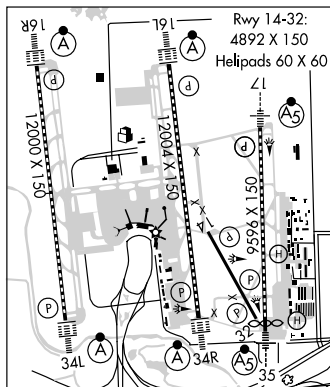

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS B See VFR Terminal Area Chart, Ctc APP CON 120.9.

RADIO AIDS TO NAVIGATION: NOTAM FILE SLC.

WASATCH (H) VORTACW 116.8 TCH Chan 115 N40°51.02' W111°58.92' 161° 3.7 NM to fld. 4220/16E.
 ILS/DME 111.9 I-UUH Chan 56 Rwy 34L. Class IIIE. DME also serves ILS Rwy 16R.
 ILS/DME 111.9 I-UAT Chan 56 Rwy 16R. Class IIIE. DME also serves ILS Rwy 34L.
 ILS/DME 109.5 I-MOY Chan 32 Rwy 16L.
 ILS/DME 109.5 I-SLC Chan 32 Rwy 34R. Class IIIE.
 ILS/DME 111.5 I-BNT Chan 52 Rwy 17. Class IE. DME also serves ILS Rwy 35.
 ILS/DME 111.5 I-UTJ Chan 52 Rwy 35. Class IE. DME service provided by ILS Rwy 17.

HELIPAD HB: H60X60 (ASPH)

HELIPAD HF: H60X60 (ASPH)

HELIPORT REMARKS: Helipads B and F located on general aviation aprons.

SOUTH VALLEY RGNL (U42) 7 SW UTC-7(-6DT) N40°37.17' W111°59.57'
 4607 B S4 FUEL 100LL, JET A OX 1, 3 TPA—5407(800) NOTAM FILE CDC
 RWY 16-34: H5860X100 (ASPH) S-12.5 MIRL
 RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.
 RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dspcd 238'.
 Road.

AIRPORT REMARKS: Attended 1400-0400Z†. Flocks of birds on and
 invof arpt. ACTIVATE MIRL Rwy 16-34, REIL Rwy 16 and Rwy
 34—CTAF. PAPI Rwy 16 and Rwy 34 opr continuously.

WEATHER DATA SOURCES: AWOS-3 134.425 (801) 562-0271 (801)
 566-2084.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ SALT LAKE CITY APP/DEP CON 120.2 124.3 CLNC DEL 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE SLC.


WASATCH (H) VORTACW 116.8 TCH Chan 115 N40°51.02'
 W111°58.92' 166° 13.8 NM to fld. 4220/16E.

SALT LAKE CITY

COPTER

H-3D, L-9C, 11D

IAP

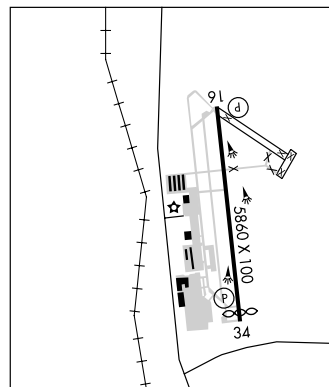

SKYPARK (See BOUNTIFUL)

SOUTH VALLEY RGNL (See SALT LAKE CITY)

SPANISH FORK-SPRINGVILLE (U77) 2 NW UTC-7(-6DT) N40°08.50' W111°39.68'

SALT LAKE CITY

4529 B S4 FUEL 100LL, JET A OX 1, 2 TPA—See Remarks NOTAM FILE CDC

COPTER

RWY 12-30: H5700X100 (ASPH) S-24 MIRL

H-3D, L-9C, 11D

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dspcd 290'. Road. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri continuously. Self serve 100LL avbl anytime with credit card. For Jet A fuel call
 801-798-9888. Deer on and invof arpt. Dec-Feb expect up to 24 hrs after storm before rwy plowing. Residual
 snow and ice on rwy after plowing. For status call 801-798-9888/9. Rwy 30 rgt tfc for rotary wing acft only.
 TPA—5529(1000) for fixed wing acft, 5029(500) for rotary wing acft. Noise abatement procedures in effect. Call
 arpt manager 801-798-9888. ACTIVATE MIRL Rwy 12-30 and REIL Rwy 12 and Rwy 30—CTAF. PAPI Rwy 12
 and Rwy 30 opr continuously.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PVU.

PROVO (T) VORW/DME 108.4 PVU Chan 21 N40°12.90' W111°43.28' 133° 5.2 NM to fld. 4493/15E.

TOOELE N40°36.65' W112°20.86' NOTAM FILE CDC.

SALT LAKE CITY

NDB (MHW) 371 TVY at Bolinder Fld-Tooele Valley. Unusable 200°-250° byd 15 NM.

L-9C, 11C

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS B See VFR Terminal Area Chart, Ctc APP CON 120.9.

RADIO AIDS TO NAVIGATION: NOTAM FILE SLC.

WASATCH (H) VORTACW 116.8 TCH Chan 115 N40°51.02' W111°58.92' 161° 3.7 NM to fld. 4220/16E.
 ILS/DME 111.9 I-UUH Chan 56 Rwy 34L. Class IIIE. DME also serves ILS Rwy 16R.
 ILS/DME 111.9 I-UAT Chan 56 Rwy 16R. Class IIIE. DME also serves ILS Rwy 34L.
 ILS/DME 109.5 I-MOY Chan 32 Rwy 16L.
 ILS/DME 109.5 I-SLC Chan 32 Rwy 34R. Class IIIE.
 ILS/DME 111.5 I-BNT Chan 52 Rwy 17. Class IE. DME also serves ILS Rwy 35.
 ILS/DME 111.5 I-UTJ Chan 52 Rwy 35. Class IE. DME service provided by ILS Rwy 17.

HELIPAD HB: H60X60 (ASPH)

HELIPAD HF: H60X60 (ASPH)

HELIPORT REMARKS: Helipads B and F located on general aviation aprons.

SOUTH VALLEY RGNL (U42) 7 SW UTC-7(-6DT) N40°37.17' W111°59.57'
 4607 B S4 FUEL 100LL, JET A OX 1, 3 TPA—5407(800) NOTAM FILE CDC
 RWY 16-34: H5860X100 (ASPH) S-12.5 MIRL
 RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.
 RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dspcd 238'.
 Road.

AIRPORT REMARKS: Attended 1400-0400Z†. Flocks of birds on and
 invof arpt. ACTIVATE MIRL Rwy 16-34, REIL Rwy 16 and Rwy
 34—CTAF. PAPI Rwy 16 and Rwy 34 opr continuously.

WEATHER DATA SOURCES: AWOS-3 134.425 (801) 562-0271 (801)
 566-2084.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ SALT LAKE CITY APP/DEP CON 120.2 124.3 CLNC DEL 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE SLC.


WASATCH (H) VORTACW 116.8 TCH Chan 115 N40°51.02'
 W111°58.92' 166° 13.8 NM to fld. 4220/16E.

SALT LAKE CITY

COPTER

H-3D, L-9C, 11D

IAP

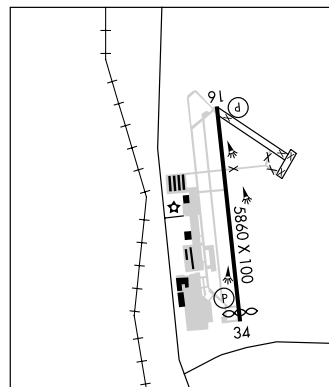

SKYPARK (See BOUNTIFUL)

SOUTH VALLEY RGNL (See SALT LAKE CITY)

SPANISH FORK-SPRINGVILLE (U77) 2 NW UTC-7(-6DT) N40°08.50' W111°39.68'

SALT LAKE CITY

4529 B S4 FUEL 100LL, JET A OX 1, 2 TPA—See Remarks NOTAM FILE CDC

COPTER

RWY 12-30: H5700X100 (ASPH) S-24 MIRL

H-3D, L-9C, 11D

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dspcd 290'. Road. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri continuously. Self serve 100LL avbl anytime with credit card. For Jet A fuel call
 801-798-9888. Deer on and invof arpt. Dec-Feb expect up to 24 hrs after storm before rwy plowing. Residual
 snow and ice on rwy after plowing. For status call 801-798-9888/9. Rwy 30 rgt tfc for rotary wing acft only.
 TPA—5529(1000) for fixed wing acft, 5029(500) for rotary wing acft. Noise abatement procedures in effect. Call
 arpt manager 801-798-9888. ACTIVATE MIRL Rwy 12-30 and REIL Rwy 12 and Rwy 30—CTAF. PAPI Rwy 12
 and Rwy 30 opr continuously.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PVU.

PROVO (T) VORW/DME 108.4 PVU Chan 21 N40°12.90' W111°43.28' 133° 5.2 NM to fld. 4493/15E.

TOOELE N40°36.65' W112°20.86' NOTAM FILE CDC.

SALT LAKE CITY

NDB (MHW) 371 TVY at Bolinder Fld-Tooele Valley. Unusable 200°-250° byd 15 NM.


L-9C, 11C

TOOELE**BOLINDER FLD—TOOELE VALLEY** (TVY) 5 NW UTC-7(-6DT) N40°36.75' W112°21.05'**SALT LAKE CITY**

4322 B FUEL 100LL NOTAM FILE CDC.

H-3D, L-9C, 11C**RWY 17-35:** H6100X100 (ASPH) S-30 MIRL 0.8% up S**IAP****RWY 17:** MALSR. PAPI(P4R)—GA 3.0° TCH 45'.**RWY 35:** REIL. PAPI(P4L)—GA 3.0° TCH 45'. Thld displcd 120'. Road.**AIRPORT REMARKS:** Unattended. Parachute Jumping. Rwy 17 MALSR OTS indef. ACTIVATE MIRL Rwy 17-35, REIL Rwy 35 and PAPI Rwy 17 and Rwy 35—CTAF.**WEATHER DATA SOURCES:** AWOS-3 119.725 (435) 882-6648**COMMUNICATIONS:** CTAF/UNICOM 123.0**SALT LAKE CITY APP/DEP CON** 135.5**SALT LAKE CITY CLNC DEL** 124.4**RADIO AIDS TO NAVIGATION:** NOTAM FILE SLC.**WASATCH (H) VORTACW** 116.8 TCH Chan 115 N40°51.02' W111°58.92' 214° 22.1 NM to fld. 4220/16E.**TOOELE NDB (MHW)** 371 TVY N40°36.65' W112°20.86' at fld.

Unusable 200°-250° byd 15 NM. NOTAM FILE CDC.

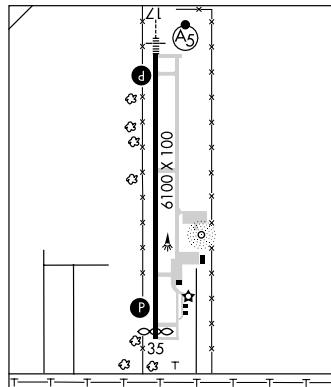ILS/DME 111.15 I-TVY Chan 48(Y) Rwy 17. Class IT.**VERNAL RGNL** (VEL) 1 SE UTC-7(-6DT) N40°26.46' W109°30.60'**SALT LAKE CITY**

5278 B S4 FUEL 100LL, JET A OX 1, 2 Class III, ARFF Index A NOTAM FILE VEL


H-3D, L-9D, 11D**RWY 16-34:** H6201X150 (ASPH) S-45, D-55 MIRL**IAP****RWY 16:** REIL. PAPI(P4L)—GA 3.0° TCH 54'. Pole.**RWY 34:** REIL. PAPI(P4L)—GA 3.0° TCH 43'. Trees.**RWY 07-25:** H4108X60 (ASPH) S-12.5 MIRL 1.1% up W**RWY 07:** REIL. PAPI(P2L)—GA 3.0° TCH 24'. Tree.**RWY 25:** REIL. PAPI(P2L)—GA 3.0° TCH 23'. Tree.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 07:** TORA-4108 TODA-4108 ASDA-4108 LDA-4108**RWY 25:** TORA-4108 TODA-4108 ASDA-4108 LDA-4108**RWY 16:** TORA-6201 TODA-6201 ASDA-6201 LDA-6201**RWY 34:** TORA-6201 TODA-6201 ASDA-6201 LDA-6201**AIRPORT REMARKS:** Attended dawn-dusk. 24 hr PPR required for air carrier ops over 30 passenger seats ctc arpt manager 435-789-3400. Rwy 07-25 not avbl for air carrier use. ACTIVATE MIRL Rwys 07-25 and 16-34, REIL Rwys 07 and 25 and 16 and 34, and PAPI Rwys 07 and 25—CTAF.**WEATHER DATA SOURCES:** ASOS 135.175 (435) 781-1224.**COMMUNICATIONS:** CTAF/UNICOM 122.7**RCO** 122.35 (CEDAR CITY RADIO)**AIRSPACE:** CLASS E svc Mon-Fri 1300-2100Z and 2300-0300Z, Sat 1300-2300Z Sun 1700-2100Z and 2300-0300Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE VEL.**(L) VOR/DME** 108.2 VEL Chan 19 N40°22.74' W109°29.60' 333° 3.8 NM to fld. 5344/15E.

DME portion unusable

070°-080° byd 30 blo 12,000'.

200°-260° byd 15 NM blo 17,000'.

VOR portion unusable 220°-260° beyond 23 NM below 15,000'

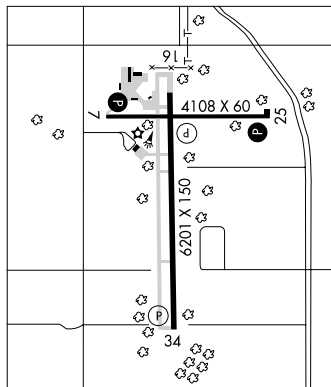

WASATCH N40°51.02' W111°58.92' NOTAM FILE SLC.

SALT LAKE CITY

(H) **VORTACW** 116.8 TCH Chan 115 161° 3.7 NM to Salt Lake City Intl. 4220/16E.

COPTER

VOR unusable:

H-30, L-9C, 11D

015°-030° blo 26,000'

085°-125° byd 30 NM blo 15,000'

030°-050° byd 20 NM

360°-015° byd 20 NM blo 17,000'

050°-085° byd 20 NM blo 18,000'

DME unusable:

030°-080° byd 17 NM blo 17,000'

185°-220° byd 25 NM blo 16,000'

030°-080° byd 25 NM

260°-290° byd 25 NM blo 11,000'

080°-140° byd 17 NM blo 15,000'

350°-360° byd 30 NM blo 16,000'

080°-140° byd 25 NM

360°-030° byd 30 NM

360°-030° byd 17 NM blo 16,000'

WAYNE WONDERLAND (See LOA)**WENDOVER** (ENV) 1 SE UTC-7(-6DT) N40°43.12' W114°01.85'

SALT LAKE CITY

4237 B S2 FUEL 100, JET A Class I, ARFF Index B NOTAM FILE ENV

H-30, L-9C, 11C

RWY 12-30: H8001X100 (ASPH-GRVD) S-64, D-85, ST-108, DT-120 MIRL

IAP

RWY 12: REIL. PAPI(P4L)—GA 4.0° TCH 45'. Rgt tfc.

RWY 30: REIL. PAPI (P4L)—GA 3.0° TCH 45'.

RWY 08-26: H8000X150 (ASPH-GRVD) S-75, D-140, ST-175

MIRL

RWY 08: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 26: PAPI(P4L)—GA 3.0° TCH 40'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-8000 TODA-8000 ASDA-8000 LDA-8000

RWY 26: TORA-8000 TODA-8000 ASDA-8000 LDA-8000

AIRPORT REMARKS: Attended 1500-0130Z±. PPR for air carrier ops with more than 30 passenger seats call arpt manager 435-665-2308.


PAPI Rwy 12 OTS indef. ACTIVATE MIRL Rwy 08-26 and Rwy 12-30, REIL Rwy 08 and Rwy 12 and Rwy 30 and PAPI Rwy 08 and Rwy 26 and Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 135.075 (435) 665-2521.**COMMUNICATIONS:** CTAF/UNICOM 122.8

BONNEVILLE RCO 122.1R 112.3T (CEDAR CITY RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.BONNEVILLE (H) **VORTAC** 112.3 BVL Chan 70 N40°43.57'

W113°45.45' 251° 12.5 NM to fld. 4220/17E.

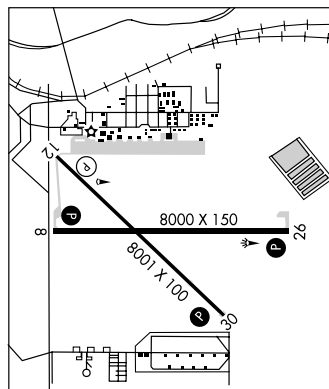

2009 U.S. & CANADIAN MILITARY AERIAL AIRCRAFT/PARACHUTE DEMONSTRATIONS


During CY 2009, the U.S. and Canadian Military Aerial Demonstration Teams (Thunderbirds, Blue Angels, Snowbirds, and Golden Knights) will be performing on the dates and locations listed below.

Pilots should expect Temporary Flight Restrictions (TFR) in accordance with 14 CFR Section 91.145, Management of aircraft operations in the vicinity of aerial demonstrations and major sporting events. The dimensions and effective times of the TFRs may vary based upon the specific aerial demonstration event and will be issued via the U.S. NOTAM system. Pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding these airspace restrictions.

The currently scheduled 2009 aerial demonstration locations, subject to change without notice, are:

DATE:		USAF Thunderbirds	USN Blue Angels	Canadian Snowbirds	USA Golden Knights
October	24-25		Fort Worth, TX		Fort Worth, TX
	24-25				Pinehurst, NC
	31		Houston, TX		
November	1		Houston, TX		
	7-8	Homestead AFB, FL	Jacksonville Beach, FL		
	13-14		NAS Pensacola, FL		
	14-15	Nellis AFB, NV			

Note: Dates and locations are scheduled "show dates" only and do not reflect arrival or practice date TFR periods that may precede the specific aerial demonstration events listed above. Again, pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding any airspace restrictions.

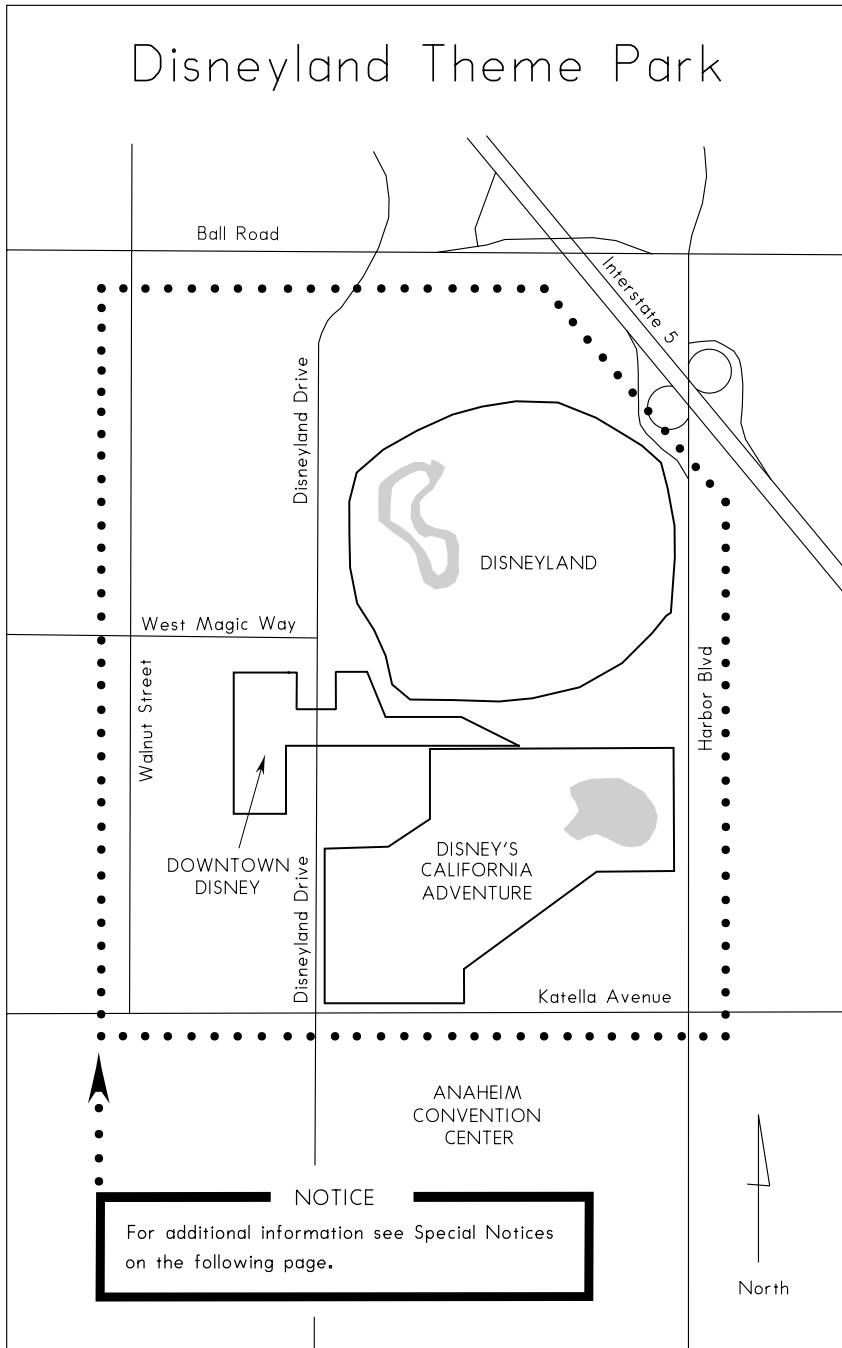

DISNEYLAND THEME PARK**NOTICE**

Pursuant to Public Law 108-199, Section 521, aircraft flight operations are prohibited at and below 3,000 feet AGL within a 3 nautical mile radius of the Disneyland Theme Park (334805N/1175517W or the Seal Beach (SLI) VORTAC 066 degree radial at 6.8 nautical miles). This restriction does not apply to: (A) those aircraft authorized by ATC for operational or safety purposes, including aircraft arriving or departing from an airport using standard air traffic procedures; (B) Department of Defense, law enforcement, or aeromedical flight operations that are in contact with ATC; Those who meet any of the following criteria may apply for a waiver to these restrictions: (A) for operational purposes of the venue, including the transportation of equipment or officials of the governing body; (b) for safety and security purposes of the venue.

LIGHTS-OUT OPERATIONS**Desert/Reveille MOAs, Nevada and Utah**

Lights-out night vision goggle flight training operations conducted within the Desert and Reveille North/South Military Operations Areas (MOAs) at all altitudes, Monday through Friday between sunset and sunrise when the MOAs are active. Traffic advisories are available from the Nellis ATC Facility (Nellis Control) on 126.65 or 124.95.

LIGHTS-OUT OPERATIONS**Lucin/Seveir/Gandy MOAs, Utah**

Lights-out night vision goggle flight training operations conducted within the Lucin, Seveir, and Gandy Military Operations Areas (MOAs) at all altitudes, Monday through Friday between sunset and sunrise when the MOAs are active. Traffic advisories are available from the Clover ATC Facility (Clover Control) on 118.45 or 134.1.

INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS**SAN FRANCISCO INTERNATIONAL AIRPORT (SFO)****SAN FRANCISCO, CALIFORNIA**

San Francisco International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 1R at Taxiway Mike

Runway 10L at Taxiways Romeo or Uniform

Runway 10R at Taxiway Uniform

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runways shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.

INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS**LAS VEGAS-MCCARRAN INTERNATIONAL AIRPORT (LAS)****LAS VEGAS, NEVADA**

Las Vegas-McCarran International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 07L at Taxiways "A8" or Delta

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runway shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.


LOS ANGELES, CA, LOS ANGELES INTERNATIONAL AIRPORT (LAX)**NOISE ABATEMENT PROCEDURES**

Successive or simultaneous departures from Runways 24L/R and Runways 25L/R are authorized, with course divergence beginning within 2 miles from the departure end of parallel runways, due to noise abatement restrictions.

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN SOUTHERN CALIFORNIA

UAS operations are conducted sunrise to sunset within three (3) nautical miles of El Mirage Field Adelanto (N34°37'30", W117°36'20") and Grey Butte (N34°33'55", W117°40'50") at or below 6,000 feet MSL. From sunset to sunrise operations may be conducted within four (4) nautical miles at and below 4,000 feet AGL. Contact Joshua control on 124.55 or 363.0 for activity information and advisory service.

UAS operations may be conducted in accordance with Visual Flight Rules (VFR) accompanied by a chase aircraft below 14,000 feet MSL in an area bounded by N34°58'00" W117°00'00", N34°27'00" W117°00'00", N34°27'00" W117°55'00", N34°48'00" W117°55'00", N34°48'00" W117°35'03", N34°48'30" W117°32'03", N34°50'20" W117°32'03", N34°53'30" W117°11'53", N34°56'20" W117°09'03" thence to point of beginning.

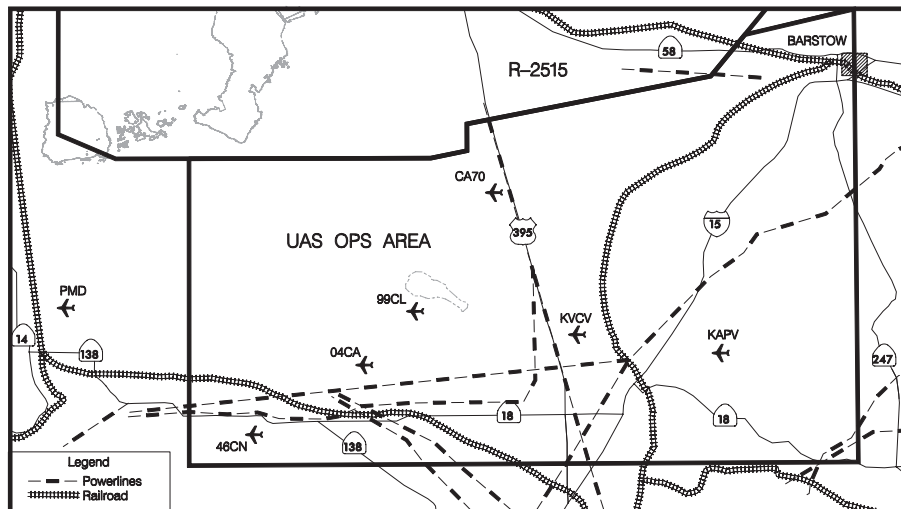

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN NORTHERN NEVADA

UAS operations are continuously conducted within the Fallon Approach Control Airspace and the Fallon Range Training Complex at all altitudes when the Special Use Airspace areas are active. Contact Desert Control on 126.2 MHz. for activity status.

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN NEVADA AND UTAH

There is continuously unmanned aircraft systems flight activity conducted within the desert and reveille military operations areas (MOAs) at all altitudes when the MOAs are active. Traffic advisories are available from the Nellis Air Traffic Control facility (Nellis Control) on 126.65.

MODEL AIRCRAFT ACTIVITY—EL TORO, CALIFORNIA

Model aircraft activity conducted 500' AGL and below, 0.5 NM radius of apch end of Rwy 25L. CLOSED MCAS El Toro, daily 1500–0400Z. For NOTAM information contact Prescott AFSS on 800–992–7433.

DENVER TERMINAL RADAR APPROACH CONTROL

Denver, Colorado

The Denver Terminal Radar Approach Control has been issued a waiver which enables controllers to assign speed restrictions without obtaining pilot concurrences; e.g., speeds of less than 250 knots below FL280 and speeds of less than 210 knots when the aircraft is greater than 20 flying miles from the threshold of the airport of intended landing.

EXTENSIVE HELICOPTER FLIGHT TRAINING IN THE VICINITY OF ROCKY MOUNTAIN METROPOLITAN AIRPORT (BJC), BROOMFIELD, COLORADO

Frequent usage of Runway 11R–29L, Taxiway D, and the north end of Runway 20 by helicopter flight schools. Pilots are cautioned to listen carefully to ATC for turnoff instructions when landing on Runway 11R–29L. Helicopters flight schools use three primary local procedures: Charlie Two, Ball, and Erie. CHARLIE TWO; Expect departures to the south thence turning to the northwest. Expect arrivals from the northwest. BALL; Expect departures to the south thence turning east. Expect arrivals from the east. ERIE; Expect departures northbound. Expect arrivals from the north.

INTENSE HELICOPTER OPERATIONS LOS ANGELES BASIN AREA, CALIFORNIA

CAUTION: Intense helicopter operation below 2000'AGL. All pilots transitioning the area at or below 2000'AGL are encouraged to make regular position reports on frequency 123.025.

LASER LIGHT DEMONSTRATIONS Anaheim, California

A laser light demonstration will be conducted nightly between sundown and midnight at Disneyland, Anaheim, California (SLI VORTAC 060 radial at 7NM LAT 33°48'40"N/LON 117°55'00"W). The beam may be injurious to eyes if viewed within 300 feet vertically and 600 feet laterally of the light sources. Cockpit illumination-flash blindness may occur beyond these distances.

Knotts Berry Farm Buena Park, California

A permanent laser light demonstration is being conducted at Knotts Berry Farm, 33°49'45"N/117°59'35"W, Seal Beach Vortac SLI 022/005, 0445 to 0600 UTC DLY. Laser light beam may be injurious to pilots/passengers eyes within 800 feet vertically and 1400 feet laterally of the light source. Flash blindness or cockpit illumination may occur beyond these distances.

Long Beach, California

A laser light demonstration will be conducted nightly between sundown and 11 PM at the Pine Avenue Theater Complex, Pine Avenue, Long Beach, California (SLI VORTAC 250 radial at 8NM LAT 33°46'12"N/LON 118°11'30"W). The beam may be injurious to eyes if viewed within 100 feet vertically and 1,900 feet laterally of the light source. Cockpit illumination-flash blindness may occur beyond these distances.

Palomar Observatory

A laser light operation is conducted intermittently between sunset and sunrise at the Palomar Observatory N33-21-22/W 116-51-53, Julian VOR (JLI) 298 degree radial at 19 nautical miles. The laser beam may be injurious to eyes if viewed on axis. Cockpit illumination and flash blindness may also occur if the beam enters the cockpit. Los Angeles ARTCC, (661) 265-8205 is the FAA coordination facility.

San Francisco, California

A Laser Light Demonstration will be conducted nightly between 8:30 pm and 2:00 am at Pier 39, San Francisco, California (SAU VORTAC 100 radial at 12 NM LAT 37°48'40" N; LON 122°24'35" W). The beam may be injurious to Pilots/Passengers' eyes if viewed within 800 feet vertically and 800 feet laterally of the light source. Cockpit illumination-flash blindness may occur beyond these distances.

CHRISTMAN AIRPORT, FORT COLLINS, COLORADO

A laser light operation for testing and alignment is being conducted at Christman Airport, 40°35'24"N/105°08'26"W, GLL VORTAC 270/28NM. This testing is ongoing, intermittently, 24 hours per day 7 days a week. Laser light beams may be injurious to pilot's/passenger's eyes within 4479 feet of the light source, to 8958 feet AGL. The secondary effects of flash blindness or cockpit illumination may occur beyond these distances. Denver TRACON, 303-342-1590 is the FAA coordination facility.

CONTROLLED FIRING AREA (CFA) EAST OF YUMA, AZ

The military has established a controlled firing area (CFA) east of Yuma, AZ. The CFA is bordered by the following fixes: BZA058015 - BZA068035 - BZA072034 - BZA075030 - BZA075015 - BZA058015. Operations will be conducted at or below 3000'AGL. The hours of operation are Monday through Saturday from sunrise to sunset.

SAN DIEGO, CALIFORNIA SOUTHBOUND INTERNATIONAL BORDER CROSSING


Pilots crossing the International border southbound into Mexican airspace, in the vicinity of San Diego, are encouraged to cross Tijuana International Airport at midfield to avoid arriving and departing aircraft. Pilots requesting transition through the Brown Field CLASS D airspace should contact Brown Tower on frequency 126.5. All others should contact Tijuana Approach Control on frequency 119.5 prior to crossing the border. Southbound aircraft are requested to squawk 1260 prior to crossing the border unless otherwise advised by ATC.

EXTENSIVE PARACHUTE DROP ACTIVITIES SAN DIEGO, CALIFORNIA

Use caution when transiting the corridor south of San Diego Class B airspace and north of the international border between the coast and east to the Tecate area. A wide variety of civilian and military aircraft types (Cessna 182-C-130) use this corridor to make high rates of ascent and descent from the surface to 15000 MSL. Note the San Diego, Trident, and Otay Reservoir jumping areas located in this corridor and to the northeast of Brown Field Municipal Airport. Use VHF 121.95 to monitor parachute drop activities.

AEROBATIC OPERATIONS SOUTHEAST OF PHOENIX GOODYEAR AIRPORT, GOODYEAR, ARIZONA

The aerobatic training area center point is located on the Stanfield VOR 300° radial at 26.5 DME. The area exists approximately 2 nautical miles on each side of the TFD VOR 300° radial from 22 to 31 DME, surface to 8000' MSL. Pilots should use caution in this area. Frequency 128.92 is provided for air-to-air communications with pilots using or transiting the area. For information regarding hours of operation, contact 623-932-1650.

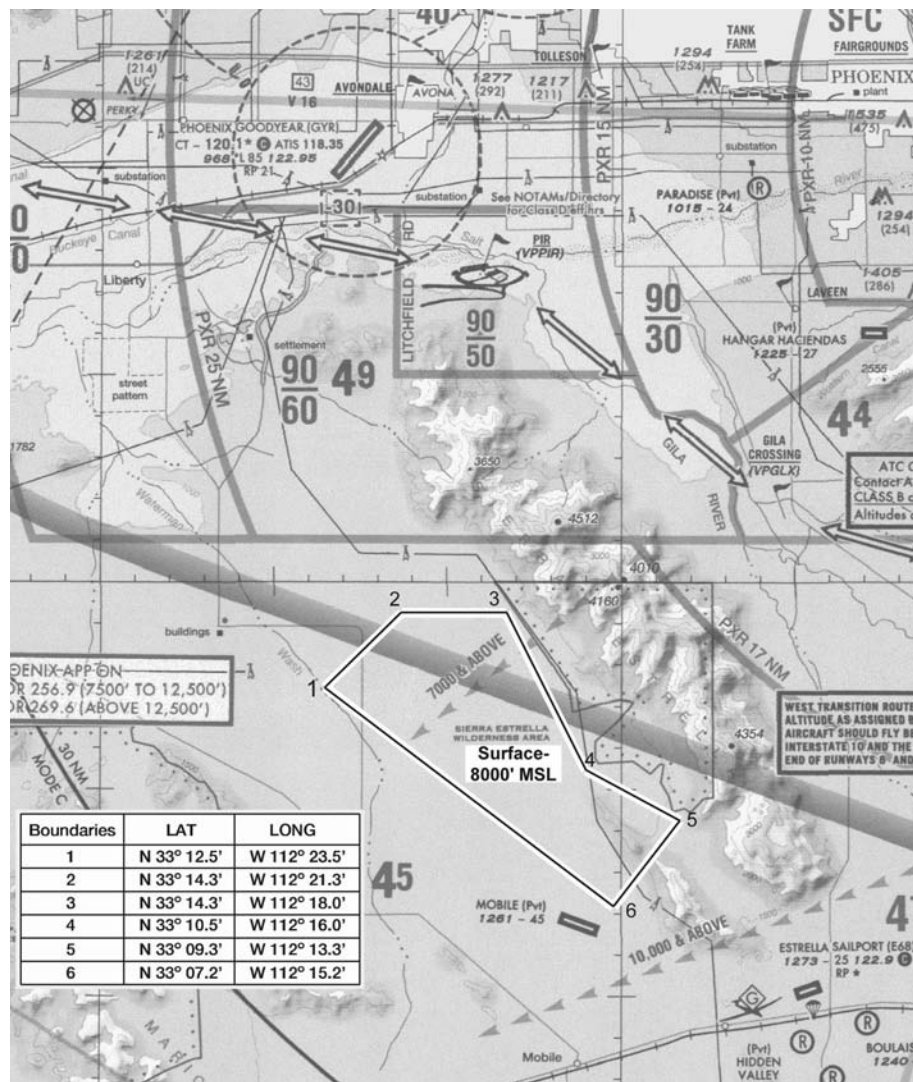

**AEROBATIC PRACTICE AREA
MOUNTAIN VALLEY AIRPORT, TEHACHAPI, CALIFORNIA**

Practice and competitive aerobatic maneuvers regularly scheduled adjacent to south side of Mountain Valley Airport (3 NM long X ½ NM wide), surface to 5000' AGL. The practice area is for waiver holders only. Pilots should use caution when operating within this area. For further information contact VAN NUYS FSDO on 1-818-904-6291.

**Restricted Area R-2305
Gila Bend, Arizona
Transit Information**

A transit route extends from Gila Bend to the Eric Marcus Airport over Arizona Highway 85 at 500 feet above ground level (AGL). VFR rules govern civilian flight through the Goldwater Air Force Range. Airevac flights will be given priority over all other air traffic other than inflight emergencies. The Airevac call sign will be used only when the aircraft is on an actual air evacuation mission. Department of Public Safety (DPS) "Ranger" call signs must indicate they are on an Airevac mission to receive priority. Military aircraft will have priority over all remaining aircraft. Aircraft requesting to transition this airspace may encounter delays.

General aviation aircraft must coordinate their route of flight, departure, and return times with Range Operations prior to departure. Phone (623) 856-8818/8819. Once airborne, aircraft from the north contact Gila Bend AFAF Tower (primary) on 257.65/127.75 (UHF/VHF) or Range Operations (secondary) on 264.125/122.775. Aircraft from the south contact Range Operations 264.125/122.775. Aircraft must hold outside restricted airspace until clearance is granted to transit the area. After receiving clearance into the Restricted Airspace, pilots shall monitor Range Operations frequency.

The preferred VFR procedure will be to fly over Highway 85 at 500 feet AGL, monitoring Range Ops on VHF 122.775. At night aircraft will fly over Highway 85 at or below 1000 feet AGL. Military aircraft on manned ranges will be instructed to remain clear of Highway 85 or to transit the highway 500 feet above altitude of transiting aircraft.

Caution: Due to repeater transmissions and mountainous terrain, flights north of the Saucedo Mountains (Black Gap) will normally only be able to contact Gila Bend Tower. Flights south of the mountains should contact Range Operations. Military aircraft on the Range may be operating lights out.

The normal hours of the Goldwater Air Force Range are from 0630-2400 local Monday through Saturday. When the range is not active, Gila Bend AFAF Tower and Range Operations are closed. If unable to contact the Tower or Range Operations, contact Albuquerque ARTCC on 126.45 or 125.25 for clearance.

LOW ALTITUDE TACTICAL NAVIGATION AREA (LATN) EAST OF TUCSON, AZ

The military has established a Low Altitude Tactical Navigation Area (LATN) east of Tucson bordered by the following fixes: TUS037017-TUS025022-TUS038037-CIE323030-CIE294015-CIE255022-TUS090028-TUS055029-TUS037017. The LATN is not a restricted area and will continue to be available for use by civilian aircraft in accordance with FAA rules and regulations. The primary operations will be conducted by HH-3/MH-60 helicopters from 100 ft AGL to 600 ft AGL. The hours of operations will be daily from 1500-0100Z

**SEA WORLD TETHERED BALLOON
SAN DIEGO, CALIFORNIA****(Until Further Notice)**

Tethered balloon 367 MSL DLY 1700-0400, Located on the Mission Bay VORTAC 180 radial at 1 mile (MZB180001).

**UNAUTHORIZED TRANSMISSION
ARIZONA, CALIFORNIA, AND NEVADA AREA****(Until Further Notice)**

Attention all aircraft: Be alert to the possibility of UNAUTHORIZED AIR TRAFFIC CLEARANCES issued on ATC frequencies in the Arizona, California, and Nevada areas. If you received a transmission that is questionable verify with AIR TRAFFIC CONTROL.

**SAN FRANCISCO INTERNATIONAL AIRPORT EXPANDED CHARTED
VISUAL FLIGHT PROCEDURES****(Until Further Notice)*******GENERAL*****

San Francisco International Airport (SFO) is subject to stratus moving slowly from West to East, creating a reportable weather ceiling over the airport, while the final approach area for Runways 28R and 28L have no significant ceiling or visibility conditions. And expanded charted visual flight procedure (E/CVFP) has been developed to maximize the level of airport efficiency during the unusual weather conditions described above.

*****MINIMUMS*****

The E/CVFP incorporates the following weather minimums:

- SFO ceiling 2100 feet and visibility 5 miles; or,
- SFO ceiling 1000 feet and visibility 3 miles, and,
- visibility 5 miles in the Eastern quadrant (030-120), and,
- ceiling 2400 and visibility 5 miles at the automated weather observing system (AWOS) located at BRIJJ

LOM. In the event the AWOS is inoperative, weather at San Carlos (SQL) is required to be at least ceiling 2400 feet and visibility 5 miles.

Although the listed weather minima are in effect aircraft should not expect simultaneous E/CVFP approaches unless BRIJJ AWOS ceiling is at least 3500 feet and visibility is at least 5 miles.

*****SPACING AND SEQUENCING*****

Controllers will clear aircraft for the E/CVFP in accordance with the provisions of Order 7110.65, Air Traffic Control. They will not utilize phrases requesting or requiring aircraft to "fly right alongside", "wingtip to wingtip", or "directly abeam" other aircraft. Additionally, controllers will not assign instructions or require aircraft to pass and/or overtake other aircraft on the adjacent final approach course. Preferably, aircraft will be vectored to achieve a slightly staggered position of approximately $\frac{1}{8}$ to $\frac{1}{4}$ mile behind the aircraft on the adjacent final approach course. Heavy aircraft and B757's will not be authorized to overtake another aircraft on the adjacent final approach course. Wake turbulence cautionary advisories will be issued, as appropriate.

*****GO-AROUND PROCEDURE*****

The Tipp Toe and Quiet Bridge approaches are visual approaches, and as such have no missed approach segment. If a go-around is necessary, aircraft will be issued an appropriate advisory/clearance/instruction by the tower or tracon. To ensure standard separation from other traffic, these instructions will include the assignment of a specific heading and altitude. Normally, the following procedures will apply:

Tipp Toe Visual Runway 28L

In the event of a go-around turn left heading 265, climb and maintain 3000; or as directed by Air Traffic Control.

Quiet Bridge Visual Runway 28R

In the event of a go-around turn right heading 310, climb and maintain 3000; or as directed by Air Traffic Control.

AEROBATIC OPERATIONS IN ARIZONA

The following practice and competitive aerobatic areas are in use without notice SR–SS daily.

5 NMR DMA	17,500 and below
2 NMR INW195055/PAN	9,600 and below
1 NM N–S and 7 NM E–W of the PXR017022	6,500 and below
PXR019020	7,500 and below
PXR128013	5,500 and below
1 Square mile of the PXR194023	5,000 and below
1 NMR PXR129018	5,000 and below
1 NMR PXR316026.2	6,600 and below
3 NMR PXR 323024	6,000 and below
2 NM N–S and 4 NM E–W PXR325027	8,000 and below
1 NM Square TFD 3000 18/E60	6,300 and below
1 NMR TDF065025/P08	5,500 and below
1 NMR TFD143021	3,000 and below
4 NMR TFD010020	4,800 and below
1NMR TFD107036	5,000 and below
P08–COOLIDGE	10,000 and below
12 NW of DVT	6,500 and below
5 NMR DRK215013	11,500 and below

Pilots should use caution in these areas. For further information contact Prescott AFSS on 1–800–992–7433.

AEROBATIC OPERATIONS NORTHWEST OF TUCSON, AZ.

Practice and competitive aerobatic maneuvers are regularly scheduled on the Tucson VORTAC 295 radial at 25 miles and Tucson VORTAC 308 radial at 22 miles, sunrise to sunset, up to 5,000 MSL.

AEROBATIC OPERATIONS NORTHEAST OF REDLANDS, CA

Practice and competitive aerobatic maneuvers are regularly scheduled in the vicinity of the PDZ VORTAC 045 radial at 23 nautical miles from 1,500' AGL up to and including 7,500' MSL. The practice area is for waiver holders only. Pilots should use caution in this area. Frequency 123.3 is provided for air-to-air communications with other pilots using or transiting the area.

AEROBATIC OPERATIONS NORTHEAST OF SANTA PAULA, CA

Practice and competitive aerobatic maneuvers are regularly scheduled in the vicinity of FIM VORTAC, SR–SS, 1,500' AGL to 5,500' MSL. The Aerobatic Area is defined by FIM 220/004, to FIM 260/008, to FIM 285/009, to FIM 360/005, to FIM 055/014, to FIM 070/013. The practice area is for waiver holders only. Pilots should use caution in this area. Frequency 122.775 is provided to air-to-air communications with other pilots using or transiting the area.

AEROBATIC OPERATIONS IN COLORADO

Practice and competitive aerobatic maneuvers are regularly conducted during daylight hours at the following locations:

- a. 2 NM radius GLL 180/009, 10000 MSL and below.
- b. 1 NM radius Sterling Muni (STK), 4000 AGL and below.
- c. 1 kilometer square, 800 to 3000 AGL 3 statute miles east of RWY 17–35, Kelly Airpark (C015).
- d. 1 statute mile square, surface to 4000 AGL. Center of the area is located 2850 feet east of RWY 18–36. Western boundary is 1000 feet from RWY 18–36 and northern boundary is 100 feet from RWY 08–26, Lamar Airport (LAA). The (LAA) ASOS will broadcast aerobatic area information when this area is active. For further information, contact Flight Services 1–800–WX–BRIEF.
- e. 1 kilometer square, 5000 AGL .5 statute mile east of Ft. Morgan Muni (FMM).
- f. 1 NM radius GLL 315/006, 10000 MSL and below. Mon–Sat 1500–2359, Sun 1600–2359.

AEROBATIC PRACTICE AREA JEAN AIRPORT, JEAN, NEVADA

Aerobatic flight activity will be conducted within a 3300' square box, located 2 miles west of Jean Airport (Specific area of operation is ½ mile radius from a point described by the LAS 190/20). Flights will occur from SFC to 6500 MSL, between 1 hour after sunrise to 1 hour before sunset daily. Pilots should use caution when operating within this area. To obtain a copy of the Certificate of Waiver outlining appropriate procedures for utilization of the practice area, ctc Henderson Executive Airport at (702) 261–4800.

**AEROBATIC PRACTICE AREA
VAUGHN MUNICIPAL AIRPORT (N17), VAUGHN, NEW MEXICO**

Aerobatic practice will be conducted within a 3 NM radius of the Vaughn Municipal Airport (N17), SFC to 11,000 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992)-7433).

**EXTENSIVE FLIGHT TRAINING IN VICINITY OF
ERNEST A. LOVE FIELD, PRESCOTT, ARIZONA**

Extensive flight training activity in areas 5 to 38 miles from the Prescott Airport 14,000 MSL and below. These areas are in use from sunrise to sunset daily. Participating traffic reports on 123.5.

**EXTENSIVE FLIGHT TRAINING IN VICINITY OF
ANGWIN-PARRETT FIELD (203), ANGWIN, CALIFORNIA**

Extensive flight training activity within a 10 NM radius of STS056024 (MAUCH INT), 4,500 MSL and below. This area is in use from 1400-0300 UTC daily. Participating traffic reports on 123.0.

**EXTENSIVE FLIGHT TRAINING IN VICINITY
OF PROVO MUNICIPAL AIRPORT**

Extensive flight training activity in areas 5 to 30 miles S & W of Provo Municipal Airport from the PVU260R-PVU150R, 9,000 MSL and below. These areas are in use from 1100Z to 0400Z Monday thru Saturday; participating traffic contact Eagle Base on 123.5.

UNMANNED AIRCRAFT SYSTEMS, SOUTHEASTERN, AZ

Unmanned aircraft system activity along the international border in southeastern Arizona. Pilots flying near the international border between Nogales, Arizona and the New Mexico border should be alert for unmanned aircraft systems operating from 14,000' MSL to 16,000' MSL inclusive, 0000-1500 UTC daily.

ROCKET FIRING SOUTHEAST OF RENO, NEVADA

Rocket firing occurs approximately on the Mustang VORTAC 107 radial at 7 miles, normally seven days a week, sunrise to sunset, up to but not including 1,000 ft above ground level.

GLIDER OPERATIONS NORTHWEST OF TUCSON, ARIZONA

There is regularly scheduled glider/soaring activity conducted from El Tiro Airport, which is located approximately on the Tucson VORTAC (116.0 MHz) 297° radial at 31 nautical miles; this is south of Pinal (Marana) Airport and bordered by V16, V66, and V105. Activity at El Tiro is normally scheduled for Saturday, Sunday, and Wednesday, with much of the soaring conducted near the intersection of V66 and V105 at altitudes up to, but not including flight level 180.

CAUTION-TETHERED AEROSTAT RADAR SYSTEM (TARS)

A TARS (a large helium-filled balloon) operates continuously up to 15,000 feet, except during inclement weather or when the system is down for maintenance, in R-2312 near Fort Huachuca, Arizona. The tether is unmarked and is virtually impossible to see from only a few hundred feet. See the Phoenix Sectional Chart for location.

YOSEMITE NATIONAL PARK

Public law prohibits flight of VFR helicopters or fixed-wing acft below 2000 feet above the surface of Yosemite National Park. "Surface" refers to the highest terrain within the park within 2000 feet laterally of the route of flight or, within the Yosemite Valley, the uppermost rim of the valley.

CALIFORNIA CONDORS

Central California Coast Ranges

California Condors are currently being reintroduced to the Central California Coast by the Ventana Wilderness Society. There are two release sites; one below Anderson Peak near Big Sur (BSR VOR radial 150, 2 NM), the other in the Pinnacles National Monument (SNS VOR radial 099, 24 NM). California Condors can be identified in the air by their distinctive size and flight patterns. Like the Turkey Vulture, the California Condor is a large black bird with a naked head which uses topography and associated wind patterns for soaring flight. However, the California Condor is nearly twice as large as the Turkey Vulture, with a wingspan approaching ten feet. Condors normally soar at altitudes between 500 and 6,000 feet AGL. They have been known to fly up to 190 miles in a single day and could therefore be found over a very large area. Please be alert for the presence of these highly endangered birds throughout the Coastal Range from Mt Hamilton near San Jose, south to the Simi Valley, near Fillmore VOR (FIM), as well as the foothills along the west side of the San Joaquin Valley. For further information contact the Ventana Wilderness Society at 831-455-9514.

CALIFORNIA CONDORS

Pinnacles National Monument

California Condors are the largest land birds in North America and are currently being reintroduced at Pinnacles National Monument in central California. Weighing 15-25 pounds and with a wingspan of 9.5 feet, this endangered species presents a formidable in-flight hazard. Condors are capable of soaring at an altitude of 15,000 feet, although they are more often found between altitudes of 2,000-9,000 feet. Using GPS tracking devices on four condors, a high-use condor flight area was identified over Pinnacles National Monument. The Monument is requesting a clearance of 3,000 feet AGL over an approximately 11.5 square mile area, as indicated, where these and other condors are consistently soaring. Monument personnel hope that such a restriction will be a manageable compromise for the continued conservation of this endangered species and the safety of all pilots. For further information, please contact Pinnacles National Monument at (831) 389-4485.

GRAND CANYON

SPECIAL FLIGHT RULES AREA

Effective on September 22, 1988

GRAND CANYON—Special Flight Rules Area, SFAR-50-2. Special regulations apply to all aircraft operations below 14,500 feet MSL. Except in an emergency or if otherwise authorized by the Las Vegas Flight Standards District Office for certain limited operations, remain at or above the following altitudes: a) in the Eastern sector from Lees Ferry to North Canyon at 5,000 feet MSL; b) in the Eastern sector from North Canyon to Boundary Ridge at 6,000 feet MSL; c) in the Central sector from Boundary Ridge to Supai Point at 10,000 feet MSL; d) in the Central sector from Supai Point to Diamond Creek at 9,000 feet MSL; e) in the Western sector from Diamond Creek to the Grand Wash Cliffs at 8,000 feet MSL. In flight corridors use the following altitudes: northbound at 11,500 or 13,500 feet MSL; southbound at 10,500 or 12,500 feet MSL. Remain clear of the indicated flight-free zones.

CAUTION: High volume of tour operations within the area. The procedures do not relieve pilots from see-and-avoid responsibility or compliance with FAR 91.119. Pilots should contact a local FSS for NOTAM information prior to flight within the Special Flight Rules Area. Utilize the Las Vegas (LAS) altimeter setting west of Mt. Dellenbaugh and the Grand Canyon (GCN) altimeter setting east of Mt. Dellenbaugh. Monitor the frequencies indicated for each sector (Western-121.95; Central-127.05; Eastern-120.05). Refer to the Grand Canyon sectional chart and NOTAMS for additional information.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows:

North Atlantic area:	123.45 MHz
Caribbean area:	123.45 MHz
Pacific area:	123.45 MHz

U.S. SPECIAL CUSTOMS REQUIREMENT

Air Commerce Regulations of the Treasury Department's Customs Service require all private aircraft arriving in the U.S. from a foreign place in the Western Hemisphere, (a) south of 33 degrees north latitude which cross into the U.S. over a point on the U.S./Mexican border between 97 and 120 degrees west longitude, or (b) south of 31 degrees north latitude which enter the U.S. via the Gulf of Mexico and Atlantic Coasts, to provide notice of intended arrival to the Customs Service at least one hour prior to crossing the U.S./Mexican border or the U.S. coastline. This notice may be provided by: (1) radio through an appropriate FAA Flight Service Station, (2) normal FAA flight plan notification procedures (a flight plan filed in Mexico does not meet this requirement due to unreliable relay of data), or (3) directly to the District Director of Customs or other Customs officer at place of first intended landing. Unless an exemption has been granted by Customs, private aircraft are required to make first landing in the U.S. at one of the following designated airports nearest to the point of border or coastline crossing:

Brownsville International, Corpus Christi International, Del Rio International, Eagle Pass Airport, El Paso International, Hobby Airport, Jefferson County Airport, Laredo International, Miller International, or Presidio-Ley International in Texas; Calexico International, or Brown Field in California; Bisbee Douglas International, Douglas Muni, Nogales International, Tuscon International, or Yuma International, in Arizona; Las Cruces Intl in New Mexico; Lakefront or Louis Armstrong New Orleans Intl in Louisiana; Fort Lauderdale Executive, Fort Lauderdale-Hollywood International, Key West Airport, Miami International, Opa-Locka Airport, St. Lucie County International, Tampa International, or West Palm Beach Airport in Florida.

MILITARY TRAINING ROUTES

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data for military users.

CIVIL USE OF MILITARY FIELDS

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission. Army installations, prior permission is required from the Commanding Officer of the installation.

For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded direct to Hq USAF (PRPOC), Washington, D.C. 20330.

Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the Commanding Officer of the field.

When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

AIRCRAFT LANDING RESTRICTIONS

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated public use airport or seaplane base.

Landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

FAR-PART 139 CERTIFICATED AIRPORTS

Additional Certificated Airports
not contained in this Directory

NAME OF AIRPORT	IDENT	INDEX
	NEVADA	
TONOPAH, Tonopah Test Range	TNX	E

CONTINUOUS POWER FACILITIES

In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply.

In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been included in this program for a selected runway.

1. ILS(Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)
2. Wind Measuring Capability
3. Approach Light System (ALS) or Short ALS (SALS)
4. Ceiling Measuring Capability
5. Touchdown Zone Lighting (TDZL)
6. Centerline Lighting (CL)
7. Runway Visual Range (RVR)
8. High Intensity Runway Lighting (HIRL)
9. Taxiway Lighting
10. Apron Light (Perimeter Only)

The following have been designated "Continuous Power Airports," and have independent back up capability for the equipment installed.

Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Anchorage, AK (ANC)	07R	Minneapolis, MN (MSP)	30L
Andrews AFB, MD (ADW)	01L	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA)	14R
Chicago, IL (ORD)	14R	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R
Indianapolis, IN (IND)	05L	Tampa, FL (TPA)	36L
Jacksonville, FL (JAX)	07	Tulsa, OK (TUL)	36R
Kansas City, MO (MCI)	19R	Washington, DC (DCA)	01
Los Angeles, CA (LAX)	24R	Washington, DC (IAD)	01R
Memphis, TN (MEM)	36L	Wichita, KS (ICT)	01L
Miami, FL (MIA)	08R		

NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

NATURAL GAS FLARE CARLSBAD/CAVERN CITY, NEW MEXICO

A natural gas flare is located at approximately N32-27-50.5/W104-34-24.2 (CNM 300/021), SFC to 4200 feet MSL. Pilots should use caution when operating in this area. For further information, contact Albuquerque AFSS on 1-505-243-7831.

SAN DIEGO INTERNATIONAL AIRPORT (SAN) AIRCRAFT NOISE PROHIBITIONS/RESTRICTIONS

No departures or engine run-ups above idle power 0730-1430Z. FAR Part 36 Stage 2 departures prohibited 0600-1500Z. Per current FAA standards all helicopters are Stage 2. Valid emergency operations or mercy flights exempt from noise abatement restrictions. Operator must provide written report to SAN noise abatement office. Noise monitoring in effect continuously. All operations of aircraft which exceed 104 Effective Perceived Noise Decibels at the takeoff reference point per FAA AC 36 Series documentation are prohibited. Noise sensitive areas all quadrants; recommend pilots use best noise abatement procedures. Pilots are requested to minimize use of reverse thrust consistent with safe operations of aircraft to minimize noise impact on surrounding community. For additional noise level restrictions and information call 619-400-2781.

SPECIAL PROCEDURES SAN FRANCISCO INTERNATIONAL AIRPORT NOISE ABATEMENT PROCEDURES

Fly Quiet Program:

The Fly Quiet Program was developed to help pilots understand the rules and regulations for noise abatement at SFO and to show the public how well airline's participate in the noise abatement programs. The purpose of the Program is to encourage individual airlines to operate as quietly as possible at SFO. The Program promotes a participatory approach in complying with noise abatement procedures by grading airlines' performance and presenting these scores to the public via a published report. The Program consists of five grading elements:

- 1) The overall noise quality of each airline's fleet operating at SFO.
- 2) A measure of how well each airline complies with the nighttime Preferential Runway Use Program.
- 3) Assessment of how well each airline adheres to the Gap departure profile.
- 4) Assessment of how well each airline adheres to the Shoreline departure profile.
- 5) Evaluation of single overflight noise level exceedances.


Flight Crews: By operating your aircraft as quietly as possible, you can directly influence your airline's Fly Quiet Program score. Here are some guidelines for maintaining a high score in the Fly Quiet Program:

(a) Preferential Runway Use Program—Between 0100 and 0600 (LT) the preferred departure runways for noise abatement are Runways 10 L/R. Pilots of heavy aircraft can significantly improve their airline's Fly Quiet Program scores by departing on Runways 10 L/R (weather permitting).

(b) Shoreline Departure Turn Quality—The radius of the initial turn after departure off Runways 28 L/R is a grading element of the Fly Quiet Program. Runway 28 L/R departures making excessively wide right turns overfly residential neighborhoods. By completing the initial right turn prior to crossing Highway 101, aircraft remain over industrial and commercial areas. **This applies to all Instrument Departure Procedures (IDPs) requiring right turns after departing Runways 28 L/R.**

(c) Gap Departure Climb Quality—Aircraft making straight out departures off Runways 28 L/R overfly heavily populated areas immediately west of the airport. Since "higher is quieter," the Airport monitors aircraft altitudes along the departure route. Scores are assigned at specific points, or gates, set approximately one mile apart, with higher scores given to those aircraft that reach higher altitudes at the gates. **It is preferred that aircraft making straight-out departures from Runways 28 L/R climb as rapidly as possible.**

(d) Noise Exceedance Rating—Maximum noise level limits are established for selected noise monitor stations surrounding SFO. Pilots can improve their airline's exceedance rating by utilizing the Preferential Runway Use Program and complying precisely with the Gap and Shoreline Departure Procedures.

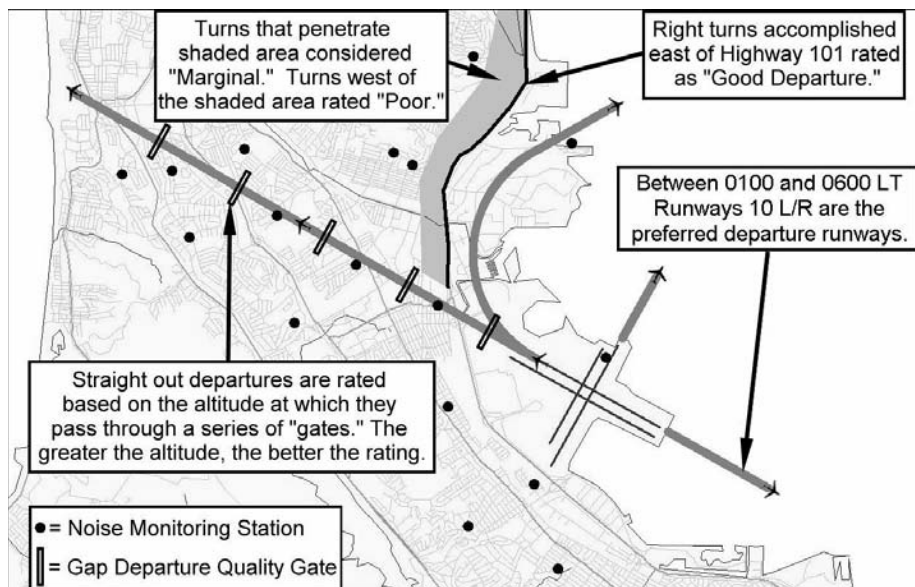

**SPECIAL PROCEDURES
SAN FRANCISCO INTERNATIONAL AIRPORT
NOISE ABATEMENT PROCEDURES
PREFERENTIAL RUNWAYS**

The SFO Nighttime Preferential Runway Use Program is a voluntary Program that was developed in 1988. SFO operates on two sets of parallel runways for both arrivals and departures, based on this runway configuration, there are three preferred nighttime preferential runway procedures:

- 1) The primary goal of the Program is to use Runways 10 L/R for take-off because they offer departure routing over the bay which will reduce the noise impacts over the communities surrounding SFO.
- 2) When departures from Runways 10 L/R are not possible, the second preference would be to depart Runways 28 L/R on the Shoreline or Quiet Departure Procedures. Both of these Procedures incorporate an immediate right turn after departure to avoid residential communities northwest of SFO.
- 3) The third preference is to depart on Runways 01 L/R. While this procedure directs aircraft over the bay, jet blast from these departures affects communities south of SFO.

The least desirable departure procedure at SFO is a straight-out departure on Runways 28 L/R these departures overfly densely populated communities immediately west of SFO and are discouraged at all hours.

The Airport Director has established a Nighttime Noise Clearance Center operated during 2200–0700 by a duty officer whose responsibilities include monitoring compliance with SFO's Preferential Runway Use Program and responding to requests for exemptions to the noise regulations.

ENGINE RUN-UP RESTRICTIONS

Run-ups of mounted aircraft engines for maintenance or test purposes is prohibited between the hours of 2200–0700 daily except as provided below:

- 1) An idle check of a single engine is allowed under the following conditions:
 - (a) An idle check of a single engine not to exceed a 5-minute duration may be conducted in the lease hold area. If more than one engine is to be checked, each engine must be checked separately and the cumulative duration of the idle checks cannot exceed 5-minutes.
 - (b) An idle check of a single engine or multiple engines (checked separately) which will exceed a duration of five minutes will be accomplished in the designated run-up areas. For purposes of noise abatement monitoring, this will be considered a power run-up.

During the hours of 2200–0700, the Operations Supervisor shall be called and permission received prior to any engine idle check or engine idle run-up, including any idle run for more than a cumulative duration of 5-minutes.

During other hours, the Operations Supervisor shall be called and permission received prior to any engine run-up. Any request for an engine run-up during the hours 2200–0700, other than that described above, which is the result of unusual or emergency circumstances, may be approved by the Nighttime Noise Clearance Center.

When approved and accomplished, the Maintenance Supervisor of the airline concerned must provide to the Airport Director a monthly report detailing the following:

- (a) Date and time of the run-up
- (b) Type of aircraft
- (c) Aircraft identification number
- (d) Location of the run-up
- (e) Duration of the run-up
- (f) An explanation of the unusual or emergency circumstances making the run-up necessary

Reports will be submitted to the Airport Director, Attn: Airport Operations within three working days after the last day of each calendar month.

SPECIAL PROCEDURES SAN FRANCISCO INTERNATIONAL AIRPORT NOISE ABATEMENT PROCEDURES

APU OPERATING RESTRICTIONS

Operators are encouraged to use ground power and air sources whenever practicable. APU's may be used when aircraft are being towed.


- 1) Domestic terminals—Use of APU's is prohibited between the hours of 2200–0600 except 30 minutes prior to departure, when passengers are aboard, or it is needed to test other aircraft equipment.
- 2) International Terminal—The following procedures apply:

(a) Aircraft scheduled to be at a gate in Boarding Areas A and G for more than 45 minutes between the hours of 0700–2200, are required to use 400Hz ground power and pre-conditioned air, where available. APU's are not authorized without prior permission is received from Airport Operations, during the use of ground power and pre-conditioned air until 30 minutes prior to push-back.

(b) All aircraft scheduled to be at an International Terminal gate between 2200–0700 hours are required to use 400Hz ground power and pre-conditioned air, where available, regardless of scheduled time at the gate. APU's are not authorized, unless prior permission is received from Airport Operations, during the use of ground power and pre-conditioned air until 30 minutes prior to push-back.

NOISE MONITORING SYSTEM

As of January 2005, the Airport installed a new Aircraft Noise Management System (ANMS) utilizing Lochard's Airport Noise and Operations Monitoring System (ANOMS(tm)) 8 product suite. This system consists of 29 fixed Environmental Monitoring Units (EMU) and four portable units. The previous passive radar system was replaced with Lochard's new hybrid, SkyTrak(tm), an integration of the FAA ARTS IIIE and live Mode S with passive radar that will drive the SFO community web site and deliver flight data throughout the airport.

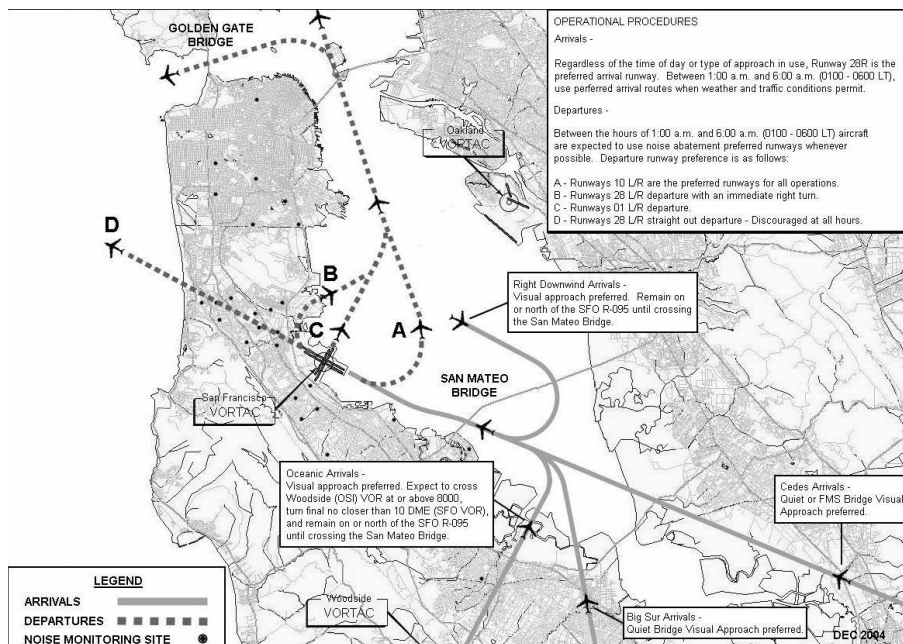

CONTACT INFORMATION

For more information about the Fly Quiet Program or noise abatement procedures contact 650-821-5100.


**AIR CARRIER OPERATIONS VICINITY OF
LONG BEACH (DAUGHERTY FIELD), CA.**


A wide mix of aircraft types including Air Carriers landing and departing Long Beach Daugherty Field, utilize the airspace south of Long Beach Airport (Daugherty Field) (LGB), Long Beach, California. The Class E airspace between Point Vicente, Catalina Island, and Huntington Beach accommodates pilot training from local flight schools, numerous IFR and VFR enroute aircraft, and helicopter and other aviation activities.

Participating flight training aircraft in Class E airspace south of Long Beach may:

- Utilize helicopter frequency 129.0 at or below 1,000 MSL.
- Utilize air-to-air frequency 121.95 above 1,000 MSL and below 4,500 MSL.
- Participants are encouraged to make position reports relative to Palos Verde Point, Point Vicente and Point Fermin, Angels Gate, Queens Gate, Emmy & Eva Oil Platforms and the Queen Mary.

VFR flight following may be available from SOCAL TRACON as indicated on the LA Terminal Area Chart.

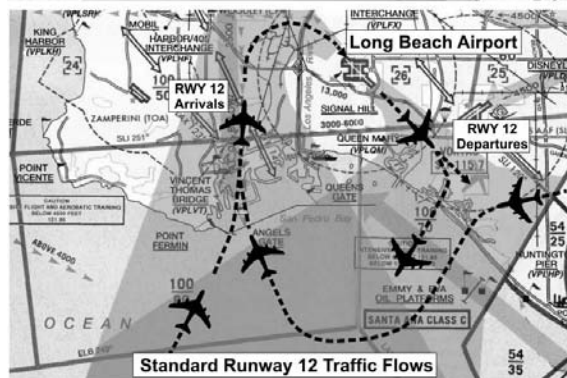


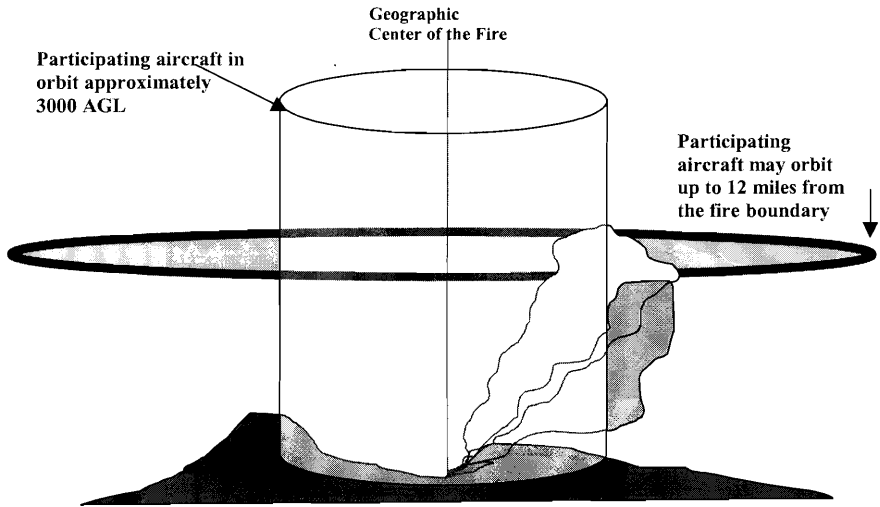FIREFIGHTING TRAFFIC AREAS

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.


The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

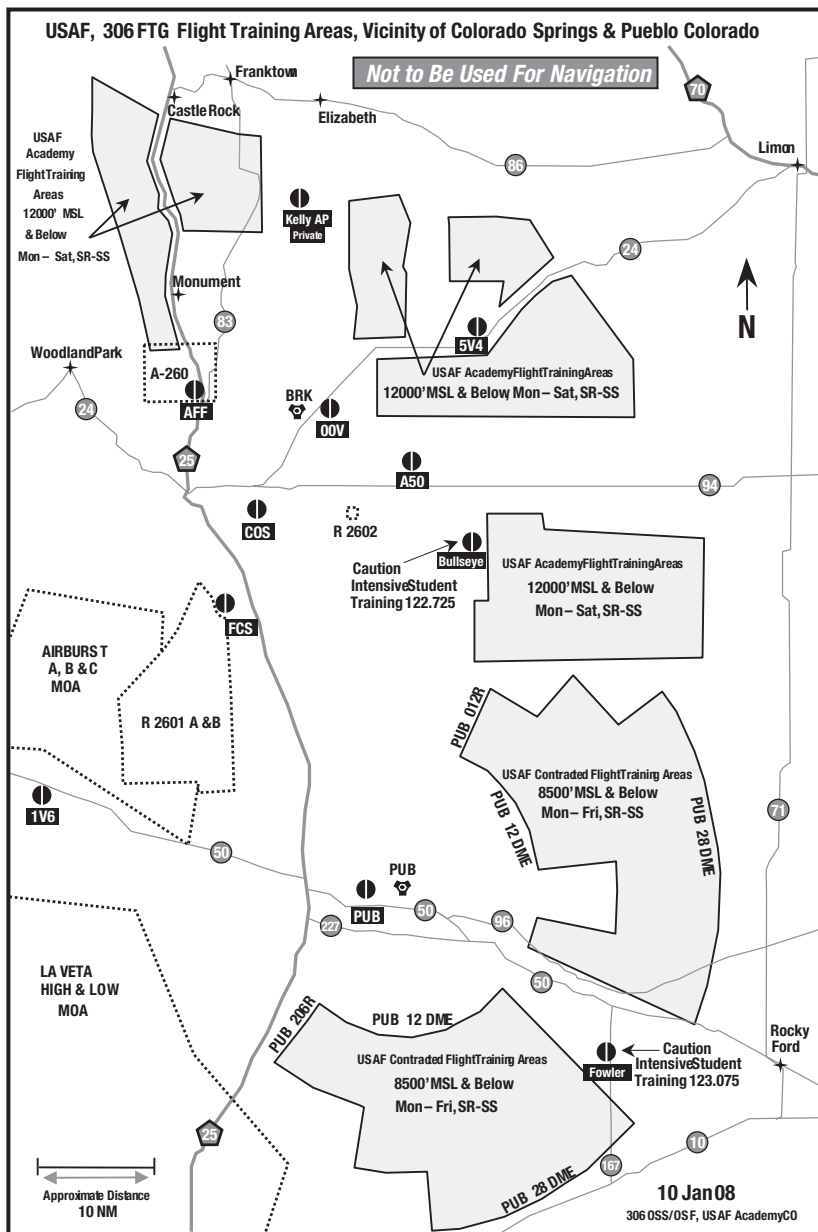

GLIDER/SOARING ACTIVITIES AROUND THE RENO-TAHOE INTERNATIONAL AIRPORT

There is intense glider activity up to FL180 near the Reno-Tahoe International Airport. Gliders conduct aerobatic maneuvers and other soaring activities in airspace on or near arrival routes, departure routes, final approach courses and holding fixes for the Reno-Tahoe International Airport. Gliders operations may originate from the Air Sailing, Minden-Tahoe and Truckee (California) Airports. The Air Sailing Airport is located near the Mustang (FMG) 337 radial at 20 nautical miles, between Anaho, Pyram and Takle intersections. The Minden-Tahoe Airport is located near the FMG 172 radial at 32 nautical miles, between J5 and J94. The Truckee California Airport is located near the FMG 225 radial at 26 nautical miles, north of the Squaw Valley VOR between J32 and V392. Federal Aviation Regulations do not require gliders operators to equip, activate or to broadcast the location of their aircraft via transponder or radio communications while operating outside of Class A or C Airspace. Atmospheric conditions attract large quantities of gliders to the area and activity near mountain ridges or "hot spots" may be intense. Altitudes up to 17,999 have been observed and pilots should exercise due diligence when exiting Class A and C airspace. Pilots are encouraged to refer to the SFO Sectional Aeronautical Chart and to the remarks in the Airport/Facility Directory, Southwest US for the Reno-Tahoe International Airport (RNO) regarding glider activity. For further information, call Reno ATCT/TRACON at (775) 784-5582.

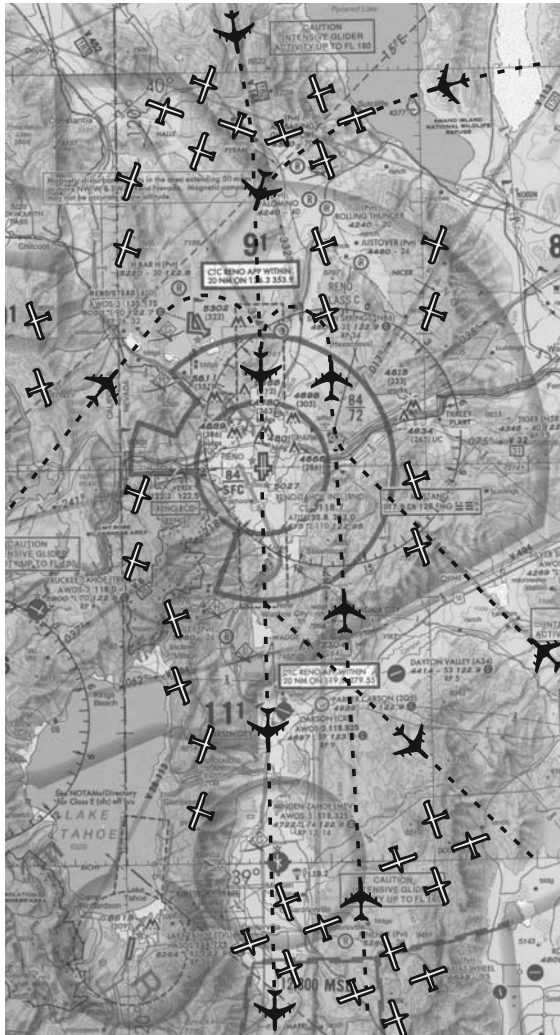

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93-1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at <http://www.faa.gov>. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e-CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll-free telephone number for accessing e-CVRS is 1-800-875-9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll-free areas may access e-CVRS by calling the toll number of 703-707-0568. The Internet web address for accessing the e-CVRS is <http://www.fly.faa.gov/ecvrs>. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904-4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high-density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904-4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e-CVRS.

FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the contiguous United States, Hawaii and Puerto Rico, are provided by a network of large hub facilities and smaller remote facilities which are interconnected with the hubs.

Selected remote FSS facilities across the contiguous United States have variable part-time operating hours. Because of the interconnectivity between remote and hub facilities, all FSS services are available continuously using published telephone numbers and radio frequencies.

Telephone Information Briefing Service (TIBS) is the FSS service that provides continuous recordings of meteorological and/or aeronautical information including area and/or route briefings, airspace procedures and special announcements. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings 1-800-WX-BRIEF (1-800-992-7433)

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

TIBS (see description above) 1-800-4TIBS-WX (1-877-484-2799)

Clearance Delivery Only 1-888-766-8267

Lifeguard Flights Only 1-877-LIF-GRD3 (1-877-543-4733)

Flights within DC SFRA & FRZ * 1-866-225-7410

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: <u>TAF</u> -routine or <u>TAF AMD</u> -amended forecast, <u>METAR</u> -hourly, <u>SPECI</u> -special or <u>TESTM</u> -non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC " <u>Z</u> ", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times	
	In U.S. METAR : <u>COR</u> rected ob; or <u>AUTO</u> mated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>Var</u> ia <u>ble</u>); next 2-3 digits for speed and unit, <u>KT</u> (KMH or MPS); as needed, <u>Gust</u> and maximum speed; 00000KT for calm; for METAR , if direction varies 60 degrees or more, <u>Variability</u> appended, e.g. 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles</u> & fractions; above 6 miles in TAF <u>Plus</u> 6SM. (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>Left</u> , <u>Center</u> , or <u>Right</u> as needed; <u>'/'</u> ; <u>Minus</u> or <u>Plus</u> in U.S., 4-digit value, <u>FeeT</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability</u> 4-digit value (and tendency <u>Down</u> , <u>Up</u> or <u>No</u> change)	R28L/2600FT
HZ	Significant present, forecast and recent weather: see table (on back)	TSRA
FEW020	Cloud amount, height and type: <u>SKY</u> Clear 0/8, <u>FEW</u> >0/8-2/8, <u>SCaT</u> tered 3/8-4/8, <u>BroKeN</u> 5/8-7/8, <u>OVerCast</u> 8/8; 3-digit height in hundreds of ft; <u>Towering CU</u> mulus or <u>CumulonimBus</u> in METAR ; in TAF , only <u>CB</u> . <u>Vertical</u> Visibility for obscured sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, <u>CleaR</u> for "clear below 12,000 feet"	OVC010CB
	Temperature: degrees Celsius; first 2 digits, temperature <u>'/'</u> last 2 digits, dew-point temperature; <u>Minus</u> for below zero, e.g., M06	18/16
	Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	A2992

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

Forecast	Explanation	Report
WS010/31022KT	In U.S. TAF , non-convective low-level ($\leq 2,000$ ft) <u>Wind Shear</u> ; 3-digit height (hundreds of ft); <u>"Z"</u> ; 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>KT</u> In METAR , <u>ReMark</u> indicator & remarks. For example: <u>Sea-Level Pressure</u> in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/dew-point</u> in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	RMK SLP045 T01820159
FM1930	<u>FroM</u> and 2-digit hour and 2-digit minute beginning time: indicates significant change. Each FM starts on new line, indented 5 spaces.	
TEMPO 2022	<u>TEMPO</u> rary: changes expected for < 1 hour and in total, < half of 2-digit hour beginning and 2-digit hour ending time period	
PROB40 0407	<u>PROB</u> ability and 2-digit percent (30 or 40): probable condition during 2-digit hour beginning and 2-digit hour ending time period	
BECMG 1315	<u>BEC</u> oming: change expected during 2-digit hour beginning and 2-digit hour ending time period	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

QUALIFIER

Intensity or Proximity

- Light "no sign" Moderate + Heavy

VC Vicinity: but not at aerodrome; in U.S. **METAR**, between 5 and 10SM of the point(s) of observation; in U.S. **TAF**, 5 to 10SM from center of runway complex (elsewhere within 8000m)

Descriptor

MI Shallow	BC Patches	PR Partial	TS Thunderstorm
BL Blowing	SH Showers	DR Drifting	FZ Freezing

WEATHER PHENOMENA

Precipitation

DZ Drizzle	RA Rain	SN Snow	SG Snow grains
IC Ice crystals	PL Ice pellets	GR Hail	GS Small hail/snow pellets
UP Unknown precipitation in automated observations			

Obscuration

BR Mist ($\geq 5/8$ SM)	FG Fog ($< 5/8$ SM)	FU Smoke	VA Volcanic ash
SA Sand	HZ Haze	PY Spray	DU Widespread dust

Other

SQ Squall	SS Sandstorm	DS Duststorm	PO Well developed dust/sand whirles
FC Funnel cloud	+FC tornado/waterspout		

- Explanations in parentheses "()" indicate different worldwide practices.
- Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
- NWS **TAFs** exclude turbulence, icing & temperature forecasts; NWS **METARs** exclude trend fcsts
- Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥ 10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, whichever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.

UNITED STATES DEPARTMENT OF COMMERCE

NOAA/PA 96052

National Oceanic and Atmospheric Administration—National Weather Service

FAA AND NWS

KEY AIR TRAFFIC FACILITIES

Air Traffic Control System Command Center

Main Number.....703-904-4400

RGNL AIR TRAFFIC DIVISIONS

REGION	TELEPHONE
Alaskan	907-271-5464
Central	816-329-2500
Eastern	718-553-4502
Great Lakes	847-294-7202
New England	781-238-7500
Northwest Mountain	425-227-2500
Southern	404-305-5500
Southwest	817-222-5500
Western Pacific	310-725-6500

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m.-4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m.-4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m.-5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m.-4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m.-4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m.-4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m.-4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m.-4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m.-4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m.-4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m.-3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m.-4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m.-4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m.-3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m.-4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m.-4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m.-4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONS)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m.-4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m.-3:30 p.m.	916-366-4001
Southern CA	310-725-3300	7:30 a.m.-4:00 p.m.	858-537-5800

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

KEY AIR TRAFFIC FACILITIES

DAILY NAS REPORTABLE AIRPORTS

AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m.-5:00 p.m.	505-842-4366
Andrews AFB, MD	718-995-5426	8:00 a.m.-4:30 p.m.	301-735-2380
Baltimore/Washington Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m.-4:30 p.m.	410-962-3555
Boston Logan Intl, MA	781-238-7001	7:30 a.m.-4:00 p.m.	617-455-3100
Bradley Intl, CT	617-238-7001	7:30 a.m.-4:00 p.m.	203-627-3428
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m.-5:30 p.m.	818-567-4806
Charlotte Douglas Intl, NC	404-305-5180	8:00 a.m.-4:30 p.m.	704-344-6487
Chicago Midway, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-884-3670
Chicago O'Hare Intl, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-601-7600
Cleveland Hopkins Intl, OH	847-294-8400	8:00 a.m.-4:00 p.m.	216-898-2020
Covington/Cincinnati, OH	708-294-7401	8:00 a.m.-4:30 p.m.	606-767-1006
Dallas/Ft. Worth Intl, TX	817-222-5006	8:30 a.m.-5:00 p.m.	972-615-2531
Dayton Cox Intl, OH	847-294-8400	7:30 a.m.-4:00 p.m.	937-454-7300
Denver Intl, CO	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1600
Detroit Metro, MI	847-294-8400	8:00 a.m.-4:00 p.m.	734-955-5000
Fairbanks Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-474-0050
Fort Lauderdale Intl, FL	404-305-5180	7:00 a.m.-3:30 p.m.	305-356-7932
George Bush Intercontinental/Houston, TX	817-222-5006	7:30 a.m.-4:00 p.m.	713-230-8400
Hartsfield-Jackson Atlanta Intl, GA	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Honolulu Intl, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-840-6100
Houston Hobby, TX	817-222-5006	8:00 a.m.-5:00 p.m.	713-847-1400
Indianapolis Intl, IN	847-294-8400	8:00 a.m.-4:00 p.m.	317-484-6600
Kahului/Maui, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-877-0725
Kansas City Intl, MO	816-329-3000	7:30 a.m.-4:00 p.m.	816-329-2700
Las Vegas McCarran, NV	310-725-3300	7:30 a.m.-4:00 p.m.	702-262-5978
Los Angeles Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	310-342-4900
Louis Armstrong New Orleans Intl, LA	817-222-5006	7:00 a.m.-4:30 p.m.	504-471-4300
Memphis Intl, TN	404-305-5180	7:30 a.m.-4:00 p.m.	901-322-3350
Miami Intl, FL	404-305-5180	7:00 a.m.-4:00 p.m.	305-869-5400
Minneapolis/St. Paul, MN	847-294-8400	8:00 a.m.-4:00p.m.	612-713-4000
Nashville Intl, TN	404-305-5180	7:00 a.m.-3:30 p.m.	615-781-5460
New York Kennedy Intl, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-656-0335
New York La Guardia, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-335-5461
Newark Liberty Intl, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	973-645-3103
Norman Y. Mineta San Jose Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	408-982-0750
Ontario Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	909-983-7518
Orlando Intl, FL	404-305-5180	7:30 a.m.-5:00 p.m.	407-850-7000
Philadelphia Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	215-492-4100
Phoenix Sky Harbor Intl, AZ	310-643-3200	7:30 a.m.-4:00 p.m.	602-379-4226
Pittsburgh Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	412-269-9237
Portland Intl, OR	425-227-1389	7:30 a.m.-4:00 p.m.	503-493-7500
Raleigh-Durham, NC	404-305-5180	8:00 a.m.-4:30 p.m.	919-840-5544
Ronald Reagan Washington National, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-413-1535
Salt Lake City, UT	425-227-1389	7:30 a.m.-4:00 p.m.	801-325-9600
San Antonio Intl, TX	817-222-5006	8:00 a.m.-4:30 p.m.	210-805-5507
San Diego Lindbergh Intl, CA	310-725-3300	8:00 a.m.-4:30 p.m.	619-299-0677
San Francisco Intl, CA	310-643-3200	7:00 a.m.-3:30 p.m.	650-876-2883
San Juan Intl, PR	404-305-5180	7:30 a.m.-5:00 p.m.	809-253-8663
Seattle-Tacoma Intl, WA	425-227-1389	7:30 a.m.-4:00 p.m.	206-768-2900
St. Louis Lambert, MO	816-329-3000	7:30 a.m.-4:00 p.m.	314-890-1000
Tampa Intl, FL	404-305-5180	7:30 a.m.-4:00 p.m.	813-371-7700
Ted Stevens Anchorage Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-271-2700
Teterboro, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	201-288-1889
Washington Dulles Intl, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-661-6031
West Palm Beach, FL	404-305-5180	8:00 a.m.-4:30 p.m.	407-683-1867
Westchester Co, NY	718-995-5426	8:00 a.m.-4:30 p.m.	914-948-6520

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

®ALBUQUERQUE CENTER – 134.6 132.8	H-4-5-6-7, L-5-6-7-8-10-15-17-19
Alamogordo – 132.65 132.65	
Animas – 134.45 133.0	(KZAB)
Carlsbad – 135.875	
Childs Peak – 135.15 132.45 126.45 125.25	
Clines Corner – 133.65 133.65 132.8 125.075	
El Paso B – 128.2 125.525	
Globe Nr 1 – 135.725 132.9 132.9	
Globe Nr 2 – 135.15 133.85 132.35 132.35 125.4	
Mesa Rica – 125.075 119.45	
Mount Dora – 133.05 127.85	
Prescott – 135.325 134.325 128.45	
Raton – 132.8	
Roswell – 132.65 132.65	
Sandia Mountain – 132.8	
Silver City – 134.45	
Tesuque Peak – 132.8	
Truth or Consequences – 128.2	
Tucson – 134.45 133.0	
Tucumcari – 132.32 126.92 126.85 119.45	
West Mesa – 134.6 133.65 133.65 124.325 119.45	
Winslow – 128.125 124.5	
Zuni – 134.6 132.9 132.9 124.325 120.55	

®DENVER CENTER – 125.9	H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15
Alamosa – 128.375	(KZDV)
Aspen – 134.5 132.85 125.35 119.85	
Brush A – 133.95	
Brush B – 118.475	
Cortez – 134.7 118.575	
Denver – 133.4 132.85 128.65 126.875 125.95	
Denver A – 126.5	
Denver B – 119.85	
Durango – 118.575	
Eastonville – 134.975	
Farmington – 128.125 125.675 118.575	
Goodland – 132.5	
Grand Mesa – 135.125 134.275 126.725 125.675	
Grand Mesa A – 125.35	
Grand Mesa B – 134.5	
Gunnison – 133.525 125.35	
Hanksville – 127.55	
Hayden – 128.325 120.475	
Kremmling – 132.85 128.65	
La Junta – 134.125 133.4 132.225 128.37	
Montrose – 125.35	
Ogallala – 126.325 132.7	
Pueblo – 135.4 132.225 128.375	
Tuba City – 132.875 127.55 118.225	
Walton Peak – 126.5	

®L. A. CENTER	H-3-4, L-3-4-5-7-8-9, A-2
Arr—Dep U.S. – 135.45 134.55 134.4 133.4 132.15 128.05 127.4 126.4 126.0 119.0	(KZLA)
Bakersfield – 127.1	
Baldwin Hills – 132.85	
Barstow – 134.65 133.55 132.5 132.3 126.35 125.725	
Blythe – 134.475 127.525	
Cedar City – 135.55 135.25 127.35 124.2	
Edom Hill – 133.75 126.7	
Julian – 127.525 126.775	
Keeler – 124.625 124.625	
Laguna – 128.6 128.15 125.65 125.65 119.95	
Lebec – 135.3 128.375	

Mount Potosi - 132.625 124.625 124.625
 Nelson - 134.65 127.35 124.85 124.2 118.025
 Ontario - 125.65
 Palmdale - 132.5 125.275
 Peach Springs - 128.075
 Pleasants Peak - 132.85 125.275 119.95
 Riverside - 126.35
 Saddle Peak - 132.6 125.8
 San Luis Obispo - 119.05
 Santa Barbara - 135.5 132.15 126.525 119.05
 Santa Catalina - 134.575
 Seligman - 133.2 124.85
 Tonopah - 124.625
 Twentynine Palms - 133.2 128.15 126.35
 Whittier - 125.275
 Yuma - 126.775

® OAKLAND CENTER

H-3-4, L-2-3-7-5-9-11, A-2
(KZOA)

Angels Camp - 134.375 132.95 127.95 126.85 121.25 119.75
 Bishop - 125.75
 Fallon - 134.45 128.8
 Ferndale - 134.15 134.15
 Fresno - 134.375 133.7 132.8 126.9 123.8
 Half Moon Bay - 134.15 134.15 127.45 125.45 119.475
 Hollister - 127.45
 Mina - 132.05 127.175 125.75
 Mount Tamalpais - 127.8
 Priest - 134.55 133.7 132.8 128.7 126.9
 Red Bluff - 134.975 132.2 119.975
 Reno - 134.45 128.8
 Sacramento - 132.95
 San Luis Obispo - 128.7
 South Lake Tahoe - 134.3
 Squaw Valley - 127.95
 Tonopah - 132.05 125.75
 Ukiah - 134.975 132.2 127.8 119.975

® SALT LAKE CITY CENTER

H-1-2-3, L-9-11-12-13-14
(KZLC)

Battle Mountain - 132.25 128.725
 Bryce Canyon - 133.6
 Cedar City - 125.575 125.575
 Delle - 132.025 128.55 128.55
 Delta - 127.825 125.575
 Elko - 132.25 128.725
 Ely - 133.45
 Fairfield - 133.9
 Francis Peak - 135.775 127.7 119.95
 Hanksville - 133.6 133.6
 Myton - 135.775 119.95
 Sunnyside - 133.9 127.925 127.925 125.575
 Tonopah - 133.45 133.45
 Wilson Creek - 134.525 133.45 133.45 127.925 127.925
 Winnemucca - 132.25

® SEATTLE CENTER

H-1-3, L-1-2-11-13

Antelope Mountain - 124.85
 Arcata - 124.85
 Ferndale - 135.15 124.85
 Klamath Falls - 134.9 127.6

(KZSE)

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID name. RCO's not at NAVAID's are listed by name.

ALBUQUERQUE AFSS

ALBUQUERQUE RCO 122.0 **122.55**
 ALAMOGORDO RCO 122.15
 ANTON CHICO VORTAC 117.8T 122.1R
 CARLSBAD RCO **122.65**
 CIMARRON VORTAC 116.4T 122.1R
 CLINES CORNERS RCO 122.3
 CLOVIS RCO 122.5
 CORONA VORTAC 115.5T 122.1R
 DEMING RCO 122.2
 FARMINGTON RCO **122.4**
 GALLUP VORTAC 115.1T 122.1R **122.6**
 HOBBS RCO 122.2
 LAS VEGAS RCO 122.6
 ROSWELL RCO **122.45**
 RUIDOSO RCO 122.25
 SANTA FE RCO 122.2
 SILVER CITY VORTAC 110.8T 122.1R
 SOCORRO VORTAC 116.8T 122.1Re
 TAOS VORTAC 117.6T 122.1R 122.25
 TRUTH OR CONSEQUENCES RCO 122.2
 TUCUMCARI RCO **122.35**
 ZUNI RCO 122.05

CEDAR CITY AFSS

ABAJO PEAK RCO 122.55
 BONNEVILLE VORTAC 112.3T 122.1R
 BRYCE CANYON RCO 122.2
 BULLFROG BASIN RCO **122.4**
 CARBON RCO 122.2
 CEDAR CITY RCO 122.0 122.2 122.6
 DELLE RCO **122.5**
 DELTA RCO 122.55
 FAIRFIELD RCO 122.25
 FRANCIS PEAK RCO 122.2
 HALLS CROSSING RCO 122.4
 HANKSVILLE RCO 122.65
 LUCIN VORTAC 113.6T 122.1R
 MILFORD VORTAC 112.1T 122.1R
 MOAB RCO 122.3
 MYTON VORTAC 112.7T 122.1R
 OGDEN RCO 122.45
 RICHFIELD RCO **122.5**
 ST GEORGE RCO 122.5
 SALT LAKE CITY RCO 122.4
 VERNAL RCO 122.35

DENVER AFSS

AKRON RCO 120.675
 ALAMOS RCO 122.15
 BADGER MOUNTAIN RCO 122.2
 BLACK FOREST RCO 122.25
 BLUE MESA RCO 122.55
 CORTEZ RCO 122.3
 DENVER RCO 122.0 122.2 122.35 123.65
 DOVE CREEK RCO 122.5
 DURANGO RCO **122.35**
 EAGLE RCO 122.2
 FORT COLLINS-LOVELAND RCO 122.4
 GILL RCO 122.65
 GLENWOOD SPRINGS RCO 122.2
 GRAND MESA RCO 122.2
 HAYDEN RCO 122.25
 KREMMLING RCO 122.3
 LA JUNTA RCO **122.6**

LAMAR VORTAC 116.9T 122.1R
 LIMON RCO 122.475
 MEEKER RCO 122.15
 MONTROSE RCO 122.65
 PUEBLO RCO 122.2
 RANGELY RCO 122.65
 RED TABLE MOUNTAIN RCO 122.4
 RIFLE RCO 122.5
 STEAMBOAT SPRINGS RCO 122.2
 TELLURIDE RCO 122.15
 TRINIDAD RCO 122.2
 WALKER FLD RCO 122.6

HAWTHORNE AFSS

BURBANK RCO 122.35
 FILLMORE VORTAC 112.5T 122.1R
 GUADALUPE VOR 111.0T 122.1R
 HAWTHORNE RCO 122.0 122.2 122.5
 PASO ROBLES RCO 122.4
 SAN MARCUS VORTAC 114.9T 122.1R 122.3

OAKLAND AFSS

ARCATA RCO 122.6
 CRESCENT CITY RCO 122.3
 EUREKA RCO 122.35
 GARBERVILLE RCO 122.3
 MOUNTAIN VIEW RCO **122.5**
 MOUNT TAMALPAIS RCO **122.35**
 OAKLAND RCO 122.0 122.2 **122.5** 129.4 131.95
 POINT ARENA RCO 122.6
 SALINAS RCO **122.6**
 UKIAH RCO **122.35**

PRESCOTT AFSS

BAGDAD RCO 122.5
 BISBEE RCO 122.4
 BLACK METAL PEAK RCO 122.55
 BUCKEYE VORTAC 110.6T 122.1R
 COCHISE VORTAC 115.8T 122.1R
 DOUGLAS RCO 122.6
 FLAGSTAFF VOR/DME 113.85T 123.65R
 GILA BEND VORTAC 116.6T 122.1R
 GLOBE RCO 122.3
 GRAND CANYON RCO 123.65
 KAYENTA RCO 122.45
 KINGMAN VOR/DME 108.8T 122.1R
 MINGUS MOUNTAIN RCO **122.3**
 MOUNT LEMMON RCO 122.4
 NEEDLES VORTAC 115.2T 122.1R
 NOGALES RCO 122.4
 PAGE RCO 122.6
 PEACH SPRINGS RCO 122.25
 PHOENIX RCO 122.2 122.6
 PRESCOTT RCO 122.2 122.4
 SAFFORD RCO 122.3
 ST JOHNS VORTAC 112.3T 122.1R
 STANFIELD VORTAC 114.8T 122.1R
 TUBA CITY VORTAC 113.5T 122.05R
 TUCSON RCO 122.2
 WINSLOW RCO 122.6
 YUMA RCO 122.2

RANCHO MURIETA AFSS

ANGELS CAMP RCO **122.3**
 ANTELOPE MOUNTAIN RCO 122.4
 BAKERSFIELD RCO **122.45**
 CHICO VOR/DME 109.8T 122.1R
 EL NIDO VOR/DME 114.2T 122.1R
 FALL RIVER MILLS RCO 122.4
 FELLOWS VORTAC 117.5T 122.1R
 FORT JONES VOR/DME 109.6T 122.1R

FRESNO RCO 122.2 **122.55**
 GORMAN VORTAC 116.1T 122.1R
 HANGTOWN VOR/DME 115.5T 122.1R
 MARYSVILLE VOR/DME 110.8T 122.1R 122.6
 MAXWELL VORTAC 110.0T 122.1R
 MODESTO VOR/DME 114.6T 122.1R
 PANOCHE VORTAC 112.6T 122.1R
 QUINCY RCO 122.4
 RANCHO MURIETA RCO 122.2
 RED BLUFF RCO **122.4**
 REDDING VOR/DME 108.4T 122.1R
 SACRAMENTO RCO **122.05**
 STOCKTON RCO 122.65
 TULE PORTERVILLE VOR/DME 109.2T 122.1R
 VALSALIA VOR/DME 109.4T 122.1R
 WEAVERVILLE RCO 122.4

RENO AFSS

BEATTY VORTAC 114.7T 122.1R
 COALDALE VORTAC 117.7T 122.1R
 CURRANT RCO 122.3
 ELKO RCO 122.6
 ELY RCO 122.2
 EUREKA RCO 122.3
 HAZEN VORTAC 114.1T 122.1R
 JACKPOT RCO 122.5
 LAS VEGAS RCO 122.4
 LOVELOCK RCO 122.4
 MINA VORTAC 115.1T 122.1R
 MORMON MESA VORTAC 114.3T 122.1R
 MOUNT LEWIS RCO **122.65**
 MOUNT POTOSI RCO 122.35
 RENO RCO 122.2 122.5
 SOD HOUSE RCO 122.6
 SQUAW VALLEY RCO 122.25
 TONOPAH RCO 122.6
 WELLS VOR 114.2T 122.1R
 WILSON CREEK VORTAC 116.3T 122.1R
 WINNEMUCCA RCO 122.3

RIVERSIDE AFSS

BARSTOW RCO 122.3
 BISHOP RCO 122.6
 BLYTHE RCO 122.4
 DAGGETT RCO 122.2
 GOFFS VORTAC 114.4T 122.05R
 FURNACE CREEK RCO 122.2
 HECTOR VORTAC 112.7T 122.1R
 HOMELAND VOR 113.4T 122.1R
 LANCASTER RCO 122.2
 MAMMOTH RCO 122.15
 NEEDLES RCO 122.2
 PALM SPRINGS VORTAC 115.5T 122.1R
 PARKER VORTAC 117.9T 122.1R
 POMONA RCO 123.65
 RAND MOUNTAIN RCO 122.4
 RIVERSIDE RCO 122.05 122.2
 SANTA ANA RCO 122.45
 THERMAL RCO **122.3**
 TWENTYNINE PALMS VORTAC 114.2T 122.1R

SAN DIEGO AFSS

BARD VORTAC 116.8T 122.1R
 IMPERIAL VORTAC 115.9T 122.1R 122.5
 JULIAN RCO 123.65
 OCEANSIDE VORTAC 115.3T 122.1R
 SAN DIEGO RCO 122.2 122.4
 YUMA RCO 122.6

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and the general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manager, Flight Standards District Office—Federal Aviation Administration.

ARIZONA

17777 N. Perimeter Drive, Suite 101
Scottsdale, AZ 85255
Telephone: 480-419-0111

CALIFORNIA

Fresno Air Terminal
4955 E. Anderson, Suite #110
Fresno, CA 93727-1573
Telephone: 559-487-5306

5001 Airport Plaza Drive, Suite #100
Long Beach, CA 90815
Telephone: 562-420-1755

2250 E. Imperial Highway, Suite #140
El Segundo, CA 90245
Telephone: 310-215-2150

1420 Harbor Bay Parkway, Suite 280
Alameda, CA 94502-7083
Telephone: 510-748-0122
Fax: 510-748-9559

6961 Flight Rd.
Riverside, CA 92504
Telephone: 951-276-6701

6650 Belleau Wood Lane
Sacramento, CA 95822
Telephone: 916-422-0272

8525 Gibbs Drive, Suite 120
San Diego, CA 92123
Telephone: 619-557-5281

San Francisco IFO
831 Mitten Road, Room 105
Burlingame, CA 94010-1303
Telephone: 650-876-2771

San Francisco CMO
863 Mitten Road, Building B
Burlingame, CA 94010-1303
Telephone: 650-876-9013

1250 Aviation Ave., Suite 295
San Jose, CA 95110-1130
Telephone: 408-291-7681

16501 Sherman Way, Suite 330
Van Nuys, CA 91406
Telephone: 818-904-6291

COLORADO

26805 E. 68th Avenue, Suite 200
Denver, CO 80249-6361
Telephone: 303-342-1100

NEVADA

7181 Amigo Street, Suite 180
Las Vegas, NV 89119
Telephone: 702-269-1445
Fax: 702-269-8013

4900 Energy Way
Reno, NV 89502
Telephone: 775-858-7700

NEW MEXICO

1601 Randolph Road SE, Suite 200N
Albuquerque, NM 87106
Telephone: 505-764-1200
1-800-531-8999 (NM only)
1-800-531-1124

UTAH

1020 North Flyer Way
Salt Lake City, UT 84116
Telephone: 801-257-5020

ROUTES

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service.

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes.

The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and flight are normally cleared directly on the airway.

2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).

3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.

4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.

5. Where more than one route is listed the routes have equal priority for use.

6. Official location identifiers are used in the route description for VOR/VORTAC nav aids.

7. Intersection names are spelled out.

8. Navaid and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and intersection names will be assigned as soon as routine processing can be accomplished. Navaid radial (no distance stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another navaid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH).

9. Where two nav aids, an intersection and a navaid, a navaid and a navaid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.

10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.

11. (90-170 incl) altitude flight level assignment in hundred of feet.

12. The notations "pressurized" and "unpressurized" for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.

13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.

Sun..... 1300-2259 local time.

Mon thru Fri 0701-2259 local time.

Sat 0701-1459 local time.

14. Use current SIDs and STARs for flight planning.

15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of the route outside the brackets will likely be required by the facilities involved.

LOW ALTITUDE

Terminals	Route	Effective Times (UTC)
SAN FRANCISCO/OAKLAND METRO AREA		
From SAN FRANCISCO Area: West Bay Airports		
Los Angeles Area	(70-90-110-130-150-170) V27 VTU V299	
	SADDE V107 LAX	1400-0800
From OAKLAND Area: East Bay Airports		
Los Angeles Area	(70-90-110-130-150-170) V109 PXN V113	1400-0800
	V485 V299 SADDE V107 LAX	

HIGH ALTITUDE

Terminals	Route	Effective Times (UTC)
ALBUQUERQUE (ABQ)		
Chicago O'Hare (ORD).....	J18 GCK J96 IRK BDF-STAR	1100-0400
Houston (HOU).....	(Turbojets) LLO TEXNN-STAR	
Houston (IAH).....	LLO RIICE-STAR.....	
ASPEN (ASE)		
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
BURBANK (BUR)		
Chicago O'Hare (ORD).....	(all B747, B767, B727, DC10, DC87, L1011) DAG LAS BCE MTU OCS J94 ONL J148 MCW JVL-STAR.....	0000-2359
	or	
	(all other jets) DAG EED DRK J96 IRK BDF-STAR..	0000-2359
Detroit Metro-Wayne Co (DTW)	[BUR OBH] OBH J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	[BUR OBH] OBH J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
DENVER (DEN)		
Boca Raton (BCT).....	[DEN ONL] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW PRRIE (RNAV)-STAR	
Boston (BOS).....	[DEN ONL] J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD).....	[DEN ONL] MCW JVL-STAR	
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	J17 AMA J58 SPS UKW	
Detroit Metro-Wayne Co (DTW)	[DEN OBH] J100 DBQ BAE MKG POLAR-STAR	
Fort Lauderdale (FLL)	(all others) [DEN ICT] RZC VUZ MGM SZW J41 PIE FORTL-STAR.....	
	or	
	(GPS or DME/DME-IRU equipped) [DEN ICT] RCZ VUZ MGM SZW JINGL (RNAV)-STAR	
Ft Myers (RSW)	TTT J58 HRV Q105 BLVNS Q102 BAGGS TYNEE (RNAV)-STAR	
Houston (HOU).....	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR.....	
Kennedy (JFK).....	[DEN ONL] J94 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
Miami (MIA)	(all others) [DEN ICT] RZC VUZ MGM SZW J41 PIE CYY-STAR	
	or	
	(Turbojets-GPS or DME/DME-IRU equipped) [DEN ICT] ICT RZC VUZ MGM SZW SSCOT (RNAV)-STAR	
Newark (EWR)	IOW GIJ J554 CRL J584 SLT FQM-STAR	1100-0400
Orlando Intl (MCO).....	[DEN ICT] RZC MEM J41 PIE LAL	
	or	
	(GPS or DME/DME-IRU equipped) ICT RZC MEM J41 PIE COSTR (RNAV)-STAR	1100-0400
Palm Beach (PBI)	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW WLACE (RNAV)-STAR	
	or	
	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW CTY WLACE (RNAV) -STAR	
Pittsburgh (PIT)	[DEN JOT] JOT J146 J34 DJB V30 ACO V337 CUTTA	1500-0100
Sarasota/Bradenton (SRQ).....	DFW J58 COVIA SRQ-STAR.....	
Tampa (TPA)	[DEN ICT] RZC VUZ MGM SZW DARBS-STAR	
	or	
	[DEN ICT optional] (GPS or DME/DME-IRU equipped) ICT RZC VUZ MGM SZW FOXX (RNAV)-STAR	

Terminals	Route	Effective Times (UTC)
West Palm Beach (PBI)	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW WLACE (RNAV)-STAR	
	or	
	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW CTY GULLO (RNAV)-STAR	
FRESNO (FAT)		
Denver	OAL J148 DTA J84 EKR TOMSN-STAR	1400-0000
LAS VEGAS (LAS)		
Chicago O'Hare (ORD)	(FL240 and above, All) BCE MTU OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Detroit/Wayne Co (DTW)	BAE MKG POLAR-STAR	
	or	
Houston (HOU)	PXV VHP FWA MIZAR-STAR	
	(Turbojets) LLO TEXNN-STAR	
	or	
Houston (IAH)	FST SAT LISSE-STAR	
	LLO RIICE-STAR	
	or	
	FST SAT GLAND-STAR	
LONG BEACH (LGB)		
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Portland, OR (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500
LOS ANGELES (LAX)		
Boston (BOS)	J9 MLF J107 OCS J94 DBQ BAE J16 ALB GDM-STAR	
	or	
	J9 MLF J107 DDY J158 ABR J70 GEP J106 GRB J38 ECK J16 ALB GDM-STAR	
Chicago O'Hare (ORD)	(all B747, B767, B727, DC10, DC87, L1011) DAG LAS BCE MTU OCS J94 ONL J148 MCW JVL-STAR	1100-0300
	or	
	(all other jets) TRM J78 DRK J96 IRK BDF-STAR	1100-0300
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Detroit Metro-Wayne (DTW)	BAE MKG POLAR-STAR	
	or	
	PXV VHP FWA MIZAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
	or	
	J146 DVC J197 GLD J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1400
	or	
	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1700-2359
Newark (EWR)	DAG J100 OBH J10 IOW J60 JOT J146 GIJ J554 CRL J584 SLT FQM-STAR	1700-1759 and 2100-2159
Pittsburgh (PIT)	JOT J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
	or	
	J146 DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	
Portland, OR (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500

Terminals	Route	Effective Times (UTC)
MONTEREY (MRY)		
Denver (DEN)	OAL J148 DTA J84 EKR TOMSN-STAR	1400-0000
OAKLAND (OAK)		
Chicago O'Hare (ORD)	(FL240 and above, Jets) to join ONL J94 DBQ JVL JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Detroit Metro-Wayne Co (DTW)	SAC FMG J94 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	SAC FMG J94 DBQ BAE MKG LAN SPRTN-STAR ...	1400-0400
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Newark (EWR)	SAC FMG J94 OBK J584 SLT FQM-STAR	0000-2359
	or	
	FMG J94 OBK J584 CRL J584 SLT FQM-STAR	
Phoenix (PHX)	OAL J92 DRK	1600-0500
ONTARIO (ONT)		
Chicago O'Hare (ORD)	(FL240 and above, All DC8, B747, B767, B727, DC10, L1011) DAG LAS BCE MTU OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
	or	
	(FL240 and above, All others) TRM J78 DRK J96 IRK BDF3	0000-2359
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	DAG OBH J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	OBH J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1400-2200
Pittsburgh (PIT)	DAG J146 DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
Portland (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500
Vancouver (CYVR)	EHF CZQ LIN	1800-2100
		and 2330-0200
PALM SPRINGS (PSP)		
Chicago O'Hare (ORD)	(FL240 and above, All DC8, B747, B767, B727, DC10, L1011) join ONL J94 DBQ JVL JVL-STAR	0000-2359
	or	
	(FL240 and above, All others) join DRK J96 IRK J26 BDF V10 PLANO	
PHOENIX (PHX)		
Chicago O'Hare (ORD)	J18 SLN J96 IRK BDF-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	CIE J2 ELP J50 INK JEN	1400-2300
Detroit Metro-Wayne (DTW)	BAE MKG POLAR-STAR	
	or	
	PXV VHP FWA MIZAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	PAYSO GUP J102 ALS J13 FQF J128 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	J18 GCK HYS PWE J192 IOW J60 JOT J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1429
	or	
	GUP J102 ALS PUB GLD J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1429
	or	
	GUP J102 ALS PUB GLD J197 OBH J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1430-2359

Terminals	Route	Effective Times (UTC)
Newark (EWR)	J18 GCK HYS PWE J192 IOW J60 JOT J146 GIJ J554 CRL J584 FQM-STAR	
	or	
	GUP J102 ALS PUB GLD J146 GIJ J554 CRL J584 FQM-STAR	0000-1459
Oakland (OAK)	J92 OAL ECA V195	1600-0500
San Francisco (SFO)	J92 OAL MOD	1600-0500
San Jose (SJC)	J92 OAL HYP	1600-0500
RENO (RNO)		
Chicago O'Hare (ORD)	J32 CZI J82 FSD J16 MCW JVL-STAR	0000-2359
Denver (DEN)	MVA EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
SACRAMENTO (SAC)		
Chicago O'Hare (ORD)	(FL240 and above, Jets) to join ONL J94 DBQ JVL JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Phoenix (PHX)	OAL J92 DRK	
SALT LAKE CITY (SLC)		
Boston (BOS)	TCH MCW J16 ECK BUF J16 ALB GDM GDM-STAR	
	or	
	OCS J107 DDY J158 ABR J70 GEP J106 GRB J38 ECK J16 ALB GDM-STAR	
	or	
	OCS J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD)	(FL240 and above, All) OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Kennedy (JFK)	OCS J94 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	0700-2359
SAN DIEGO (SAN)		
Chicago O'Hare (ORD)	IPL J18 SLN J96 IRK BDF-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	IPL J18 GBN J50 SSO J4 INK JEN	1400-2300
Detroit/Wayne (DFW)	BAE MKG POLAR-STAR	
	or	
	PXV VHP FWA MIZAR-STAR	
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	IPL J18 PXR J102 ALS PUB GLD J197 OBH J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1430-2359
Pittsburgh (PIT)	JOT J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
	or	
	DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	
Portland (PDX)	EHF J65 RBL J1	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN J189 BTG OLM-STAR	1300-0500
Vancouver (CYVR)	EHF CZQ LIN J189 LMT J65 SEA PAE ACORD-STAR	1800-2100 and 2330-0200
SAN FRANCISCO (SFO)		
Boston (BOS)	FMG J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD)	FMG J32 CZI J82 FSD J16 MCW JVL-STAR	1500-0400
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Detroit Metro-Wayne (DTW)	PXV VHP FWA MIZAR-STAR	
	or	
	BAE MKG POLAR-STAR	

Terminals	Route	Effective Times (UTC)
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CQGG)	SAC FMG J94 DBQ BAE MKG LAN SPRTN-STAR	1400-0400
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Kennedy (JFK)	FMG J94 OBK J584 CRL J554 JHW J70 LVZ	
	LENDY-STAR	0000-2359
Newark (EWR)	FMG J94 OBK J584 SLT FQM-STAR	0000-2359
Phoenix (PHX)	OAL J92 DRK	1600-0500
Pittsburgh (PIT)	FMG J94 BFF OBH DSM IOW J60 JOT J146 J34	
	DJB V30 ACO V337 CUTTA	1300-0100
Toronto (CYYZ)	FMG J32 ABR J70 GEP J106 GRB J38 ECK	
	YWT-STAR	
SAN JOSE (SJC)		
Chicago O'Hare (ORD)	(FL240 and above, All) J32 BAM J94 DBQ JVL	
	JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
Houston (HOU)	(Turbojets) LLO TEXNN-STAR	
Houston (IAH)	LLO RIICE-STAR	
Phoenix (PHX)	OAL J92 DRK	1600-0500
SANTA ANA (SNA)		
Chicago O'Hare (ORD)	TRM J78 DRK J96 IRK J26 BDF V10 PLANO	
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	TRM PKE J96 DRK FLG J10 FQF J128 DBQ BAE	
	MKG POLAR-STAR	1100-0300
Portland (PDX)	EHF J65 RBL J1 OED	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN J189 LMT	1300-0500
TUCSON (TUS)		
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	

SPECIAL HIGH ALTITUDE ARRIVAL ROUTES FOR DENVER TERMINAL AREA

SOUTHEAST		
Denver	over LAA QUAIL-STAR	
SOUTH		
Denver	over TBE J171 TODDE QUAIL-STAR	
.....	over ALS LARKS-STAR	
.....	over HBU POWDR-STAR	
SOUTHWEST		
Denver	over DVC J146 HBU POWDR-STAR	
.....	over TBC ABOTS LARKS-STAR	
.....	or	
.....	over TBC J128 HBU POWDR-STAR	
.....	over FMN LARKS-STAR	
.....	over ALS LARKS-STAR	
WEST		
Denver	over EKR TOMSN-STAR	
.....	over TCH J56 CHE TOMSN-STAR	
.....	over OCS J154 ALPOE RAMMS-STAR	
NORTHWEST		
Denver	over MBW RAMMS-STAR	
NORTH		
Denver	over BFF LANDR-STAR	
NORTHEAST		
Denver	over ONL J114 SNY LANDR-STAR	
.....	over OBH J10 LBF SAYGE-STAR	
EAST		
Denver	over OBH J10 LBF SAYGE-STAR	
.....	over GCK J154 RYLIE DANDD-STAR	

SPECIAL HIGH ALTITUDE ARRIVAL ROUTES FOR SALT LAKE CITY TERMINAL AREA

	SOUTHEAST	
	Salt Lake City	over JNC J12 HELPR SPANE-STAR..... over EKR MTU SPANE-STAR
	SOUTH	
	Salt Lake City	over BCE DTA-TCH
		over MLF DTA-TCH
	WEST	
	Salt Lake City	over BVL BVL-STAR
	NORTHWEST	
	Salt Lake City	over BY1 BEARR-STAR.....
	NORTH	
	Salt Lake City	over PIH BEARR-STAR
		over DBS BRIGHAM CITY-STAR
	NORTHEAST	
	Salt Lake City	over JAC BRIGHAM CITY-STAR
	EAST	
	Salt Lake City	over OCS BRIGHAM CITY-STAR

SPECIAL HIGH ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
Traffic overflying Salt Lake Center, westbound south of a line from Rock Springs VORTAC (OCS) to Mina VORTAC (MVA):		
Salt Lake City (ZLC)	TATOO DOUGLE MADWIN-STAR..... or RUMPS OAL MODESTO-STAR	
	or TPH CANDA HYPER (RNAV)-STAR	
Traffic overflying Salt Lake Center, westbound north of a line from Rock Springs VORTAC (OCS) to Mina VORTAC (MVA):		
Salt Lake City (ZLC)	FMG RAIDR (RNAV)-STAR	
	or FMG ILA PYE GOLDEN GATE-STAR.....	
	or FMG HYPER (RNAV)-STAR	
Transcon flights overflying Salt Lake City Center, westbound south of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	DTA TATOO DUGLE MADWIN-STAR	
Salt Lake City (ZLC)	DTA RUMPS OAL MODESTO-STAR	
Salt Lake City (ZLC)	ILC TATOO DUGLE MADWIN-STAR	
Salt Lake City (ZLC)	ILC RUMPS OAL MODESTO-STAR	
Transcon flights overflying Salt Lake City Center, westbound Wasatch VORTAC (TCH) or north of (TCH):		
Salt Lake City (ZLC)	FMG RAIDR (RNAV)-STAR	
Salt Lake City (ZLC)	FMG ILA PYE GOLDEN GATE-STAR.....	
Traffic departing Salt Lake City Center, westbound south of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	TPH CANDA EL NIDO-STAR	
Traffic departing Salt Lake City Center, westbound from or north of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	FMG EL NIDO-STAR	

HIGH ALTITUDE—SINGLE DIRECTION ROUTES

Airway	Segment Fixes	Direction Effective	Effective Times (UTC)
J110	Farmington, NM to Boulder City, NV	West	1500-0300

Q-ROUTES REGULATORY

Q1, Q3, Q5, Q7, Q9 and Q11 are preferred single direction (Southbound) Q routes; flight planning Northbound not authorized.

Q routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast and South Central A/FD volumes. Q routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.

GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".


Route	Segment	DME
Q1	ELMAA-ERAVE	BTG, OLM, HQM, HUH, UBG
	ERAVE-EASON	BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG
	EASON-EBINY	CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT
	EBINY-ENVIE	CVO, OED, EUG, LMT, RBL, ENI, ONP, FJS
	ENVIE-ETCHY	OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS
Q2	ETCHY-POINT REYES	LIN, ECA, RBL, ENI, SAC, OAK
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-HOBOL	BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS
	HOBOL-ITUCO	TFD, GBN, BLH, PXR, TUS, CIE, SSO
Q3	ITUCO-NEWMAN	EWM, TFD, PXR, CIE, SSO, TUS, TCS
	FEPOT-FAMUK	OLM, TOU, HQM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG
	FAMUK-FRFLY	BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT
	FRFLY-FINER	OED, EUG, RBL, LMT, ENI, CVO, FJS
Q4	FINER-FOWND	OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS
	FOWND-POINT REYES	LIN, ECA, PYE, RBL, SAC, ENI
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-SCOLE	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SCOLE-SPTFR	EED, BLH, BZA, GBN, TRM, IPL, TFD
Q5	SPTFR-ZEBOL	EED, IPL, BZA, GBN, TFD, PXR, BLH
	ZEBOL-SKTTT	PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS
	SKTTT-EL PASO	EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME
	HAROB-HISKU	OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH
	HISKU-HARPR	ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV
Q7	HARPR-HOMEG	CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV
	HOMEG-HUPTU	SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS
	HUPTU-STIKM	OAK, ECA, PYE, LIN, SAC, ENI, RBL
	JINMO-JOGEN	CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA
Q9	JOGEN-JUNEJ	LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG
	JUNEJ-JAGWA	RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS
	JAGWA-AVENAL	OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ
	SUMMA-SMIGE	OLM, UBG, SEA, YKM, BTG, ONP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED, EPH, MWH
Q11	SMIGE-SUNBE	IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG
	SUNBE-REBRG	RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED, SWR
	REBRG-DERBB	CZQ, PMD, EHF, LAX, RZS, AVE, MOD, ECA
	PAAGE-PAWLI	EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV, OED, SEA
Q13	PAWLI-PITVE	EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO
	PITVE-PUSHH	FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ
	PUSHH-LOS ANGELES	SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS
	All segments	None; GNSS required
Q15	All segments	None; GNSS required
Q19	PLESS-NASHVILLE	ENL, GQO, PXV, BNA, IUI, FAM, BWG, CSX
Q20	CORONA-HONDS	CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME
	HONDS-UNNOS	CNX, INK, CME, TXO, TCC
	UNNOS-FUSCO	FST, ACH, INK, CME, SJT, TXO, TCC
	FUSCO-JUNCTION	ABI, CWK, CSI, INK, LZZ, JCT, SJT, STV, FST
Q21	JONEZ-RAZORBACK	BYP, EOS, TUL, TXK, ADM, RZC, OKM
Q22	GUSTI-OYSTY	AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV
	OYSTY-ACMES	RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJJ
	ACMES-CATLN	SJJ, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI
Q23	FORT SMITH-RAZORBACK	OKM, RZC, EOS, TUL

Route	Segment	DME
Q24	LAKE CHARLES-BATON ROUGE	AEX, DAS, LCH, MCB, LFT, BTR
	BATON ROUGE-IRUBE	AEX, LEV, MCB, LCH, RQR, HRV, BTR, GCV, MCB, PCU, SJI, LBY
Q25	IRUBE-PAYTN	GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI
	MEEOW-WALNUT RIDGE	ELD, MEM, LIT, FAM, RZC
Q26	WALNUT RIDGE-WLSUN	MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH
	WLSUN-POCKET CITY	BWG, PXV, ENL, BNA, TTH
Q27	WALNUT RIDGE-DEVAC	LIT, JKS, GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG
	FORT SMITH-ZALDA	OKM, SGF, RZC, EOS, TUL
Q28	GRAZN-PYRMD	EIC, LIT, ELD, OKM, TXK
	PYRMD-HAKAT	ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK
Q29	HAKAT-ESTEE	ARG, LIT, FAM, SGF, MEM
	ESTEE-POCKET CITY	ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA
Q30	HARES-MEMPHIS	MEM, ARG, LIT, JAN, ELD, SQS
	MEMPHIS-SIDAE	MEM, PXV, BNA, BWG, ARG, ENL
Q31	SIDAE-POCKET CITY	PXV, TTH, BWG, ENL
	SIDON-VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
Q32	DHART-JODOX	SQS, LIT, TXK
	JODOX-MARVELL	SQS, LIT, ELD, MEM, ARG
Q33	MARVELL-TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
	TIIDE-POCKET CITY	BWG, PXV, ENL, TTH
Q34	EL DORADO-GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
	GAGLE-CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
Q35	CRAMM-NASHVILLE	BWG, MEM, VUZ, BNA, GQO
	NASHVILLE-SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
Q36	DHART-LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
	LITTLE ROCK-PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
Q37	TEXARKANA-MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
	MATIE-MEMPHIS	LIT, ARG, MEM, ELD, SQS
Q38	MEMPHIS-SWAPP	BWG, ARG, MEM, MKL, SQS, PXV, BNA, GQO, IIU, VXV
	KIMBERLY-NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
Q39	NEERO-WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
	WINEN-CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
Q40	CORKR-DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
	RAZORBACK-TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
Q41	TWITS-DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
	DEPEC-NASHVILLE	GQO, BWG, BNA, PXV, IIU
Q42	NASHVILLE-SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
	ROKIT-INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
Q43	INCIN-LAREY	JAN, MCB, SWB, AEX
	LAREY-BESOM	JAN, JYU, MEI, SQS, VUZ
Q44	ALEXANDRIA-DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
	DOOMS-WINAP	JAN, SQS, MEI, MCB
Q45	WINAP-MISLE	MEI, VUZ, JYU
	KIRKSVILLE-STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
Q46	STRUK-DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK, OBK, GIJ, FWA, GSH, IRK
	DANVILLE-MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
Q47	MUNCIE-HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN, AIR, HVQ, CXR, EWC
	HIDON-BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
Q48	BUBAA-PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
	PSYKO-BRNAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
Q49	BRNAN-MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
	MAALS-SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
Q50	SUZIE-EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
	EAST TEXAS-ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
Q51	DEFUN-HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
	HEVVN-PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
Q52	PLYER-SWABE	PIE, ORL, OMN, SRQ, TAY
	SWABE-ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
Q53	ST PETERSBURG-CYPRESS	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN

Route	Segment	DME
Q106	SMELZ-BULZI	LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW
	BULZI-DRABK	AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI
	DRABK-GADAY	MGM, PZD, OTK, JYU, SZW, CEW, SJI
Q108	GADAY-CLAWZ	MGM, SJI, CEW, JYU, PZD, OTK, MCN, SZW, LGC, TAY, AMG
Q110	THNDR-JAYMC	SRQ, VRB, PIE, LAL, VKZ, ORL, PBI
	JAYMC-RVERO	VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP
	RVERO-KPASA	OMN, PIE, PBI, SRQ, ORL, LAL
	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-GULFR	OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK
Q112	GULFR-FEONA	TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM
	DEFUN-HEVVN	PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB
	HEVVN-INPIN	JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG
Q116	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-GULFR	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK
	GULFR-CEEYA	MCN, AMG, PZD, OTK, SZW, TAY
Q118	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-LENIE	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN
Q501	VIXIS-GOPHER	ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU,
		DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF
Q502	GOPHER-SOBME	FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD
	KENPA-GOPHER	SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW,
Q504		MSP, MNM, ASP, TVC, GEP, RWF, BRD
	GOPHER-SOBME	FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD
	NOTAP-CESNA	SSM, ECK, APN, GLR, PLN, ISQ, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC,
Q505		SAW, GRB, BRD
	CESNA-HEMDI	ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD
	OMAGA-RIMBE	SSM, TVC, ASP, SAW, GRB
	RIMBE-CESNA	SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI
	CESNA-HEMDI	GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

*Denotes Critical DME Facility

TOWER ENROUTE CONTROL

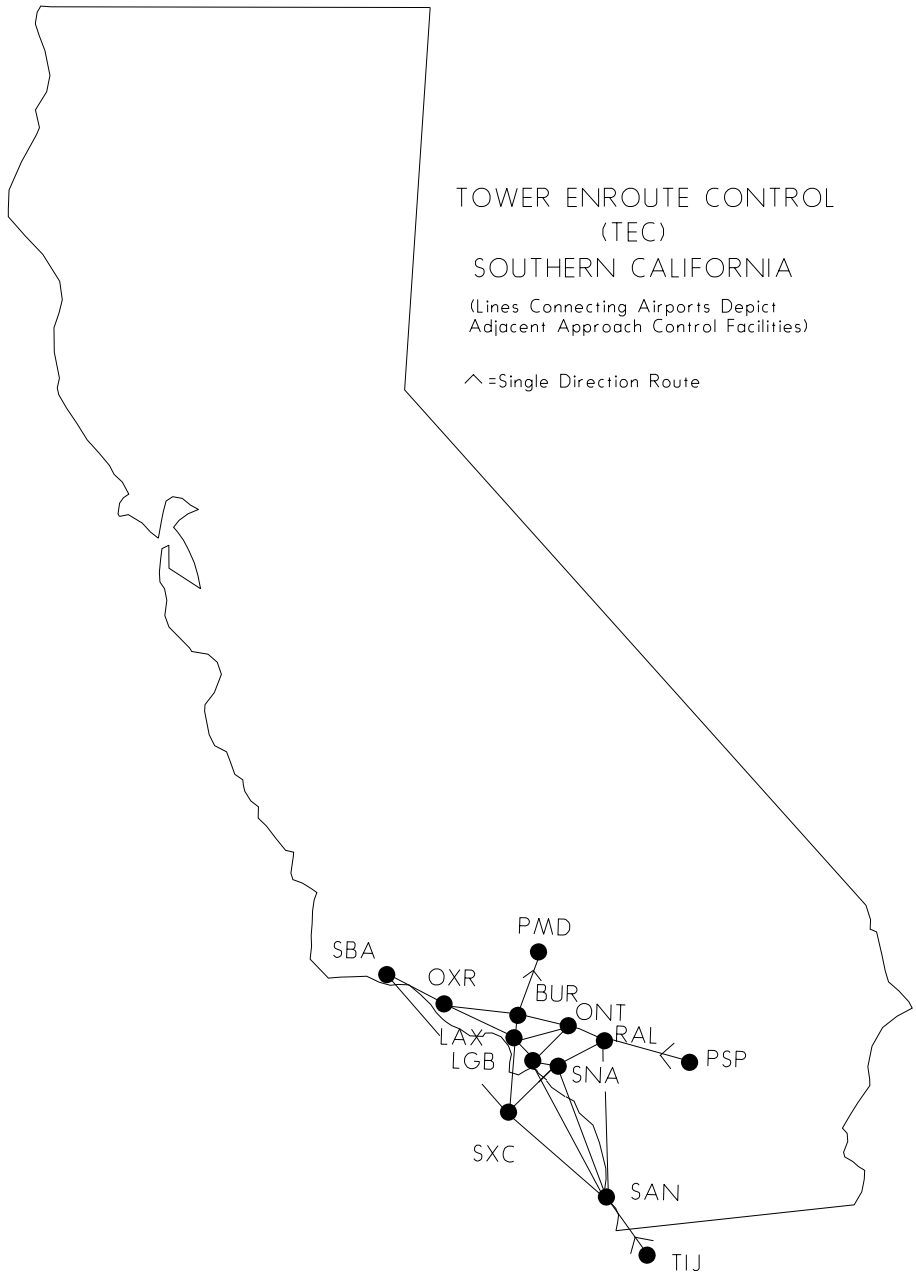

Within the national airspace system it is possible for a pilot to fly IFR from one point to another without leaving approach control airspace. This is referred to as "Tower Enroute" which allows flight beneath the enroute structure. The tower enroute concept has been expanded (where practical) by reallocating airspace vertically/geographically to allow flight planning between city pairs while remaining within approach control airspace. Pilots are encouraged to use the TEC route descriptions provided in the Southwest U.S. Airport/Facility Directory when filing flight plans. Other airways which appear to be more direct between two points may take the aircraft out of approach control airspace thereby resulting in additional delays or other complications. All published TEC routes are designed to avoid enroute airspace and the majority are within radar coverage. The following items should be noted before using the graphics and route descriptions.

1. The graphic is not to be used for navigation nor detailed flight planning. Not all city pairs are depicted. It is intended to show geographic areas connected by tower enroute control. Pilots should refer to route descriptions for specific flight planning.

2. The route description contains four columns of information after geographic area listed in the heading, where the departure airport is located; i.e., the airport/airports of intended landing using FAA three letter/letter-two number identifiers, the coded route number (this should be used when filing the flight plan and will be used by ATC in lieu of reading out the full route description), the specific route (airway, radial, etc.), the altitude allowed for type of aircraft and the routes.

3. The word "DIRECT" will appear as the route when radar vectors will be used or no airway exists. Also this indicates that a Standard Instrument Departure (SID) or Standard Terminal Arrival (STAR) may be applied by ATC.

4. When a NAVAID or intersection identifier appears with no airway immediately preceding or following the identifier, the routing is understood to be DIRECT to or from that point unless otherwise cleared by ATC or radials are listed (See item 5).

5. Routes beginning and ending with an airway indicate that the airway essentially overflies the airport or radar vectors will be applied.

6. Where more than one route is listed to the same destination, ensure you file correct route for type of aircraft which is denoted after the route in the altitude column using J,M,P, or Q. These are listed after item 10 under Aircraft Classification.

7. Although all airports are not listed under the destination column, IFR flight may be planned to satellite airports in the proximity of major airports via the same routing.

8. Los Angeles International Airport (LAX) and four other airports (ONT-SAN-TOA-SNA) have two options due to winds and these affect the traffic flows and runways in use. To indicate the difference the following symbols are used after the airport: Runway Number, W for west indicating normal conditions, E for East, and N for North indicating other than normal operation. If nothing follows the airport use this route on either West, East, or North plan. Other destinations have different arrivals due to LAX being East and they have the notation "(LAXE)." Torrance Airport is also unique in that the airport is shared between Los Angeles and Coast area of Southern California TRACON; for Runway 11 departures use Coast area routings and for Runway 29 departures use Los Angeles area routings.

9. When filing flight plans, the coded route identifier, i.e. SANL2, VTUL4, POML3 may be used in lieu of the route of flight.

10. Aircraft types i.e. J, M, P, and Q are listed at the beginning of the altitude and should be used with the route of flight filed. (See Aircraft Classification below). The altitudes shown are to be used for the route. This allows for separation of various arrival routes, departure routes, and overflights to, from, and over all airports in the Southern California area.

LEGENDS

AIRCRAFT CLASSIFICATION

(J) = Jet powered

(M) = Turbo Props/Special (cruise speed 190 knots or greater)

(P) = Non-jet (cruise speed 190 knots or greater)

(Q) = Non-jet (cruise speed 189 knots or less)

BURBANK AREA**FROM:** BUR VNY WHP

TO:	ROUTE ID	ROUTE	ALTITUDE
HHR	BURN1	V186 ADAMM V394 HHR RY25 LOC	PQ50
HHR	BURN2	V186 V264 POM V394 HHR RY25 LOC ..	JM70
HHR (LAXE)	BURN3	VNY095R ELM00	JMPQ50
LAX	BURN4	VNY095R PURMS	JMPQ50
LAX (LAXE)	BURN5	VNY SMO	JM50PQ40
SMO	BURN6	VNY095R DARTS	JMPQ50
CCB	BURN7	V186 V264 POM	JM70PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	BURN8	V186 PDZ	PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	BURN9	V186 V264 POM V197 PDZ	JM70
HMT	BURN10	V186 PDZ V186 WESIN	PQ50
HMT	BURN11	V186 V264 POM V197 PDZ V186	
		WESIN	JM70
L67	BURN12	V186 PDZ PDZ078R EDITS	PQ50
L67	BURN13	V186 V264 POM V197 PDZ PDZ078R	
		EDITS	JM70
F70	BURN14	V186 PDZ V186 NIKKL	PQ50
F70	BURN15	V186 V264 POM V197 PDZ V186	
		NIKKL	JM70
AVX	BURN16	V186 BAYJY V363 DANAH SXC065R	
		SXC	PQ50
AVX	BURN17	TWINE V518 KIMMO V459 SLI V21 SXC	JM90
AVX (LAXE)	BURN18	V186 BAYJY V363 DANAH SXC065R	
		SXC	JM50
LGB FUL SLI TOA	BURN19	V186 ADAMM V394 SLI	PQ50
SNA	BURN20	V186 BAYJY V363 POXKU V8 SLI	PQ50
LGB SNA FUL SLI TOA	BURN21	TWINE V518 KIMMO V459 SLI	JM90
FUL SLI TOA (LAXE)	BURN22	V186 ADAMM V394 SLI	JM50
SNA (LAXE)	BURN23	V186 BAYJY V363 POXKU V8 SLI	JM50
LGB (LAXE)	BURN24	V186 ADAMM V394 SLI	M50
LGB (LAXE)	BURN25	V186 BAYJY V363 DANAH V23 SLI	J70
CRQ NFG NKX OKB	BURN26	V186 ROBNN V458 OCN	PQ70
CRQ NFG NKX OKB	BURN27	TWINE V518 KIMMO V459 SLI V23	
		OCN	JM90
CRQ NFG NKX OKB (LAXE)	BURN28	V186 BAYJY V363 DANAH V23 OCN	JM70
MYF NRS NZY SAN SDM SEE	BURN29	V186 HAILE V66 MZB	PQ90
MYF NRS NZY SAN SDM SEE	BURN30A	TWINE V518 KIMMO V459 SLI V23	
		KELPS MZB	M90
MYF NRS NZY SAN SDM SEE	BURN30B	TWINE V518 KIMMO V459 SLI SLI171	
		LAX118 CARDI MZB320 MZB	J110
MYF NRS NZY SAN SDM SEE (LAXE)	BURN31	V186 BAYJY V363 DANAH V23 KELPS	
		MZB	J110M90
SAN (SANE)	BURN32	V186 BAYJY V363 DANAH V165 SARGS	PQ50
SAN (SANE)	BURN33	TWINE V518 KIMMO V459 SLI V165	
		SARGS	J110M90
SAN (SANE) (LAXE)	BURN34	V186 POM164R V25 REDIN V165	
		SARGS	JM70
RNM	BURN35	V186 ROBNN V208 JLI	PQ70
RNM	BURN36	TWINE V518 KIMMO V459 SLI V23 OCN	
		V208 JLI	JM90
RNM (LAXE)	BURN37	V186 BAYJY V363 DANAH V23 OCN	
		V208 JLI	JM70
OXR CMA NTD	BURN38	FIM	JMPQ40
SBA	BURN39	FIM V186 DEANO V27 KWANG	JMPQ60

COAST AREA**FROM:** FUL LGB SLI SNA TOA (RWY11)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	CSTN1	SLI V23 POPPR SMO125R SMO	
		SMO311R SILEX	PQ40
BUR	CSTN2	SLI V23 LAX LAX316R SILEX	JM60
WHP VNY	CSTN3	SLI V23 POPPR SMO125R SMO	
		SMO317R CANOG	PQ40
WHP VNY	CSTN4	SLI V23 LAX LAX320R CANOG	JM60
BUR VNY WHP (LAXE)	CSTN5	SLI SLI333R V186 VNY	JMPQ60
HHR	CSTN6	SLI SLI340R WELLZ HHR RY25 LOC	JM70PQ40

LAX	CSTN7	SLI	JM70PQ40
LAX (LAXE)	CSTN8	SLI V8 TANDY	JM50PQ40
TO:	ROUTE ID	ROUTE	ALTITUDE
SMO	CSTN9	SLI V23 POPPR SMO125R SMO	
		SMO059R ELMOO	PQ40
SMO	CSTN10	SLI V459 DARTS	JM80
SMO (LAXE)	CSTN11	SLI SLI333R V186 DARTS	JMPQ60
CCB EMT POC	CSTN12	SLI V8 POXKU V363 POM	JMPQ50
CNO REI L65 AJO ONT RAL RIR RIV SBD	CSTN13	SLI V8 PDZ	JM60PQ50
HMT	CSTN14	SLI V8 PDZ V186 WESIN	JM60PQ50
L67	CSTN15	SLI V8 PDZ PDZ078R EDITS	JM60PQ50
F70	CSTN16	SLI V8 PDZ V186 NIKKL	JM60PQ50
CRQ NFG NKX OKB	CSTN17	V25 PACIF V208 OCN	JM70
RNM	CSTN18	V25 PACIF V208 JLI	JM70
MYF NRS NZY SAN SDM SEE	CSTN19	V25 PACIF V208 LAX118R CARDI	
		MZB320R MZB	J110M90
SAN (SANE)	CSTN20	V25 REDIN V165 SARGS	J110M90
SBA	CSTN21	SLI V23 LAX V299 VTU VTU282R	
		KWANG	PQ60
SBA (LAXE)	CSTN22	SLI SLI333R V186 DEANO V27 KWANG..	MPQ60
SBA (LAXE)	CSTN23	SXC V208 VTU VTU282R KWANG	J100
NTD OXR CMA	CSTN24	SLI V23 POPPR SMO125R SMO VNY	PQ40
NTD CMA OXR (LAXE)	CSTN25	SLI SLI333R V186 FIM	MPQ60
FROM: LGB			
TO:	ROUTE ID	ROUTE	ALTITUDE
SBA	CSTN26	LAX V299 VTU VTU282R KWANG	J100M80
NTD OXR CMA	CSTN27	SLI V23 LAX VNY	JM60
FROM: FUL SLI SNA TOA (RWY11)			
TO:	ROUTE ID	ROUTE	ALTITUDE
SBA	CSTN28	SXC V208 VTU VTU282R KWANG	J100M80
NTD OXR CMA	CSTN29A	SLI V23 LAX VNY	M60
NTD OXR CMA	CSTN29B	SXC V208 VTU	J80
FROM: SNA			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN30	V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	CSTN31	V23 MZB	PQ50
RNM	CSTN32	V23 OCN V208 JLI	PQ70
SAN (SANE)	CSTN33	V23 OCN V165 SARGS	PQ50
FROM: FUL LGB SLI TOA (RWY11) when SNA South traffic			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN34	SLI V64 V363 DANAH V23 OCN	PQ50
RNM	CSTN35	SLI V64 V363 DANAH V23 OCN V208	
		JLI	PQ70
MYF NRS NZY SAN SDM SEE	CSTN36	SLI V64 V363 DANAH V23 MZB	PQ50
SAN (SANE)	CSTN37	SLI V64 V363 DANAH V165 SARGS	PQ50
FROM: FUL LGB SLI TOA (RWY 11) when SNA North traffic			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN38	V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	CSTN39	V23 MZB	PQ50
RNM	CSTN40	V23 OCN V208 JLI	PQ70
SAN (SANE)	CSTN41	V23 OCN V165 SARGS	PQ50
FROM: AVX			
TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	CSTN42	SXC V21 SLI V23 POPPR SMO125R	
		SMO SMO311R SILEX	PQ40
BUR (LAXE)	CSTN43	SXC V21 SLI V23 LAX LAX316R SILEX ...	PQ40
BUR	CSTN44	SXC V21 SLI V23 LAX LAX316R SILEX ...	JM60
WHP VNY	CSTN45	SXC V21 SLI V23 POPPR SMO125R	
		SMO SMO317R CANOG	PQ40
WHP VNY (LAXE)	CSTN46	SXC V21 SLI V23 LAX LAX320R CANOG .	PQ40
WHP VNY	CSTN47	SXC V21 SLI V23 LAX LAX320R CANOG .	JM60
CCB EMT POC	CSTN48	SLI V8 POXKU V363 POM	JMPQ50

CNO REI L65 AJO ONT RAL RIR RIV SBD
 L67
 F70
TO:
 HMT
 CRQ NFG NKX OKB
 MYF NRS NZY SAN SDM SEE

 RNM
 MYF NRS NZY SAN SDM SEE
 SAN (SANE)
 NTD OXR CMA
 SBA

CSTN49
 CSTN50
 CSTN51
ROUTE ID
 CSTN52
 CSTN53
 CSTN54

 CSTN55
 CSTN56
 CSTN57
 CSTN58
 CSTN59

SLI V8 PDZ
 SLI V8 PDZ PDZ078R EDITS
 SLI V8 PDZ V186 NIKKL
ROUTE
 SLI V8 PDZ V186 WESIN
 SXC V208 OCN
 SXC V208 LAX118R CARDI MZB320R
 MZB
 SXC V208 JLI
 SXC V208 OCN V23 MZB
 SXC V208 OCN V165 SARGs
 SXC V208 VTU
 SXC V208 VTU VTU282R KWANG

JM60PQ50
 JM60PQ50
 JM60PQ50
ALTITUDE
 JM60PQ50
 JMPQ50

 J110M90
 JMPQ70
 PQ50
 PQ50
 JM80PQ60
 J100M80PQ60

LOS ANGELES AREA**FROM: LAX West (J Class)**

TO:
 BUR
 WHP VNY
 AVX
 FUL LGB SLI SNA TOA
 CCB EMT POC
 CNO REI L65 AJO RAL RIR RIV SBD ONT
 HMT
 L67
 F70
 CRQ NFG NKX OKB

 MYF NRS NZY SAN SDM SEE
 RNM

 SAN (SANE)

 OXR CMA NTD
 SBA

ROUTE ID
 LAXN1
 LAXN2
 LAXN3
 LAXN4
 LAXN5
 LAXN6
 LAXN7
 LAXN8
 LAXN9
 LAXN10

ROUTE
 LAX316R SILEX
 LAX320R CANOG
 LAXX DP SLI V21 SXC
 LAXX DP SLI
 LAXX DP SLI V8 POXKU V363 POM
 LAXX DP SLI V8 PDZ
 LAXX DP SLI V8 PDZ V186 WESIN
 LAXX DP SLI V8 PDZ PDZ078R EDITS
 LAXX DP SLI V8 PDZ V186 NIKKL
 LAXX DP SLI SLI171R ALBAS V25 PACIF
 V208 OCN
 LAXX DP MZB
 LAXX DP SLI SLI171R ALBAS V25 PACIF
 V208 JLI
 LAXX DP SLI SLI171R ALBAS V25 REDIN
 V165 SARGs
 VENTURA DP VTU
 VENTURA DP VTU VTU282R KWANG

ALTITUDE
 J50
 J50
 J50
 J50
 J90
 J90
 J90
 J90
 J90

 J110
 J110

 J110

 J110
 J60
 J100

FROM: LAX East (J Class)

TO:
 BUR
 WHP VNY
 AVX
 FUL LGB SLI SNA TOA
 CCB EMT POC
 CNO REI L65 AJO RAL RIR RIV SBD ONT
 HMT
 L67
 F70
 CRQ NFG NKX OKB

 MYF NRS NZY SAN SDM SEE

 RNM

 SAN (SANE)

 OXR CMA NTD
 SBA

ROUTE ID
 LAXN16
 LAXN17
 LAXN18
 LAXN19
 LAXN20
 LAXN21
 LAXN22
 LAXN23
 LAXN24
 LAXN25

 LAXN26

 LAXN27

 LAXN28

 LAXN29
 LAXN30

ROUTE
 LAX316R SILEX
 LAX320R CANOG
 LAXX DP SLI V21 SXC
 LAXX DP SLI
 LAXX DP SLI V8 POXKU V363 POM
 LAXX DP SLI V8 PDZ
 LAXX DP SLI V8 PDZ V186 WESIN
 LAXX DP SLI V8 PDZ PDZ078R EDITS
 LAXX DP SLI V8 PDZ V186 NIKKL
 LAXX DP SLI SLI148R V25 PACIF V208
 OCN
 LAXX DP SLI SLI148R V25 PACIF V208
 LAX118R CARDI
 MZB320R MZB
 LAXX DP SLI SLI148R V25 PACIF V208
 JLI
 LAXX DP SLI SLI148R V25 REDIN V165
 SARGs
 VENTURA DP VTU
 VENTURA DP VTU VTU282R KWANG

ALTITUDE
 J50
 J50
 J50
 J40
 J90
 J90
 J90
 J90
 J90
 J90
 J90

 J110

 J110

 J110
 J60
 J100

FROM: LAX West and East (M Class)

TO:
 BUR
 WHP VNY
 AVX
 FUL LGB SLI SNA TOA
 CCB EMT POC

 CNO REI L65 AJO RAL RIR RIV SBD ONT

ROUTE ID
 LAXN31
 LAXN32
 LAXN33
 LAXN34
 LAXN35

 LAXN36

ROUTE
 LAX316R SILEX
 LAX320R CANOG
 SEAL BEACH DP SLI V21 SXC
 SEAL BEACH DP SLI
 SEAL BEACH DP SLI V8 POXKU V363
 POM
 SEAL BEACH DP SLI V8 PDZ

ALTITUDE
 M50
 M50
 M50
 M50

 M50
 M50

TOWER ENROUTE CONTROL

359

TO:	ROUTE ID	ROUTE	ALTITUDE
HMT	LAXN37	SEAL BEACH DP SLI V8 PDZ V186	
L67	LAXN38	WESIN	M50
F70	LAXN39	SEAL BEACH DP SLI V8 PDZ PDZ078R	
CRQ NFG NKX OKB (LAXW)	LAXN40	EDITS	M50
CRQ NFG NKX OKB (LAXE)	LAXN41	SEAL BEACH DP SLI V8 PDZ V186	
MYF NRS NZY SAN SDM SEE (LAXW)	LAXN42	NIKKL	M50
MYF NRS NZY SAN SDM SEE (LAXE)	LAXN43	SEAL BEACH DP SLI SLI171R ALBAS	
SAN (SANE) (LAXW)	LAXN44	V25 PACIF V208 OCN	M90
SAN (SANE) (LAXE)	LAXN45	SEAL BEACH DP SLI SLI148R V25 PACIF	
RNM(LAXW)	LAXN46	V208 OCN	M90
RNM(LAXE)	LAXN47	SEAL BEACH DP SLI SLI171R ALBAS	
OXR CMA NTD (LAXW)	LAXN48	V25 PACIF V208 JLI	M90
OXR CMA NTD (LAXE)	LAXN49	SEAL BEACH DP SLI SLI148R V25 PACIF	
SBA (LAXW)	LAXN50	V208 MZB320R MZB	M90
SBA (LAXE)	LAXN51	SEAL BEACH DP SLI SLI171R ALBAS	
		V25 REDIN V165 SARGS	M90
		SEAL BEACH DP SLI SLI148R V25	
		REDIN V165 SARGS	M90
		SEAL BEACH DP SLI SLI171R ALBAS	
		V25 PACIF V208 JLI	M90
		SEAL BEACH DP SLI SLI148R V25 PACIF	
		V208 JLI	M90
		VENTURA DP VTU	M60
		CHATY DP VTU	M60
		VENTURA DP VTU VTU282R KWANG	M60
		CHATY DP KWANG	M60

FROM: LAX West and East (P and Q Class)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	LAXN52	LAX316R SILEX	PQ40
WHP VNY	LAXN53	LAX320R CANOG	PQ40
AVX	LAXN54	SEAL BEACH DP SLI V21 SXC	PQ40
FUL LGB SLI SNA TOA	LAXN55	SEAL BEACH DP SLI	PQ40
CCB EMT POC	LAXN56	SEAL BEACH DP SLI V8 POXKU V363	
CNO REI L65 AJO RAL RIR RIV SBD ONT ...	LAXN57	POM	PQ50
HMT	LAXN58	SEAL BEACH DP SLI V8 PDZ	PQ50
L67	LAXN59	SEAL BEACH DP SLI V8 PDZ V186	
F70	LAXN60	WESIN	PQ50
CRQ NFG NKX OKB	LAXN61	SEAL BEACH DP SLI V8 PDZ PDZ078R	
CRQ NFG NKX OKB (SNAN)	LAXN62	EDITS	PQ50
MYF NRS NZY SAN SDM SEE	LAXN63	SEAL BEACH DP SLI V8 PDZ V186	
MYF NRS NZY SAN SDM SEE (SNAN)	LAXN64	NIKKL	PQ50
RNM	LAXN65	SEAL BEACH DP SLI V64 V363 DANA	
RNM (SNAN)	LAXN66	V23 OCN	PQ50
SAN (SANE)	LAXN67	SEAL BEACH DP SLI V23 OCN	PQ50
OXR CMA NTD	LAXN68	SEAL BEACH DP SLI V64 V363 DANA	
SBA (LAXW)	LAXN69	V23 MZB	PQ50
SBA (LAXE)	LAXN70	SEAL BEACH DP SLI V23 MZB	PQ50
		SEAL BEACH DP SLI V64 V363 DANA	
		V23 OCN JLI	PQ70
		SEAL BEACH DP SLI V23 OCN V208 JLI ..	PQ70
		SEAL BEACH DP SLI V64 V363 DANA	
		V165 SARGS	PQ50
		VNY	PQ40
		VENTURA DP VTU VTU282R KWANG	PQ60
		CHATY DP KWANG	PQ60

FROM: HHR TOA (RWY29)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SCTN1	SMO SMO311R SILEX	JM50PQ40
WHP VNY	SCTN2	SMO SMO317R CANOG	JM50PQ40
AVX	SCTN3	SXC	JM50PQ40
FUL LGB SLI SNA TOA	SCTN4	LIMBO V64 SLI	JM50PQ40
FUL LGB SLI SNA TOA (LAXE)	SCTN5	SLI	JMPQ40
CCB EMT POC	SCTN6	LIMBO V64 SLI V8 POXKU V363 POM ...	J90MPQ50
CNO REI L65 AJO RAL RIR RIV SBD ONT	SCTN7	LIMBO V64 SLI V8 PDZ	J90MPQ50
HMT	SCTN8	LIMBO V64 SLI V8 PDZ V186 WESIN	J90MPQ50

TO:	ROUTE ID	ROUTE	ALTITUDE
L67	SCTN9	LIMBO V64 SLI V8 PDZ PDZO78R EDITS.	J90MPQ50
F70	SCTN10	LIMBO V64 SLI V8 PDZ V186 NIKKL	J90MPQ50
CRQ NFG NKX OKB	SCTN11	LIMBO V64 V363 DANAH V23 OCN	PQ50
CRQ NFG NKX OKB	SCTN12	LIMBO V64 SLI V23 OCN	J110M90
CRQ NFG NKX OKB (LAXE)	SCTN13	SLI SLI148R V25 PACIF V208 OCN	J110M90
CRQ NFG NKX OKB (SNAN)	SCTN14	LIMBO V64 SLI V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	SCTN15	LIMBO V64 V363 DANAH V23 MZB	PQ50
MYF NRS NZY SAN SDM SEE (LAXE)	SCTN16	SLI V64 V363 DANAH V23 MZB	PQ50
MYF NRS NZY SAN SDM SEE	SCTN17	LIMBO V64 WILMA V25 PACIF V208	
		LAX118R CARDI MZB320R MZB	J110M90
MYF NRS NZY SAN SDM SEE (LAXE)	SCTN18	SLI SLI148R V25 PACIF V208 MZB320R	
		MZB	J110M90
MYF NRS NZY SAN SDM SEE (SNAN)	SCTN19	LIMBO V64 SLI V23 MZB	PQ50
RNM	SCTN20	LIMBO V64 V363 DANAH V23 OCN	
		V208 JLI	PQ70
RNM (SNAN)	SCTN21	LIMBO V64 SLI V23 OCN V208 JLI	PQ70
RNM	SCTN22	LIMBO V64 SLI V23 OCN V208 JLI	J110M90
RNM (LAXE)	SCTN23	SLI SLI148R V25 PACIF V208 JLI	J110M90
SAN (SANE)	SCTN24	LIMBO V64 V363 DANAH V165 SARGs ..	PQ50
SAN (SANE)	SCTN25	LIMBO V64 WILMA V25 REDIN V165	
		SARGs	J110M90
OXR CMA NTD	SCTN26	SMO VNY	PQ40
OXR CMA NTD	SCTN27	LAX VTU	JM60
SBA	SCTN28	SMO V107 SADDE V299 VTU VTU282R	
		KWANG	J100MPQ60
SBA (LAXE)	SCTN29	LAX V23 V186 DEANO V27 KWANG	JM50PQ40
EDW LOO MHV PMD WJF IYK NID TSP			
VCV	SCTN30	LAX V165 LANGE V518 PMD	JMPQ70
FROM: SMO			
TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SMON1	SMO SMO311R SILEX	JM50PQ40
WHP VNY	SMON2	SMO SMO317R CANOG	JM50PQ40
AVX	SMON3	SMO SMO125R SXC350R SXC	M50PQ40
FUL LGB SLI SNA TOA	SMON4	SMO SMO125R V64 SLI	M50PQ40
FUL LGB SLI SNA TOA	SMON5	SLI	J50
FUL LGB SLI SNA TOA (LAXE)	SMON6	SMO LAX V23 SLI	JMPQ40
CCB EMT POC	SMON7	SMO SMO125R V64 SLI V8 POXKU	
		V363 POM	MPQ50
CCB EMT POC	SMON8	SLI V8 POXKU V363 POM	J90
CNO REI L65 AJO RAL RIR RIV SBD ONT	SMON9	SMO SMO125R V64 SLI V8 PDZ	MPQ50
CNO REI L65 AJO RAL RIR RIV SBD ONT	SMON10	SLI V8 PDZ	J90
HMT	SMON11	SMO SMO125R V64 SLI V8 PDZ V186	
		WESIN	MPQ50
HMT	SMON12	SLI V8 PDZ V186 WESIN	J90
L67	SMON13	SMO SMO125R V64 SLI V8 PDZ	
		PDZO78R EDITS	MPQ50
L67	SMON14	SLI V8 PDZ PDZO78R EDITS	J90
F70	SMON15	SMO SMO125R V64 SLI V8 PDZ V186	
		NIKKL	MPQ50
F70	SMON16	SLI V8 PDZ V186 NIKKL	J90
CRQ NFG NKX OKB	SMON17	SMO SMO125R V64 V363 DANAH V23	
		OCN	PQ50
CRQ NFG NKX OKB	SMON18	SMO SMO125R V64 SLI V23 OCN	M90
CRQ NFG NKX OKB	SMON19	SXC V208 OCN	J110
CRQ NFG NKX OKB (LAXE)	SMON20	SMO LAX V23 SLI SLI148R V25 PACIF	
		V208 OCN	J110M90
CRQ NFG NKX OKB (SNAN)	SMON21	SMO SMO125R V64 SLI V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	SMON22	SMO SMO125R V64 V363 DANAH V23	
		MZB	PQ50
MYF NRS NZY SAN SDM SEE (LAXE)	SMON23	SMO LAX V23 SLI V64 V363 DANAH	
		V23 MZB	PQ50
MYF NRS NZY SAN SDM SEE	SMON24	SMO SMO125R V64 SLI V23 MZB	M90
MYF NRS NZY SAN SDM SEE	SMON25	SXC V208 LAX118R CARDI MZB320R	
		MZB	J110
MYF NRS NZY SAN SDM SEE (LAXE)	SMON26	SMO LAX V23 SLI SLI148R V25 PACIF	
		V208 LAX118R CARDI MZB320R MZB ...	J110M90
MYF NRS NZY SAN SDM SEE (SNAN)	SMON27	SMO SMO125R V64 SLI V23 MZB	PQ50

TOWER ENROUTE CONTROL

361

TO:	ROUTE ID	ROUTE	ALTITUDE
RNM.....	SMON28	SMO SMO125R V64 V363 DANAH V23	
		OCN V208 JLI	PQ70
RNM (SNAN)	SMON29	SMO SMO125R V64 SLI V23 OCN V208	
		JLI	PQ70
RNM.....	SMON30	SMO SMO125R V64 SLI V23 OCN V208	
		JLI	M90
RNM.....	SMON31	SXC V208 JLI	J110
RNM (LAXE)	SMON32	SMO LAX V23 SLI V23 OCN V208 JLI	J110M90
SAN (SANE)	SMON33	SMO SMO125R V64 V363 DANAH V165	
		SARGs	PQ50
SAN (SANE)	SMON34	SMO SMO125R V64 SLI V165 SARGs ...	M90
SAN (SANE)	SMON35	SXC V208 PACIF V25 REDIN V165	
		SARGs	J110
OXR CMA NTD.....	SMON36	SMO VNY	PQ40
OXR CMA NTD.....	SMON37	VTU	JM60
SBA.....	SMON38	SMO V107 SADDE V299 VTU VTU282R	
		KWANG	J100MPQ60
SBA (LAXE)	SMON39	LAX V23 V186 DEANO V27 KWANG	JM50PQ40

EMPIRE AREA

FROM: CCB CNO EMT HMT REI L65 AJO L67
RAL RIR RIV SBD F70 ONT POC

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	ONTN1	PDZ V186 VNY	PQ60
BUR VNY WHP	ONTN2	PDZ V197 POM V264 V186 VNY	JM80
HHR	ONTN3	PDZ PDZ270R HHR RY25 LOC	JMPQ30
LAX	ONTN4	PDZ PDZ270R LAX RWY 24R LOC	JMPQ40
LAX (LAXE)	ONTN5	PDZ PDZ270R V394 AHEIM V8 TANDY ...	PQ40
LAX (LAXE)	ONTN6	PDZ V16 PRADO V363 DANAH V23 SLI	
		V8 TANDY	JM80
SMO.....	ONTN7	PDZ V186 DARTS	JMPQ60
AVX	ONTN8	PDZ V16 PRADO V363 DANAH SXC065R	
		SXC	JMPQ70
FUL LGB SLI TOA	ONTN9	PDZ PDZ270R V394 SLI	JMPQ40
SNA.....	ONTN10	PDZ PDZ270R V363 POXKU V8 SLI	JMPQ40
CRQ NFG NKX OKB	ONTN11	PDZ V186 ROBNN V458 OCN	JM110PQ70
MYF NRS NZY SAN SDM SEE	ONTN12	PDZ V186 HAILE V66 MZB	JM110PQ90
RNM.....	ONTN13	PDZ V186 ROBNN V208 JLI	JM110PQ70
CMA OXR NTD.....	ONTN14	PDZ V186 FIM	PQ60
CMA OXR NTD.....	ONTN15	PDZ V197 POM V264 V186 FIM	JM80
SBA.....	ONTN16	PDZ V186 DEANO V27 KWANG.....	PQ60
SBA.....	ONTN17	PDZ V197 POM V264 V186 DEANO V27	
		KWANG	JM80

PT MUGU AREA

FROM: OXR CMA

TO:	ROUTE ID	ROUTE	ALTITUDE
SBA.....	VTUN1	KWANG	JMPQ40
BUR	VTUN2	VTU054R TOAKS	JMPQ50
WHP VNY	VTUN3	CMA CMA072R GINNA	JMPQ50
PMD WJF EDW NID VCV IYK L00			
MHV TSP.....	VTUN4	FIM V386 PMD.....	JMPQ70
AVX	VTUN5	VTU V208 SXC	JM70PQ50
FUL LGB SLI TOA	VTUN6	VTU044R GINNA V326 VNY V186	
		ADAMM V394 SLI	PQ50
SNA.....	VTUN7	VTU044R GINNA V326 VNY V186 BAYJY	
		V363 POXKU V8 SLI	PQ50
HHR	VTUN8	VTU V299 SADDE V107 SMO SMO125R	
		POPPR V23 SLI	PQ50
FUL LGB SLI TOA SNA HHR.....	VTUN9	VTU V208 SXC SLI	JM70
HHR (LAXE)	VTUN10	VTU044R GINNA V326 VNY V186	
		ELMOO	JM70PQ50
LAX	VTUN11	VTU V299 SADDE V107 SMO	JMPQ50
LAX (LAXE)	VTUN12	VTU V25 EXERT	JMPQ50
SMO.....	VTUN13	VTU044R GINNA V326 VNY V186	
		DARTS	JMPQ50
CCB.....	VTUN14	VTU044R GINNA V326 VNY V186 V264	
		POM	JM70PQ50

TO:	ROUTE ID	ROUTE	ALTITUDE
CNO EMT REI L65 AJO ONT POC RAL RIR RIV SBD.....	VTUN15	VTU044R GINNA V326 VNY V186 PDZ ...	PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR RIV SBD.....	VTUN16	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ	JM70
HMT	VTUN17	VTU044R GINNA V326 VNY V186 PDZ V186 WESIN	PQ50
HMT	VTUN18	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ V186 WESIN	JM70
L67	VTUN19	VTU044R GINNA V326 VNY V186 PDZ PDZ078R EDITS	PQ50
L67	VTUN20	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ PDZ078R EDITS	JM70
F70	VTUN21	VTU044R GINNA V326 VNY V186 PDZ V186 NIKKL	PQ50
F70	VTUN22	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ V186 NIKKL	JM70
CRQ NFG NKX OKB	VTUN23	VTU044R GINNA V326 VNY V186 ROBNN V458 OCN.....	PQ70
CRQ NFG NKX OKB (LAXE)	VTUN24	VTU044R GINNA V326 VNY V186 ROBNN V458 OCN	PQ70
CRQ NFG NKX OKB	VTUN25	VTU V208 SXC V208 OCN	J110M90
MYF NRS NZY SAN SDM SEE	VTUN26	VTU044R GINNA V326 VNY V186 HAILE V66 MZB.....	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	VTUN27	VTU044R GINNA V326 VNY V186 HAILE V66 MZB	PQ70
MYF NRS NZY SAN SDM SEE	VTUN28	VTU V208 SXC V208 LAX118R CARDI MZB320R MZB	J110M90
RNM	VTUN29	VTU044R GINNA V326 VNY V186 ROBNN V208 JLI	PQ70
RNM (LAXE)	VTUN30	VTU044R GINNA V326 VNY V186 ROBNN V208 JLI	PQ70
RNM	VTUN31	VTU V208 SXC V208 JLI	J110M90
SAN (SANE)	VTUN32	VTU044R GINNA V326 VNY V186 BAYJY V363 DANAH V165 SARGs	PQ50
SAN (SANE)	VTUN33	VTU V208 SXC V27 REDIN V165 SARGs.....	J110M90
SMX	VTUN34	V25 RZS RZS286R KOAKS	JMPQ80
IZA	VTUN35	V25 RZS RZS277R CALLI	JMPQ60
LPC	VTUN36	V27 GVO	JMPQ60

SAN DIEGO AREA

FROM: CRQ MYF NFG NKX NRS NZY SAN
SDM SEE RNM OKB L18 TIJ

TO:	ROUTE ID	ROUTE	ALTITUDE
AVX	SANN1	MZB V23 OCN V208 SXC	PQ60
AVX	SANN2	MZB293R V27 SXC	J100M80
FUL LGB SNA SLI TOA LAX	SANN3	OCN V23 SLI	PQ60
FUL LGB SNA SLI TOA LAX	SANN4	MZB293R SLI148R SLI	J100M80
LAX (LAXE)	SANN5	OCN V23 SLI V8 TANDY	PQ60
LAX (LAXE)	SANN6	MZB293R SLI148R VTU114R V8 TANDY	J100M80
HHR	SANN7	OCN V23 SLI SLI340R WELLZ HHR RY25 LOC	PQ60
HHR	SANN8	MZB293R SLI148R SLI SLI340R WELLZ HHR RY25 LOC	J100M80
SMO	SANN9	OCN V23 POPPR SMO125R SMO SMO059R ELM00	PQ60
SMO	SANN10	MZB293R SLI148R SLI V459 DARTS	J100M80
SMO (LAXE)	SANN11	OCN V23 SLI SLI333R V186 DARTS	PQ60
SMO (LAXE)	SANN12	MZB293R SLI148R SLI SLI333R V186 DARTS	J100M80
BUR.....	SANN13	OCN V23 POPPR SMO125R SMO SMO311R SILEX	PQ60
BUR	SANN14	MZB293R SLI148R SLI V23 LAX LAX316R SILEX.....	J100M80
WHP VNY	SANN15	OCN V23 POPPR SMO125R SMO SMO317R CANOG	PQ60

TOWER ENROUTE CONTROL

363

TO:	ROUTE ID	ROUTE	ALTITUDE
WHP VNY	SANN16	MZB293R SLI148R SLI V23 LAX	
		LAX320R CANOG.....	J100M80
BUR VNY WHP (LAXE).....	SANN17	OCN V23 SLI SLI333R V186 VNY	PQ60
BUR VNY WHP (LAXE).....	SANN18	MZB293R SLI148R SLI SLI333R V186	
		VNY.....	J100M80
CNO AJO L65 REI ONT RAL RIR SBD RIV....	SANN19	OCN V23 DANAH V363 POXKU V8 PDZ...	PQ60
ONT SBD.....	SANN20	V186 TANNR HDF PETIS.....	JM100
CNO AJO RAL RIR	SANN21	V186 PDZ	JM100
L65 REI RIV.....	SANN22	V186 TANNR HDF.....	JM100
CCB EMT POC.....	SANN23	OCN V23 DANAH V363 POM	PQ60
CCB EMT POC.....	SANN24	MZB293R POM164R POM.....	J100M80
HMT	SANN25	OCN V23 DANAH V363 POXKU V8 PDZ	
		V186 WESIN.....	PQ60
HMT	SANN26	V186 WESIN.....	JM100
L67	SANN27	OCN V23 DANAH V363 POXKU V8 PDZ	
		PDZ078R EDITS.....	PQ60
L67	SANN28	V186 PDZ PDZ078R EDITS.....	JM100
F70	SANN29	OCN V23 DANAH V363 POXKU V8 PDZ	
		V186 NIKKL	PQ60
F70	SANN30	V186 NIKKL	JM100
OXR CMA NTD.....	SANN31	OCN V23 SLI SLI272R SMO125R SMO	
		VNY	PQ60
OXR CMA NTD.....	SANN32	MZB293R V27 SXC V208 VTU	J100M80
CMA OXR NTD (LAXE).....	SANN33	OCN V23 SLI SLI333R V186 FIM.....	PQ60
CMA OXR NTD (LAXE).....	SANN34	MZB293R SLI148R SLI SLI333R V186	
		FIM	J100M80
SBA.....	SANN35	OCN V23 LAX V299 VTU VTU282R	
		KWANG	PQ60
SBA.....	SANN36	MZB293R V27 SXC V208 VTU VTU282R	
		KWANG	J100M80
SBA (LAXE).....	SANN37	OCN V23 DANAH V363 BAYJY V186	
		DEANO V27 KWANG.....	PQ60

SANTA BARBARA AREA

FROM: SBA

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SBAN1	KWANG CMA CMA078R TOAKS	PQ50
WHP VNY	SBAN2	KWANG CMA CMA072R GINNA	PQ50
BUR VNY.....	SBAN3	HENER V186 FIM FERNANDO STAR.....	J110M90
AVX	SBAN4	KWANG VTU V208 SXC	JM70PQ50
FUL LGB SLI TOA	SBAN5	KWANG CMA VNY V186 ADAMM V394	
		SLI	PQ50
SNA.....	SBAN6	KWANG CMA VNY V186 BAYJY V363	
		POXKU V8 SLI.....	PQ50
HHR	SBAN7	KWANG VTU V299 SADDE V107 SMO	
		SMO125R POPPR V23 SLI.....	PQ50
FUL LGB SLI TOA SNA HHR.....	SBAN8	KWANG VTU V208 SXC SLI	J110M90
HHR (LAXE)	SBAN9	KWANG CMA VNY V186 ELM00	PQ50
LAX	SBAN10	KWANG VTU V299 SADDE V107 SMO	JM110PQ50
LAX (LAXE)	SBAN11	KWANG VTU V25 EXERT	JM70PQ50
SMO.....	SBAN12	KWANG CMA VNY V186 DARTS	PQ50
SMO.....	SBAN13	HENER FIM V186 DARTS	J110M90
CCB.....	SBAN14	KWANG CMA VNY V186 V264 POM.....	PQ50
CCB.....	SBAN15	HENER V186 FIM V186 V264 POM.....	JM70
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN16	KWANG CMA VNY V186 PDZ.....	PQ50
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN17	HENER FIM V186 V264 POM V197 PDZ .	J110M90
HMT	SBAN18	KWANG CMA VNY V186 PDZ V186	
		WESIN	PQ50
HMT	SBAN19	HENER V186 V264 POM V197 PDZ	
		V186 WESIN.....	J110M90
L67	SBAN20	KWANG CMA VNY V186 PDZ PDZ078R	
		EDITS	PQ50
L67	SBAN21	HENER FIM V186 V264 POM V197 PDZ	
		PDZ078R EDITS.....	J110M90

TO:	ROUTE ID	ROUTE	ALTITUDE
F70	SBAN22	KWANG CMA VNY V186 PDZ V186	
		NIKKL	PQ50
F70	SBAN23	HENER FIM V186 V264 POM V197 PDZ	
		V186 NIKKL	J110M90
CRQ NFG NKX OKB	SBAN24	HENER V186 DARTS V597 OCN	PQ90
CRQ NFG NKX OKB (LAXE)	SBAN25	KWANG CMA VNY V186 ROBNN V458	
		OCN	PQ70
CRQ NFG NKX OKB	SBAN26	KWANG VTU V208 SXC V208 OCN	J110M90
MYF NRS NZY SAN SDM SEE	SBAN27	HENER V186 DARTS V597 MZB	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	SBAN28	KWANG CMA VNY V186 HAILE V66	
		MZB	PQ70
MYF NRS NZY SAN SDM SEE	SBAN29	KWANG VTU V208 SXC V208 LAX118R	
		CARDI MZB320R MZB.....	J110M90
SAN (SANE)	SBAN30	KWANG CMA VNY V186 BAYJY V363	
		DANAH V165 SARGs	PQ50
SAN (SANE)	SBAN31	KWANG VTU V208 SXC V27 REDIN V165	
		SARGs.....	J110M90
RNM	SBAN32	HENER V186 DARTS V597 OCN V208	
		JLI.....	PQ90
RNM (LAXE)	SBAN33	KWANG CMA VNY V186 ROBNN V208	
		JLI	PQ70
RNM	SBAN34	KWANG VTU V208 JLI	J110M90
OXR CMA NTD.....	SBAN35	KWANG CMA.....	JMPQ30
PSP UDD TRM.....	SBAN36	FIM V186 NIKKL V64 TRM PSP	PQ110

SANTA BARBARA AREA**FROM:** SBP SMX VBG LPC IZA

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	SBAN37	RZS V186 FIM	PQ70
BUR VNY	SBAN38	RZS V386 FIM FERNANDO STAR.....	J110M90
AVX	SBAN39	RZS VTU V208 SXC	JMPQ70
FUL LGB SLI TOA	SBAN40	RZS V186 ADAMM V394 SLI.....	PQ70
SNA	SBAN41	RZS V186 BAYJY V363 POXKU V8 SLI....	PQ70
HHR	SBAN42	RZS VTU V299 SADDE V107 SMO	
		SMO125R POPPR V23 SLI	PQ70
FUL LGB SLI TOA SNA HHR	SBAN43	RZS VTU V208 SXC SLI	J110M90
HHR (LAXE)	SBAN44	RZS V186 ELM00	PQ70
LAX	SBAN45	RZS VTU SADDE STAR	JM110PQ70
LAX (LAXE)	SBAN46	RZS VTU V25 EXERT	JM70PQ50
SMO	SBAN47	RZS V186 DARTS	PQ70
SMO	SBAN48	RZS V386 FIM V186 DARTS	J110M90
CCB.....	SBAN49	RZS V186 V264 POM	PQ70
CCB.....	SBAN50	RZS V386 FIM V186 V264 POM	J110M90
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN51	RZS V186 PDZ	PQ70
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN52	RZS V386 FIM V186 V264 POM V197	
		PDZ	J110M90
HMT	SBAN53	RZS V186 PDZ V186 WESIN	PQ70
HMT	SBAN54	RZS V386 FIM V186 V264 POM V197	
		PDZ V186 WESIN	J110M90
L67	SBAN55	RZS V186 PDZ PDZ078R EDITS	PQ70
L67	SBAN56	RZS V386 FIM V186 V264 POM V197	
		PDZ PDZ078R EDITS	J110M90
F70	SBAN57	RZS V186 PDZ V186 NIKKL	PQ70
F70	SBAN58	RZS V386 FIM V186 V264 POM V197	
		PDZ V186 NIKKL	J110M90
CRQ NFG NKX OKB	SBAN59	RZS V597 OCN	PQ90
CRQ NFG NKX OKB (LAXE)	SBAN60	RZS V186 ROBNN V458 OCN.....	PQ70
CRQ NFG NKX OKB	SBAN61	RZS VTU V208 SXC V208 OCN.....	J110M90
MYF NRS NZY SAN SDM SEE	SBAN62	RZS V597 MZB	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	SBAN63	RZS V186 HAILE V66 MZB	PQ70
MYF NRS NZY SAN SDM SEE	SBAN64	RZS VTU V208 SXC V208 LAX118R	
		CARDI MZB320R MZB.....	J110M90
SAN (SANE)	SBAN65	RZS V186 VNY V186 BAYJY V363	
		DANAH V165 SARGs	PQ70
SAN (SANE)	SBAN66	RZS VTU V208 SXC V27 REDIN V165	
		SARGs.....	J110M90
RNM	SBAN67	RZS V597 OCN V208 JLI	PQ90

TOWER ENROUTE CONTROL

365

TO:	ROUTE ID	ROUTE	ALTITUDE
RNM (LAXE)	SBAN68	RZS V186 ROBNN V208 JLI	PQ70
RNM	SBAN69	RZS VTU V208 JLI	J110M90
OXR CMA NTD	SBAN70	RZS VTU	JMPQ70
PSP UDD TRM	SBAN71	RZS V386 FIM V186 NIKKL V64 TRM	
		PSP	PQ110

PALM SPRINGS AREA FROM: PSP UDD TRM

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	PSPN1	V388 PDZ V186 VNY	PQ100
BUR VNY WHP	PSPN2	V388 PDZ V197 POM V264 V186 VNY ...	JM120
AJO CNO RAL RIR ONT RIV SBD	PSPN3	V388 PDZ	JM120PQ100
HMT	PSPN4	V388 PDZ V186 WESIN	JM120PQ100
EMT POC CCB	PSPN5	V388 PDZ PDZ270R V363 POM	JM120PQ100
L67	PSPN6	V388 PDZ PDZ078R EDITS	JM120PQ100
F70	PSPN7	V388 PDZ V186 NIKKL	JM120PQ100
FUL LGB SLI TOA SNA	PSPN8	V388 ACINS V283 SLI	JM120PQ100
HHR	PSPN9	V388 PDZ PDZ270R HHR RY25 LOC	JM120PQ100
LAX	PSPN10A	V388 PDZ V16 LAHAB	M120PQ100
LAX	PSPN10B	V388 LENHO SEAVU SEAVU ARRIVAL	J120
LAX (LAXE)	PSPN11	V388 PDZ PDZ270R V394 SLI V8	
		TANDY	PQ100
LAX (LAXE)	PSPN12	V388 ACINS V283 SLI V8 TANDY	JM120
SMO	PSPN13	V388 PDZ V186 DARTS	JM120PQ100
CMA OXR NTD	PSPN14	V388 PDZ V186 FIM	PQ100
CMA OXR NTD	PSPN15	V388 PDZ V197 POM V264 V186 FIM	JM120
SBA	PSPN16	V388 PDZ V186 DEANO V27 KWANG	PQ100
SBA	PSPN17	V388 PDZ V197 POM V264 V186	
		DEANO V27 KWANG	M120

PALMDALE AREA

FROM: EDW LOO MHV PMD WJF

TO:	ROUTE ID	ROUTE	ALTITUDE
HHR	EDWN1	PMD V518 KIMMO V459 DARTS V186	
		ADAMM V394 HHR RY25 LOC	JMPQ80
FUL LGB SLI SNA TOA	EDWN2	PMD V201 BERRI V459 SLI	JMPQ90
FUL LGB SLI SNA TOA (LAXE)	EDWN3	PMD V386 V23 LAX V25 ALBAS SLI	MPQ80

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by **pitch** (entry into) and **catch** (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures, preferred IFR routing, or other established routing programs.

The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City (ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU). Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes only.

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted.

Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.

Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: <http://sua.faa.gov/sua/Welcome.do>. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as preferred IFR routes.

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports Located Outside HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing over any of the following pitch points (listed from north to south):

DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD, MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic.

HAR Special High Altitude Pitch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists pitch points for airports within the HAR Phase I expansion airspace.

Albuquerque	ABQ, GUP, HANOS or ZUN
Austin	ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV
Boca Raton, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Burbank includes Santa Monica and Van Nuys	GMN, MARKS or DAG LAS or HEC EED or PMD BLH
Chicago Terminal Area	IOW, PLL275065, MZV or BAE
Dallas/Fort Worth Terminal Area	ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK ELD, SWB or Aircraft destined the Chicago terminal area Except MDW EAKER MIDEE BDF BRADFORD-STAR or MLC J105 SGF BDF BRADFORD-STAR
Denver Terminal Area	PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE, CABET, WEEDS, OR BINKE
Fort Lauderdale (or) Fort Lauderdale Executive	THNDR KPASA Q118 LENIE or THNDR KPASA Q116 CEEYA or THNDR KPASA Q110 FEONA or THNDR SMELZ Q106 GADAY or THNDR SMELZ Q106 BULZI
Houston Bush	LIT, EMG, MLC, JCT or Aircraft destined Atlanta Terminal Area LCH Q24 PAYTN HONIE-RNAV STAR or Aircraft joining J37 to the northeast, BPT GUSTI Q22 CATLN or Aircraft joining J42 to the northeast, ELD Q32 J42

Houston Hobby	LIT, EMG, MLC, JCT, or Aircraft joining J42 to the northeast, ELD Q32 J42
Jacksonville, FL	TAY
Kansas City Terminal Area	TIFTO, CATTS or KENTN
Los Angeles, includes Ontario	GMN, RZS or DAG LAS or TRM EED or TRM PKE
Las Vegas	DOBNE, MOSBI, NICLE, TRALR or ZELOT
Long Beach includes Orange County	GMN SNS, EHF, LANDO or TRM PKE or TRM EED
Memphis	BNA, HAAWK, SALMS or SQS
Miami Terminal Area	WINCO KPASA Q118 LENIE or WINCO KPASA Q116 CEEYA or WINCO KPASA Q110 FEONA or WINCO SMELZ Q106 GADAY or WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE

Salt Lake City	HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI or TCH J56 CHE or TCH J173 EKR
Saint Louis	VIH, MAP, MYERZ, MCM or HLV MCI
San Antonio Terminal Area	FUZ, SJT, MQP, ABI or Aircraft North of LFK, LFK or Aircraft South of HUB, ELA or Aircraft South of LFK and North of HUB LCH
San Diego	TRM EED or TRM PKE or TRM JOTNU BLD
San Francisco Bay Area	GALLI, INSLO, HAROL JSICA
Oakland	GALLI, INSLO, HAROL JSICA
San Jose	GALLI or INSLO
Seattle	BLUIT
Southwest Florida Airports (RSW/FMY)	JOCKS KPASA Q118 LENIE or JOCKS KPASA Q116 CEEYA or JOCKS KPASA Q110 FEONA or JOCKS SMELZ Q106 GADAY or JOCKS SMELZ Q106 BULZI
Tampa Terminal Area	FEONA, BULZI or BRUTS Q118 LENIE or GULFR Q116 CEEYA or BULZI Q106 GADAY

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Atlanta Terminal Area	Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA or Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVA or MEM or Aircraft through ZME airspace from ZID airspace west of a line from VHP to BWG, BNA or Aircraft through ZME airspace from ZID airspace east of a line from VHP to BWG, BWG or Aircraft through ZME airspace from ZFW airspace, MEM or MEI HONIE (RNAV)–STAR or PATYN HONIE (RNAV)–STAR
-----------------------	--

Baltimore–Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL
Hartford Bradley*	GEP, CRL
Canton–Akron*	GIJ, VHP, GEP
Charlotte	BNA, VUZ
Cincinnati Terminal Area	BNA, PXV or Aircraft north of SLC, JOT or Aircraft over or south of SLC, ENL or SLC or SFO departures, ENL, JOT
Cleveland Terminal Area*	OBK
Detroit Terminal Area	BAE MKG POLAR–STAR or VHP FWA MIZAR–STAR
Detroit Young	VHP FWA or LAN SPRTN–STAR
Indianapolis Terminal Area	BIB, SPI, JOT
Louisville	ENL, MEM
Newark*	GEP, VHP, FLM, IIU, BNA, VUZ or IOW GIJ J554 CRL J584 SLT FQM
New York Kennedy*	GEP, VHP, FLM, IIU, BNA, VUZ or DBQ J94 PMM J70 LVZ LENDY–STAR
New York LaGuardia*	GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ
Philadelphia Terminal Area*	GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ
Pittsburgh Terminal Area*	VHP, GIJ, BAE, GEP
Pontiac	LFD, LAN, VHP, FWA, GEP
Providence	JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ
Raleigh–Durham	FLM, IIU, BNA, VUZ
Toronto Terminal Area	ECK, SVM, SSM, GEP
Teterboro*	GEP, VHP, CRL, BNA, VUZ
Washington Dulles/National*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ
White Plains*	GEP, VHP, CRL, FLM, IIU, BNA, VUZ
Willow Run*	LAN, LFD, VHP, FWA, GEP

*Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522, Q505, Q504, Q502, Q501

or

Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP

or

Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.

Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area	CURLY CURLY-STAR or ESPAN FRIHO-STAR or LAVAN LAVAN-STAR or FTI FRIHO-STAR or MIERA MIERA-STAR
Austin Terminal Area	Aircraft west of a north-south line at LFK, BLEWE or Aircraft east of a north-south line at LFK, IDU or LLO
Boca Raton, FL	CEW DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or SZW INPIN SHDAY (RNAV)-STAR
Chicago Midway	CVA MOTIF-STAR or PIA MOTIF-STAR or DBQ CVA MOTIF-STAR or LMN MOTIF-STAR
Chicago O'Hare Terminal Area	GEP DLL MSN JVL JANESVILLE-STAR or TVC PULLMAN-STAR or FOD DBQ JVL JANESVILLE-STAR or MCW JANESVILLE-STAR or GCK IRK BRADFORD-STAR
Dallas/Fort Worth Terminal Area	IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR Aircraft through ZME airspace from north and west of PXV, RZC, Q23 FSM or Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW or Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS or Aircraft through ZME airspace from J52 and south of J52, SQS

Denver Terminal Area	OATHE DANDD-STAR
	or
	HGO QUAIL-STAR
	or
	LOPEC-STAR
	or
	ALS LARKS-STAR
	or
	HBU POWDR-STAR
	or
	EKR TOMSN-STAR
	or
	CHE TOMSN-STAR
	or
	BFF LANDR-STAR
	or
	LBF SAYGE-STAR
	or
	HCT SAYGE-STAR
	or
	RSK LARKS-STAR
	or
	LAA QUAIL-STAR
	or
	GCK J154 RYLIE DANDD-STAR
	or
	OCS J154 ALPOE RAMMS-STAR
	or
	YANKI J114 SNY LANDR-STAR
	or
	Aircraft filed BIL or east, MBW RAMMS-STAR
Ft Lauderdale or Ft Lauderdale Executive	CEW DEFUN Q104 PIE SWAGS (RNAV)-STAR
	Aircraft through ZHU airspace remain south ZME and ZTL airspace
	or
Houston Bush	SZW HEVVN Q104 PIE SWAGS (RNAV)-STAR
	CRP, CVE, LLO, LUKIY, SAT
	or
	Aircraft south and east of LLA, LLA
	or
	MISLE Q40 AEX
	or
	Aircraft north and east of SJI, SJI
	or
	Aircraft east of PXV, PXV Q31 DHART SWB
	or
	Aircraft north and west of PXV, PROWL Q33 DHART SWB
Houston Hobby	CRP, ELLVR, SAT, SWB
	or
	Aircraft south and east of GIRLY, GIRLY
	or
	Aircraft north and east of SJI, SJI
	or
	BESOM Q38 ROKIT ROKIT-STAR
	or
	Aircraft east of PXV, PXV Q29 HARES SWB
	or
	Aircraft north and west of PXV, PROWL Q33 DHART SWB
Jacksonville	GADAY ZOOSS TAY
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	ZOOSS TAY

John Wayne–Orange County	HEC, PGS, BLD or Aircraft south of TBC from ZAB airspace, HIPPI
Kansas City Terminal Area	LMN BRAYMER–STAR or PWE ROBINSON–STAR or EMP JHAWK–STAR
Las Vegas	DILCO, LIDAT, IGM or Aircraft over PGA or north of PGA KSINO or Aircraft south of PGA, PGS, LYNYS
Los Angeles Terminal Area	Aircraft North of TBC, HEC, PGS or Aircraft South of TBC from ZAB airspace, HIPPI, MESSI
Miami Terminal Area	CEW DEFUN Q104 CYY DEEDS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace or SZW HEVNV Q104 CYY DEEDS (RNAV)–STAR
Minneapolis Terminal Area	Aircraft from north, west, south, FAR GOPHER–STAR or RWF SKETR–STAR or ALO KASPR–STAR or BRD GOPHER–STAR or BAE EAU CLAIRE–STAR or FOD TWOLF–STAR
Memphis Terminal Area	ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD
Naples, FL	CEW DEFUN Q104 PLYER PIKKR (RNAV)–STAR Aircraft through ZHU AIRSPACE remain south of ZME and ZTL airspace or SZW HEVNV Q104 PLYER PIKKR (RNAV)–STAR
Nashville	CCT, GHM, GUITR, TINGS, VOLLIS
New Orleans Terminal Area	BLUEZ, GPT, LCH, MCB, TBD, FATSO
Oakland	ILA or KATTS PAMMY or Aircraft over or south of a line ILC J16 DVC REANA KATTS PAMMY or Aircraft from north of ILC, JOPER PAMMY or KATTS PAMMY or Aircraft over or south of ILC, REANA KATTS PAMMY
Orlando Terminal Area	GADAY Q108 CLAWZ LEESE–STAR Aircraft through ZHU airspace remain south of ZME/ZTL airspace or OTK LEESE–STAR

Palm Beach, FL	CEW DEFUN Q112 INPIN GULLO (RNAV)–STAR Aircraft through ZHU airspace remain south of ZME and ZTL airspace or SZW INPIN GULLO (RNAV)–STAR
Phoenix	CORKR DRK or Aircraft from ZDV airspace, GUP or Aircraft from ZAB airspace, ZUN, MOHAK, SSO or VYLLA TUS
Phoenix Satellites	FLG, SSO, MOHAK or VYLLA, TUS
Portland, OR Terminal Area	ARNIT BONVL–STAR or LARNO BONVL–STAR or MOXEE MOXEE–STAR
St. Louis Terminal Area	SGF TRAKE–STAR or BUM TRAKE–STAR or ANX TRAKE–STAR or LMN IRK RIVRS–STAR or RBS VANDALIA–STAR
Salt Lake City Terminal Area	JNC J12 HELPR SPANE–STAR or EKR MTU SPANE–STAR or BCE DTA–TCH or MLF DTA–TCH or BVL BONNEVILLE–STAR or BYI BEARR–STAR or PIH BEARR–STAR or DBS BRIGHAM CITY–STAR or JAC BRIGHAM CITY–STAR or BPI BRIGHAM CITY–STAR or OCS BRIGHAM CITY–STAR
San Diego Terminal Area	EED, LAX, GBN
Santa Ana	HEC, PGS, BLD, HIPPI
San Antonio Terminal Area	IDU, CSI, JCT, LLO, CRP, LRD or West of a north–south line at LFK, BLEWE or East of a north–south line at LFK, IDU

San Francisco	FMG GOLDEN GATE-STAR
	or
	MVA MODESTO-STAR
	or
	ENI GOLDEN GATE-STAR
	or
	OAL MODESTO-STAR
San Jose	or
	South of a line ILC to DVC, REANA KATTS OAL MODESTO-STAR
	FMG HYP EL NIDO-STAR
	or
	OAL HYP EL NIDO-STAR
	or
	ENI GOLDEN GATE-STAR
Seattle Terminal Area	or
	South of a line ILC to DVC, REANA KATTS KICHI CANDA EL NIDO-STAR
	Aircraft from northeast, southeast, south, TEMPL GLASR-STAR
	or
	SUNED CHINS-STAR
	or
	BTG OLMYPIA-STAR
Southwest Florida Airports RSW and FMY	CEW DEFUN Q104 SWABE JOSFF-STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW HEVVN Q104 SWABE JOSFF-STAR
Tampa Terminal Area	CEW DEFUN Q104 HEVVN DARBS-STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW DARBS-STAR
Tucson	DRK PXR
	or
	MOHAK GBN

VISUAL FLIGHT RULES (VFR) WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag. The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database.

BALTIMORE–WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPAXI	_____	N38°34.57' / W076°20.38'
VPONX	_____	N39°06.65' / W076°55.92'
VPOOP	_____	N38°56.32' / W076°36.90'

BOSTON HELICOPTER CHART

VPBAY	_____	N42°16.17' / W070°49.48'
VPBLT	_____	N42°19.67' / W070°53.40'
VPCGS	_____	N42°22.08' / W071°03.13'
VPEVS	_____	N42°23.52' / W071°04.10'
VPFEN	_____	N42°12.58' / W071°08.88'
VPFRE	_____	N42°25.03' / W071°12.32'
VPGLV	_____	N42°21.88' / W070°52.18'
VPHAM	_____	N42°30.13' / W071°07.15'
VPPIK	_____	N42°20.37' / W071°15.93'
VPQUA	_____	N42°12.10' / W071°04.78'
VPQUB	_____	N42°12.60' / W070°59.83'
VPSPF	_____	N42°24.20' / W071°09.47'
VPTOB	_____	N42°31.42' / W070°59.82'
VPWAN	_____	N42°36.88' / W071°19.45'

BOSTON TERMINAL AREA CHART

VPCOH	Cohasset	N42°13.58' / W070°48.94'
VPCUT	Cuttyhunk Harbor	N41°25.50' / W070°55.03'
VPFRA	Framingham Shopping Center	N42°18.16' / W071°23.65'
VPHOL	Woods Hole	N41°31.06' / W070°40.60'
VPHUL	Hull	N42°18.20' / W070°55.30'
VPLPT	Nantucket Great Point	N41°23.41' / W070°02.78'
VPNED	Needham Towers	N42°18.51' / W071°14.64'
VPPEA	Peabody Shopping Center	N42°32.52' / W070°56.69'
VPROC	Rockingham Race Track	N42°46.29' / W071°13.57'
VPSCI	Scituate	N42°11.89' / W070°43.69'
VPTPT	Nantucket Third Point	N41°18.51' / W070°03.37'
VPTUC	Tuckernuck	N41°18.31' / W070°15.43'
VPWAK	Wakefield	N42°30.72' / W071°05.24'
VPWAN	Wang Towers	N42°36.88' / W071°19.45'

CHARLOTTE SECTIONAL CHART

VPATO	_____	N34°37.37' / W076°31.47'
VPAVA	_____	N34°57.00' / W077°16.50'
VPBFE	_____	N32°16.38' / W080°47.50'
VPBRA	_____	N36°13.75' / W076°08.08'
VPGCE	_____	N36°03.90' / W076°36.42'
VPGHI	_____	N35°15.30' / W075°31.25'
VPGIO	_____	N35°32.50' / W076°37.33'
VPKJU	_____	N35°26.58' / W076°10.22'
VPLMN	_____	N34°55.43' / W077°46.42'
VPMAB	_____	N34°42.20' / W077°03.50'
VPNPO	ISLE OF PALMS	N32°47.78' / W079°46.45'
VPOKY	_____	N35°06.53' / W075°59.17'
VPREP	_____	N32°33.98' / W080°21.82'
VPRRS	_____	N33°25.45' / W079°07.60'
VPUMO	_____	N35°35.63' / W075°28.08'
VPWZO	_____	N36°00.87' / W075°40.07'
VPZIE	_____	N32°01.62' / W080°53.42'

CHICAGO SECTIONAL CHART

WAYPOINT IDENT
VPCOH

COLLOCATED VFR CHECKPOINT

LOCATION
N31°49.35' / W081°51.07'

DENVER TERMINAL AREA CHART/FLYWAY CHART

VPBEN
VPFTG
VPNIC

NORTH INTERCHANGE

N39°44.28' / W104°26.00'
N39°44.35' / W104°32.75'
N39°58.90' / W104°59.27'

HOUSTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT
VPBWY
VPDTN
VPGLA
VPGLB
VPKTY
VPPLN
VPRSN
VPSND
VPSNT
VPTNE
VPTNW
VPTRK

COLLOCATED VFR CHECKPOINT

LOCATION
N29°46.25' / W095°09.24'
N29°46.59' / W095°22.01'
N30°08.32' / W095°06.62'
N30°07.80' / W094°55.70'
N29°47.05' / W095°44.92'
N30°08.80' / W095°50.42'
N29°30.00' / W095°41.00'
N29°23.13' / W095°28.86'
N29°49.29' / W094°53.94'
N29°47.48' / W095°03.34'
N29°47.06' / W095°33.81'
N29°24.06' / W095°10.44'

JACKSONVILLE SECTIONAL CHART

VPAFI
VPAFY
VPBEC
VPCJA
VPCKY
VPCNY
VPDAD
VPDAR
VPDFI
VPDUT
VPEAR
VPEGV
VPPFU
VPGPE
VPHAA
VPHUC
VPIWA
VPJMY
VPKER
VPLEV
VPLJA
VPMIA
VPTLH
VPXZY
VPYIW
VPZIE

DADE CITY

CLEARWATER BEACH

ST PETE BEACH

MIDWAY

LAKE PARKER

N31°49.35' / W081°51.07'
N30°07.00' / W081°21.33'
N29°46.25' / W081°15.10'
N29°30.00' / W081°06.00'
N28°46.50' / W082°34.00'
N28°30.00' / W080°45.00'
N28°22.57' / W082°11.25'
N31°22.38' / W081°24.13'
N29°00.17' / W081°20.85'
N27°37.70' / W082°09.10'
N27°58.67' / W082°49.83'
N29°39.97' / W081°24.87'
N28°57.08' / W081°00.33'
N27°43.50' / W082°44.67'
N30°04.02' / W083°40.02'
N28°19.87' / W082°43.77'
N31°48.33' / W081°25.85'
N29°26.92' / W081°18.27'
N28°04.00' / W081°56.00'
N28°48.00' / W080°52.00'
N29°00.00' / W080°51.00'
N30°50.02' / W084°56.63'
N30°32.70' / W083°52.22'
N29°35.00' / W083°10.00'
N30°42.28' / W081°27.25'
N32°01.62' / W080°53.42'

KANSAS CITY SECTIONAL CHART

VPAGO
VPBEK
VPDEN
VPENE
VPESSE
VPFME
VPGXY
VPMBE
VPMKE
VPROV
VPUTT

N37°50.33' / W090°29.03'
N37°15.07' / W092°30.67'
N37°46.75' / W092°19.20'
N37°44.75' / W091°55.78'
N36°59.48' / W091°00.88'
N37°41.00' / W092°38.33'
N37°15.50' / W091°40.17'
N37°11.08' / W090°27.92'
N37°24.47' / W092°40.00'
N38°01.72' / W091°12.81'
N37°52.05' / W092°01.20'

KANSAS CITY TERMINAL AREA CHART

KLAMATH FALLS SECTION CHART

LOS ANGELES HELICOPTER CHART

SW, 22 OCT 2009 to 17 DEC 2009

LOS ANGELES SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71'/W119°10.39'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART

VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPGETY	GETTY CENTER	N34°04.84'/W118°28.66'
VPLBP	BANNING PASS	N33°56.05'/W116°59.63'
VPLCC	CHAFFEY COLLEGE	N34°08.87'/W117°34.33'
VPLCP	CAJON PASS	N34°18.07'/W117°27.68'
VPLDL	DISNEYLAND	N33°48.72'/W117°55.13'
VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLDS	DODGER STADIUM	N34°04.42'/W118°14.42'
VPLFX	91/605 INTERCHANGE	N33°52.38'/W118°06.08'
VPLGP	GRIFFITH PARK OBSERVATORY	N34°07.10'/W118°18.02'
VPLHF	110/405 FWYS	N33°51.42'/W118°17.10'
VPLHP	HUNTINGTON PIER	N33°39.32'/W118°00.25'
VPLKH	KING HARBOR	N33°50.75'/W118°23.88'
VPLLC	L.A. COLISEUM	N34°00.83'/W118°17.27'
VPLLM	LAKE MATHEWS	N33°50.58'/W117°26.85'
VPLMM	MAGIC MOUNTAIN	N34°26.20'/W118°36.28'
VPLMS	MILE SQUARE PARK	N33°43.40'/W117°56.77'
VPLPD	PRADO DAM	N33°53.40'/W117°38.48'
VPLPP	PACIFIC PALISADES	N34°02.13'/W118°32.15'
VPLQM	QUEEN MARY	N33°45.17'/W118°11.37'
VPLRB	ROSE BOWL	N34°09.67'/W118°10.05'
VPLRT	SANTA ANITA RACE TRACK	N34°08.45'/W118°02.65'
VPLSA	SANTA ANA CANYON	N33°52.03'/W117°42.68'
VPLSB	SANTA FE FLOOD BASIN	N34°07.72'/W117°57.30'
VPLSC	STATE COLLEGE	N33°52.97'/W117°53.13'
VPLSF	SAN FERNANDO RESERVOIR	N34°17.87'/W118°29.00'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPLSR	HAWTHORNE & 405 FREEWAY	N33°53.07'/W118°21.13'
VPLSS	SANTA SUSANA PASS	N34°16.00'/W118°38.43'
VPLTW	TUJUNGA WASH & FOOTHILL	N34°16.40'/W118°20.30'
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97'/W118°16.32'
VPLWT	WATER TANK	N34°10.82'/W118°46.27'
VPNEW	NEWHALL PASS	N34°20.18'/W118°30.72'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

MIAMI SECTIONAL CHART

VPACH	HOLLYWOOD BEACH	N26°00.92'/W080°06.93'
VPBOV	_____	N27°57.00'/W080°46.75'
VPCLC	_____	N26°27.07'/W082°00.88'
VPCTE	_____	N26°09.28'/W081°20.70'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDUT	_____	N27°37.70'/W082°09.10'
VPDZE	_____	N27°19.00'/W080°44.17'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78'/W080°28.00'
VPFAH	_____	N26°25.40'/W081°29.67'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHRO	_____	N27°05.97'/W082°12.20'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIBR	_____	N27°12.47'/W081°40.22'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPKOE	_____	N24°40.08'/W081°20.55'
VPLYY	_____	N24°49.07'/W080°49.17'
VPMBO	GULFSTREAM PARK	N25°58.57'/W080°08.17'
VPOBA	PUMPING STATION	N26°28.30'/W080°26.75'
VPRBI	_____	N25°50.67'/W080°55.18'
VPRNL	RANGER STATION	N25°22.92'/W080°36.58'
VPWMO	_____	N27°03.00'/W080°35.00'

MIAMI TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPACH	HOLLYWOOD BEACH	N26°00.92'/W080°06.93'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78'/W080°28.00'
VPMB0	GULFSTREAM PARK	N25°58.57'/W080°08.17'
VPOBA	PUMPING STATION	N26°28.30'/W080°26.75'
VPRBI		N25°50.67'/W080°55.18'
VPRNL	RANGER STATION	N25°22.92'/W080°36.58'

NEW ORLEANS SECTIONAL CHART

VPGPT		N30°25.95'/W089°05.62'
VPLIP	PHILLIPS INLET	N30°16.23'/W085°59.25'
VPMAI		N30°50.02'/W084°56.63'
VPMOB		N30°23.00'/W088°31.72'
VPRAM		N30°18.95'/W089°35.88'
VPRER		N30°13.87'/W085°20.67'
VPRIV		N30°54.85'/W087°57.82'
VPSAW		N30°49.65'/W089°07.42'
VPTHR		N30°19.93'/W087°08.50'

NEW YORK HELICOPTER CHART

VPJAY		N40°59.00'/W073°07.00'
VPLYD		N40°57.37'/W073°29.59'
VPROK		N40°52.70'/W073°44.24'

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

VPALL	ALLENVILLE	N33°20.97'/W112°35.20'
VPAQU	AQUEDUCT PUMPING STATION	N33°40.05'/W112°41.38'
VPARM	ARROWHEAD MALL	N33°38.52'/W112°13.48'
VPAWG	AHWATUKEE GOLF COURSE	N33°19.98'/W111°59.08'
VPAZM	ARIZONA MILLS	N33°23.43'/W111°57.88'
VPBAR	BARTLETT DAM	N33°49.10'/W111°37.92'
VPCCC	COUNTRY CLUB & CANAL	N33°30.73'/W111°50.37'
VPCNL	CANAL	N33°33.23'/W111°46.89°
VPFRB	FIREBIRD LAKE	N33°16.35'/W111°58.10'
VPFTN	FOUNTAIN HILLS	N33°36.12'/W111°42.72'
VPGLX	GILA CROSSING	N33°16.55'/W112°10.08'
VPGPP	GLENDALE POWER PLANT	N33°33.27'/W112°13.00'
VPMAR	MARICOPA	N33°03.42'/W112°02.88'
VPMHS	MESQUITE HIGH SCHOOL	N33°20.53'/W111°49.58'
VPNRV	NEW RIVER	N33°55.08'/W112°08.45'
VPNTT	NORTH TEST TRACK	N33°03.50'/W111°55.83'
VPIIR	PIR	N33°22.52'/W112°18.90'
VPQTR	QUINTERO GOLF COURSE	N33°49.53'/W112°23.58'
VPRVC	RIO VERDE COMMUNITY	N33°44.37'/W111°39.62'
VPSMC	SOUTH MOUNTAIN COLLEGE	N33°23.02'/W112°02.12'
VPSQP	SQUAW PEAK	N33°32.83'/W112°01.27'
VPSSS	SUPERSTITION SPRINGS MALL	N33°23.50'/W111°41.37'
VPSTN	SANTAN MOUNTAINS	N33°09.23'/W111°40.92'
VPSTT	SOUTH TEST TRACK	N32°56.25'/W111°59.67'
VPZZZ		N33°20.18'/W111°26.53'

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

VPAGN	TV ANTENNA	N38°32.08'/W090°22.42'
VPBPE		N38°23.80'/W090°20.38'
VPCJY	HOLIDAY SHORES	N38°55.00'/W089°56.00'
VPCOJ	WINFIELD DAM	N39°00.28'/W090°41.23'
VPDFA	JEFFERSON BARRACKS BRIDGE	N38°29.18'/W090°16.47'
VPEAZ	BUSCH STADIUM	N38°37.43'/W090°11.55'
VPEDZ	WATER TANKS	N38°45.30'/W090°34.87'
VPEGR	GAS TANKS	N38°35.80'/W090°19.32'
VPEOX	ST PETERS	N38°47.17'/W090°39.25'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPFAI	HOWELL ISLAND	N38°40.00'/W090°43.00'
VPFFY		N38°55.37'/W090°17.30'
VPGPF		N38°35.60'/W090°26.92'
VPGVI		N38°32.30'/W090°27.80'
VPHRQ	CHAIN OF ROCKS BRIDGE	N38°45.88'/W090°10.42'
VPIBO	WATERLOO	N38°20.00'/W090°09.00'
VPJMU	HORSESHOE LAKE	N38°41.00'/W090°05.00'
VPKNY	PACIFIC	N38°29.00'/W090°44.00'
VPLES	ST CHARLES	N38°47.00'/W090°30.00'
VPLIW	SIX FLAGS	N38°30.67'/W090°40.47'
VPLXU	GATEWAY ARCH	N38°37.50'/W090°11.00'
VPNSY	WOOD RIVER REFINERIES	N38°50.00'/W090°05.00'
VPNZY	WENTZVILLE	N38°48.83'/W090°50.98'
VPRAZ	JERSEYVILLE	N39°07.00'/W090°20.00'
VPRMO	FOREST PARK	N38°38.00'/W090°17.00'
VPWKO	COLUMBIA	N38°27.00'/W090°12.00'
VPXXI	MILLSTADT	N38°27.50'/W090°05.68'
VPYID	MOSENTHEIN ISLAND	N38°43.00'/W090°12.25'

SALT LAKE CITY HELICOPTER CHART

VPAIR	SALTAIR	N40°44.85'/W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18'/W111°54.23'
VPBRN	BARN	N40°54.28'/W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67'/W111°53.25'
VPCHS		N40°42.28'/W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38'/W112°09.00'
VPCWY	CAUSEWAY	N41°05.37'/W112°07.17'
VPCYN	PARLEYS CANYON	N40°42.67'/W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92'/W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98'/W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28'/W112°11.88'
VPHVE	SPAGHETTI BOWL	N40°43.50'/W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02'/W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80'/W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08'/W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50'/W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50'/W111°53.37'
VPMSH		N41°01.67'/W112°02.47'
VPNSL		N40°50.15'/W111°54.90'
VPNTP		N41°03.57'/W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13'/W112°00.45'
VPOPS	POWER STATION	N41°20.38'/W112°02.78'
VPPEN	STATE PRISON	N40°29.88'/W111°53.62'
VPPPT	PROMONTORY POINT	N41°12.28'/W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42'/W111°54.83'
VPVPO	PROVO CANYON	N40°18.77'/W111°39.45'
VPRWY		N40°48.48'/W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83'/W111°54.85'
VPTIP	SOUTH TIP	N40°50.93'/W112°10.92'
VPWBR	WEBER CANYON	N41°08.17'/W111°54.83'
VPWBT		N40°38.00'/W112°03.33'

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART

VPAIR	SALTAIR	N40°44.85'/W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18'/W111°54.23'
VPBRN	BARN	N40°54.28'/W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67'/W111°53.25'
VPCHS		N40°42.28'/W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38'/W112°09.00'
VPVCI	CENTERVILLE INTERCHANGE	N40°55.30'/W111°53.43'
VPCWY	CAUSEWAY	N41°05.37'/W112°07.17'
VPCYN	PARLEYS CANYON	N40°42.67'/W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92'/W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98'/W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28'/W112°11.88'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPHVE	SPAGHETTI BOWL	N40°43.50'/W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02'/W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80'/W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08'/W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50'/W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50'/W111°53.37'
VPMSH	_____	N41°01.67'/W112°02.47'
VPNSL	_____	N40°50.15'/W111°54.90'
VPNTP	_____	N41°03.57'/W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13'/W112°00.45'
VPOPS	POWER STATION	N41°20.38'/W112°02.78'
VPPEP	STATE PRISON	N40°29.88'/W111°53.62'
VPPTT	PROMONTORY POINT	N41°12.28'/W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42'/W111°54.83'
VPVPO	PROVO CANYON	N40°18.77'/W111°39.45'
VPRWY	_____	N40°48.48'/W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83'/W111°54.85'
VP TIP	SOUTH TIP	N40°50.93'/W112°10.92'
VPUOU	U OF U EVENTS CENTER	N40°45.73'/W111°50.28'
VPWBR	WEBER CANYON	N41°08.17'/W111°54.83'
VPWBT	_____	N40°38.00'/W112°03.33'
VPZOO	HOGLE ZOO	N40°45.00'/W111°48.95'

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART

VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPOCN	_____	N33°14.15'/W117°26.63'
VPSBC	BARONA CASINO	N32°56.25'/W116°52.60'
VPSBL	_____	N33°05.18'/W117°18.55'
VPSBM	BLACK MOUNTAIN	N32°58.87'/W117°07.00'
VPSCF	_____	N32°48.55'/W117°09.17'
VPSCM	COWLES MOUNTAIN	N32°48.72'/W117°01.97'
VPSCP	CRYSTAL PIER	N32°47.77'/W117°15.42'
VPSCR	_____	N32°39.37'/W117°07.30'
VPSFB	IRON MOUNTAIN	N32°58.25'/W116°57.33'
VPSLJ	LAKE JENNINGS	N32°51.53'/W116°53.28'
VPSMB	_____	N32°45.57'/W117°12.22'
VPSMP	_____	N33°22.70'/W117°36.75'
VPSMS	MOUNT SOLEDAD	N32°50.40'/W117°15.10'
VPSMV	_____	N32°45.75'/W117°09.80'
VPSMW	MOUNT WOODSON	N33°00.52'/W116°58.23'
VPSOP	OTAY MESA PRISON	N32°35.82'/W116°55.28'
VPSOT	LOWER OTAY LAKE	N32°37.73'/W116°55.38'
VPSPL	SOUTH POINT LOMA	N32°39.90'/W117°14.55'
VPSPP	POWER PLANT	N33°08.25'/W117°20.23'
VPSQS	QUALCOMM STADIUM	N32°46.98'/W117°07.23'
VPSRT	DEL MAR RACE TRACK	N32°58.58'/W117°15.95'
VPSSM	SAN MIGUEL MOUNTAIN	N32°41.78'/W116°56.18'
VPSSV	SAN VICENTE ISLAND	N32°55.53'/W116°55.00'
VPSTP	TORREY PINES GOLF COURSE	N32°54.17'/W117°14.68'
VPSVA	_____	N33°11.48'/W117°16.38'

SAN FRANCISCO SECTIONAL CHART

VPKBG	KINGSBURY GRADE	N38°58.75'/W119°53.20'
-------	-----------------	------------------------

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART

VPALT	ALTAMONT PASS	N37°44.35'/W121°35.42'
VPANT	ANTIOCH BRIDGE	N38°01.45'/W121°45.02'
VPBBR	BENICIA BRIDGE	N38°02.50'/W122°07.45'
VPCL	CALAVERAS RESERVOIR	N37°28.16'/W121°48.93'
VPCBT	LAKE CHABOT	N37°43.68'/W122°06.94'
VPCOY	COYOTE HILLS	N37°32.50'/W122°05.06'
VPCQZ	CARQUINEZ BRIDGE	N38°03.66'/W122°13.52'
VPCRL	_____	N37°11.00'/W121°41.06'
VPCRY	CRYSTAL SPRINGS CAUSEWAY	N37°30.56'/W122°21.10'

WAYPOINT IDENT

VPDUB

VPEMB

WAYPOINT IDENT

VPCSH

VPDAM

VPDLR

VPDUB

VPEMB

VPGGF

VPGIL

VPHHH

VPKGO

VPLEX

VPMID

VPMOR

VPNUM

VPPAC

VPPRU

VPSAR

VPSLA

VPSTB

VPSUN

VPUTC

VPWAL

VPWAM

VPWFR

COLLOCATED VFR CHECKPOINT

DUBLIN

EMBASSY SUITES

COLLOCATED VFR CHECKPOINT

CAL STATE UNIVERSITY

DEL VALLE DAM

DUBLIN

EMBASSY SUITES

GOLDEN GATE FIELDS

GILROY

HAMILTON

KGO

LEXINGTON RESERVOIR

MID-SPAN SAN MATEO BRIDGE

MORMON TEMPLE

NUMMI PLANT

PRUNEYARD

SARATOGA

SLAC/LINEAR ACCELERATOR

STINSON BEACH

SUNOL GOLF COURSE

U.T.C.

WALNUT CREEK

CEMENT PLANT

LOCATION

N37°42.06'/W121°55.36'

N37°26.05'/W121°53.83'

LOCATION

N37°39.52'/W122°03.52'

N37°36.91'/W121°44.78'

N37°07.00'/W121°47.06'

N37°42.06'/W121°55.36'

N37°26.05'/W121°53.83'

N37°53.07'/W122°18.71'

N37°01.37'/W121°33.99'

N38°03.58'/W122°30.66'

N37°31.58'/W122°06.10'

N37°11.66'/W121°59.18'

N37°36.28'/W122°11.81'

N37°48.46'/W122°11.95'

N37°29.56'/W121°56.58'

N37°38.00'/W122°32.07'

N37°17.33'/W121°56.01'

N37°15.26'/W122°02.33'

N37°24.75'/W122°14.35'

N37°54.45'/W122°40.41'

N37°34.85'/W121°53.23'

N37°13.93'/W121°41.35'

N37°53.78'/W122°04.30'

N37°30.28'/W122°10.00'

N37°30.88'/W122°12.26'

TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART

VPBOV

VPCNY

VPDAD

VPDFI

VPDUT

VPEAR

VPFFU

VPGPE

VPHUC

VPKER

VPLEV

VPLJA

DADE CITY

CLEARWATER BEACH

ST PETE BEACH

LAKE PARKER

N27°57.00'/W080°46.75'

N28°30.00'/W080°45.00'

N28°22.57'/W082°11.25'

N29°00.17'/W081°20.85'

N27°37.70'/W082°09.10'

N27°58.67'/W082°49.83'

N28°57.08'/W081°00.33'

N27°43.50'/W082°44.67'

N28°19.87'/W082°43.77'

N28°04.00'/W081°56.00'

N28°48.00'/W080°52.00'

N29°00.00'/W080°51.00'

WASHINGTON SECTIONAL CHART

VPACE

VPAXI

VPBRA

VPGCE

VPWZO

N38°07.82'/W076°48.75'

N38°34.57'/W076°20.38'

N36°13.75'/W076°08.08'

N36°03.90'/W076°36.42'

N36°00.87'/W075°40.07'

VOR RECEIVER CHECK VOR RECEIVER CHECKPOINTS AND VOR TEST FACILITIES (VOT)

385

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground. A/ stands for airborne followed by figures (2300) or (1000-3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

ARIZONA VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Bard	116.8/BZA	A/2000	242	5.9	Over interstate 8 freeway crossing canal.
Drake (Ernest A. Love Fld).....	114.1/DRK	A/7000	124	5.0	Over apch end Rwy 30.
Flagstaff (Pulliam).....	113.85/FLG	A/8000	033	6.5	Over red and white square twr.
Fort Huachuca (Sierra Vista Muni/Libby AAF).....	113.6/FHU	G	80		Runup area Twy G at 26 end.
Kingman (Kingman).....	108.8/IGM	G	220	1.0	Center of runup area apch end Rwy 03.
Tucson (Tucson Intl)	116.0/TUS	G	318	0.7	On runup pad northeast of Twy A17.
Willie (Phoenix-Mesa Gateway).....	113.3/IWA	G	157	0.4	On runup area Rwy 30L.
Winslow (Winslow-Lindbergh Rgnl)	112.6/INW	A/6000	106	5.0	Over apch end Rwy 29.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Phoenix Sky Harbor Intl.	109.0	G	
Phoenix-Mesa Gateway	113.3/IWA	G	299 1.4 On Twy G between Rwy 12R and Rwy 12C.
Prescott (Ernest A. Love Fld)	110.0	G	

CALIFORNIA VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Arcata (Arcata)	110.2/ACV	G	148	0.7	On runup area apch end Rwy 32.
Chico (Chico Muni).....	109.8/CIC	G	302	1.1	On north runup area.
Clovis (Fresno Yosemite Intl).....	112.9/CZQ	A/1400	130	7.2	Over apch end Rwy 11L.
Compton Woodley	113.6/LAX	A/1000	091	10.0	Over apch end Rwy 25L.
Concord (Buchanan Field).....	117.0/CCR	A/1200	172		Over apch end Rwy 19L.
Daggett (Barstow-Daggett)	113.2/DAG	A/2800	223	11.7	Over apch end Rwy 22.
El Nido (Merced Muni/Macready Fld)	114.2/HYP	A/1200	290		Over end Rwy 30.
Fortuna (Murray Fld).....	114.0/FOT	A/1500	015	9.6	Over Rwy apch end 11.
Fortuna (Rohnerville)	114.0/FOT	A/1400	130	8.2	Over apch end Rwy 11.
Guadalupe (Santa Maria Pub/Capt G Allan Hancock Fld)	111.0/GLJ	A/1200	118		Over apch end Rwy 30.
Imperial (Imperial County).....	115.9/IPL	A/1500	313	5.7	Over apch end Rwy 32.
Lake Hughes (General Wm J. Fox Airfield).....	108.4/LHS	G	065	18.1	On the main ramp at east terminal gas pit.
Maxwell (Willows-Glenn County)	110.0/MXW	A/1200	342	11.5	Over apch end Rwy 34.

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Modesto (Modesto City-Co-Harry Sham Fld)	114.6/MOD	G	093	0.6	On ramp area next to intersection of Taxiways A and A1.
Oakland (Metropolitan Oakland Intl)	116.8/OAK	G	081	0.9	On runup pad end of Rwy 27R and 27L.
Palmdale (General Wm. J. Fox Airfield)	114.5/PMD	A/5000	296	10.1	Over center taxiway/runway intersection.
Paradise (Ontario Intl)	112.2/PDZ	G	320	8.9	Intersection of Twy Q, Twy P and Rwy 26L.
Paso Robles (Paso Robles Muni).....	114.3/PRB	G	247	0.4	Transient parking ramp front of terminal.
Placerville (Placerville)	115.5/HNW	A/5200	076	8.7	Dam on west end of lake.
Pomona (Cable).....	110.4/POM	A/3500	053	5.1	Over apch end of Rwy 06.
Red Bluff	115.7/RBL	A/1500	358	5.8	Over the center of Red Bluff Fairgrounds Race Track.
Redding (Redding Muni).....	108.4/RDD	G	310	0.5	Over runup area apch end Rwy 12.
Sacramento (McClellan Airfield)	109.2/MCC	G	358	.9	On Taxiway at end of Rwy 16.
	109.2/MCC	G	015	0.4	On Taxiway B.
Sacramento (Sacramento Executive).....	115.2/SAC	A/1000	016	4.4	Over apch end Rwy 02.
Salinas (Salinas Muni).....	117.3/SNS	G	247	0.4	Intersection of twys C and D.
San Francisco (San Francisco Intl).....	115.8/SFO	A/1800	153	6.7	Over Crystal Springs causway 5 NM west of San Carlos arpt.
San Jose (Norman Y. Mineta San Jose Intl) .	114.1/SJC	G	123	1.7	On Twy B and runup area Rwy 30L.
San Jose (Norman Y. Mineta San Jose Intl) .	114.1/SJC	G	132	0.6	Twy V abeam Twy J.
Santa Barbara	114.9/RZS	A/2000	279	11	Over Lake Cachuma Dam spillway.
Santa Barbara (Santa Barbara Muni).....	114.9/RZS	G	197	5.8	At intersection of Taxiway D and H.
Santa Rosa (Charles M. Schulz-Sonoma Co)	113.0/STS	A/2000	323	5.9	River bridge on Highway 101.
	113.0/STS	G	121		.5 NM runup Rwy 32.
	113.0/STS	G	344		.4 NM runup Rwy 14.
Scaggs Island (Napa County).....	112.1/SGD	A/1000	047	5.4	Over rotating beacon.
Thermal (Jacqueline Cochran Rgnl)	116.2/TRM	G	329	0.3	On centerline of twy 375' in front of hangar.
Van Nuys	113.1/VNY	G	169	0.5	At intersection of Twy D and Twy A.
	113.1/VNY	G	161	1.6	On West runup area rwy 34L.
	113.1/VNY	G	142	0.4	Runup area Rwy 16L.
Ventura (Camarillo)	108.2/VTU	G	330	6.1	Runup Rwy 26.
	108.2/VTU	G	320	6.5	Runup Rwy 08.
Ventura (Oxnard)	108.2/VTU	G	289	9.0	On parallel Twy W of Rwy 25 runup area.
Visalia (Visalia Muni)	109.4/VIS	A/1300	107	5.0	Over apch end rwy 12.
Woodside (Hayward Executive).....	113.9/OSI	G	009		Runup area Rwy 28L.
Woodside (San Carlos)	113.9/OSI	A/2000	355	7.2	Over Rwy 30 numbers.

VOR RECEIVER CHECK VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Bakersfield	111.2	G	
Hawthorne (Jack Northrop Fld/Hawthorne Muni)	113.9	G	Unusable on south taxiway.
Long Beach (Daugherty Field)	113.9	G	Unusable all areas except runup Rwy 25L at Taxiway J, runup Rwy 25R.
Los Angeles Intl	113.9	G	Unusable all areas except intersection of Twys A at G runup Rwy 25L at Twy F and intersection of Twy C at N.
Sacramento Executive	111.4	G	
Sacramento Intl	111.4	G	
San Diego (EL Cajon) (Gillespie Fld)	110.0	G	
San Diego Intl	109.0	G	Unusable all areas except runup area Rwy 27.
San Diego (Montgomery)	109.0	G	Unusable all areas except runup areas for Rwy 05 and 28L.
San Francisco Intl	111.0	G	
Santa Ana (John Wayne Airport/Orange Co)	110.0	G	
Santa Monica Muni	113.9	G	Unusable all areas except runup areas for Rwy 03 and 21.
Torrance (Zamperini Fld)	113.9	G	

COLORADO VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Akron	114.4/AKO	A/6000	179	7.0	Over lgtd twr.
Cortez (Cortez Muni)	108.4/CEZ	A/7000	196		Over apch end rwy 21.
Denver (Rocky Mountain Metropolitan)	115.4/BJC	G	060	0.6	Runup area at Alpha 17.
Hayden (Craig-Moffat)	115.6/CHE	A/7200	248	9.6	Over apch end rwy 25.
Pueblo (Pueblo Memorial)	116.7/PUB	G	249	3.8	On painted circle with arrow on runup pad S side apch end rwy 08L.
	116.7/PUB	A/7300	294	7.8	Over KOAA TV twr, 5.4 NM of arpt.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Centennial	108.2	G	VOT unusable east of Twy C-4.
(City of Colorado Springs Muni)	110.4	G	
Denver International	110.0	G	VOT unusable in terminal area N of Twy AA to Twy BN and W Twy L to Twy F.

VOR RECEIVER CHECK NEVADA VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Bullion (Elko Rgnl)	114.5/BQU	A/7000	343	5.1	Over center of race track.
Ely (Ely Arpt/Yelland Fld)	110.6/ELY	G	059		Intersection of Twy A and Twy B.
Mustang (Reno/Stead)	117.9/FMG	A/7000	291	12.8	Over atct.
Wells (Wells Muni/Harriet Fld)	114.2/LWL	A/7000	286	8.3	Over radio twr.
Winnemucca Muni	108.2/INA	A/6000	024	6.5	Over highway bridge crossing railroad tracks.
	108.2/INA	G	134	.8	Runup area Rwy 32.

VOR TEST FACILITIES (VOT)

Las Vegas (North Las Vegas)	108.2	G
--	-------	---

NEW MEXICO

VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Carlsbad (Carlsbad City Air Terminal)	116.3/CNM	G	333	5.4	On Twy A in front of fire department.
Hobbs (Lea County Rgnl)	111.0/HOB	G	030	3.5	On runup pad apch end Rwy 03.
Las Vegas (Las Vegas Muni)	117.3/LVS	A/8500	233	6.0	Over yellow water tank.
Roswell (Roswell Intl Air Center)	116.1/CME	G	100	5.2	On middle of W ramp adjacent to twy.
Santa Fe (Santa Fe County Muni)	110.6/SAF	G	334	4.7	At junction main intersection of twy and ramp. (Checkpoint unusable).
Silver City (Grant Co)	110.8/SVC	G	100	0.9	Twy entrance to Rwy 26 just west of approach end.
Texico (Clovis Muni)	112.2/TXO	A/6000	240	12.7	Over rotating beacon on steel twr adjacent to terminal bldg.
Truth or Consequences (Truth or Consequences Muni)	112.7/TCS	G	155	3.2	On Twy A 2000' from AER 31.
Tucumcari (Tucumcari Muni)	113.6/TCC	G	258	0.5	100' in front of terminal on twy.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Albuquerque Intl. Sunport	111.0	G	

VOR RECEIVER CHECK UTAH

389

VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt.	Azimuth from	Dist. from	Checkpoint Description
		Gnd. AB/ALT	Fac. Mag.	Fac. N.M.	
Cedar City (Cedar City Rgnl).....	117.3/CDC	A/6500	177	4.7	Over apch end Rwy 20.
Delta (Delta Muni).....	116.1/DTA	A/6000	346	5.3	Over apch end of Rwy 17.
Vernal (Vernal Rgnl)	108.2/VEL	A/8000	021	6.5	Over towers on knoll.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Salt Lake City Intl	111.0	G	

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unless otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods of activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the locations listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower or ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
ARIZONA			
(c) Buckeye Muni	8 NM; 089° Buckeye	14,000	Daily SR—2 hours after SS. 2 NM radius.
(c) Bullhead City, Eagle Airpark ..	10 NM; 300° Needles.....	15,000	3 NM Daily 0645–1835
(c) Casa Grande Muni	9 NM; 041° Stanfield.....	12,000	2 NM Daily 0600–1700.
(c) Coolidge Muni	25 NM; 070° Stanfield.....	17,999	15 NM radius, daily. High altitude, full canopy, free fall, and low level combat parachute jumping. Large military transports in vicinity of arpt.
(c) Cottonwood Arpt	22.1 NM; 072° Drake	14,000	Continuous during daylight hrs.
(c) Eloy Muni	17 NM; 094° Stanfield.....	17,500	Albuquerque Center 124.5 4 NM radius. Daily SR—2 hours after SS (cfc UNICOM for PAJA advisories. Landing area ¼ mile E of rwy centerline).
(c) Estrella Sailport	17 NM; 300° Stanfield.....	14,000	1 NM radius. Daily SR—SS.
Kingman Arpt	25 NM; 334° Kingman	12,000	5 NM radius, daily SR—SS.
(c) Laguna AAF/Yuma Proving Ground	11.8 NM; 048° Bard	25,000	Continuous 24 hrs. 5 NM radius, Laguna AAF Control Zone.
(c) Marana Rgnl	25 NM; 308° Tucson	17,999	15 NM radius, Continuous. Tucson Tower 125.1
(c) Marana, Pinal Airpark	33 NM; 308° Tucson	25,000	15 NM radius, Continuous.
CALIFORNIA			
Apple Valley Arpt	10 NM; 073° Victorville.....	15,000	2 NM radius, daily SR—SS.
(c) Brickland's Ranch	12.5 NM; 339° Redding.....	3,900	3 NM radius, May 1 thru Nov 1 yearly.
(c) Byron Arpt	23 NM; 250° Manteca	15,000	Daily SR—SS
(c) California City Muni Arpt	30 NM; 348° Palmdale	17,500	Daily SR—SS.
(c) Camarillo Arpt	8.4 NM; 000° Ventura	14,000	2 NM radius, usually blo 10,000', SR—SS; Listen for 1-minute call on Camarillo Twr freq.
(c) Cloverdale Muni Arpt	18 NM; 316° Santa Rosa.....	12,500	1 NM radius, Mon–Sun 0800–2100.
(c) Davis/Woodland/Winters, Yolo Co	16.5 NM; 283° Sacramento	13,500	3 NM radius, daily SR—2300.
(c) Fall River Mills Arpt	34.4 NM; 63° Redding.....	8,700	2 NM radius, daily May 1–Nov 30.
(c) Hemet/Diamond Valley	12.5 NM; 107° Homeland	14,000	3 NM radius. Wed–Fri 0900–SS. Sat–Sun 0800–SS, other days and times by request.
(c) Hollister Muni	16.6 NM; 017° Salinas.....	17,999	1 NM. Daily, all hours. Oakland Center 128.7
(c) Lake Elsinore, Skylark Fld	10.5 NM; 198° Homeland	14,000	1 NM radius, 0800–SS daily
(c) Lincoln Rgnl/Karl Harder Fld ..	14.7 NM; 353° McClellan.....	15,000	Daily 0800–SR
(c) Lodi Arpt	15 NM; 285° Linden	15,000	Continuous 24 hrs. 1 NM radius. Other altitudes by notam.
Lompoc Arpt	20 NM; 277° Gaviota.....	15,000	4 NM radius, Thu–Mon SR—SS.
(c) Lompoc	14 NM; 284° Gaviota	17,999	1 NM radius, daily 1600–0400.

PARACHUTE JUMPING AREAS

391

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
(c) Los Alamitos AAF	At field.....	1,500 AGL	Weekends and occasional weekdays
(c) Madera Muni Arpt	15.2 NM; 277° Clovis.....	15,000	3 NM radius. Daily SR-1 hour after SS.
(c) Marina Muni	7.6 NM; 259° Salinas.....	12,500	SR-SS Sat and Sun
Murrieta, Bear Creek Arpt.....	13 NM; 178° Homeland	11,500	1 NM radius. Mon-Fri 0800-sunset, Sat-Sun 0630-sunset.
(c) Oro Loma, Eagle Fld	12 NM; 010° Panoche	12,500	2 NM radius, Fri-Sun.
Palm Springs	12 NM; 130° Palm Springs.....	14,000	1 NM radius. Daily sunrise to sunset.
(c) Paradise Skypark Arpt	12 NM; 097° Chico	14,500	Daily, 0800-SS.
(c) Perris Valley Arpt.....	1 NM; 220° Homeland	14,500	Daily SR-SS
(c) Salinas, Davis Road Drop Zone.....	6 NM; 235° Salinas.....	18,000	1 NM radius, Daily 0500-1900
(c) San Diego, Brown Fld Muni ...	2.3 NM 157° Poggi.....	14,000	2 NM radius. Mon-Fri 0800-1800.
(c) San Diego, Leon Drop Zone ..	11.5 NM; 192° Mission Bay	2,800	Continuous. 1NM radius. Altitudes above 2800-15000 MSL avbl upon request, (ctc SOCAL prior to entering Terminal Control Area).
(c) San Diego, Otay Reservoir	4.4 NM; 058° Poggi.....	5,800	1NM radius. Daily SR-SS.
(c) San Diego, South Bay	7 NM; 136° Mission Bay	2,800	Daily SR-SS. 1NM radius altitudes above 2800-3300 MSL avbl upon request, (ctc SOCAL prior to entering Terminal Control Area).
(c) San Diego, Trident	5 NM; 111° Poggi.....	15,000	Daily SR-SS. 1NM radius
Santa Maria	5 NM; 021° Guadalupe	12,500 AGL	0900-SS, Sat, Sun and holidays
(c) Santa Ynez	8 NM; 293° Gaviota.....	17,999	1 NM radius, daily 1600-0400.
(c) Slate Creek	30 NM; 323° Redding.....	5,500	3 NM radius. May 1 thru Nov 1 yearly.
(c) Taft Drop Zone	25.7 NM; 197° Shafter	13,000	1 NM radius. SR-SS, occasional night jumps by NOTAM.
(c) Taft-Kern Co Arpt	21 NM; 066° Fellows.....	13,000	2 NM radius. Daily SR-SS, occasional ngt jumps by NOTAM.
(c) Tres Pinos Drop Zone	16 NM; 045° Salinas.....	12,500	1 NM radius. Daily SR-SS.
(c) Twentynine Palms	12 NM; 265° Twentynine Palms .	12,500	1 NM radius, 0900-SS, Sat, Sun, and holidays.
(c) Wilton Drop Zone	17.5 NM; 080° Sacramento	1,500 AGL	Hvy equip, paratroopers.
COLORADO			
Boulder Muni	9 NM; 328° Jeffco.....	18,000	2 NM radius. Daylight hrs.
(c) Brush Muni	19.6 NM 277° Akron	17,700	2 NM radius, Daily 0800-SS.
(c) Calhan Arpt	17NM; 057° Black Forrest.....	17,500	2 NM radius, 1hr before SR- 1 hr after SS daily.
(c) Canon City, Fremont County Arpt	32.9 NM; 271° Pueblo.....	17,500	2 NM radius. Weekends 0600-2100.
(c) Colorado Springs, USAF Academy Airstrip	9 NM; 266° Black Forrest.....	17,500	Daily SR-SS occasionally til 2200.
(c) Colorado Springs, Yoder Drop Zone	20.5 NM; 100° Black Forrest.....	12,000 AGL	1 NM radius. Heavy equipment paratroopers possible jumps during IFR/marginal VFR.
(c) Fort Collins/Loveland Muni Arpt	19.5 NM; 248° Gill.....	17,500	3 NM Wed-Sun SR-1 hr after SS.
Greeley, Skydive the Farm	16 NM; 308° Gill.....	14,500	2 NM radius. Fri-Sun 0800-SS.
(c) Hugo, Kelly Drop Zone.....	10 NM; 254° Hugo	8,000	2 NM radius. Heavy equipment paratroopers possible jumps during IFR/marginal VFR.
(c) Longmont, Vance Brand Arpt	15 NM; 346° Jeffco.....	17,900	2 NM radius. Daily SR-2 hrs after SS.
(c) Trinidad, Pinon Drop Zone	28 NM; 279° Tobe	8,000	2 NM radius. Heavy equipment paratroopers possible jumps during IFR/marginal VFR.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC NEVADA	MAXIMUM ALTITUDE	REMARKS
(c) Boulder City Arpt.	3 NM; 164° Boulder City	17,000	0.5 NM radius. Daily SR-SS.
(c) El Dorado Jump Zone	7 NM; 195° Boulder City	17,000	0.5 NM radius. Daily, SR-SS.
Indian Springs AF Aux Arpt.	38 NM; 304° Las Vegas	10,000	5 NM radius. Daily SR-SS.
(c) Jean Drop Zone	24.1 NM; 191° Las Vegas	15,000	1 NM radius. Daily SR-SS.
(c) Mesquite Arpt.	11.4 NM; 054° Mormon Mesa ...	17,500	2 NM radius. Continuous SR-SS.
(c) Minden-Tahoe Arpt	26 NM; 098° Squaw Valley	17,000	5 NM radius. Daily SR-SS.
(c) Nellis AFB, Gunfighter Drop Zone	12.7 NM; 25° Las Vegas	17,500 AGL	1.3 NM east of rwys. SR-SS Sat-Sun. Other times by NOTAM.
(c) Pahrump	49 NM; 126° Beatty	12,500	Tue-Sun SR-SS
Reno/Stead Arpt	15 NM; 292° Mustang	14,000	1.0 NM radius. Daily SR-SS.
(c) Tonopah Arpt.	10 NM; 270° Tonopah	10,000	1 NM radius. Daily SR-SS.
NEW MEXICO			
Albuquerque	6 NM; 050° Albuquerque	18,000	Weekends and holidays
	17 NM; 140° Albuquerque	17,000	SR-SS weekends.
(c) Belen, Alexander Muni	12 NM; 346° Socorro	16,000	1 NM radius. Daily SR-SS.
(c) Santa Teresa, Dona Ana Co at Santa Teresa Arpt	22 NM; 268° El Paso	13,000	1 NM radius. SR-SS Sat-Sun. S side of arpt.
UTAH			
(c) Cedar Fort, Cedar Valley Arpt	6.5 NM; 313° Fairfield	17,500	3 NM radius. Daily SR-2300.
Goshen Wells, Cedar Valley	4 NM; 270° Fairfield	10,000	0.25 NM radius. Occasional use
(c) Hurricane, General Dick Stout Fld	15 NM; 060° St George	15,000	1 NM radius. Daily SR-SS.
Logan, Logan-Cache Arpt	7.2 NM; 051° Brigham City	15,000	0.5 NM radius 0900-sunset. Weekends and Holidays.
(c) Ogden-Hinckley	5 NM; 085° Ogden	17,999	2 NM radius. Daily SR-SS. NE corner Ogden Arpt.
(c) Bolinder Fld-Tooele Valley Arpt	24 NM; 215° Wasatch	17,000	2 NM radius. Daily 1300-0600.

**INTENTIONALLY
LEFT
BLANK**

**INTENTIONALLY
LEFT
BLANK**

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

ALBUQUERQUE SECTIONAL

84th Edition, 22 Oct 2009

OBSTRUCTIONS

22 Oct 2009 No Major Changes.

AIRPORTS

22 Oct 2009 No Major Changes.

NAVAIDS

22 Oct 2009 No Major Changes.

AIRSPACE

22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Oct 2009 No Major Changes.

MISCELLANEOUS

22 Oct 2009 No Major Changes.

CF-16 WORLD AERONAUTICAL CHART

38th Edition, 15 Jan 2009

OBSTRUCTIONS

12 Mar 2009 – 22 Oct 2009 No Major Changes.

AIRPORTS

12 Mar 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

12 Mar 2009 Change ROME VORTAC freq from 122.5 to 112.5, 42°35'26"N, 117°52'05"W.

7 May 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

12 Mar 2009 – 22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

12 Mar 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

12 Mar 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

12 Mar 2009 – 22 Oct 2009 No Major Changes.

CG-19 WORLD AERONAUTICAL CHART**39th Edition, 4 Jun 2009****OBSTRUCTIONS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRPORTS****2 Jul 2009** Add arpt elev 1071, lighting code *L, runway length 71 and unicom at GLENDALE arpt, 33°31'36"N, 112°17'42"W.**27 Aug 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****2 Jul 2009 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****2 Jul 2009 – 22 Oct 2009** No Major Changes.

CHEYENNE SECTIONAL**80th Edition, 30 Jul 2009****OBSTRUCTIONS****27 Aug 2009** Add windmill farm. 6365'UC is highest MSL, 43°04'40"N, 105°50'43"W. Add obst 6988' MSL (407'AGL)UC, 41°08'23"N, 104°59'52"W.**22 Oct 2009** Add obst 7523' MSL (263'AGL)UC, 41°39'15"N, 106°04'16"W.

Add obst 7508' MSL (391'AGL)UC, 41°40'22"N, 105°59'52"W.

Add obst 5157' MSL (258'AGL)UC, 42°41'04"N, 103°55'53"W.

AIRPORTS**27 Aug 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****27 Aug 2009** Delete ANTELOPE NDB, 41°36'15"N, 109°00'06"W.**22 Oct 2009** No Major Changes.**AIRSPACE****27 Aug 2009** Add RUSHVILLE, NE Class E: That airspace extending upward from 700 feet above the surface within a 7.3-mile radius of Modisett airport.**22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 22 Oct 2009** No Major Changes.

DENVER SECTIONAL

81st Edition, 30 Jul 2009

OBSTRUCTIONS

27 Aug 2009 Add obst 6498' MSL (455' AGL) UC, 39°54'22"N, 105°13'31"W.

22 Oct 2009 No Major Changes.

AIRPORTS

27 Aug 2009 No Major Changes.

22 Oct 2009 Delete GANADO arpt, 35°42'06"N, 109°31'00"W.

Delete GHOST arpt, 36°18'10"N, 106°29'17"W.

NAVAIDS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

27 Aug 2009 No Major Changes.

22 Oct 2009 Revise MONTROSE, CO Class E5: That airspace extending upward from 700 feet above the surface within a 7.2-mile radius of the Montrose Regional Airport and within 4.3 miles northeast and 8.3 miles southwest of the Montrose VOR/DME 313° and 133° radials extending from 7.2 miles southeast to 21.4 miles northwest of the VOR/DME, and within 4 miles each side of the Montrose VOR/DME 360° radial extending to 13.6 miles north of the VOR/DME; and that airspace extending upward from 1,200 feet above the surface within an area bounded by a point beginning at 38°40'00" N, 108°46'00" W; to 38°25'00" N, 108°42'30" W; to 37°58'00" N, 108°10'00" W; to 38°09'00" N, 107°35'00" W; to 38°43'00" N, 107°39'30" W; to 38°51'30" N, 107°41'00" W; to 39°01'00" N, 107°47'00" W; to 39°01'00" N, 108°09'00" W; thence to the point of beginning.

SPECIAL USE AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

DENVER/COLORADO SPRINGS TERMINAL AREA CHART

72nd Edition, 30 Jul 2009

OBSTRUCTIONS

27 Aug 2009 Add obst 6498' MSL (455' AGL) UC, 39°54'22"N, 105°13'31"W.

22 Oct 2009 No Major Changes.

AIRPORTS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

EL PASO SECTIONAL
83rd Edition, 30 Jul 2009**OBSTRUCTIONS****27 Aug 2009** No Major Changes.**22 Oct 2009** Add obst 4390' MSL (310' AGL) UC, 32°04'52"N, 106°16'32"W.
Add obst 5015' MSL (250' AGL) UC, 30°23'40"N, 102°50'44"W.**AIRPORTS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 22 Oct 2009** No Major Changes.

GRAND CANYON VFR AERONAUTICAL CHART
3rd Edition, 19 Apr 2001**OBSTRUCTIONS****17 May 2001 – 22 Oct 2009** No Major Changes.**AIRPORTS****17 May 2001 – 10 May 2007** No Major Changes.**5 Jul 2007** Delete TASSI arpt, 36°15'09"N, 113°57'54"W.

Delete THE RANCH arpt, 36°00'37"N, 112°17'30"W.

30 Aug 2007 – 22 Oct 2009 No Major Changes.**NAVAIDS****17 May 2001 – 22 Oct 2009** No Major Changes.**AIRSPACE****17 May 2001 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****17 May 2001 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****17 May 2001 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****17 May 2001** Blue Direct North (BDN) west bound route, add 10,500 with a westbound arrow above the 8,500 figure just west of Supai/Diamond Creek Sector boundary.**12 Jul 2001 – 22 Oct 2009** No Major Changes.

KLAMATH FALLS SECTIONAL

81st Edition, 24 Sep 2009

OBSTRUCTIONS

22 Oct 2009 No Major Changes.

AIRPORTS

22 Oct 2009 Delete RED & WHITE arpt, 43°07'09"N, 121°02'41"W.
Delete UNITY arpt, 44°27'05"N, 118°11'12"W.

NAVAIDS

22 Oct 2009 No Major Changes.

AIRSPACE

22 Oct 2009 Add NORTH BEND, OR Class D: That airspace extending upward from the surface to and including 2500 feet MSL within a 4.2-mile radius of the Southwest Oregon Regional Airport. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

SPECIAL USE AIRSPACE

22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Oct 2009 No Major Changes.

MISCELLANEOUS

22 Oct 2009 No Major Changes.

LAS VEGAS SECTIONAL

82nd Edition, 27 Aug 2009

OBSTRUCTIONS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRPORTS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

LAS VEGAS TERMINAL AREA CHART

71st Edition, 27 Aug 2009

OBSTRUCTIONS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRPORTS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 22 Oct 2009 No Major Changes.

LOS ANGELES HELICOPTER ROUTE CHART**8th Edition, 22 Dec 2005****OBSTRUCTIONS**

22 Dec 2005 – 13 Apr 2006 No Major Changes.
8 Jun 2006 Add group obst 405' MSL (390' AGL) UC, 33°43'39"N, 118°14'19"W.
3 Aug 2006 – 15 Jan 2009 No Major Changes.
12 Mar 2009 Add obst 421' MSL (348' AGL), 33°53'39"N, 118°13'31"W.
7 May 2009 – 22 Oct 2009 No Major Changes.

AIRPORTS

22 Dec 2005 – 3 Aug 2006 No Major Changes.
28 Sep 2006 Delete METHODIST heliport, 34°08'00"N, 118°02'33"W.
Delete SAN PEDRO PENINSULA heliport, 33°44'19"N, 118°18'38"W.
23 Nov 2006 – 30 Aug 2007 No Major Changes.
25 Oct 2007 Delete ANAHEIM POLICE heliport, 33°49'35"N, 117°54'05"W.
20 Dec 2007 – 20 Nov 2008 No Major Changes.
15 Jan 2009 Add SAN BERNARDINO INTL ATCT 119.45, 34°05'43"N, 117°14'06"W.
EL TORO MCAS arpt abandoned, 33°40'34"N, 117°43'52"W.
Change CTAF freq 122.975 to 119.45 at SAN BERNARDINO INTL arpt, 34°05'43"N, 117°14'06"W.
12 Mar 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

22 Dec 2005 – 15 Jan 2009 No Major Changes.
12 Mar 2009 Change RIVERSIDE VOR position from 33°57'07"N, 117°26'57"W to 33°57'19"N, 117°26'59"W, and magnetic variation from 15E to 14E.
7 May 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

22 Dec 2005 – 25 Sep 2008 No Major Changes.
20 Nov 2008 Add SAN BERNARDINO, CA Class D: That airspace extending upward from the surface to and including 3200 feet MSL beginning at 34°08'09"N, 117°18'40"W; to 34°08'09"N, 117°11'13"W; to 34°07'42"N, 117°10'26"W; to 34°02'24"N, 117°10'26"W; thence via the 4.5 nautical mile radius of the San Bernardino Airport clockwise to the point of beginning. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective dates and times will thereafter be continuously published in the Airport/Facility Directory.
15 Jan 2009 – 2 Jul 2009 No Major Changes.
27 Aug 2009 Change SANTA ANA Class C freq from 380.2 to 279.575
22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

22 Dec 2005 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Dec 2005 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

22 Dec 2005 – 8 Jun 2006 No Major Changes.
3 Aug 2006 Change MEF 0⁵ to 0⁶ in quadrant 33°30'–33°45'N, 118°00'–118°15'W.
28 Sep 2006 – 22 Oct 2009 No Major Changes.

LOS ANGELES SECTIONAL**85th Edition, 2 Jul 2009****OBSTRUCTIONS**

2 Jul 2009 – 22 Oct 2009 No Major Changes.

AIRPORTS

2 Jul 2009 – 22 Oct 2009 No Major Changes.

NAVAIDS

2 Jul 2009 – 22 Oct 2009 No Major Changes.

AIRSPACE

2 Jul 2009 No Major Changes.
27 Aug 2009 Change SAN DIEGO Class B freq from 381.5 to 279.625 Change SANTA ANA Class C freq from 380.2 to 279.575 Change SANTA BARBARA Class C freq from 397.9 to 291.1 Revise MEXICALI, MX TCA
22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

2 Jul 2009 – 22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

2 Jul 2009 – 22 Oct 2009 No Major Changes.

MISCELLANEOUS

2 Jul 2009 – 22 Oct 2009 No Major Changes.

LOS ANGELES TERMINAL AREA CHART**59th Edition, 2 Jul 2009****OBSTRUCTIONS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRPORTS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****2 Jul 2009** No Major Changes.**27 Aug 2009** Change SANTA ANA Class C freq from 380.2 to 279.575**22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****2 Jul 2009 – 22 Oct 2009** No Major Changes.

PHOENIX SECTIONAL**82nd Edition, 22 Oct 2009****OBSTRUCTIONS****22 Oct 2009** No Major Changes.**AIRPORTS****22 Oct 2009** No Major Changes.**NAVAIDS****22 Oct 2009** No Major Changes.**AIRSPACE****22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009** No Major Changes.

PHOENIX TERMINAL AREA CHART**41st Edition, 22 Oct 2009****OBSTRUCTIONS****22 Oct 2009** No Major Changes.**AIRPORTS****22 Oct 2009** No Major Changes.**NAVAIDS****22 Oct 2009** No Major Changes.**AIRSPACE****22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009** No Major Changes.

SALT LAKE CITY HELICOPTER ROUTE CHART**3rd Edition, 26 Oct 2006****OBSTRUCTIONS****23 Nov 2006 – 22 Oct 2009** No Major Changes.**AIRPORTS****23 Nov 2006 – 10 Apr 2008** No Major Changes.**5 Jun 2008** Delete PAYNE arpt, 41°05'54"N, 112°06'56"W.

Delete WARD heli, 40°35'59"N, 111°48'03"W.

31 Jul 2008 – 25 Sep 2008 No Major Changes.**20 Nov 2008** Delete CHANNEL 4 heli, 40°43'57"N, 111°57'20"W.**15 Jan 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****23 Nov 2006 – 22 Oct 2009** No Major Changes.**AIRSPACE****23 Nov 2006 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****23 Nov 2006 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****23 Nov 2006 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****23 Nov 2006 – 22 Oct 2009** No Major Changes.

SALT LAKE CITY SECTIONAL
82nd Edition, 22 Oct 2009

OBSTRUCTIONS

22 Oct 2009 No Major Changes.

AIRPORTS

22 Oct 2009 No Major Changes.

NAVAIDS

22 Oct 2009 No Major Changes.

AIRSPACE

22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Oct 2009 No Major Changes.

MISCELLANEOUS

22 Oct 2009 No Major Changes.

SALT LAKE CITY TERMINAL AREA CHART
41st Edition, 22 Oct 2009

OBSTRUCTIONS

22 Oct 2009 No Major Changes.

AIRPORTS

22 Oct 2009 No Major Changes.

NAVAIDS

22 Oct 2009 No Major Changes.

AIRSPACE

22 Oct 2009 No Major Changes.

SPECIAL USE AIRSPACE

22 Oct 2009 No Major Changes.

MILITARY TRAINING ROUTES

MISCELLANEOUS

22 Oct 2009 No Major Changes.

SAN DIEGO TERMINAL AREA CHART
58th Edition, 2 Jul 2009**OBSTRUCTIONS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRPORTS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****2 Jul 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****2 Jul 2009** No Major Changes.**27 Aug 2009** Change SAN DIEGO Class B freq from 381.5 to 279.625 Change SANTA ANA Class C freq from 380.2 to 279.575**22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****2 Jul 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****2 Jul 2009 – 22 Oct 2009** No Major Changes.

SAN FRANCISCO SECTIONAL
83rd Edition, 27 Aug 2009**OBSTRUCTIONS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**AIRPORTS****27 Aug 2009** No Major Changes.**22 Oct 2009** Change CTAF 122.95 to 122.9 at BROWNSVILLE arpt, 39°27'18"N, 121°17'29"W.**NAVAIDS****27 Aug 2009** No Major Changes.**22 Oct 2009** Delete LAMPSON NDB, 38°59'43"N, 122°53'01"W.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 22 Oct 2009** No Major Changes.

SAN FRANCISCO TERMINAL AREA CHART**75th Edition, 27 Aug 2009****OBSTRUCTIONS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**AIRPORTS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**WICHITA SECTIONAL****83rd Edition, 30 Jul 2009****OBSTRUCTIONS**

27 Aug 2009 Add obst 2930' MSL (350' AGL) UC, 39°50'12"N, 100°10'48"W. Add obst 1665' MSL (310' AGL) UC, 37°57'55"N, 97°09'08"W. Add obst 2636' MSL (350' AGL) UC, 39°49'30"N, 99°35'27"W.
22 Oct 2009 Add obst 1641' MSL (238' AGL), 37°59'00"N, 96°52'21"W.
 Add obst 1782' MSL (260' AGL), 37°56'06"N, 97°51'53"W.
 Add obst 1604' MSL (314' AGL), 37°30'30"N, 97°11'19"W.
 Add obst 2978' MSL (350' AGL) UC, 36°19'02"N, 100°15'34"W.
 Add obst 3298' MSL (315' AGL) UC, 38°55'12"N, 101°11'02"W.
 Add obst 1588' MSL (320' AGL) UC, 37°29'57"N, 97°30'51"W.

AIRPORTS**27 Aug 2009** No Major Changes.**22 Oct 2009** Change CTAF/UNICOM freq to 123.075 at STEARMAN arpt, 37°46'30"N, 97°06'47"W.**NAVAIDS****27 Aug 2009 – 22 Oct 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009**

IR-526 Revised

IR-513 Revised

IR-504 Revised

22 Oct 2009 No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 22 Oct 2009** No Major Changes.

**INTENTIONALLY
LEFT
BLANK**

**INTENTIONALLY
LEFT
BLANK**

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private-use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

FACILITY NAME	CHART & PANEL
Frankfort, IL (LL40)	L-28H
Chicago App/Dep Con 133.1 285.6	
Glasgow Industrial, MT (Ø7MT)	H-1E, 2F, L-13D
Salt Lake Center App/Dep Con 126.85 305.2	
USAF Academy Bullseye Aux Airstrip, CO (C09Ø)	L-10F
ASOS 118.325	
West Kentucky Airpark, KY (5KY3)	L-16I
Memphis Center App/Dep Con 133.65 292.15	
William P Gwinn, FL (Ø6FA)	H-8I, L-23C
Gwinn Tower 120.4 314.6 (Mon-Fri 1300-2100Z±)	
Gnd Con 121.65 279.25	

CANADA

FACILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX)	H-1B, L-12F
ATIS 119.8 (1500-Ø700Z±)	
Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8	
Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500-Ø700Z±) Gnd Con 121.8	
MF 119.4 295.0 (Ø700-1500Z±) (Shape irregular to 4500')	
Amos/Maguy, QC (CYEY)	H-11B
Montreal Center App/Dep Con 125.9	
Atikokan Muni, ON (CYIB)	L-14I
MF 122.3 (5 NM to 4500' No ground station)	
Barrie-Orillia (Lake Simcoe Rgnl), ON (CNB9)	H-11B, L-31D
AWOS 122.55 (Pvt)	
Toronto Center App/Dep Con 124.025	
Bar River, ON (CPF2)	L-31C
Toronto Center App/Dep Con 132.65	
Bathurst, NB (CZBF)	L-32J
Moncton Center App/Dep Con 134.25	
Boundary Bay, BC (CZBB)	H-1B, L-1E
ATIS 125.5 (1500-Ø700Z±)	
Vancouver App/Dep Con 132.3 363.8	
Tower 118.1 (Inner) 127.6 (Outer) (1500-Ø700Z±) Gnd Con 124.3	
MF 118.1 (Ø700-1500Z± to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500'.)	
Brampton, ON (CNC3)	L-31D
Toronto Trml App/Dep Con 119.3 253.1	
Brandon Muni, MB (CYBR)	H-2H
Winnipeg Center App/Dep Con 132.25 285.4	
MF 122.1 (5 NM to 4000')	
Brantford, ON (CYFD)	L-31D
Toronto Trml App/Dep Con 128.27	
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3)	L-32G
Montreal Center App/Dep Con 134.675	
Bromont, QC (CZBM)	L-32G
Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	
Burlington Airpark, ON (CZBA)	L-31D
Toronto Center App/Dep Con 119.3 253.1	
Castlegar, BC (CYCG)	H-1C
Vancouver Center App/Dep Con 134.2 227.3	
MF 122.1 (5 NM to 6500')	
Centralia/James T. Fld Muni, ON (CYCE)	H-10G, 11B, L-31D
Toronto Center App/Dep Con 135.30	
Charlottetown, PE (CYYG)	H-11E, L-32J
Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	
Chatham-Kent, ON (CNZ3)	H-10G, L-30G
Cleveland Center App/Dep Con 132.25	

FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3) Toronto Center App/Dep Con 124.02	H-11B, L-31D
Cornwall Rgnl, ON (CYCC) Boston Center App/Dep Con 135.25 377.1	L-32G
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3) Halifax Trml App/Dep Con 119.2	H-11E, L-32J
Digby, NS (CYID) Moncton Center App/Dep Con 123.9	L-32J
Downsview, ON (CYZD) Toronto Center App Con 133.4 Toronto Center Dep Con 133.4 MF 126.2 (3 NM to 1900')	H-11B, L-31E
Drummondville, QC (CSC3) Montreal Center App/Dep Con 132.35	L-32H
Earlton (Timiskaming Rgnl), ON (CYXR) MF 122.0 (5 NM to 3800') AWOS 128.6	H-11B
Elliot Lake Muni, ON (CYEL) Toronto Center App/Dep Con 135.4	L-31C
Fort Frances Muni, ON (CYAG) Minneapolis Center App/Dep Con 120.9	L-14H
Fredericton Intl, NB (CYFC) ATIS 127.55 Moncton Center App/Dep Con 124.3 135.5 270.8 Cinc Del 121.7 (Ltd hrs) MF 119.0 (5 NM to 3500')	H-11E, L-32I
Goderich, ON (CYGD) Toronto Center App/Dep 135.3 266.3	H-11B, L-31D
Greenwood, NS (CYZX) ATIS 128.85 244.3 (1100-0000Z) App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3 Gnd Con 133.75 289.4 Cinc Del 128.05 283.9	H-11E, L-32J
Grimsby Air Park, ON (CNZ8) Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31E
Halifax/Shearwater, NS (CYAW) ATIS 129.175 (Ltd hrs) App/Dep Con 119.2 Tower 119.0 126.2 340.2 360.2 (Ltd hrs) Gnd Con 121.7 250.1	H-11E, L-32J
Halifax/Stanfield Intl, NS (CYHZ) ATIS 121.0 Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 225.2 363.8 Tower 118.4 236.6 Gnd Con 121.9 275.8 Cinc Del 123.95 Apron Advisory 122.125	H-11E, L-32J
Hamilton, ON (CYHM) ATIS 128.1 Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0 Gnd Con 121.6	H-10H, 11B, L-11B
Kingston, ON (CYGK) Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z) MF 122.5 (1115-0400Z \pm 5 NM to 3300')	H-11C, L-31E, 32F
Kitchener/Waterloo, ON (CYKF) ATIS 125.1 (1200-0400Z) Toronto Trml App/Dep Con 128.275 Waterloo Tower 126.0 118.55 (1200-0400Z \pm) Gnd Con 121.8 MF 126.0 (0400-1200Z \pm 5 NM to 4000')	H-11B, L-31D
Lachute, QC (CSE4) Montreal Center App Con 124.65 132.85 268.3 Montreal Center Dep Con 132.85 268.3	L-32G
La Tuque, QC (CYLQ) Montreal Center App/Dep Con 134.5	H-11C
Langley, BC (CYNJ) ATIS 124.5 (1630-0230Z, DT 1530-0330Z) Victoria Trml 132.7 290.8 Tower 119.0 (1630-0230Z, DT 1530-0330Z) Gnd Con 121.9 MF 119.0 (0230-1630Z, DT 0330-1530Z 3 NM to 1900')	L-1E

FACILITY NAME	CHART & PANEL
Leamington, ON (CLM2) Cleveland Center App/Dep Con 132.45	L-30F
Lethbridge, AB (CYQL) ATIS 124.4 (1300-0545Z‡) Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	H-1D
Lindsay, ON (CNF4) Toronto Center App/Dep 134.25	L-31E, L-32F
Liverpool/South Shore Rgnl, NS (CYAU) Moncton Center App/Dep Con 123.9	L-32J
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡) Toronto Center App/Dep 135.3 135.625 Tower 119.4 125.65 (1120-0345Z‡) Gnd Con 121.9 MF 119.4 (0345-1120Z‡ 5 NM to 3000')	H-10G, 11B, L-30G, 31D
Manitowaning/Manitoulin East Muni, ON (CYEM) Toronto Center App/Dep 135.4 260.9	L-31C
Maniwaki, QC (CYMW) Montreal Center App/Dep Con 126.57	L-32G
Mascouche, QC (CSK3) MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the N shore of Riviere des Milles-Iles and 1 NM around Lac Agile Mascouche arpt.)	L-32G
Medicine Hat, AB (CYXH) AWOS 124.875 (0345-1245Z‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400')	H-1D
Midland/Huron, ON (CYEE) Toronto Center App/Dep 124.025	L-31D
Miramichi, NB (CYCH) Moncton Center App/Dep Con 123.7	H-11E, L-32J
Moncton/Greater Moncton Intl, NB (CYQM) ATIS 128.65 App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8 Apron Advisory 122.075	H-11E, L-32J
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L-32G
Montreal Intl (Mirabel), QC (CYMX) ATIS 125.7 Montreal Center App Con 124.65 132.85 268.3 Montreal Dep Con 132.85 MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL) ATIS 133.7 Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3 Tower 119.9 267.1 Gnd Con 121.9 275.8 Cinc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 268.3 (W-NW-NE) VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/St-Hubert, QC (CYHU) ATIS 124.9 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) AWOS 124.9 Montreal Center App/Dep Con 125.15 268.3 St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar 0400-1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	H-11C, L-32G
Muskoka, ON (CYQA) AWOS 124.575 MF 122.3 (5 NM to 3900')	H-11B, L-31D
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 1330-0530Z‡ (5 NM to 2500')	H-1B, L-1E
North Bay, ON (CYYB) ATIS 124.9 (1130-0300Z‡) Toronto Center App/Dep 121.225 127.25 MF 118.3 (1130-0330Z‡ 7 NM to 5000')	H-11B, L31D
Oshawa, ON (CYOO) ATIS 125.675 (1130-0330Z‡) Toronto Trml App Con 133.4 Tower 120.1 (1130-0330Z‡) Gnd Con 118.4 Toronto Trml Dep Con 133.4 MF 120.1 (0330-1130Z‡ 5 NM to 3000')	L-31E

FACILITY NAME	CHART & PANEL
Ottawa/Carp, ON (CYRP) ATIS 121.15 Ottawa Trml App/Dep Con 128.175 252.5	L-31E, 32F
Ottawa/Batineau, QC (CYND) Ottawa Trml App/Dep Con 127.7 128.175 252.5 MF 122.3 (5 NM shape irregular to 2500') VFR Advisory Ottawa Trml 127.7	H-11C, L-32G
Ottawa/MacDonald-Cartier Intl, ON (CYOW) ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 120.1 341.3 Gnd Con 121.9 Clnc Del 119.4 Ottawa Dep Con 128.175	L-11C
Owen Sound/Billy Bishop Rgnl, ON (CYOS) Toronto Center App/Dep Con 132.575 290.6	L-31D
Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0	L-30F
Pembroke, ON (CYTA) Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z†, OT PPR)	H-11C, L-31E, 32F
Penticton, BC (CYF) Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100')	H-1B
Peterborough, ON (CYPQ) AWOS 126.925 Toronto Center App/Dep Con 134.25	H-11B, L-31E, 32F
Pincher Creek, AB (CZPC) Edmonton Center App/Dep Con 132.75 265.2	H-1D
Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z†) Vancouver Center App Con 128.6 352.7 (Outer) Pitt Tower 126.3 (1500-0700Z†) Gnd Con 123.8 Vancouver Center Dep Con 132.3 363.8 (South) MF 126.3 (0700-1500Z†) (3NM to 2500')	L-1E
Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134.6 Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 (185.65 Quebec Trw VFR acft at or below 3000') Tower 118.65 236.6 Gnd Con 121.9 250.0	H-11D, L-32H
Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6	H-11D
Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9 MF 122.2 (5 NM to 4000')	H-11B
Saint John, NB (CYSJ) Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400')	H-11E, L-32J
Sarnia (Chris Hadfield), ON (CYZR) Toronto Center 134.375	H-10G, 11B, L-30F
Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z†) Toronto Center App/Dep Con 132.65 344.5 Tower 118.8 (1300-0100Z†) Gnd Con 121.7 MF 118.8 (0100-1300Z† 5 NM irregular shape to 3000')	H-2K, L-31B
Sherbrooke, QC (CYAM) AWOS 126.25 Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')	H-11D, L-32H
South Renfrew Muni, ON (CNP3) Montreal Center App/Dep 124.275	L-31E, 32F
Southport, MB (CYPG) ATIS 120.85 (Mon-Fri 1400-2300Z† except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z† except holidays) Gnd Con 121.7 275.8	H-2H

FACILITY NAME	CHART & PANEL
Springwater Barrie Airport, ON (CNA3) Toronto Center App/Dep Con 124.025	L-31D
St. Catharines/Niagara District, ON (CYSN) ATIS 128.525 (1215-0200Z) Toronto Trml App/Dep Con 133.4 253.1 MF 123.25 (1215-0200Z± 5 NM to 3300')	H-10H, 11B, L-31E
St. Frederic, QC (CSZ4) Montreal Center App/Dep Con 135.025 270.9	L-32H
St. Georges, QC (CYSG) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM 3900' ASL)	H-32H, L-11D
St. Jean, QC (CYJN) Montreal Center App/Dep Con 125.15 268.3 Tower 118.2 (Apr-Oct 1230-0230Z± Nov-Mar 1300-0200Z) Gnd Con 121.7	L-32G
Sudbury, ON (CYSB) ATIS 127.4 Toronto Center App/Dep Con 135.5 MF 125.5 (7 NM to 4000')	H-31B, 10G, L-31D
Summerside, PE (CYSU) AWOS 122.55 (Pvt) Moncton Center App/Dep Con 124.4 384.8	H-11E, L-32J
Thunder Bay, ON (CYQT) ATIS 128.8 (1100-0400Z) Winnipeg Center App/Dep Con 132.125 (0400-1100Z) Tower 118.1 (1100-0400Z) Gnd Con 121.9 App/Dep 119.2 MF 118.1 (0400-1100Z± 5 NM to 4000')	H-2J, L-14J
Timmins, ON (CYTS) ATIS 124.95 (1000-0500Z) Toronto Center App/Dep Con 128.3 226.3 MF 122.3 (5 NM to 4000')	H-11B
Toronto/Buttonville Muni, ON (CYKZ) ATIS 127.1 (1200-0400Z) Toronto Center App Con 133.4 Toronto Center Dep Con 133.4 Tower 124.8 119.9 (1200-0400Z) Gnd Con 121.8 MF 124.8 (0400-1200Z± No gnd station. 5 NM shape irregular to below 2500')	L-31E
Toronto/City Centre, ON (CYTZ) ATIS 133.6 (1130-0400Z) App Con 133.4 Dep Con 133.4 Tower 118.2 119.2 226.5 (1130-0400Z) Gnd Con 121.7	L-31E
Toronto/Lester B Pearson Intl, ON (CYYZ) ATIS 120.825 App Con 124.475 125.4 132.8 Dep Con 127.575 128.8 Tower 118.35 118.7 Gnd Con 118.0 119.1 121.65 121.9 Cinc Del 121.3 (1200-0400Z) VFR Advisory 119.3 133.4	H-11B, L-31D
Trenton, ON (CYTR) ATIS 135.45 257.7 App/Dep Con 128.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8 Cinc Del 124.35 286.4	H-11C, L-31E, 32F
Trenton/Mountain View, ON (CPZ3) Trenton Mil Advisory 268.0	H-11C, L-31E, 32F
Trois-Rivieres, QC (CYRQ) Montreal Center App/Dep Con 128.225 229.2 MF 123.0 (5 NM to 3200')	H-11C, L-32H
Val-D'or, QC (CYVO) Montreal Center App/Dep Con 125.9 308.3 MF 118.5 (1030-0325Z± 5 NM to 4000')	H-11B
Vancouver Intl, BC (CYVR) ATIS 124.6 124.75 App Con 128.6 128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner) Dep Con 126.125 (north) 132.3 (south) 363.8 Tower 118.7 (south) 119.55 (north) VFR 124.0 125.65 226.5 236.6 Gnd Con 121.7 (south) 127.15 (north) 275.8 Cinc Del 121.4	H-1B, L-1E

FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ) ATIS 118.8 (1400-0800Z‡) App Con 125.95 308.4 Dep Con 133.85 308.4 Tower 119.1 (Outer) 119.7 (Inner) 239.6 Gnd Con 121.9 361.4 (1400-0800Z‡ OT ctc Kamloops 119.7) Cinc Del 126.4 (1400-0800Z‡)	H-1B, L-1E
Victoriaville, QC (CSR3) Montreal Center App Con 132.35	L-32H
Waterville/Kings Co Muni, NS (CCW3) Greenwood Trml App/Dep Con 120.6 335.9 Greenwood Tower 119.5 324.3	L-32J
Warton, ON (CYVY) Toronto Center App/Dep Con 132.575 MF 122.2 (5 NM to 3700')	H-11B, L-31D
Windsor, ON (CYQG) ATIS 134.5 (1130-0330Z‡) Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2 Tower 124.7 (1130-0330Z‡) Gnd Con 121.7 MF 124.7 (0330-1130Z‡ 6 NM irregular shape to below 3000') VFR Advisory Detroit App Con 134.3	H-10G, L-8J
Yarmouth, NS (CYQI) Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	H-11E, L-32I

MEXICO

FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS) Juarez App Con 119.9 Juarez Tower 118.9	H-4K, L-6F
Del Norte Intl (MMAN) ATIS 127.55 (1300-0300Z‡) Monterrey App 119.75 120.4 Tower 118.6	H-7B, L-20G
Durango Intl (MMDO) ATIS 132.1 Tower 118.1 Durango Info 122.3	H-7A
General Abelardo L Rodriguez Intl (MMTJ) ATIS 127.9 Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Cinc Del 122.35 Tijuana Info 132.1	H-4H, L-4H
General Lucio Blanco Intl (MMRX) Reynosa App Con 118.8 Reynosa Tower 118.8	H-7B, L-20H
General Mariano Escobedo Intl (MMMY) ATIS 127.7 Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	H-7B, L-20G
General R Fierro Villalobos Intl (MMCU) ATIS 127.9 Chihuahua App Con 121.0 Chihuahua Tower 118.4	L-6I
General Rodolfo Sanchez Taboada Intl (MMML) ATIS 127.6 Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	H-4H, L-4J, 5A
General Servando Canales (MMMA) Matamoros App Con 118.0 Matamoros Tower 118.0	H-7C, L-21A
Plan De Guadalupe Intl (MMIO) Saltillo App Con 127.4 Saltillo Tower 118.4	H-7B
Quetzalcoatl Intl (MMNL) Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3	H-7B, L-20G
Torreon Intl (MMTC) App Con 119.6 Tower 118.5	H-7A

**INTENTIONALLY
LEFT
BLANK**

**INTENTIONALLY
LEFT
BLANK**









In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams have been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city and airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in ground taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedures Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.

NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current than the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION




PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Available pilot controlled lighting (PCL) systems are indicated as follows:

1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., , , .
2. Approach lighting systems that do not bear a system identification are indicated with a negative "0" beside the name. A star (★) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., ★. To activate lights use frequency indicated in the communication section of the chart with a  or the appropriate lighting system identification e.g., UNICOM 122.8 , , .

<u>KEY MIKE</u>	<u>FUNCTION</u>
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

CHART CURRENCY INFORMATION

FAA procedure amendment number  Amdt 11A 99365  Date of latest change
 Orig 00365

The Chart Date identifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.

MISCELLANEOUS


- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.

09071
LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM

Runways

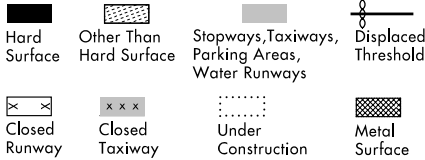

ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.



ARRESTING SYSTEM

REFERENCE FEATURES

Buildings.....	■
Tanks.....	●
Obstructions.....	▲
Airport Beacon #.....	☆
Runway	
Radar Reflectors.....	▼
Control Tower #.....	■
Hot Spot.....	○

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A **D** symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 S75, T185, ST175, TT325
PCN 80 F/D/X/U

Helicopter Alighting Areas

Negative Symbols used to identify Copter Procedures landing point.....

Runway Threshold elevation.....THRE 123

Runway TDZ elevation.....TDZE 123

Runway Slope.....0.3% DOWN

(shown when runway slope is greater than or equal to 0.3%)
.....0.8% UP.....

NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.


True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ±600 feet unless otherwise noted on the chart.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FUP. (Foreign Only)

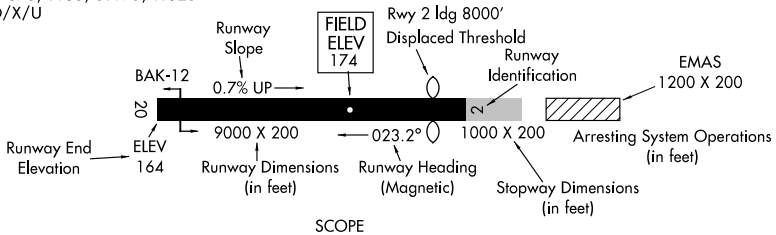

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

HOT SPOTS

An "Airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on a airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles designated as "HOT¹", "HOT²", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION
ARIZONA		
MESA FALCON FLD (FFZ)	HOT ¹	Acraft approaching Twy D from the ramp and destined for Rwy 4R or Rwy 22L sometimes miss the turn into Twy D.
TUCSON RYAN FLD (RYN)	HOT ¹	Air traffic often taxies acft via Twy B and onto Rwy 33 for departure on Rwy 6R. Use caution not to enter Rwy 6R without ATC authorization.
TUCSON TUCSON INTL (TUS)	HOT ¹ HOT ²	Complex intersection. Pilots instructed to hold short of Rwy 11L-29R or Rwy 11R-29L sometimes cross the approach area of these rwys without authorization.
	HOT ³	Rwy 29R sometimes mistaken for Rwy 29L.
CALIFORNIA		
HAYWARD HAYWARD EXECUTIVE (HWD)	HOT ¹ HOT ² HOT ³	Acraft approaching Twy A from the ramp sometimes fail to turn onto Twy A, proceeding onto Twy E and ultimately Rwy 10L-28R. Area not visible from ATCT. Area not visible from ATCT.
LONG BEACH LONG BEACH DAUGHERTY FLD (LGB)	HOT ¹ HOT ² HOT ³ HOT ⁴ HOT ⁵ HOT ⁶ HOT ⁷	Acraft exiting Rwy 30 at Twy A turn left on Twy D, anticipate reaching their destination, and fail to hold short of Rwy 7L-25R. Acraft northbound on Twy B and instructed to hold short of Rwy 12-30 at Twy K sometimes miss the turn onto Twy K and proceed straight ahead onto Rwy 12-30 and Rwy 7L-25R. Acraft southbound on Twy B anticipate reaching their destination parking ramp and fail to hold short of Rwy 7R-25L. Acraft eastbound on Twy J instructed to taxi to Rwy 25L at Twy D sometimes miss the turn onto Twy D and proceed onto Rwy 12-30 without authorization. Acraft taxiing to Rwy 16R from the southwest ramp sometimes miss the left turn onto Twy B, continue eastbound onto Twy F, and enter Rwy 16R-34L. After completing a run-up on inactive Rwy 34R, aircraft sometimes fail to hold short of Rwy 7R-25L. Acraft landing Rwy 30, be aware that this rwy crosses every other rwy at the airport. When exiting, pilots should ensure they are following a yellow, "lead-off" line onto a rwy.
MERDEDE CASTLE (MER)	HOT ¹ HOT ²	Complex area. Verify correct taxi route. Areas south of Twy A and Twy G are private ramp. Traffic congestion due to large volume of aircraft proceeding to and from Rwy 31.

OAKLAND METROPOLITAN OAKLAND INTL (OAK)	HOT ¹	Pilots sometimes mistake Twy A for Twy B, and vice versa. Verify correct taxi route.
	HOT ²	Acft departing the ramp sometimes miss their turn onto Twy C or Twy D, mistakenly proceeding onto Twy H or Twy G and ultimately Rwy 9L–27R.
	HOT ³	Complex intersection. Pilots sometimes taxi onto Rwy 9L or Rwy 33 by mistake.
PALM SPRINGS PALM SPRINGS INTL (PSP)	HOT ¹	Pilots sometimes mistake Twy C for Rwy 13R–31L or Rwy 13L–31R.
	HOT ²	Pilots instructed to taxi to Rwy 13R via Twy B and Twy C sometimes miss the turn onto Twy C and proceed onto Rwy 31R without authorization.
	HOT ³	Pilots approaching Rwy 31R on Twy B sometimes fail to hold short of Rwy 31R.
SALINAS SALINAS MUNI (SNS)	HOT ¹	Acft instructed to taxi from the ramp to Rwy 31 sometimes miss the turn onto Twy A and continue along Twy E, subsequently entering Rwy 31 without ATC authorization.
	HOT ²	Acft instructed to taxi from the ramp to Rwy 26 sometimes miss the turn onto Twy C and continue along Twy A, subsequently entering Rwy 26 at Twy A without ATC authorization.
SAN FRANCISCO SAN FRANCISCO INTL (SFO)	HOT ¹	Pilots instructed to follow Twy B south sometimes continue onto Twy J or Twy F by mistake.
	HOT ²	Pilots taxiing east on Twy C and instructed on turn right onto Twy E sometimes miss the turn onto Twy E and continue across Rwy 1L–19R by mistake.
SAN JOSE NORMAN Y. MINETA SAN JOSE INTL (SJC)	HOT ¹	Pilots assigned Rwy 29 for landing sometimes land Rwy 30L by mistake. Pilots proceeding into, or exiting, the Rwy 29 run-up area sometimes enter Rwy 29 without ATC authorization.
SANTA ANA JOHN WAYNE AIRPORT/ORANGE CO (SNA)	HOT ¹	ATC often instructs pilots to “Taxi up to and hold short” of Rwy 19L and Rwy 19R. As with normal hold short instruction, one must always stop short of the Runway Holding Position Markings.
	HOT ²	Pilots exiting Rwy 19R or Rwy 19L onto Twy H: short distance between rwys. Expect to hold short of the parallel rwy. Manage your taxi speed. Do not cross the Runway Holding Position Markings for the parallel rwy without ATC authorization.
	HOT ³	Pilots taxiing via Twy A, Twy H, and Twy C sometimes miss the turn from Twy H to Twy C.
SANTA BARBARA SANTA BARBARA MUNI (SBA)	HOT ¹	Pilots are sometimes confused by the angle at which Twy C intersects Rwy 7–25.
	HOT ²	Very wide pavement area. Do not cross Rwy 15L or Rwy 15R without authorization.
	HOT ³	ATC often utilizes Rwy 15L–33R and Rwy 15R–33L to taxi arriving aircraft off of Rwy 7–25.
	HOT ⁴	Pilots instructed to taxi to Rwy 35 sometimes miss the turn onto Twy J, not realizing that the approach end of Rwy 25 begins at Twy J.

COLORADO

DENVER CENTENNIAL (APA)	HOT ¹	Intersection Twy A–1. Hold line across run-up area.
	HOT ²	Twy A–4 and B–4 cross Rwy 17L at touchdown zone. Twy A, Twy A–8, Twy A–9 and Twy C–1 congested intersections. Twy C–1 and Twy D–1 close proximity to Rwy 10.

DENVER ROCKY MOUNTAIN METROPOLITAN (BJC)	HOT ¹	Frequent helicopter operations on north ends of Twy B and Rwy 02–20. Use caution in this area.
EAGLE EAGLE COUNTY RGNL (EGE)	HOT ¹	High density parking area on ramp east of Twy C–2. Air carrier aircraft should not leave or enter taxiway A east of Twy C–2.

NEVADA

LAS VEGAS MC CARRAN INTL (LAS)	HOT ¹	Exiting the ramp, use caution at Twy S not to cross the rwy holding position markings for Rwy 19L. Twy S intersects with Twy D, Twy Z, and Twy G, which require a turn to the north or south.
	HOT ²	Exiting Rwy 1R–19L use caution not to enter Twy U, and avoid entering Rwy 1L–19R without authorization.
	HOT ³	Exiting Rwy 1R–19L use caution not to enter Twy Y, and avoid entering Rwy 1L–19R without authorization.
	HOT ⁴	Rwy holding position markings for Rwy 7L and Rwy 1L are co-located, and located north of Rwy 7L. Verify rwy heading and alignment with proper rwy prior to departure.
	HOT ⁵	Twy E is often misidentified as a rwy. Verify rwy markings prior to departure.
LAS VEGAS NORTH LAS VEGAS (VGT)	HOT ¹	ATC often requires Rwy 12R departures to hold short of Rwy 7. Common mistake is to cross Rwy 7 without ATC authorization.
	HOT ²	Pilots sometimes enter or cross Rwy 12R without authorization.
	HOT ³	Pilots taxiing east on Twy A and destined for Rwy 30L sometimes miss the turn onto Twy B, proceeding onto Rwy 12R without ATC authorization.
	HOT ⁴	Pilots taxiing east on Twy A sometimes fail to hold short of Rwy 12L, or neglect to turn onto Rwy 12L for departure, instead departing on Twy A.
RENO RENO/TAHOE INTL (RNO)	HOT ¹	Pilots departing the southwest ramp and instructed to hold short of Rwy 7–25 sometimes fail to comply.
	HOT ²	Pilots northbound on Twy C sometimes proceed straight ahead into the ramp by mistake.
	HOT ³	Full length departures for Rwy 16L sometimes turn left at Twy D by mistake.

UTAH

SALT LAKE CITY SALT LAKE CITY INTL (SLC)	HOT ¹	Caution do not cross hold line for Rwy 35 during taxi SE on Rwy 14–32. Hold line is on north side of Rwy 32 numbers.
	HOT ²	Possible confusion between ramp, twy and rwy due to large paved area. Do not cross rwy hold lines without ATC clearance. ATC clearance is needed to enter the movement area, which is immediately west of vehicle drive lanes and marked by movement/nonmovement boundary line.


09295

AIRPORT DIAGRAM

AL-5889 (FAA)

ASPEN-PITKIN COUNTY/SARDY FIELD (ASE)

ASPEN, COLORADO

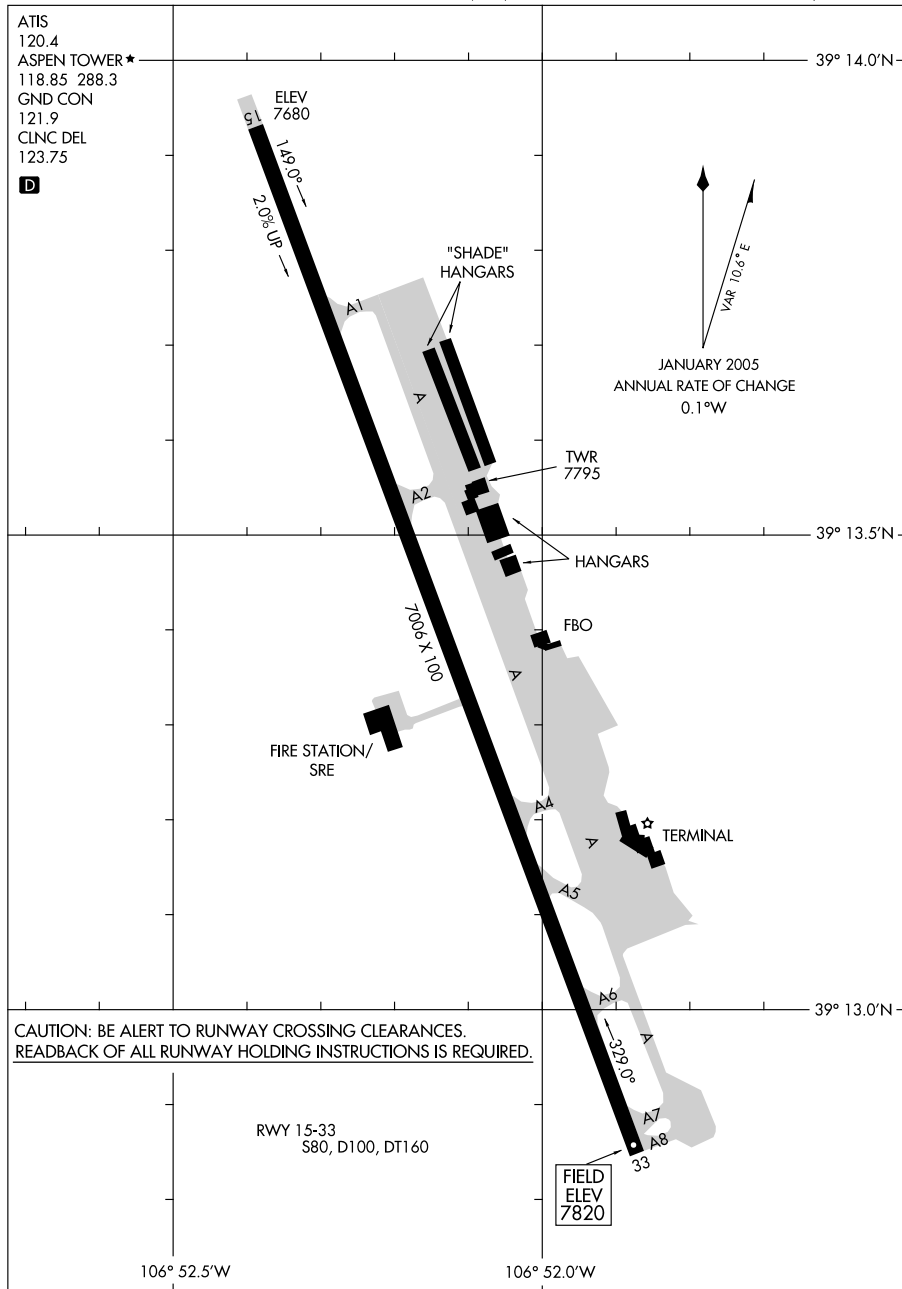

AIRPORT DIAGRAM

09295


ASPEN, COLORADO

ASPEN-PITKIN COUNTY/SARDY FIELD (ASE)

09127

AIRPORT DIAGRAM

AL-36 (FAA)

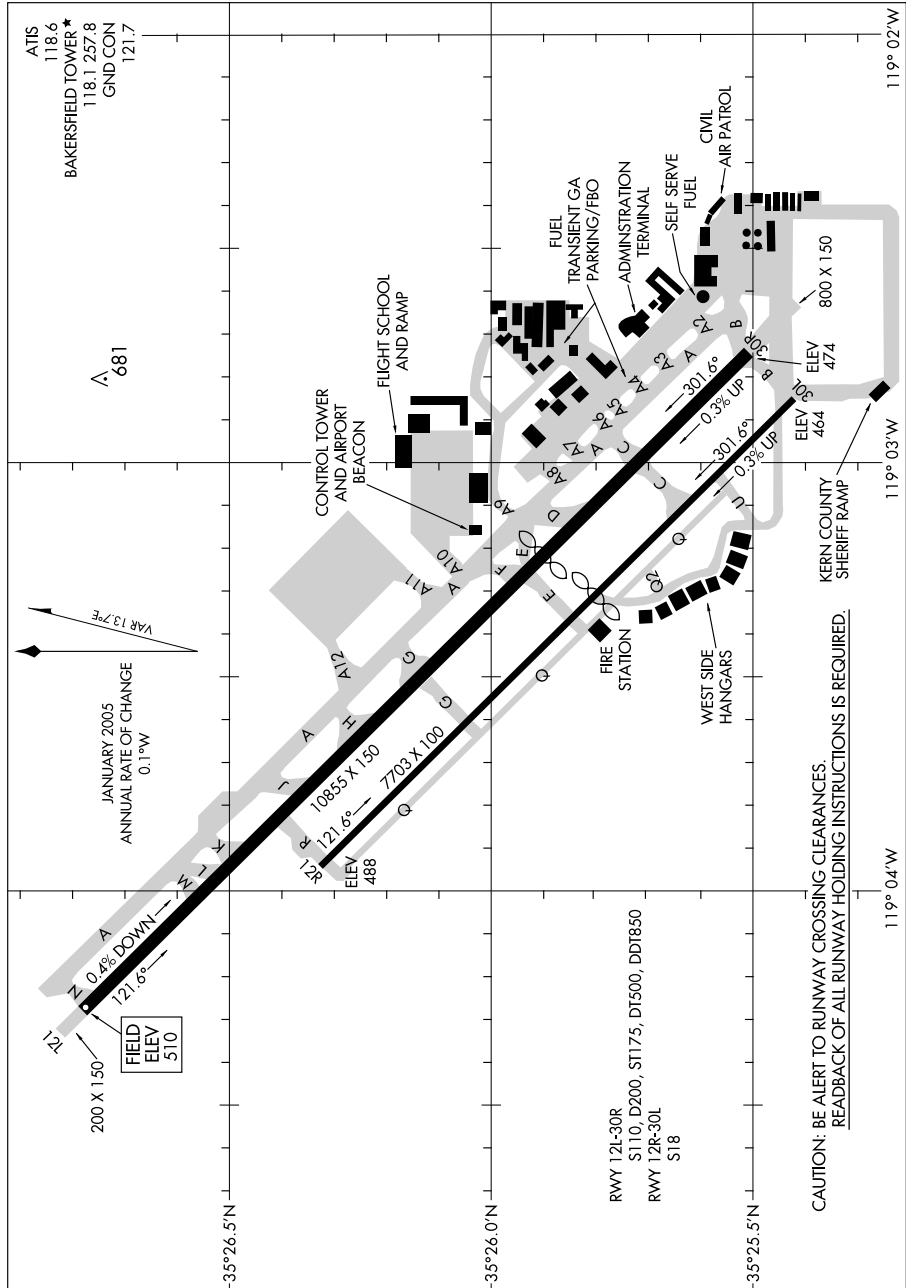BAKERSFIELD/MEADOWS FIELD (BFL)
BAKERSFIELD, CALIFORNIA

AIRPORT DIAGRAM

09127

BAKERSFIELD, CALIFORNIA
BAKERSFIELD/MEADOWS FIELD (BFL)


09127

AIRPORT DIAGRAM

[USAF] AFD-771

BEALE AFB (KBAB)

MARYSVILLE, CALIFORNIA

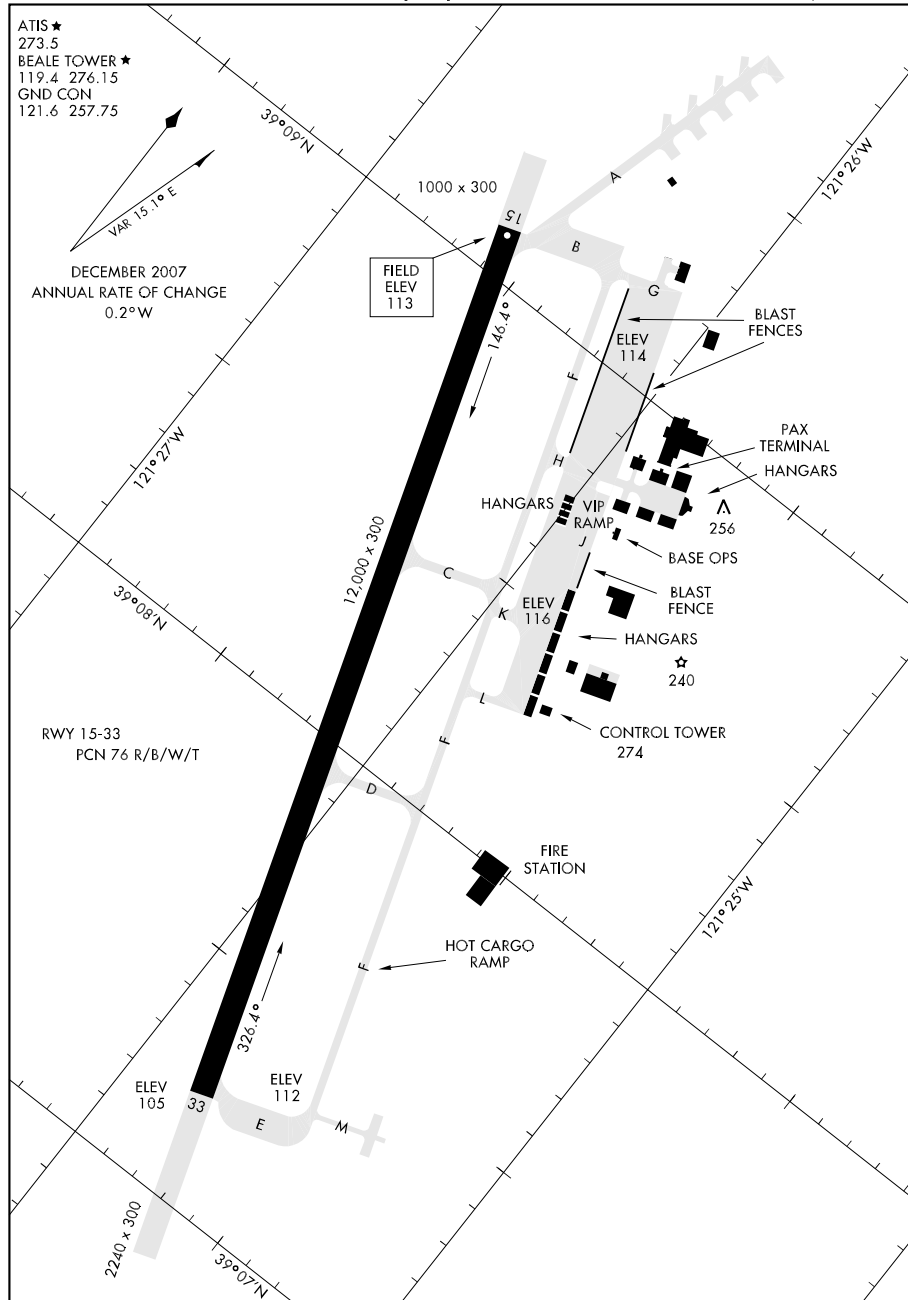

AIRPORT DIAGRAM

MARYSVILLE, CALIFORNIA

BEALE AFB (KBAB)


08269

AIRPORT DIAGRAM

AFD 538 [USAF]

BUCKLEY AFB (KBKF)

AURORA, COLORADO

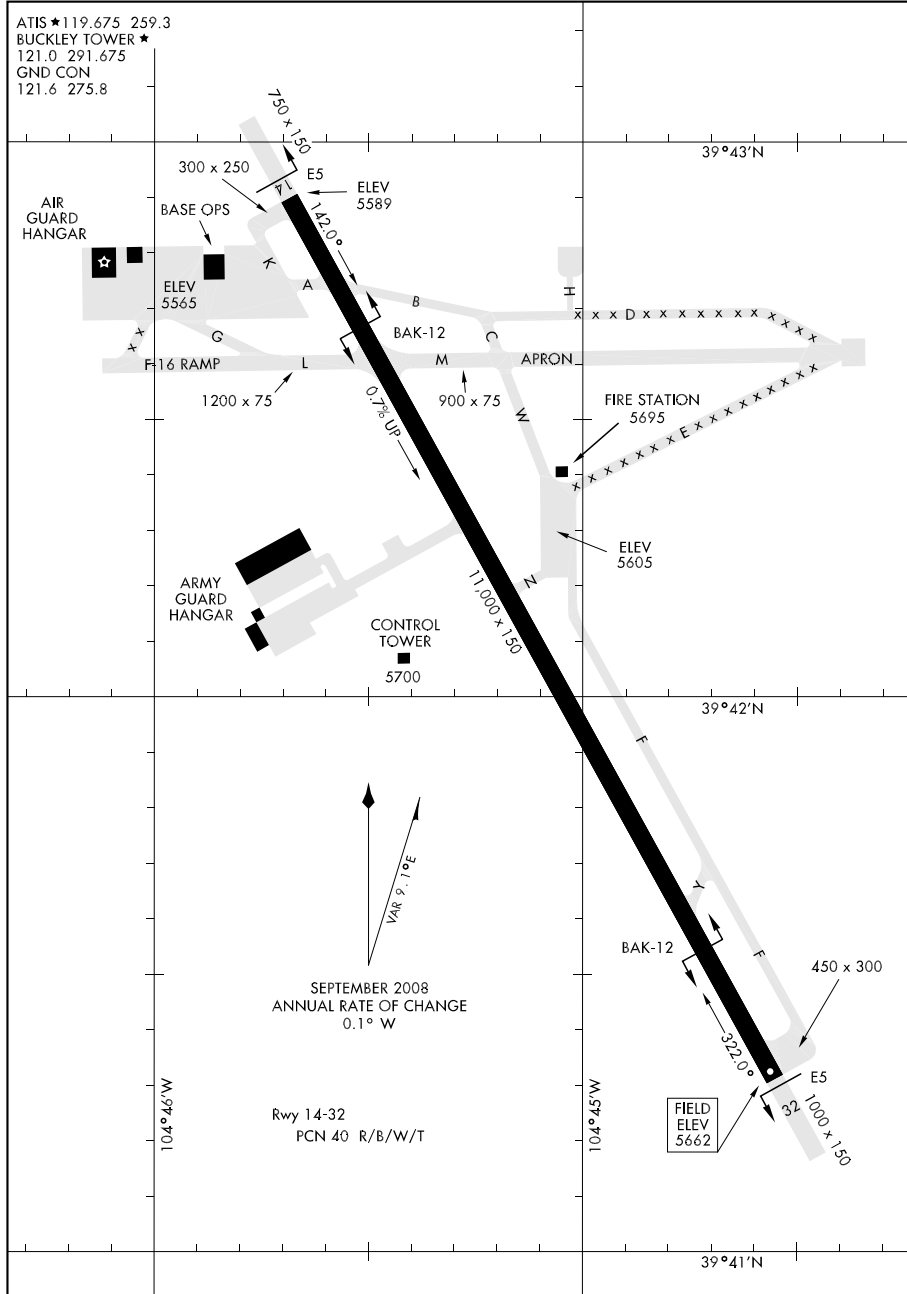

AIRPORT DIAGRAM

AURORA, COLORADO

BUCKLEY AFB (KBKF)


09295

AIRPORT DIAGRAM

BULLHEAD CITY/ LAUGHLIN/ BULLHEAD INTL (IFP)

AL-6967 (FAA)

BULLHEAD CITY, ARIZONA

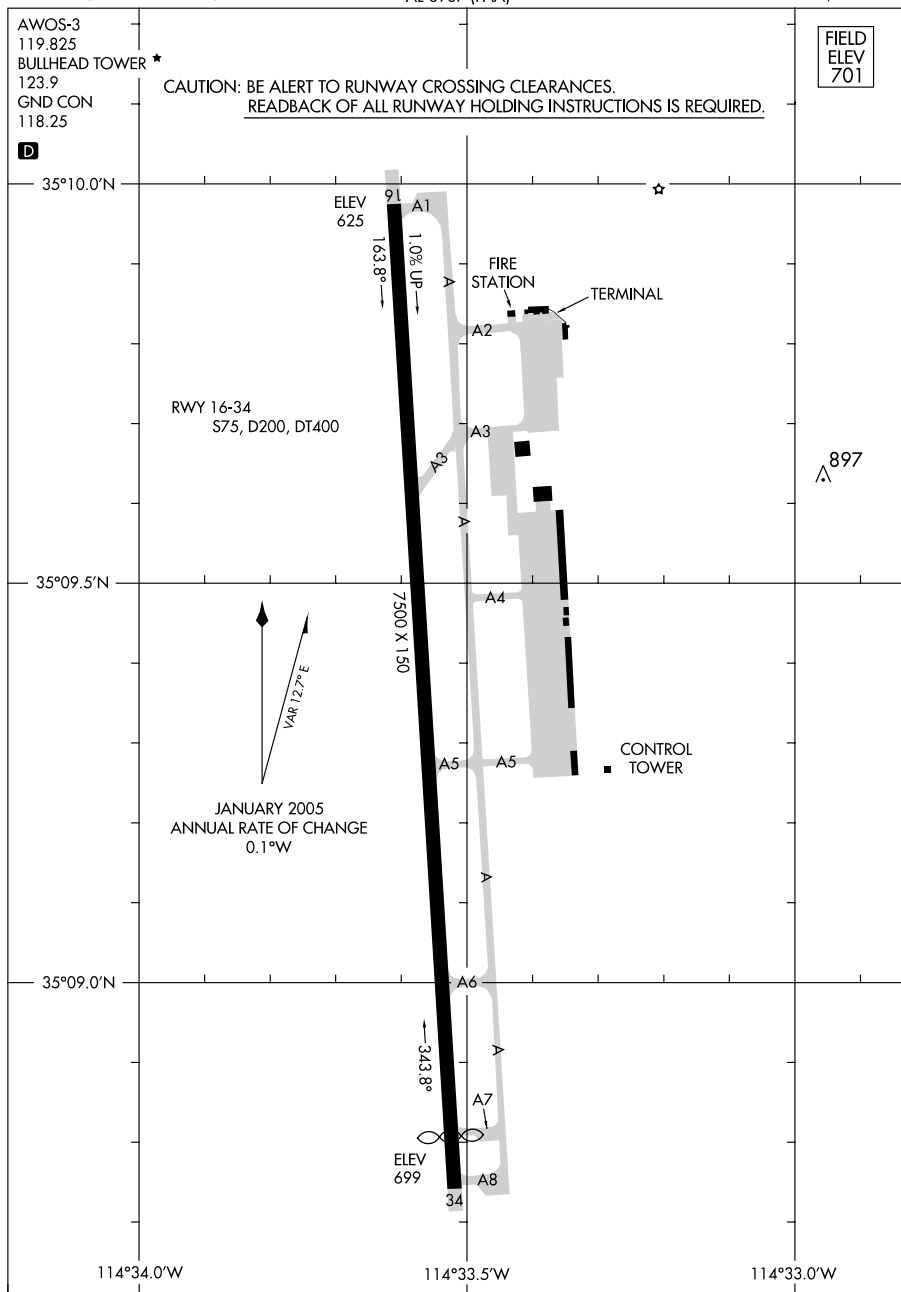

AIRPORT DIAGRAM

BULLHEAD CITY, ARIZONA

BULLHEAD CITY/ LAUGHLIN/ BULLHEAD INTL (IFP)

09295


09239

AIRPORT DIAGRAM

AL-67 (FAA)

BURBANK/ BOB HOPE (BUR)

BURBANK, CALIFORNIA

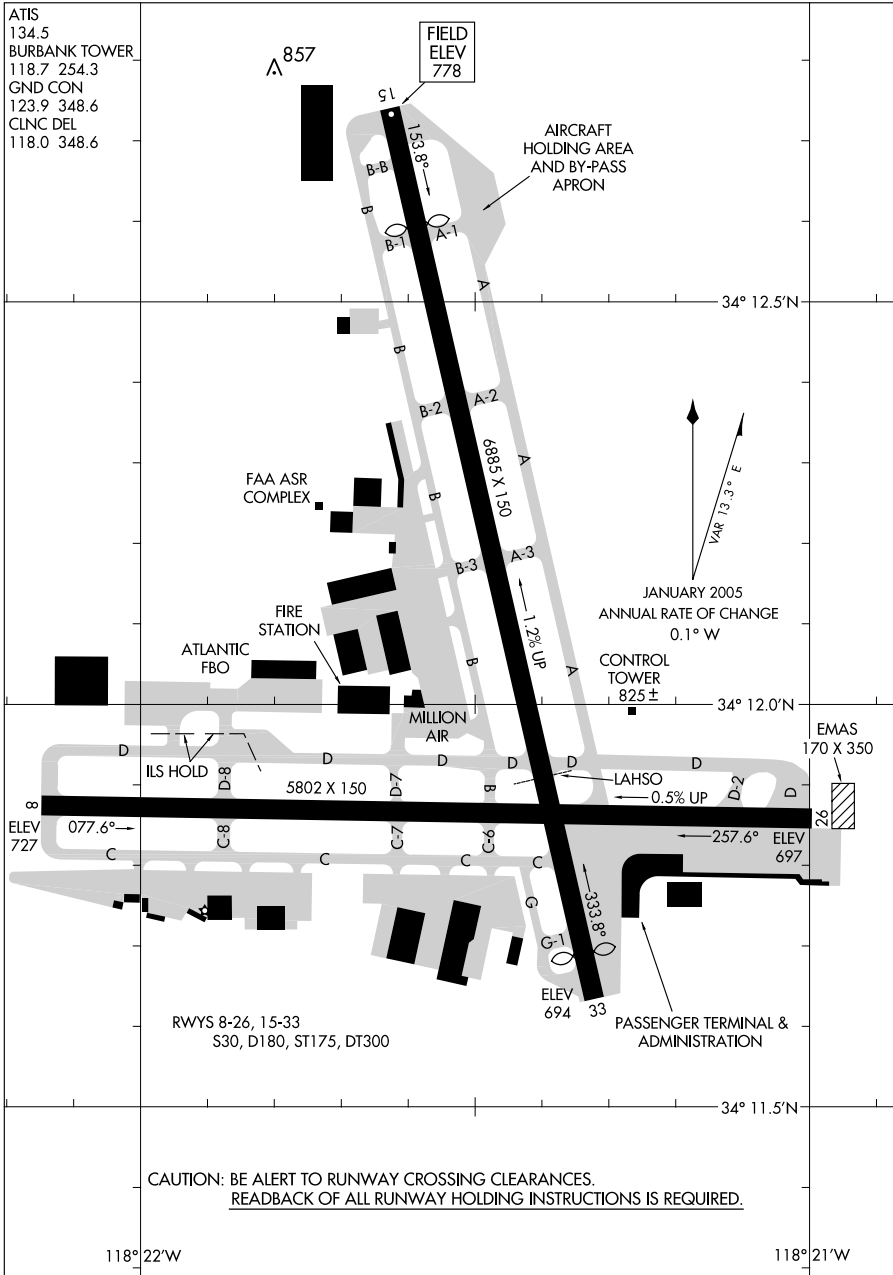

AIRPORT DIAGRAM

09239


BURBANK, CALIFORNIA
BURBANK/ BOB HOPE (BUR)

08157

AIRPORT DIAGRAM

AL-680 (FAA)

CAMARILLO (CMA)
CAMARILLO, CALIFORNIA

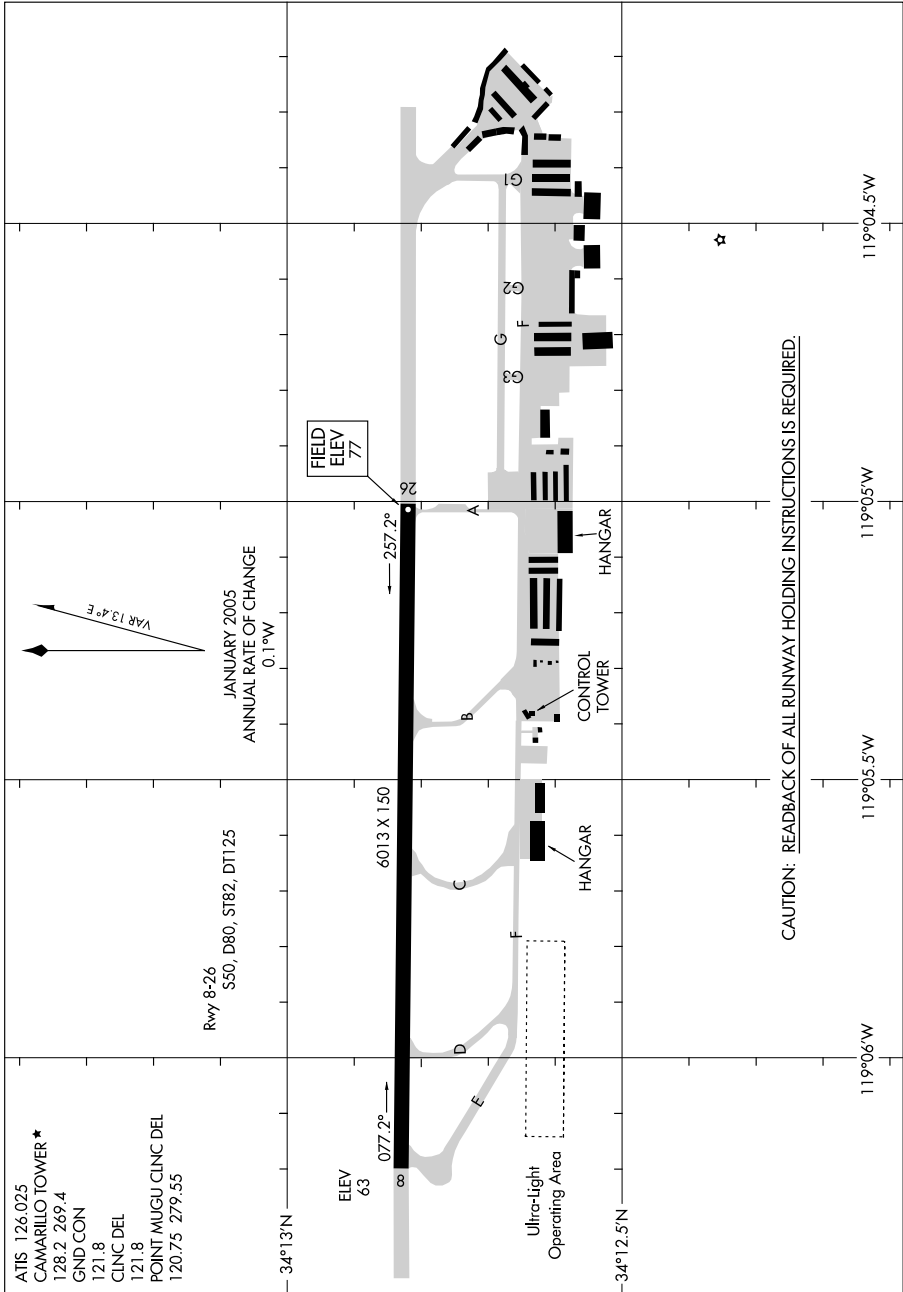

AIRPORT DIAGRAM

08157

CAMARILLO, CALIFORNIA
CAMARILLO (CMA)


09239

AIRPORT DIAGRAM

CAMP PENDLETON MCAS (MUNN FIELD) (KNFG)

AFD-5985 [USN]

OCEANSIDE, CALIFORNIA

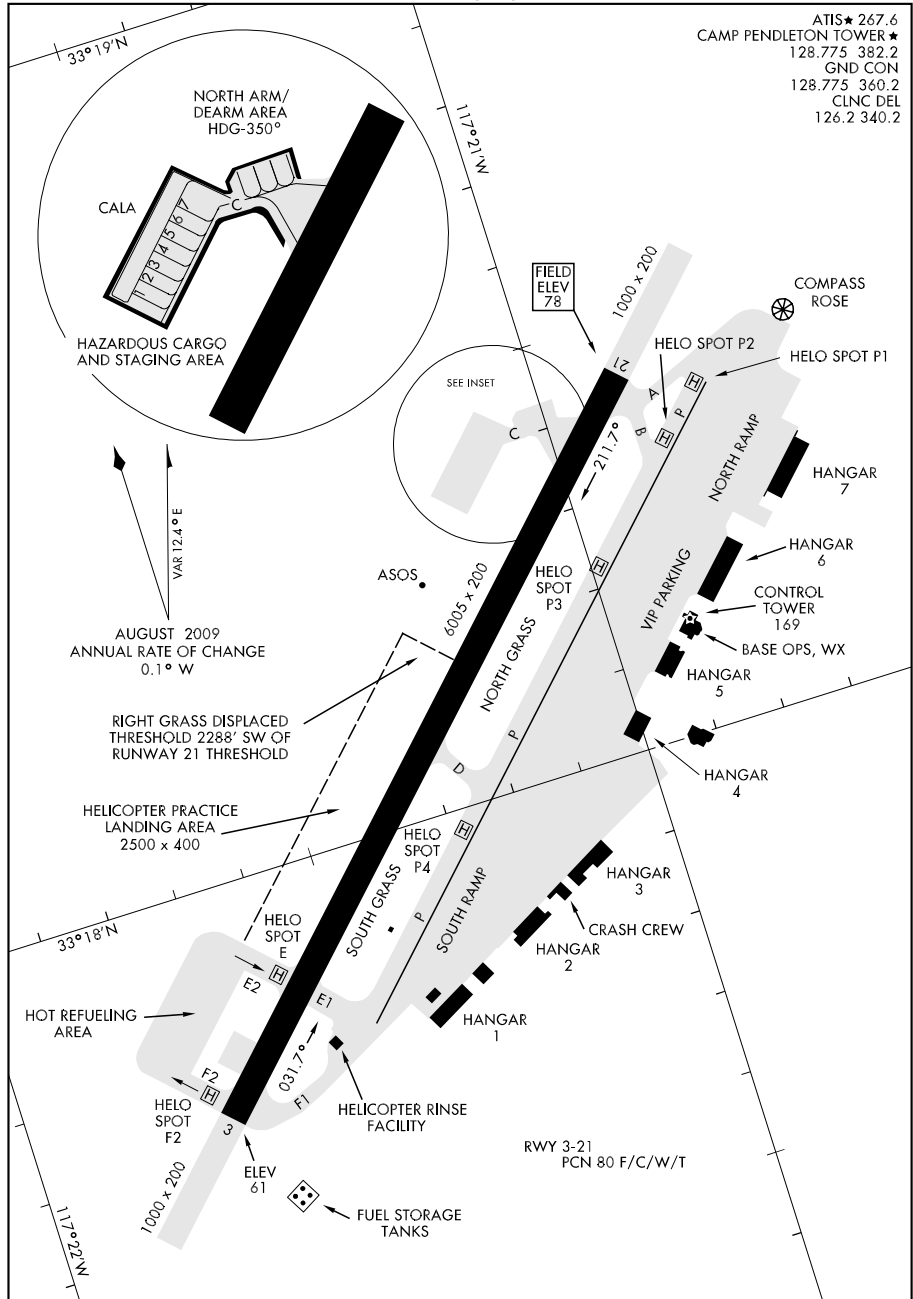

AIRPORT DIAGRAM

OCEANSIDE, CALIFORNIA
CAMP PENDLETON MCAS (MUNN FIELD) (KNFG)

09015


AIRPORT DIAGRAM

AFD-512 [USAF]

CANNON AFB (KCVS)

CLOVIS, NEW MEXICO

ATIS ★ 119.1 269.9
 CANNON TOWER ★
 120.4 270.25
 GND CON
 121.9 275.8
 CLNC DEL
 120.2 293.225

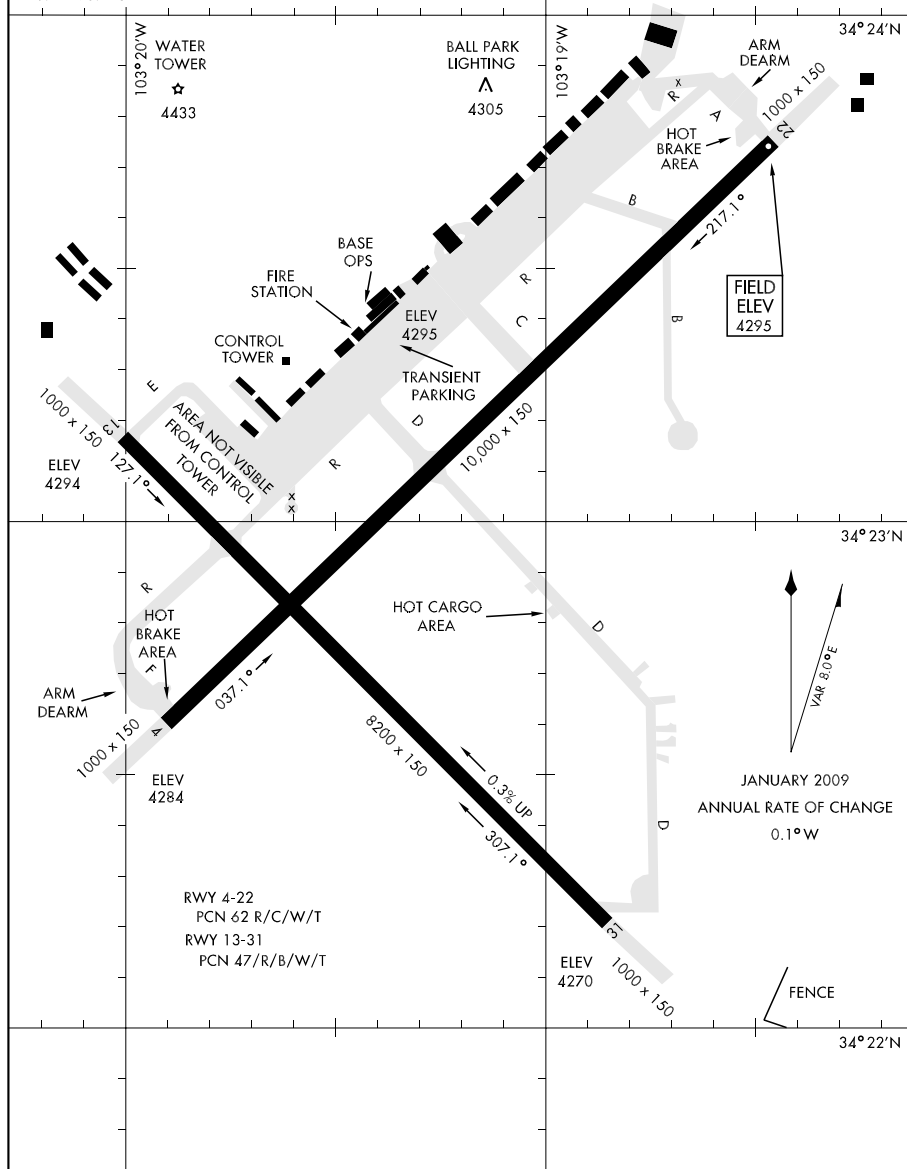

AIRPORT DIAGRAM

WGS-84 DATUM

CLOVIS, NEW MEXICO
 CANNON AFB (KCVS)


09127

AIRPORT DIAGRAM

CARLSBAD/MC CLELLAN-PALOMAR (CRQ)

AL-5310 (FAA)

CARLSBAD, CALIFORNIA

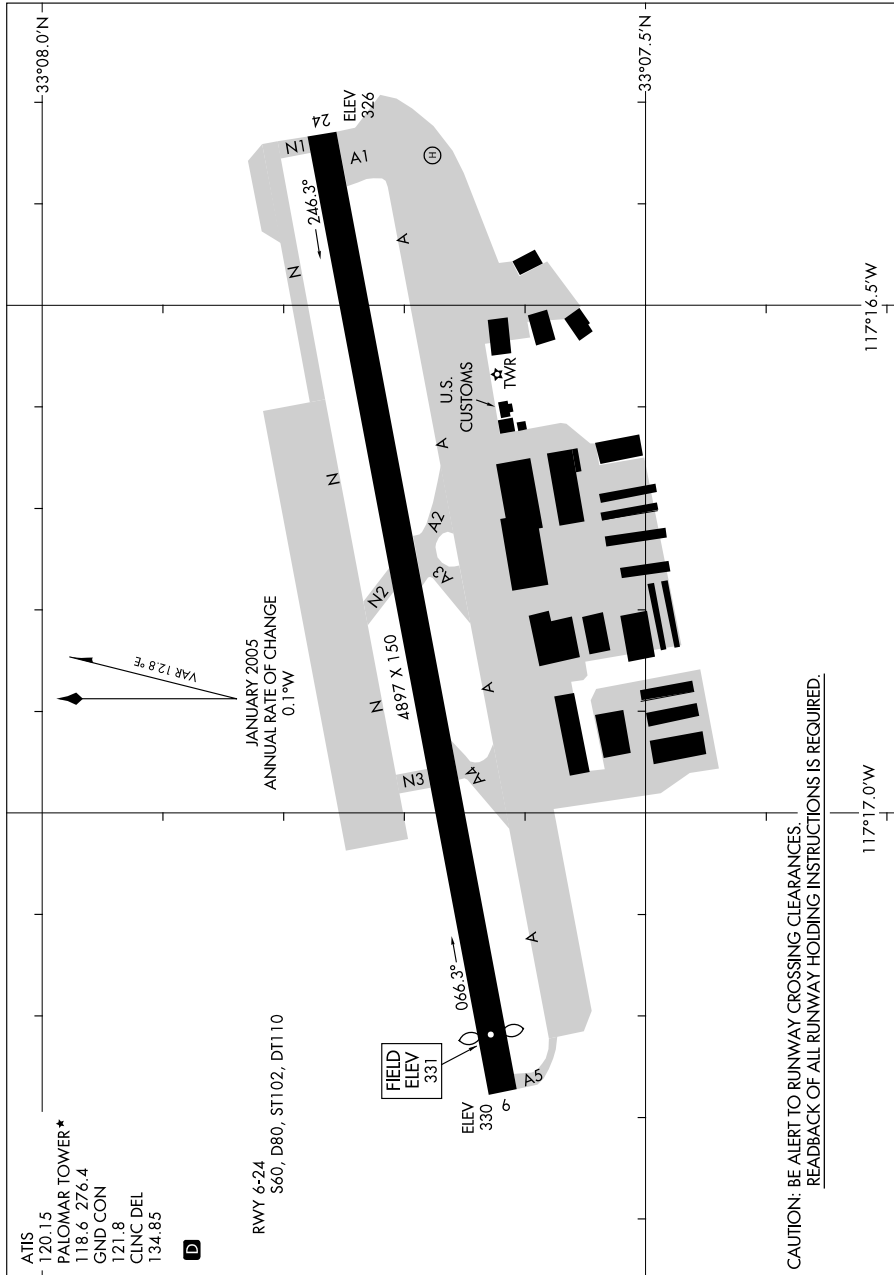

AIRPORT DIAGRAM

09127

CARLSBAD, CALIFORNIA


CARLSBAD/ MC CLELLAN-PALOMAR (CRQ)

08101

AIRPORT DIAGRAM

AL-6494 (FAA)

CHANDLER MUNI (CHD)
CHANDLER, ARIZONA

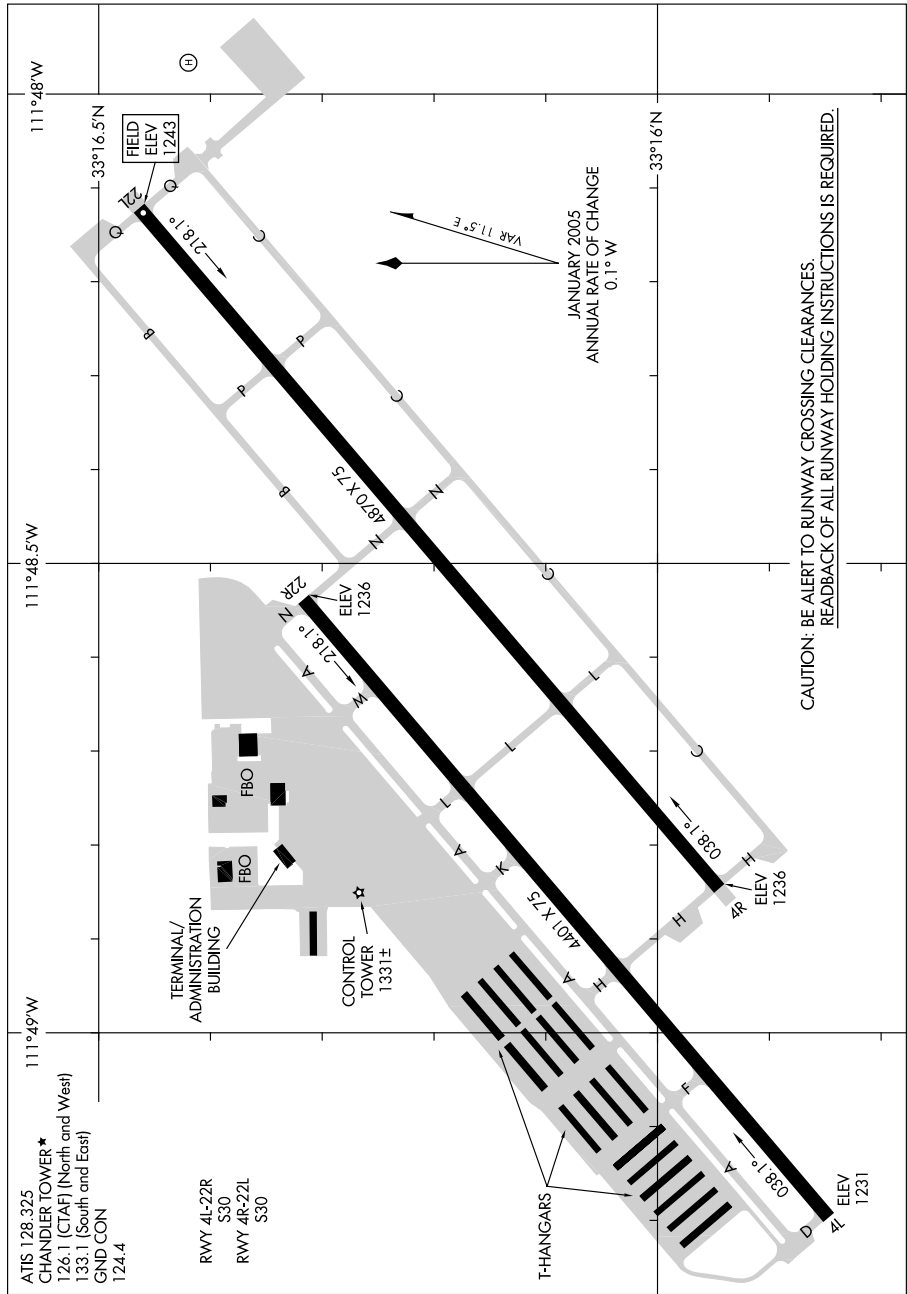

AIRPORT DIAGRAM

08101


CHANDLER, ARIZONA
CHANDLER MUNI (CHD)

08157

AIRPORT DIAGRAM

AL-557 (FAA)

CHICO MUNI (CIC)
CHICO, CALIFORNIA

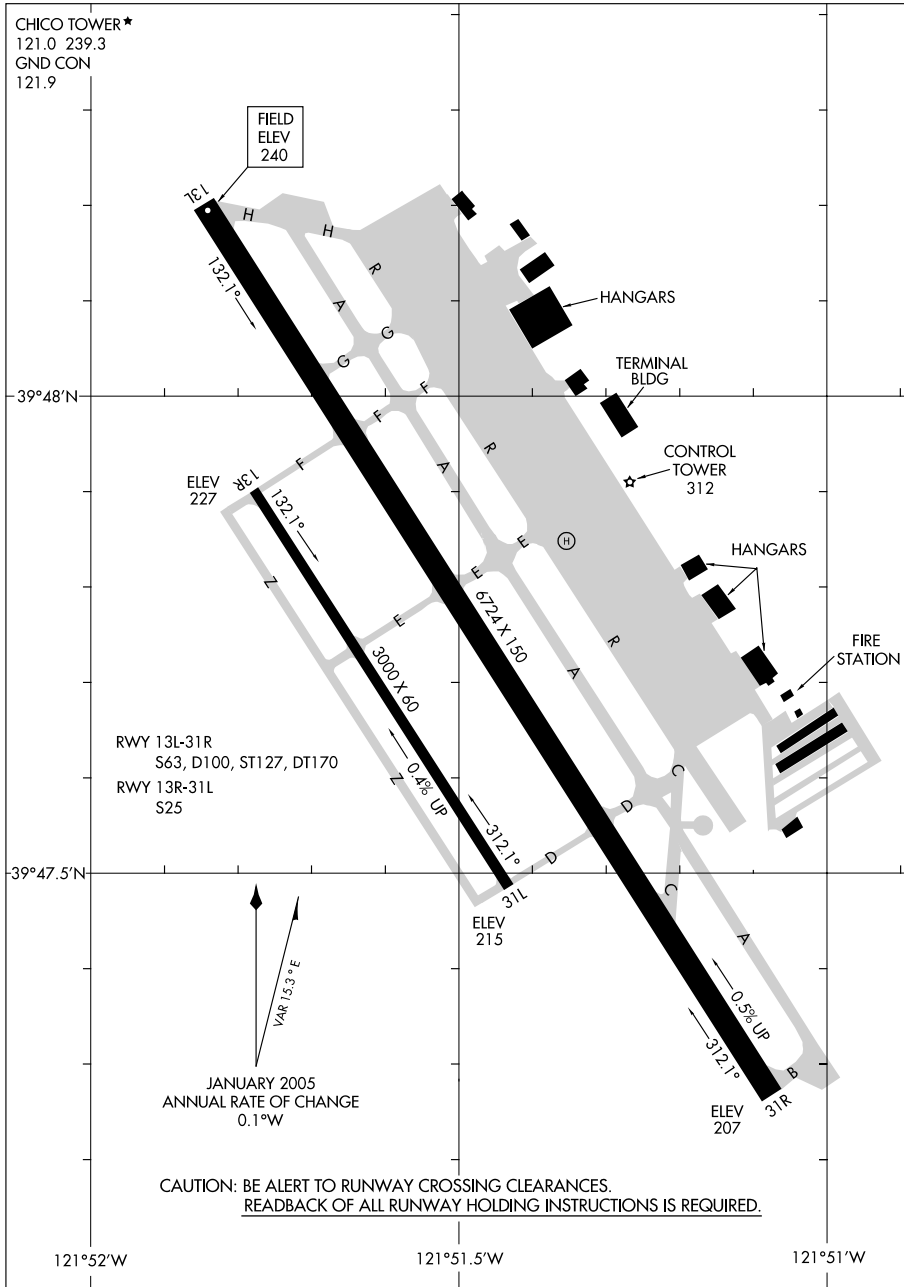

AIRPORT DIAGRAM

08157

CHICO, CALIFORNIA
CHICO MUNI (CIC)


09127

AIRPORT DIAGRAM

CHINA LAKE NAWS (ARMITAGE FIELD) (KNID)

AFD-914 [USN]

RIDGECREST, CALIFORNIA

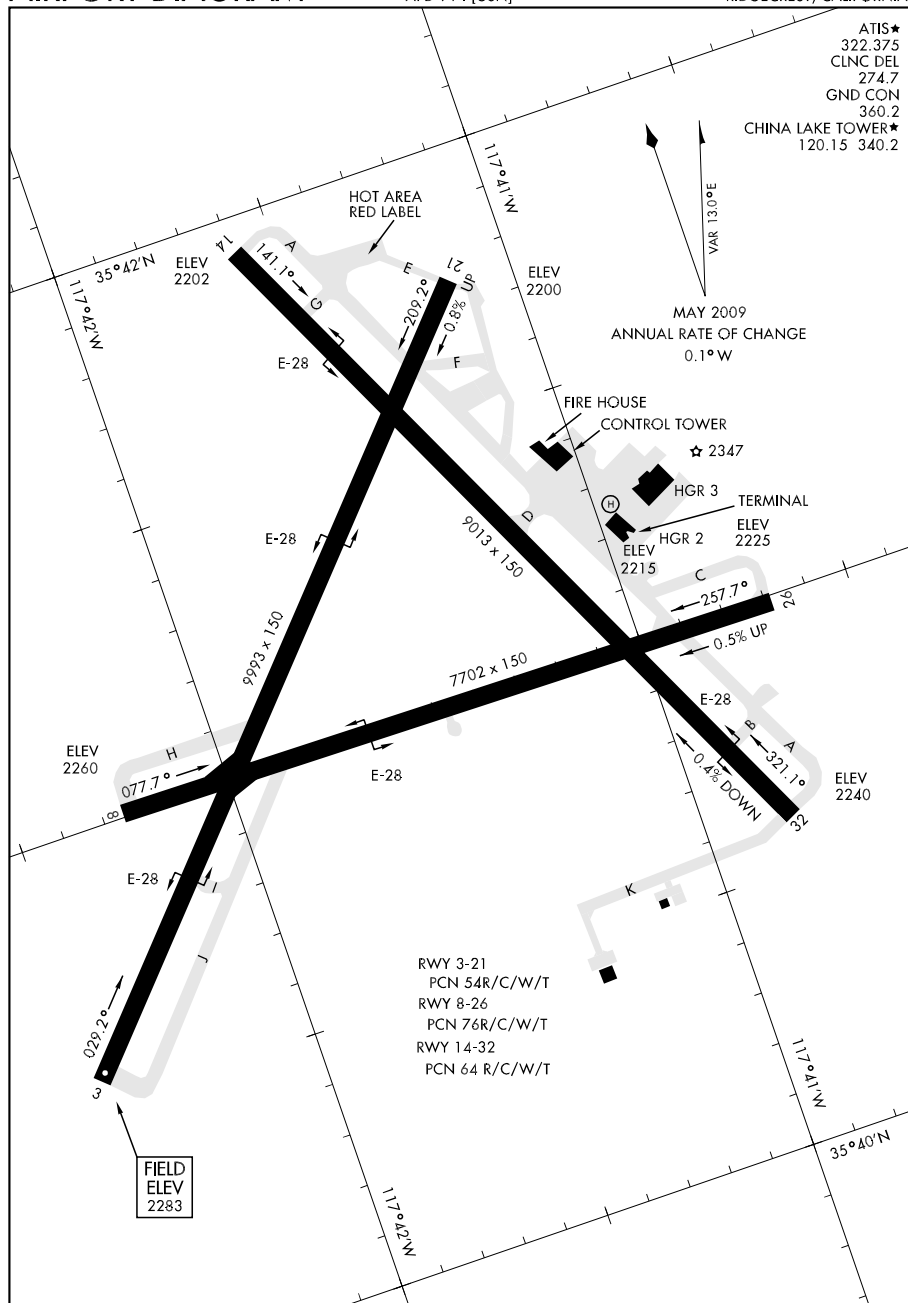

AIRPORT DIAGRAM

RIDGECREST, CALIFORNIA


CHINA LAKE NAWS (ARMITAGE FIELD) (KNID)

07354

AIRPORT DIAGRAM

AL-5599 (FAA)

CHINO (CNO)
CHINO, CALIFORNIA

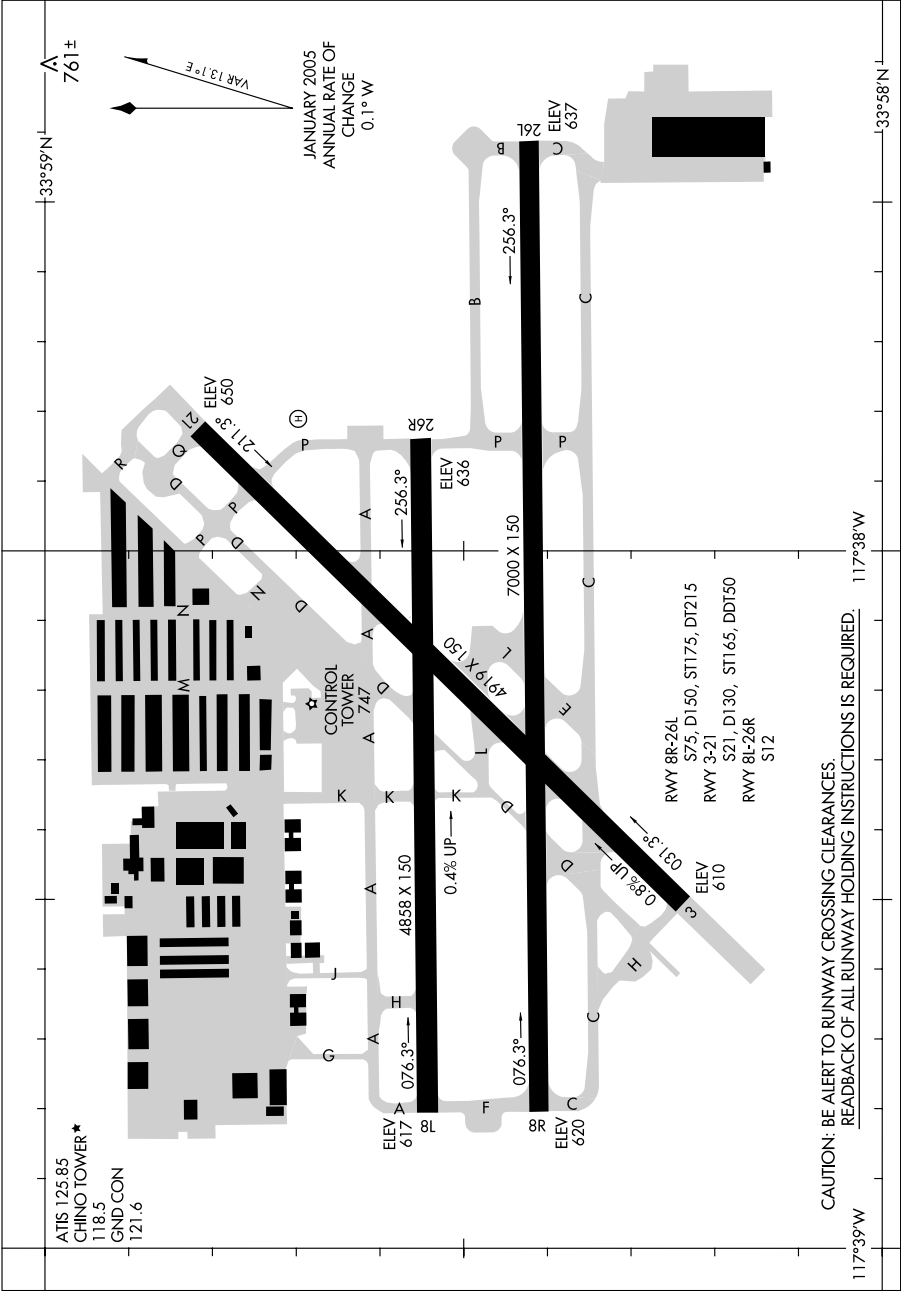

AIRPORT DIAGRAM


07354

CHINO, CALIFORNIA
CHINO (CNO)

09127

AIRPORT DIAGRAM

COLORADO SPRINGS/CITY OF COLORADO SPRINGS MUNI (COS)
AL-87 (FAA)
COLORADO SPRINGS, COLORADO

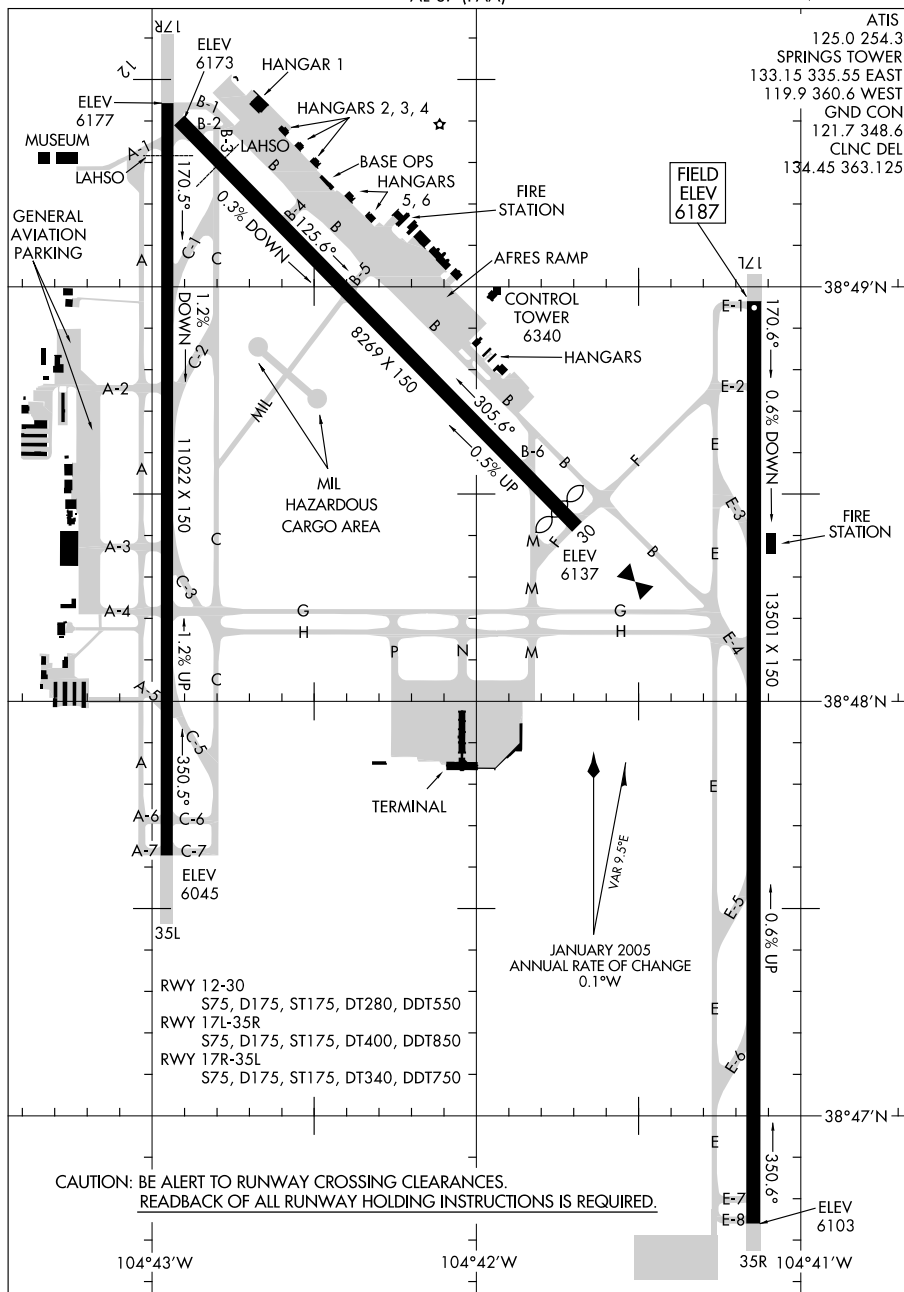

AIRPORT DIAGRAM

09127


COLORADO SPRINGS, COLORADO
COLORADO SPRINGS/CITY OF COLORADO SPRINGS MUNI (COS)

09295

AIRPORT DIAGRAM

AL-5320 (FAA)

CONCORD/BUCHANAN FIELD (CCR)
CONCORD, CALIFORNIA

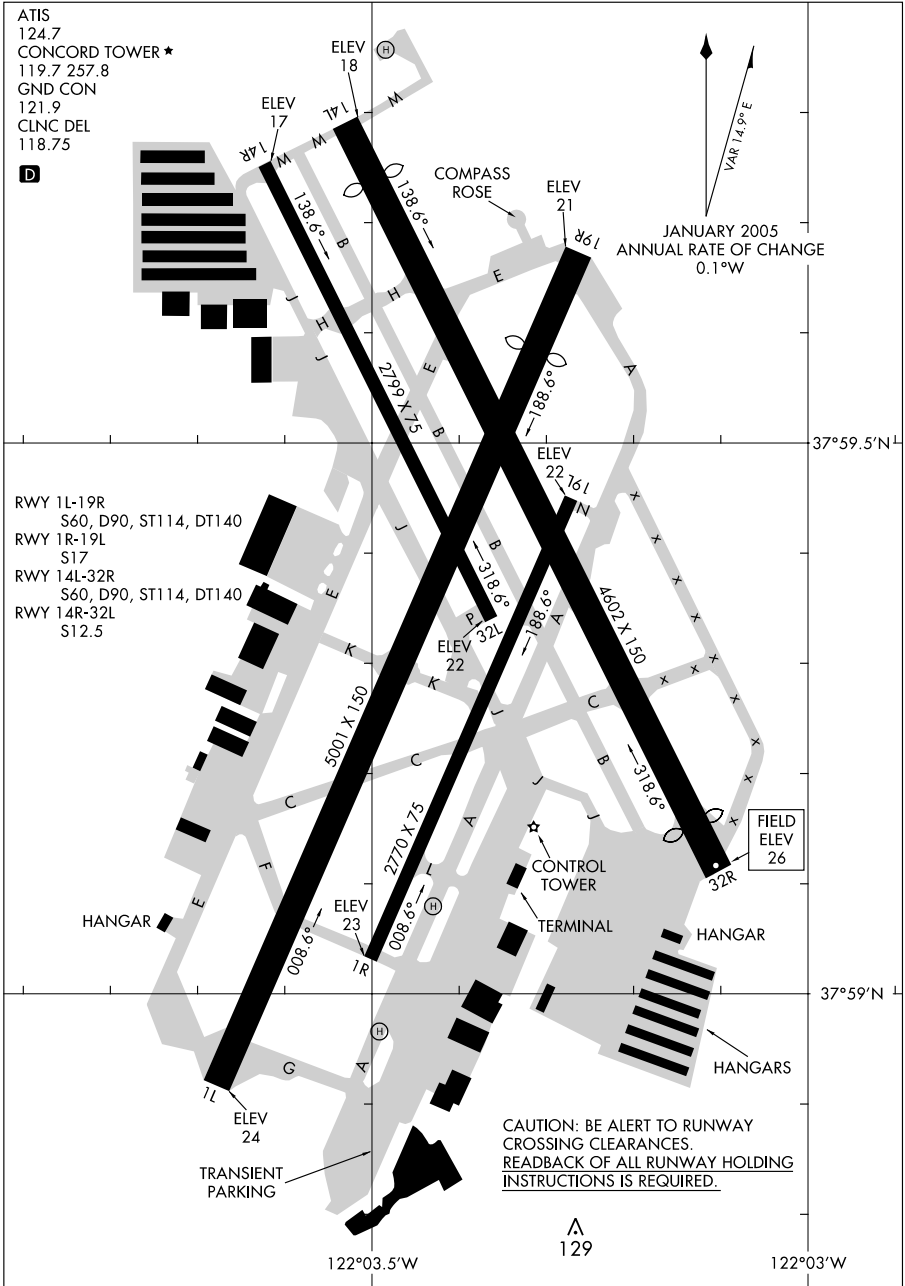

AIRPORT DIAGRAM

09295

CONCORD, CALIFORNIA
CONCORD/BUCHANAN FIELD (CCR)


09239

AIRPORT DIAGRAM

AL-104 (FAA)

DAGGETT/BARSTOW-DAGGETT (DAG)

DAGGETT, CALIFORNIA

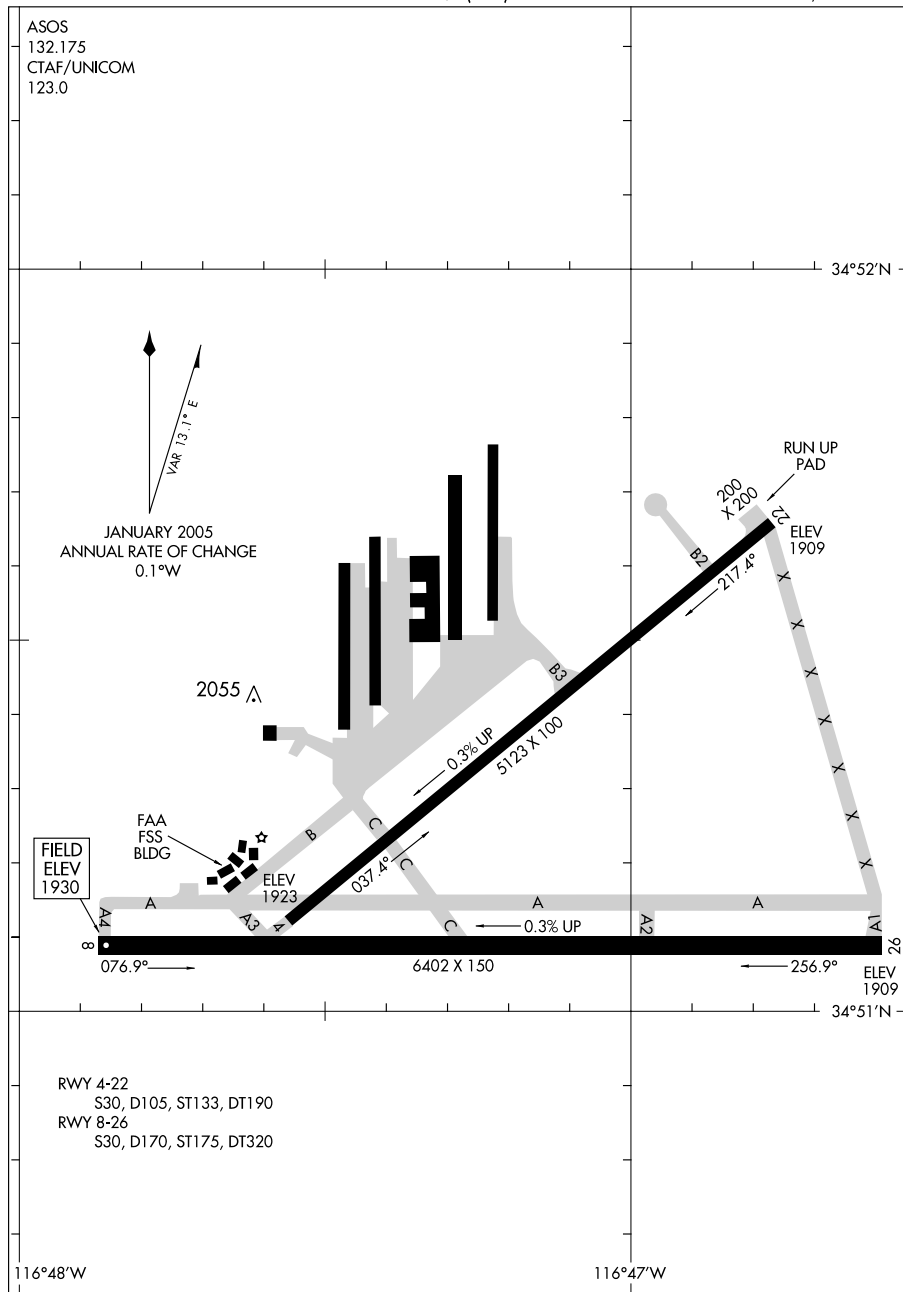

AIRPORT DIAGRAM

09239

DAGGETT, CALIFORNIA
DAGGETT/BARSTOW-DAGGETT (DAG)


05188

DAVIS-MONTHAN AFB (KDMA)

AIRPORT DIAGRAM

AFD-429 [USAF]

TUCSON, ARIZONA

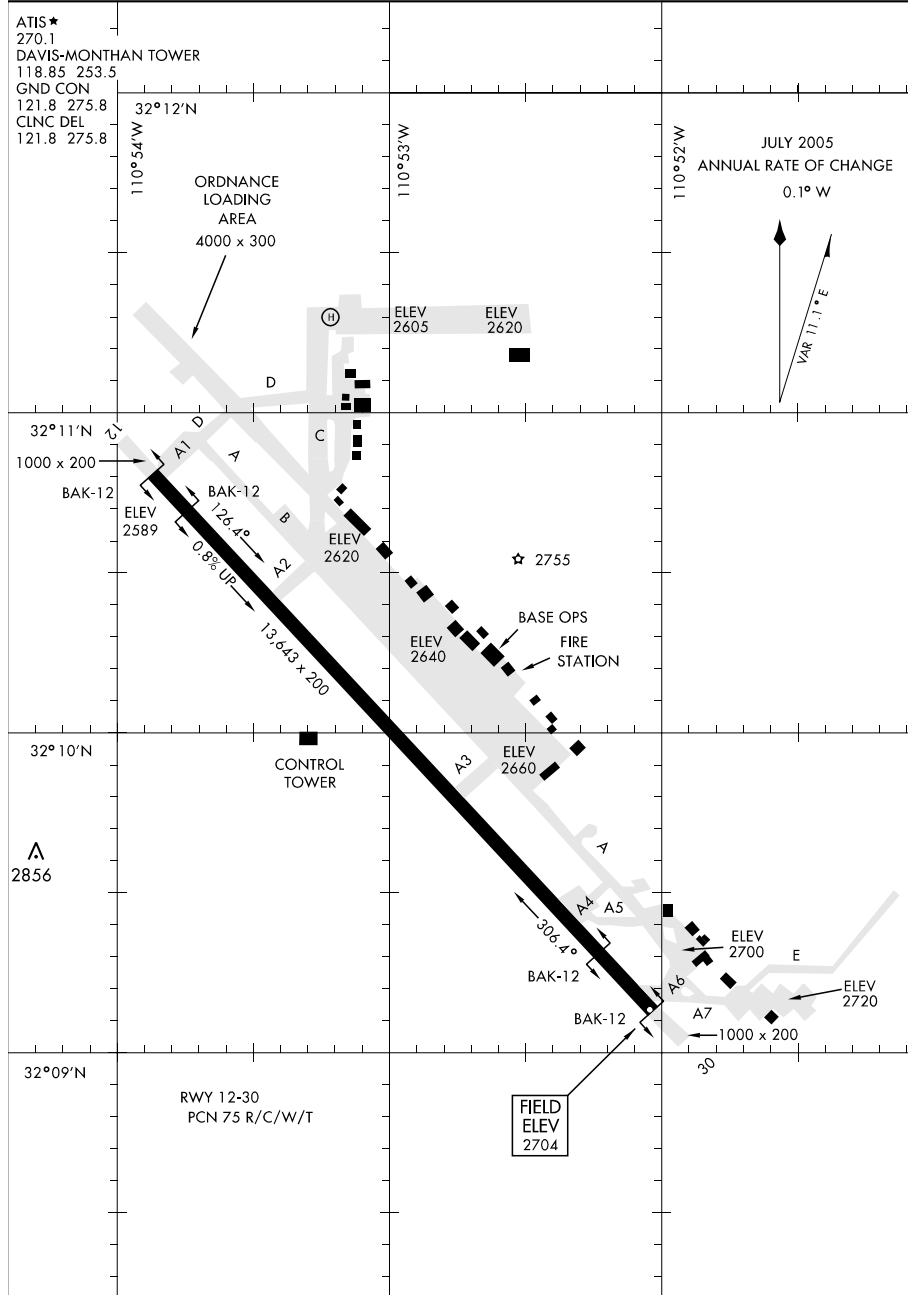

AIRPORT DIAGRAM

TUCSON, ARIZONA

DAVIS-MONTHAN AFB (KDMA)


09239

AIRPORT DIAGRAM

AL-5715 (FAA)

DENVER/CENTENNIAL (APA)

DENVER, COLORADO

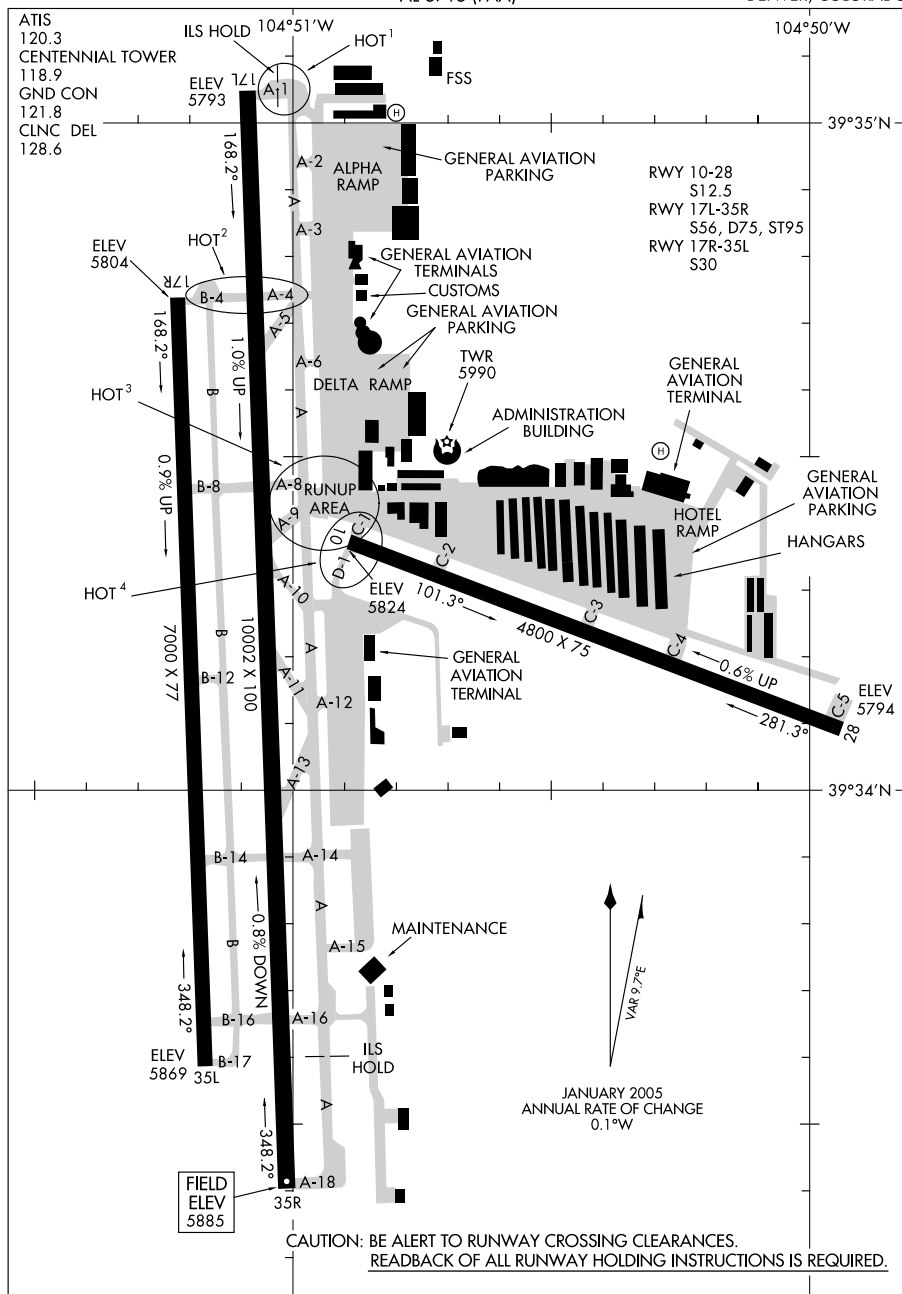

AIRPORT DIAGRAM


09239

DENVER, COLORADO
DENVER/CENTENNIAL (APA)

09015

AIRPORT DIAGRAM

AL-6851 (FAA)

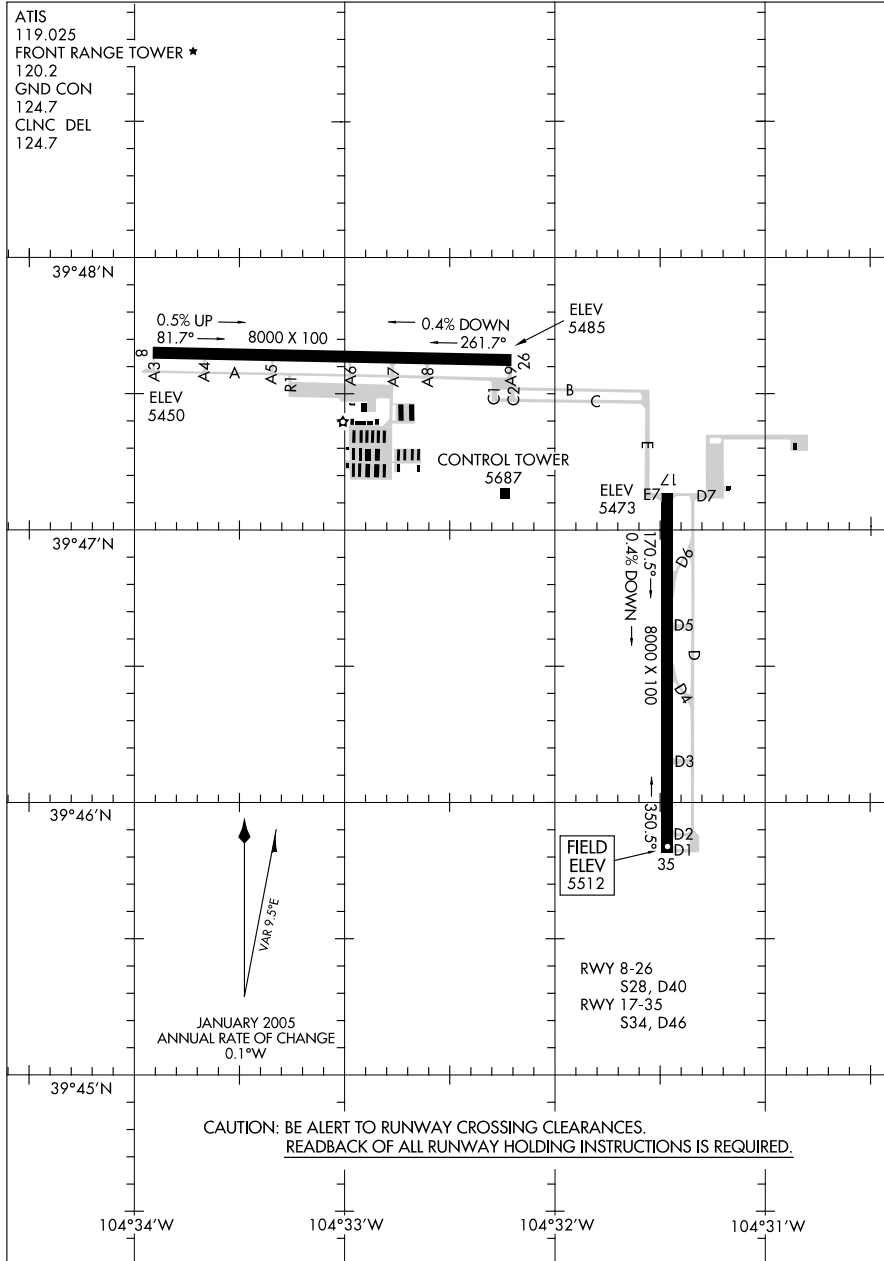DENVER/FRONT RANGE (F'TG)
DENVER, COLORADO

AIRPORT DIAGRAM


DENVER/FRONT RANGE (F'TG)
DENVER, COLORADO

09015

09239

AIRPORT DIAGRAM

AL-9077 (FAA)

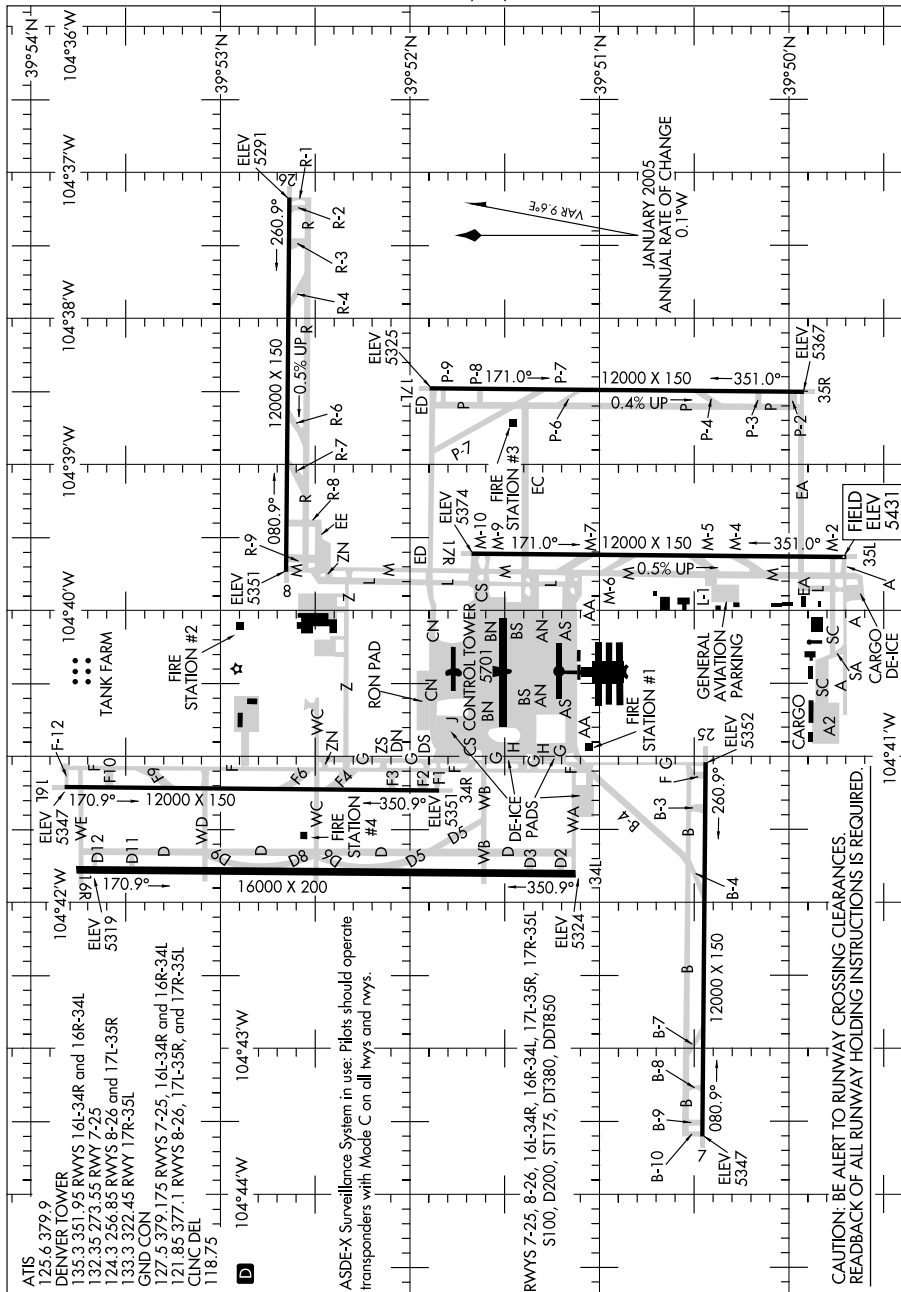DENVER INTL (DEN)
DENVER, COLORADO


AIRPORT DIAGRAM

09239

DENVER, COLORADO
DENVER INTL (DEN)

09295

AIRPORT DIAGRAM

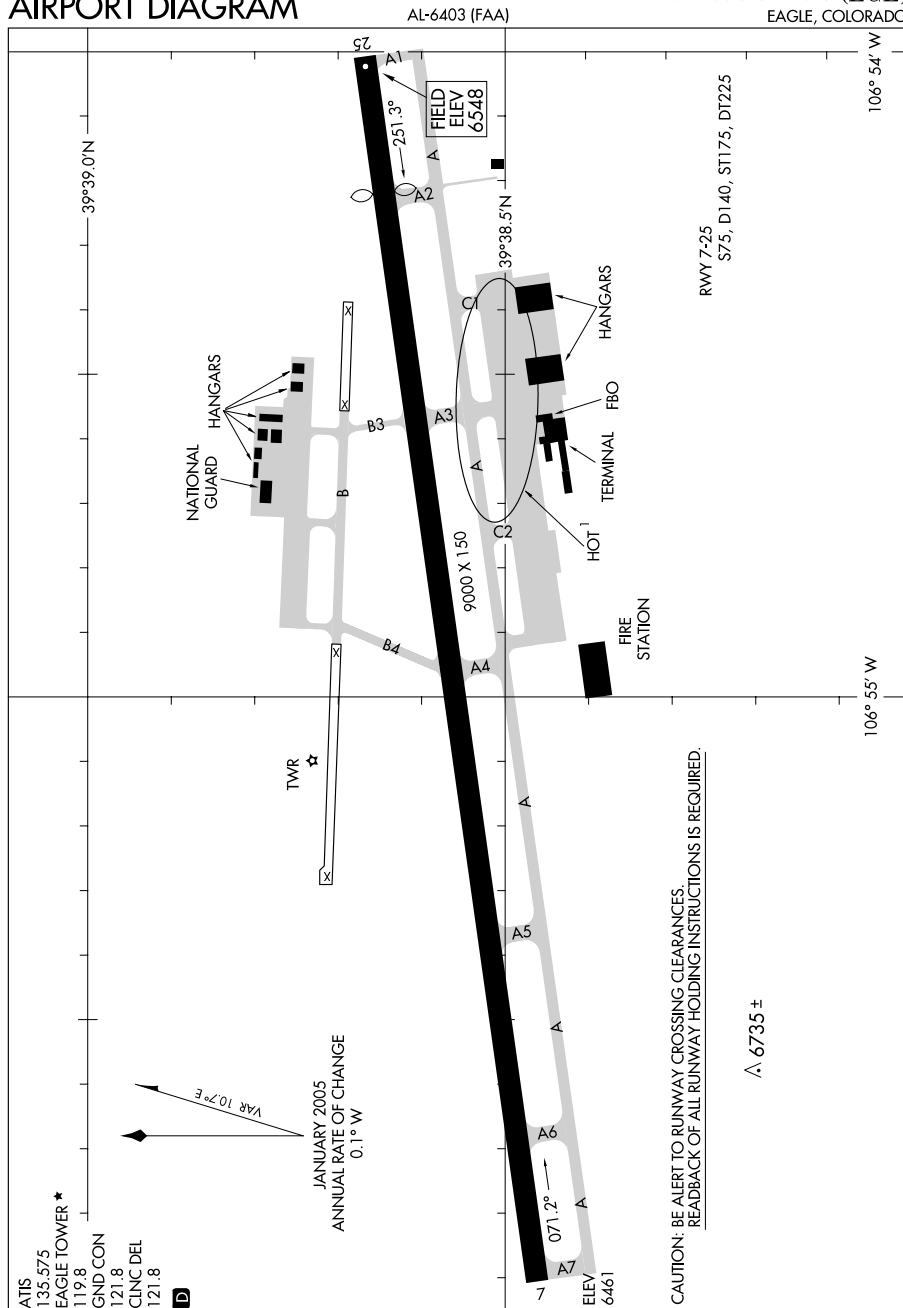EAGLE COUNTY RGNL (E.G.E.)
EAGLE, COLORADO

AIRPORT DIAGRAM

09295

EAGLE, COLORADO
EAGLE COUNTY RGNL (E.G.E.)

09239


AIRPORT DIAGRAM

AFD-500 [USAF]

EDWARDS AFB (KEDW)

EDWARDS, CALIFORNIA

ATIS 269.9 ★
 EDWARDS TOWER ★
 120.7 318.1
 GND CON
 121.8 225.4

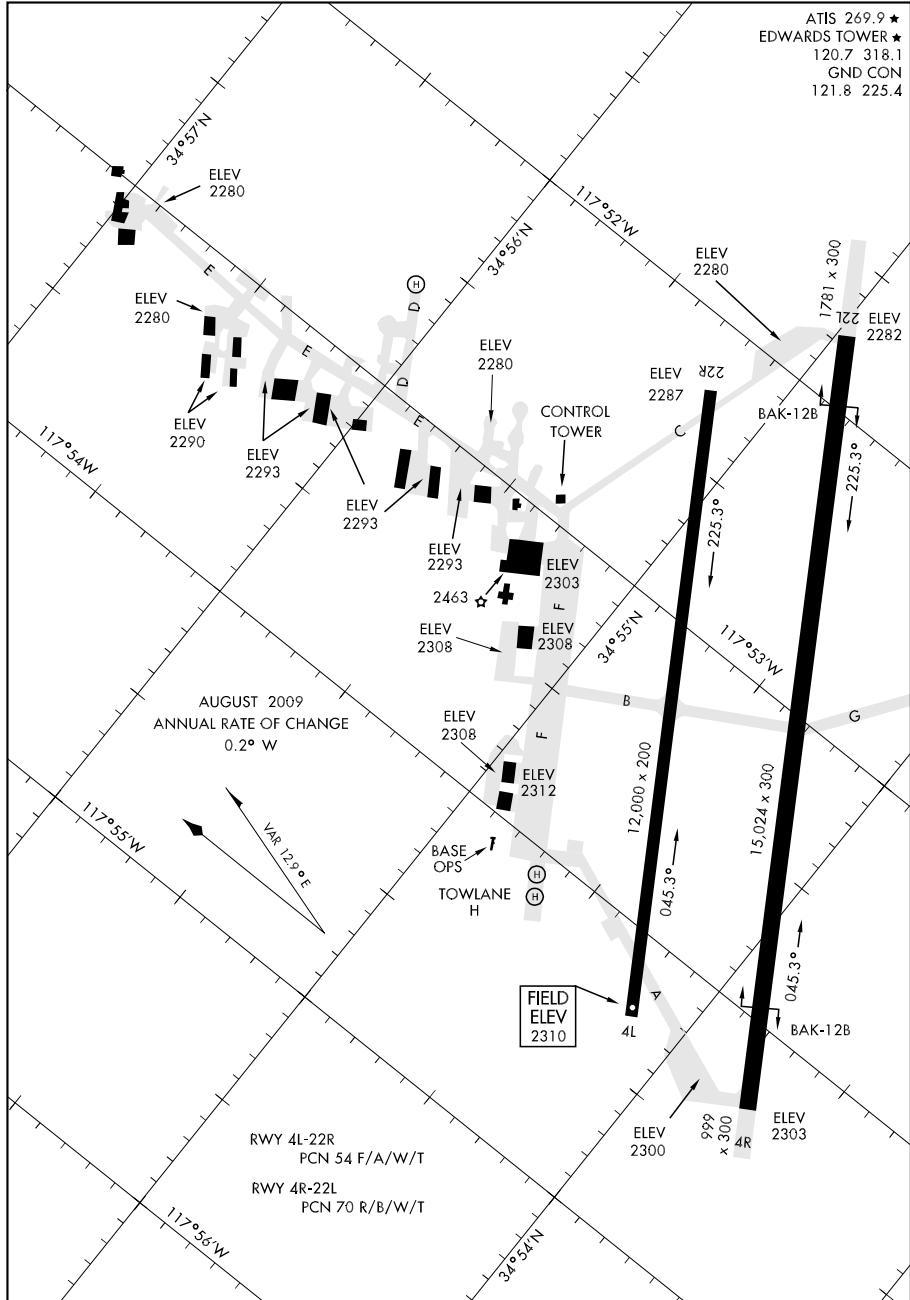

AIRPORT DIAGRAM


EDWARDS, CALIFORNIA
 EDWARDS AFB (KEDW)

09295

AIRPORT DIAGRAM

EDWARDS/ROGERS LAKEBED (KEDW)

EDWARDS, CALIFORNIA

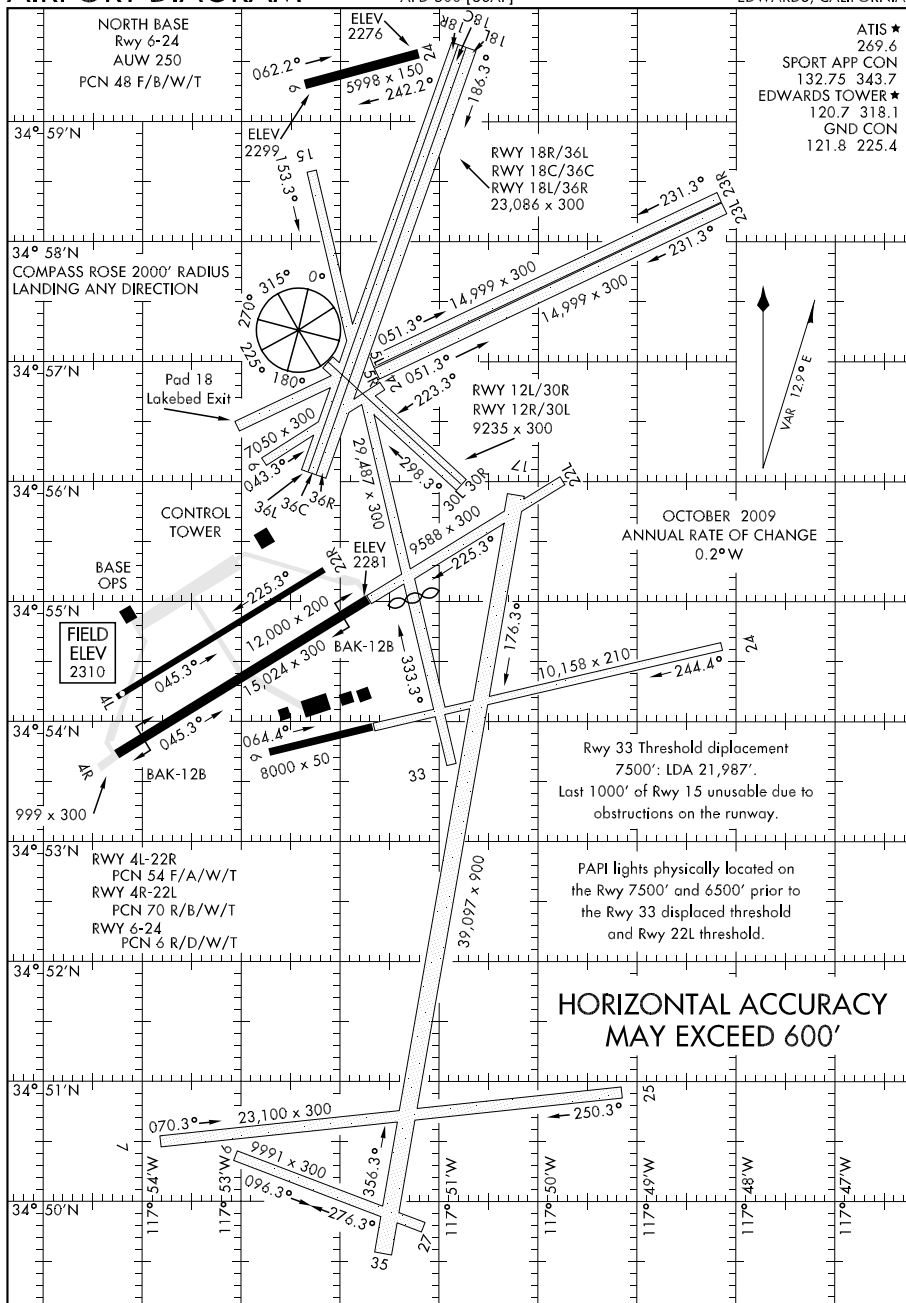

AIRPORT DIAGRAM

EDWARDS, CALIFORNIA

EDWARDS/ROGERS LAKEBED (KEDW)

07354

AIRPORT DIAGRAM


EL CENTRO NAF (KNJK)

EL CENTRO, CALIFORNIA

ATIS ★ 269.275
 EL CENTRO TOWER ★
 119.1 360.2
 GND CON
 121.9 254.35
 METRO 348.3
 CLNC DEL
 340.2

AFD-472 [USN]

DECEMBER 2007
 ANNUAL RATE OF CHANGE
 0.2°W

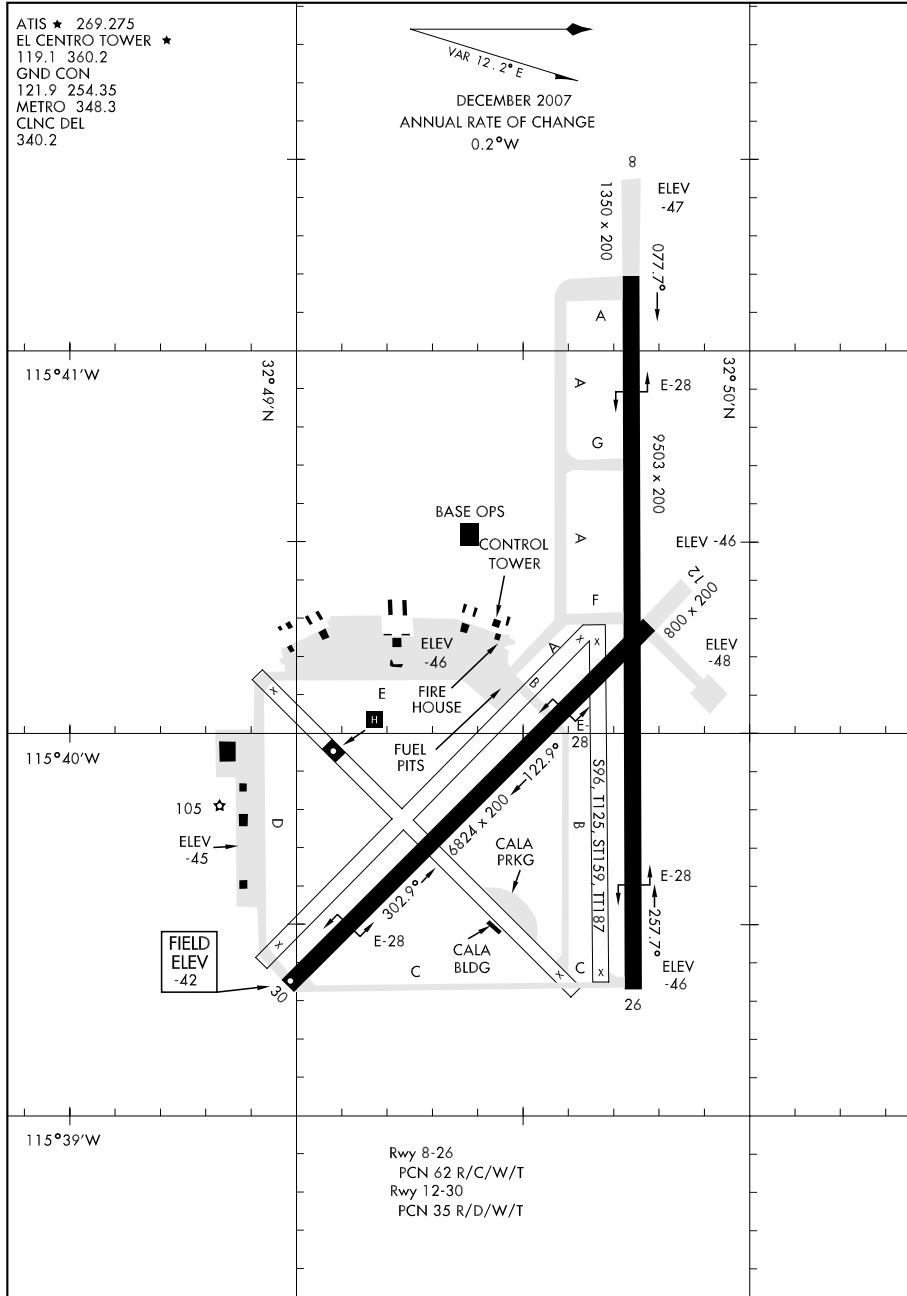


AIRPORT DIAGRAM

EL CENTRO, CALIFORNIA
 EL CENTRO NAF (KNJK)

09071

AIRPORT DIAGRAM

AL-5639 (FAA)

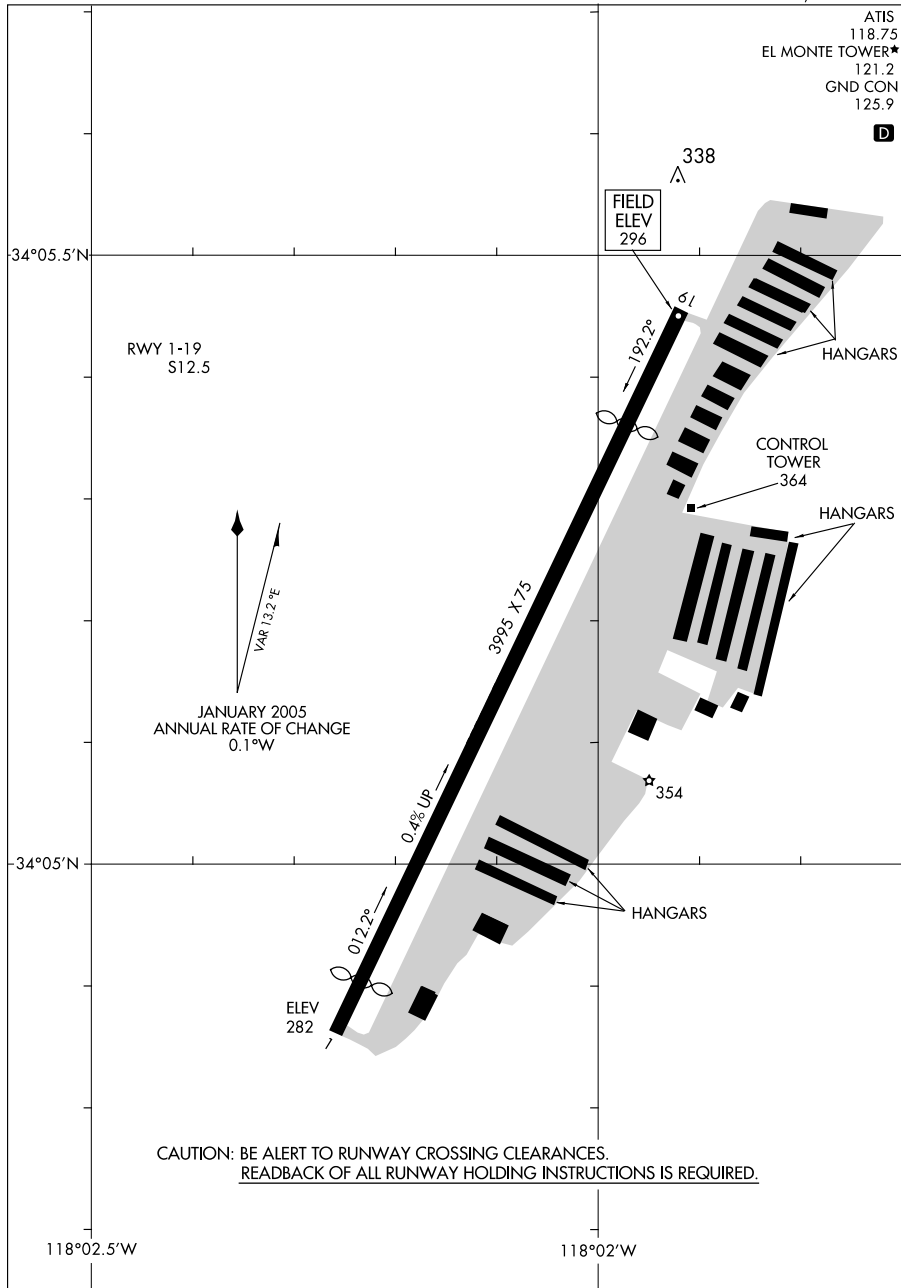EL MONTE (EMT)
EL MONTE, CALIFORNIA

AIRPORT DIAGRAM

09071


EL MONTE, CALIFORNIA
EL MONTE (EMT)

09071

AIRPORT DIAGRAM

AL-129 (FAA)

ELKO RGNL (EKO)
ELKO, NEVADA

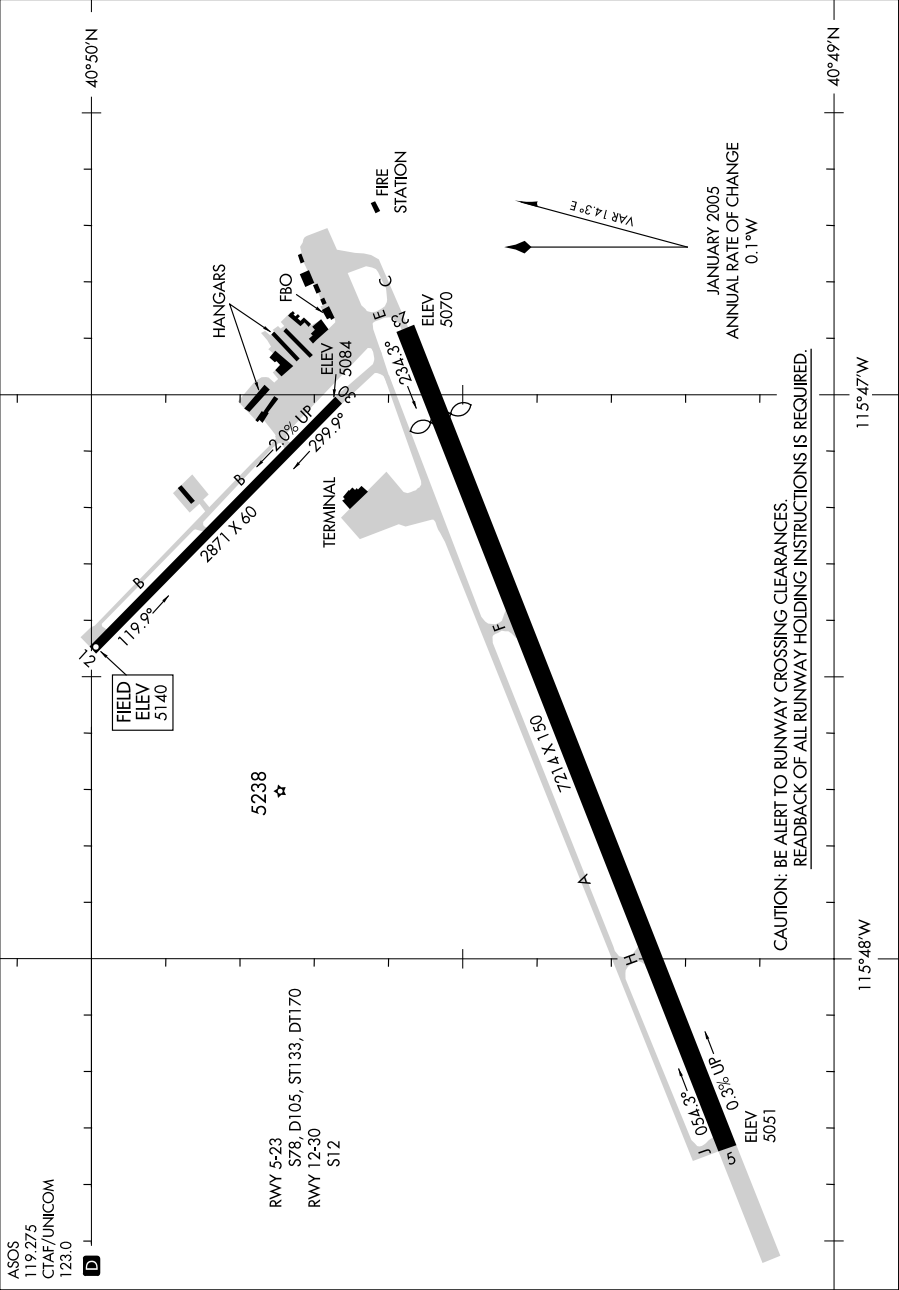

AIRPORT DIAGRAM

ELKO, NEVADA
ELKO RGNL (EKO)

09071


09267

AIRPORT DIAGRAM

AFD-143 [USN]

FALLON NAS (VAN VOORHIS FIELD) (KNFL)

FALLON, NEVADA

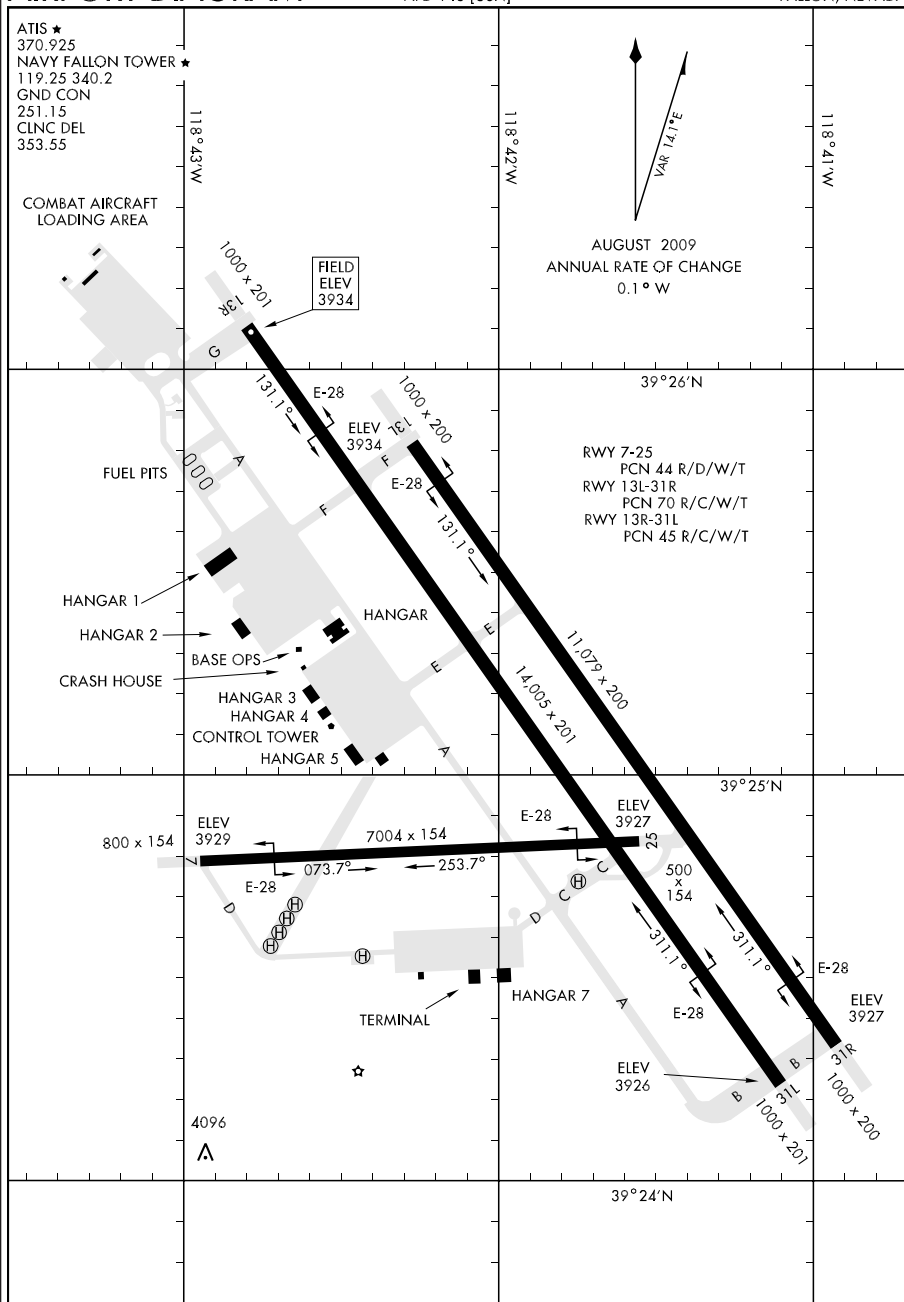

AIRPORT DIAGRAM

FALLON, NEVADA

FALLON NAS (VAN VOORHIS FIELD) (KNFL)


09071

AIRPORT DIAGRAM

FARMINGTON/ FOUR CORNERS RGNL (FMN)

AL-493 (FAA)

FARMINGTON, NEW MEXICO

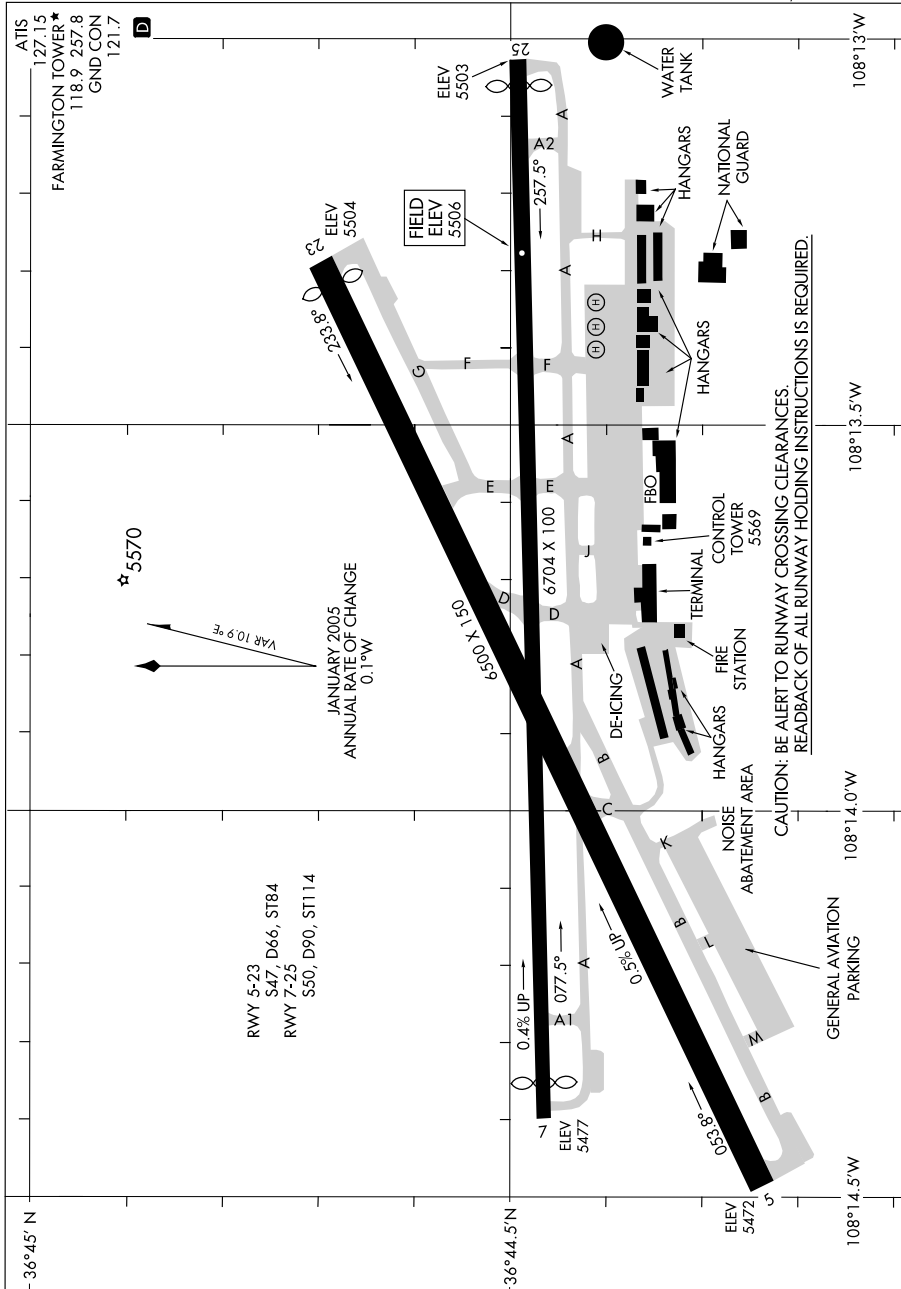

AIRPORT DIAGRAM

09071

FARMINGTON, NEW MEXICO


FARMINGTON/ FOUR CORNERS RGNL (FMN)

09239

AIRPORT DIAGRAM

AL-5034 (FAA)

FLAGSTAFF PULLIAM (FLG)
FLAGSTAFF, ARIZONA

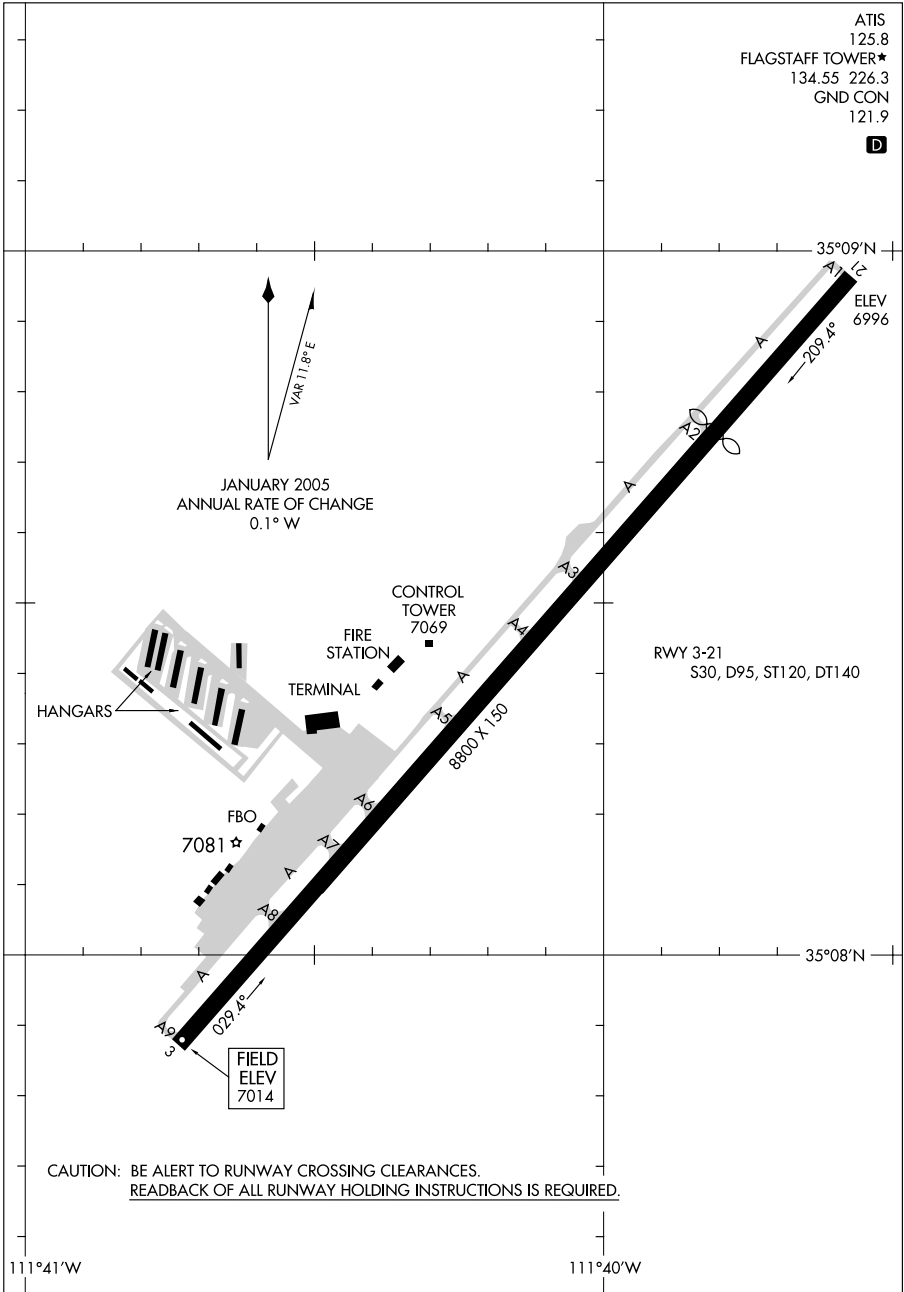

AIRPORT DIAGRAM

09239

FLAGSTAFF, ARIZONA
FLAGSTAFF PULLIAM (FLG)


07018

AIRPORT DIAGRAM

FORT HUACHUCA-SIERRA VISTA/SIERRA VISTA MUNI-LIBBY AAF (FHU)

AFD-5081 [USA]

FORT HUACHUCA/SIERRA VISTA, ARIZONA

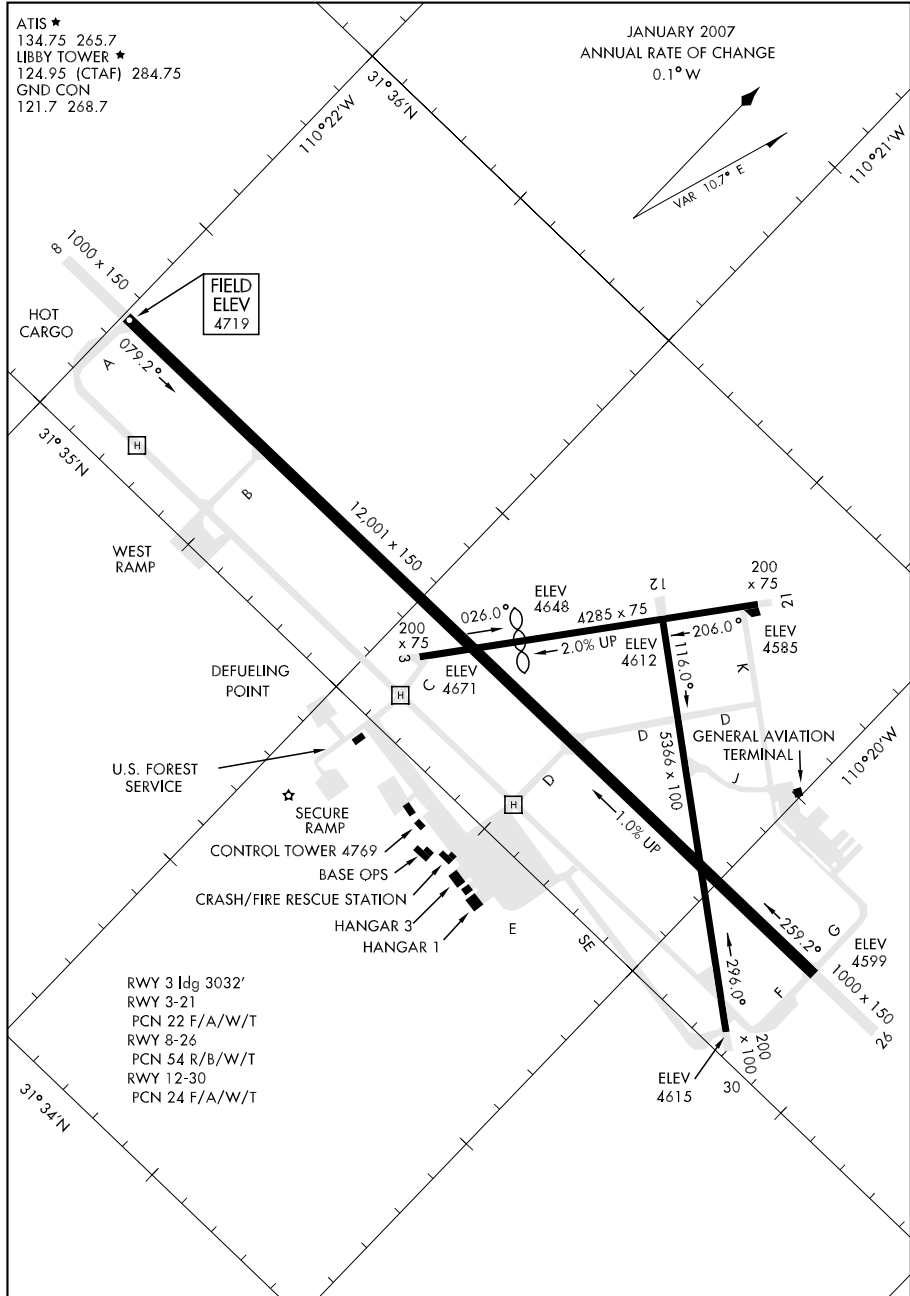

AIRPORT DIAGRAM

FORT HUACHUCA/SIERRA VISTA, ARIZONA


FORT HUACHUCA-SIERRA VISTA/SIERRA VISTA MUNI-LIBBY AAF (FHU)

09071

AIRPORT DIAGRAM

AL-161 (FAA)

FRESNO CHANDLER EXECUTIVE (FCH)
FRESNO, CALIFORNIA

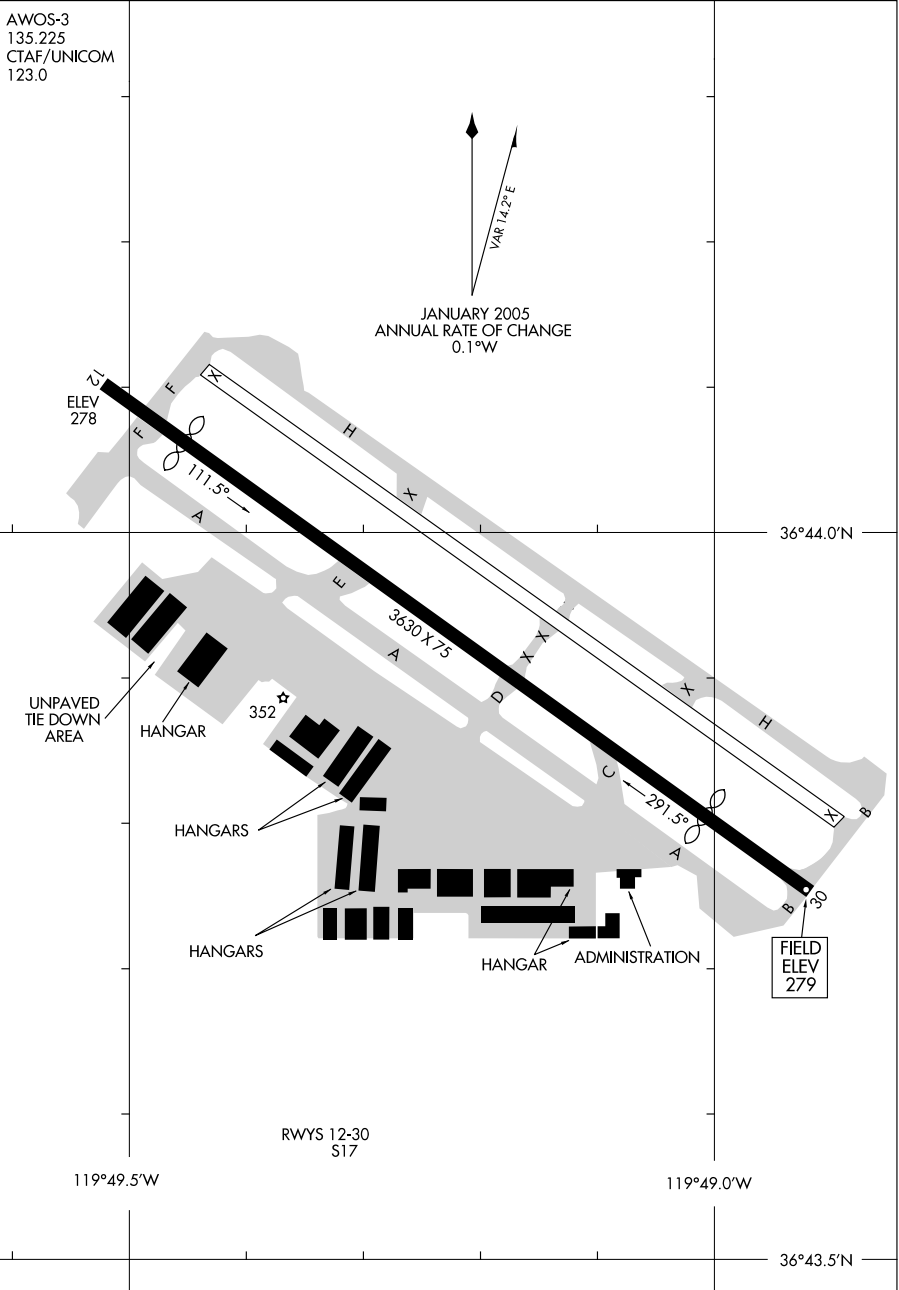

AIRPORT DIAGRAM

09071

FRESNO, CALIFORNIA
FRESNO CHANDLER EXECUTIVE (FCH)


09295

AIRPORT DIAGRAM

AL-162 (FAA)

FRESNO YOSEMITE INTL (FAT)

FRESNO, CALIFORNIA

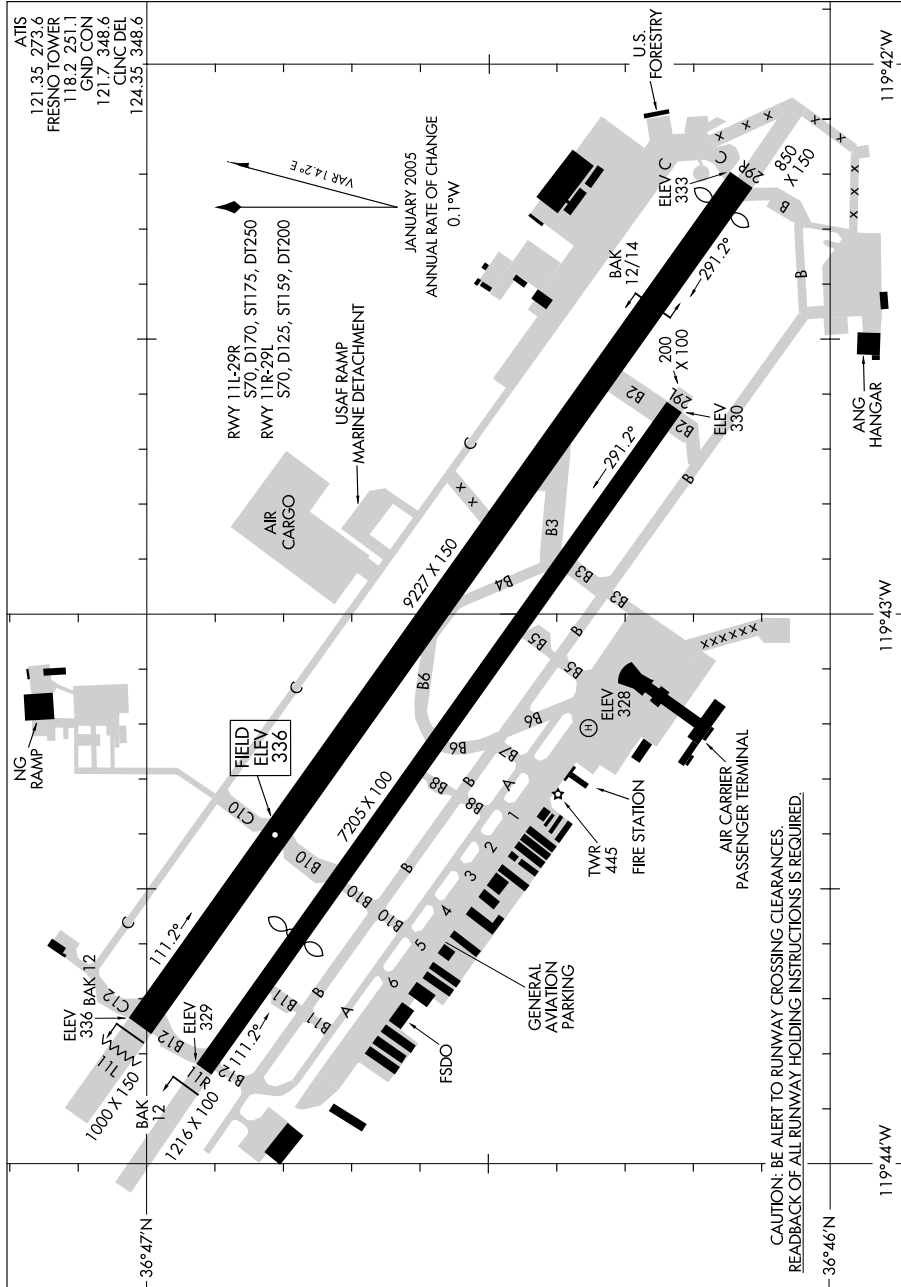

AIRPORT DIAGRAM

09295

FRESNO, CALIFORNIA
FRESNO YOSEMITE INTL (FAT)

FRESNO YOSEMITE INTL (FAT)

09295

AIRPORT DIAGRAM

FULLERTON MUNI (FUL)
FULLERTON, CALIFORNIA

ATIS
125.05
FULLERTON TOWER ★
119.1
GND CON
121.8

AL-5136 (FAA)

33°52.5'N

117°59.0'W

VAR 13.1°E

JANUARY 2005
ANNUAL RATE OF CHANGE
0.1°W

ELEV
85

064.0°

HANGARS

3121 X 75

0.3% UP

TRANSIENT
PARKINGTWR/TERMINAL
158

INTERSECTION
DEPARTURES
NOT AUTHORIZED

FIELD
ELEV
96RWY 6-24
S12.5

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBCK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM


09295

FULLERTON, CALIFORNIA
FULLERTON MUNI (FUL)

09071

AIRPORT DIAGRAM

AL-6915 (FAA)

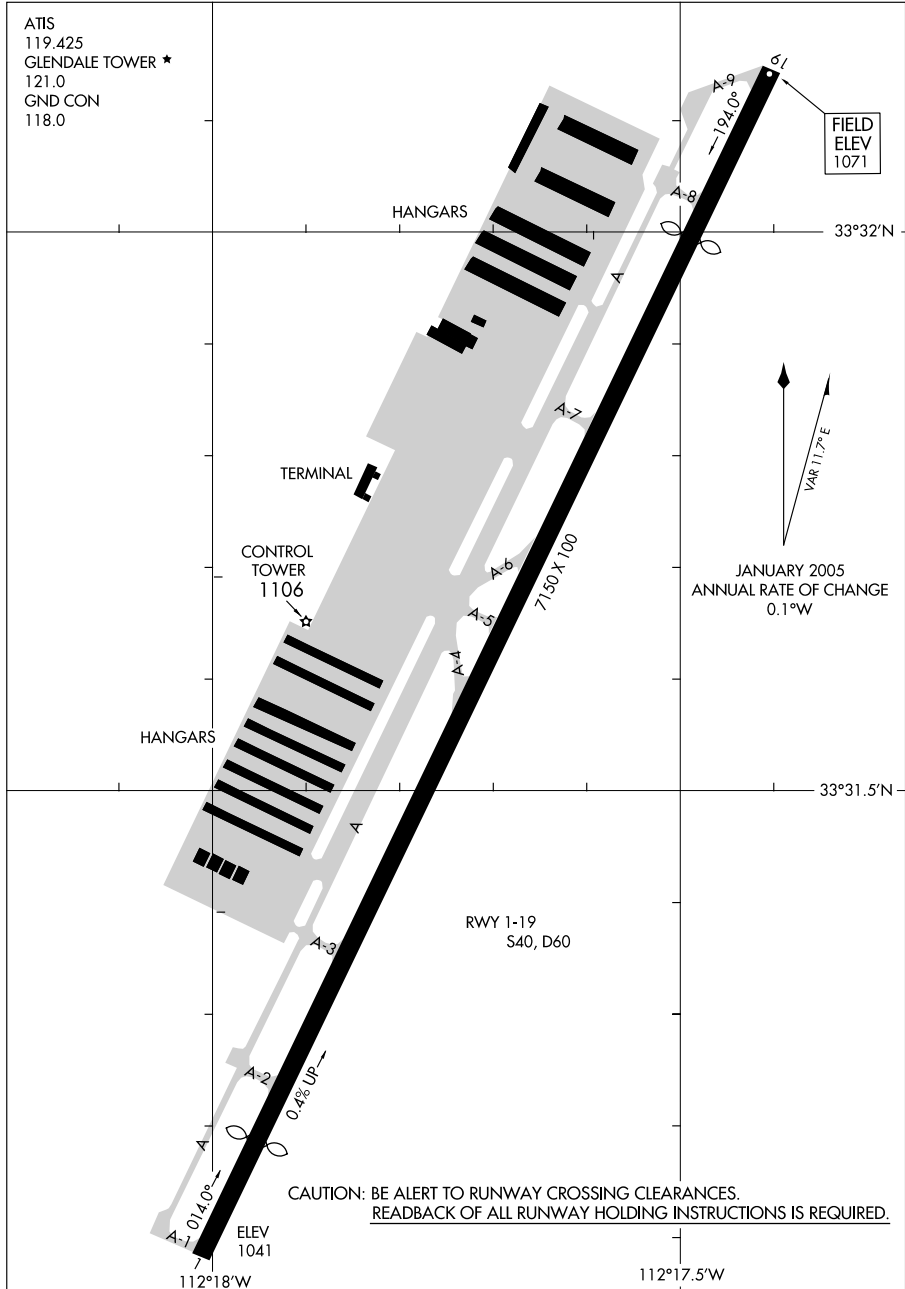GLENDALE MUNI (GEU)
GLENDALE, ARIZONA

AIRPORT DIAGRAM

09071

GLENDALE, ARIZONA
GLENDALE MUNI (GEU)


09071

AIRPORT DIAGRAM

AL-6648 (FAA)

GOODYEAR/PHOENIX GOODYEAR (GYR)

GOODYEAR, ARIZONA

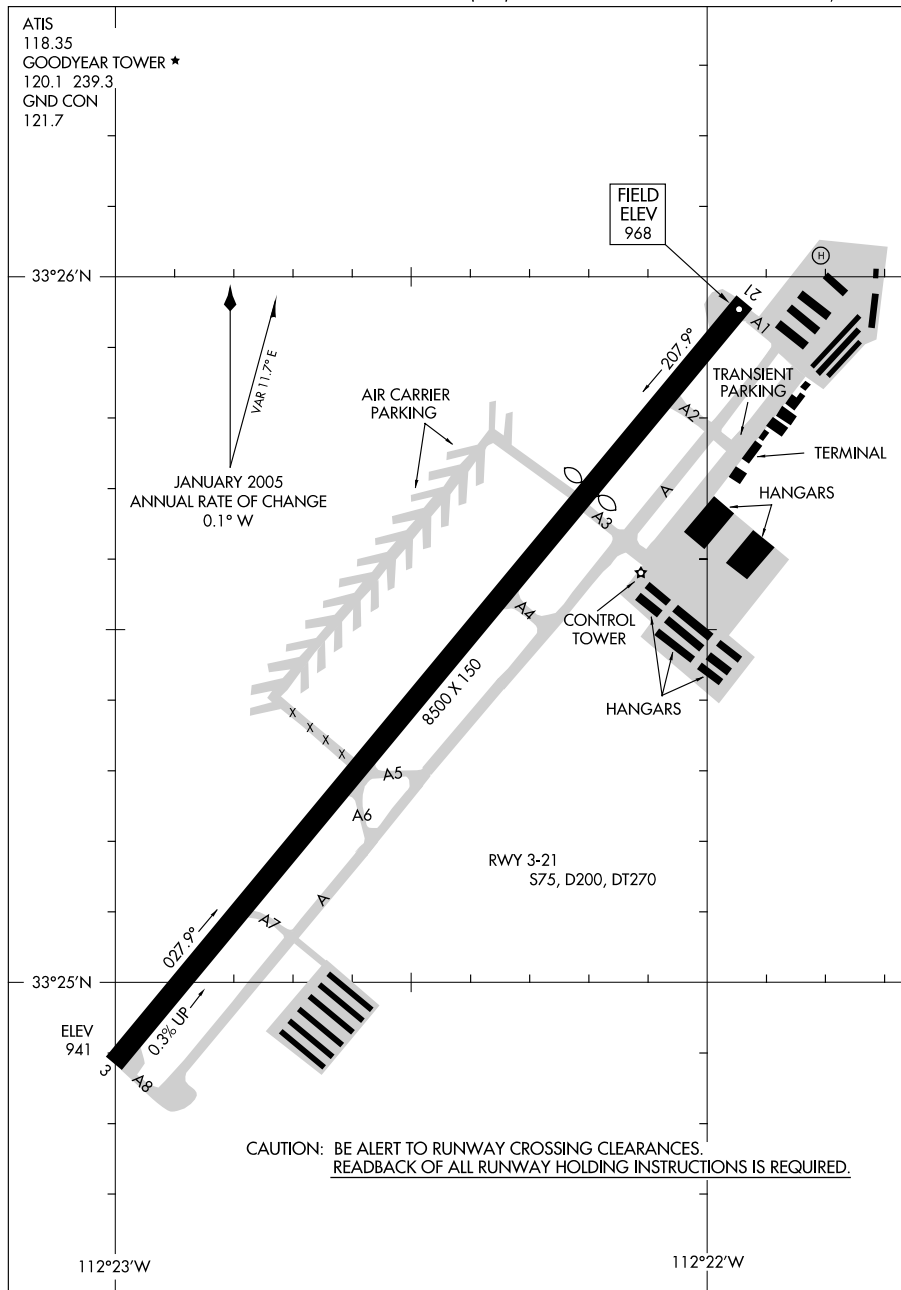

AIRPORT DIAGRAM

09071

GOODYEAR, ARIZONA

GOODYEAR/PHOENIX GOODYEAR (GYR)


06271

AIRPORT DIAGRAM

GRAND CANYON NATIONAL PARK (GCN)

AL-5381 (FAA)

GRAND CANYON, ARIZONA

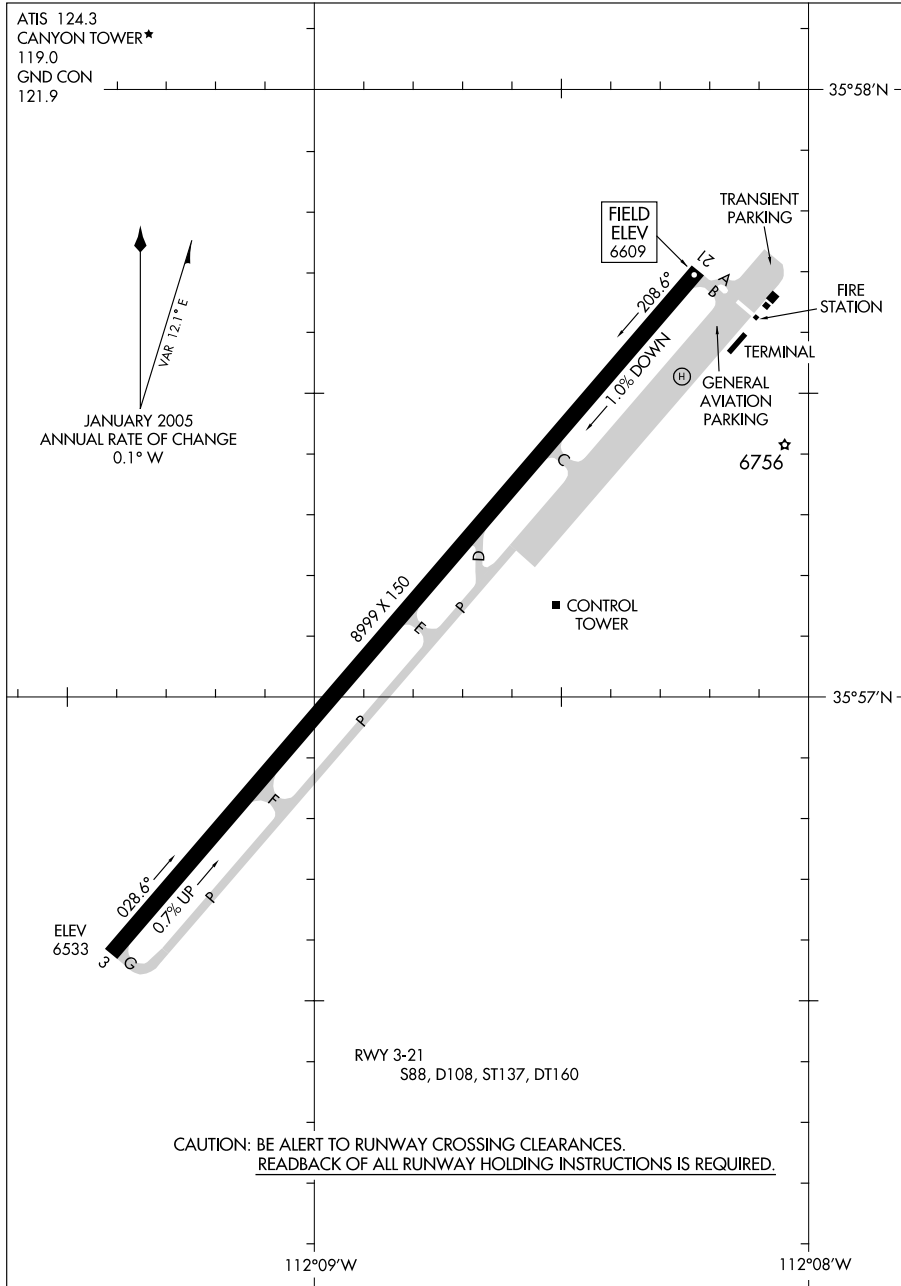

AIRPORT DIAGRAM


06271

GRAND CANYON, ARIZONA
GRAND CANYON NATIONAL PARK (GCN)

07242

AIRPORT DIAGRAM

AL-634 (FAA)

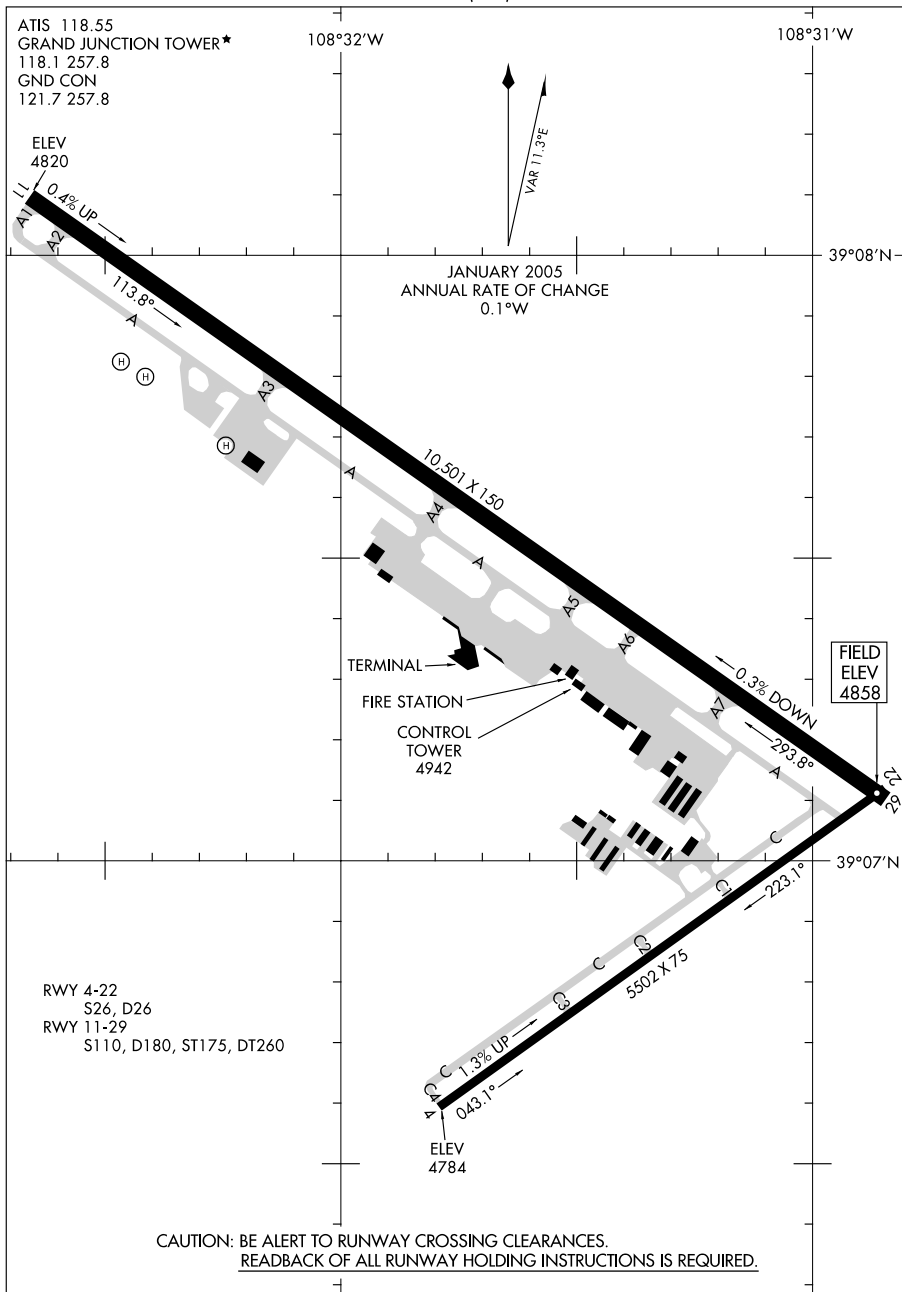GRAND JUNCTION RGNL (GJT)
GRAND JUNCTION, COLORADO


AIRPORT DIAGRAM

07242

GRAND JUNCTION, COLORADO
GRAND JUNCTION RGNL (GJT)

06327
AIRPORT DIAGRAM

GRASS VALLEY/ NEVADA COUNTY AIRPARK (GOO)
AL-6659 (FAA) GRASS VALLEY, CALIFORNIA

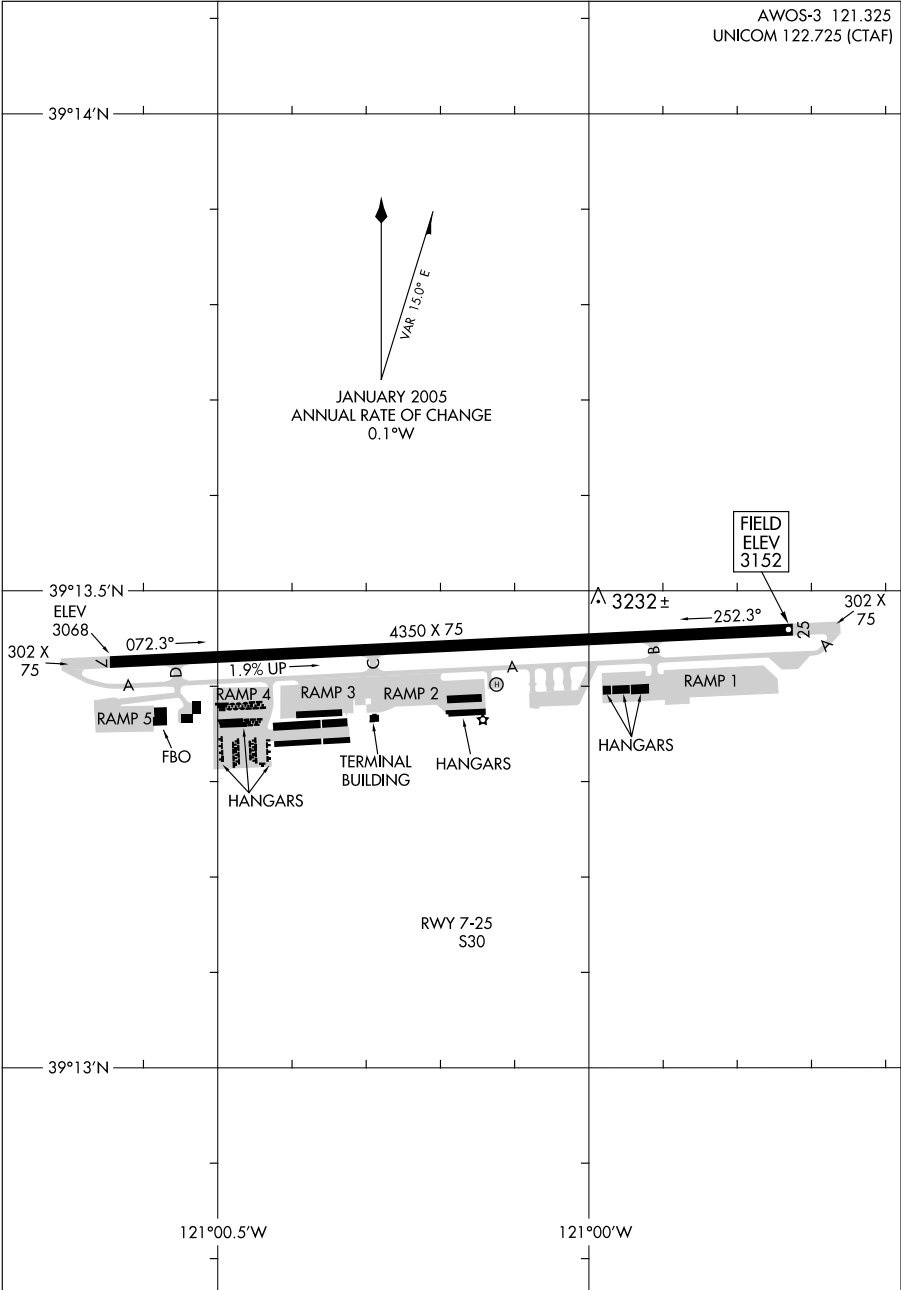

AIRPORT DIAGRAM
06327


GRASS VALLEY, CALIFORNIA
GRASS VALLEY/ NEVADA COUNTY AIRPARK (GOO)

09071

AIRPORT DIAGRAM

AL-325 (FAA)

GREELEY-WELD COUNTY (GXY)
GREELEY, COLORADO

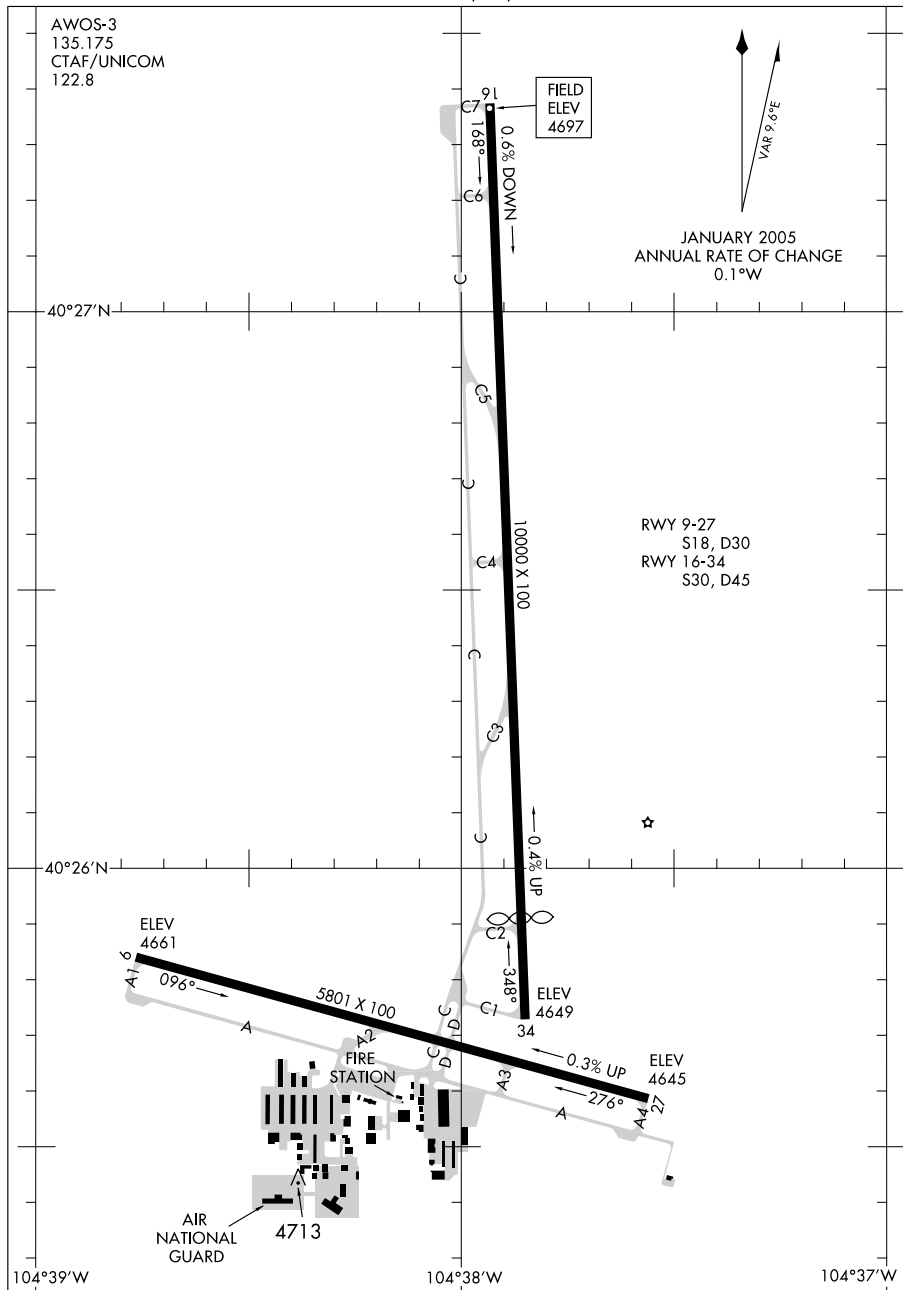

AIRPORT DIAGRAM

GREELEY, COLORADO
GREELEY-WELD COUNTY (GXY)


09071

SW, 22 OCT 2009 to 17 DEC 2009

09295

AIRPORT DIAGRAM

HAWTHORNE/JACK NORTHROP FIELD/HAWTHORNE MUNI (HHR)
AL-5120 (FAA) HAWTHORNE, CALIFORNIA

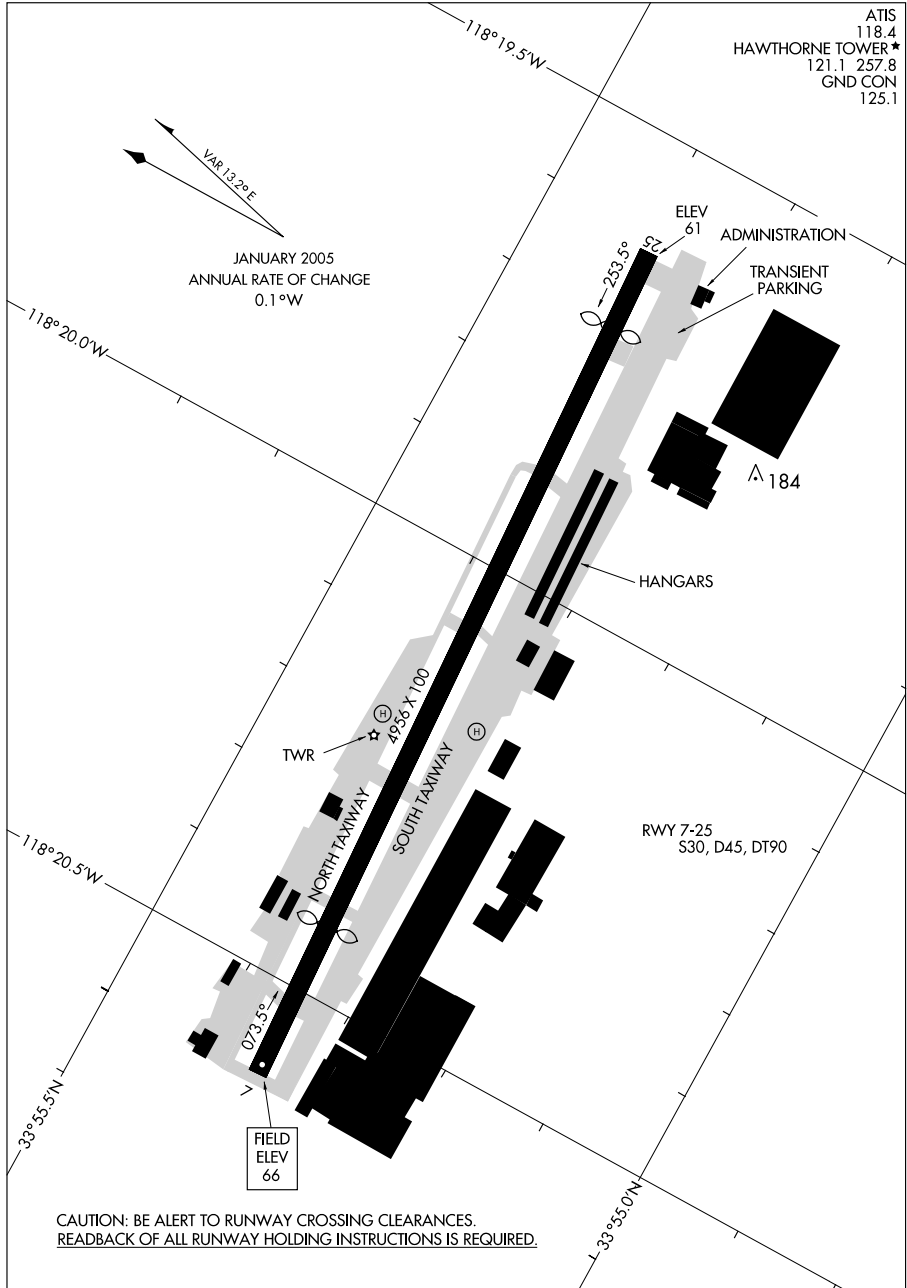

AIRPORT DIAGRAM


09295

HAWTHORNE, CALIFORNIA
HAWTHORNE/JACK NORTHROP FIELD/HAWTHORNE MUNI (HHR)

09295

AIRPORT DIAGRAM

AL-5015 (FAA)

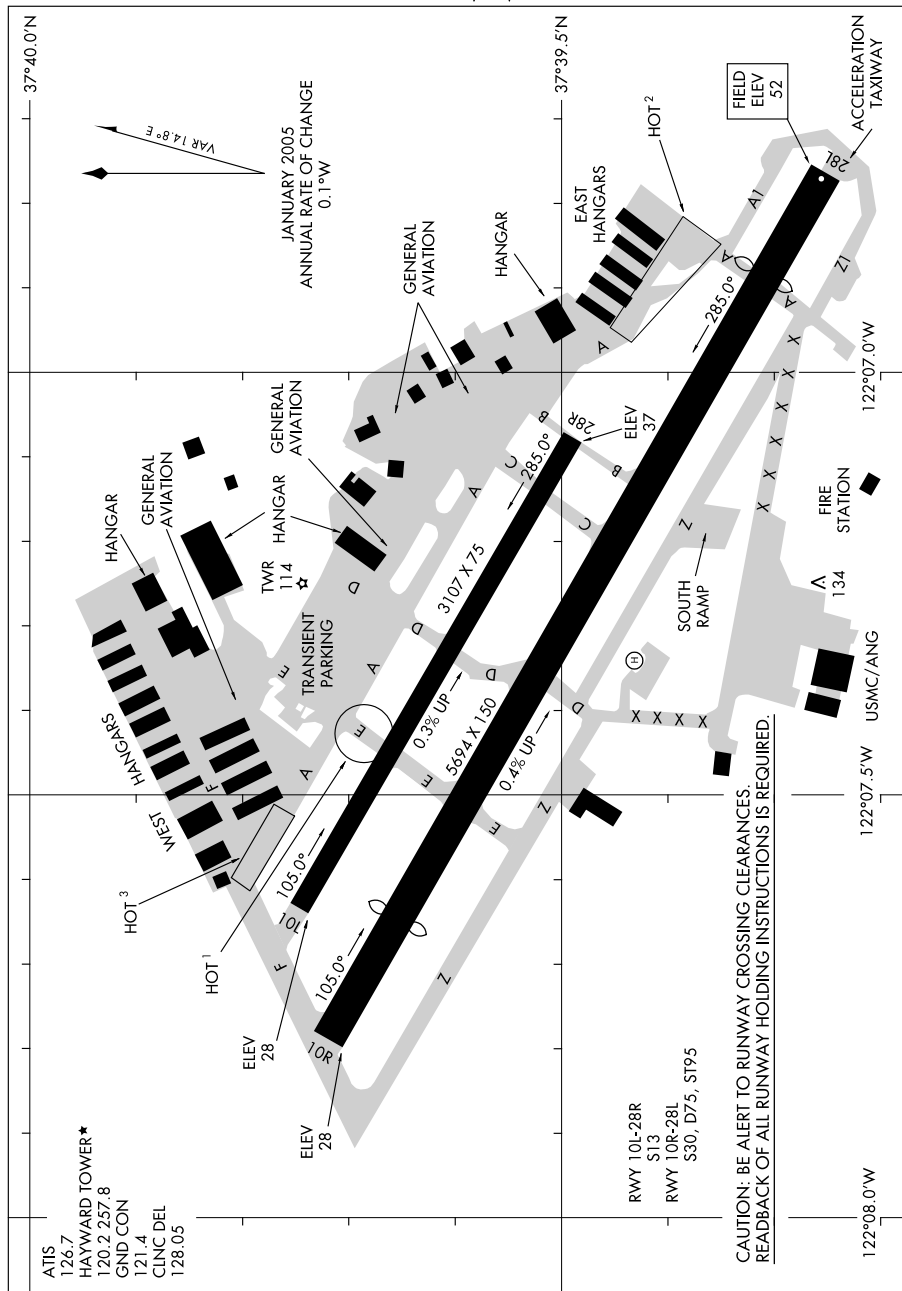HAYWARD EXECUTIVE (HWD)
HAYWARD, CALIFORNIA

AIRPORT DIAGRAM

09295

HAYWARD, CALIFORNIA
HAYWARD EXECUTIVE (HWD)


08269

AIRPORT DIAGRAM

AFD-296 [USAF]

HILL AFB (KHIF)

OGDEN, UTAH

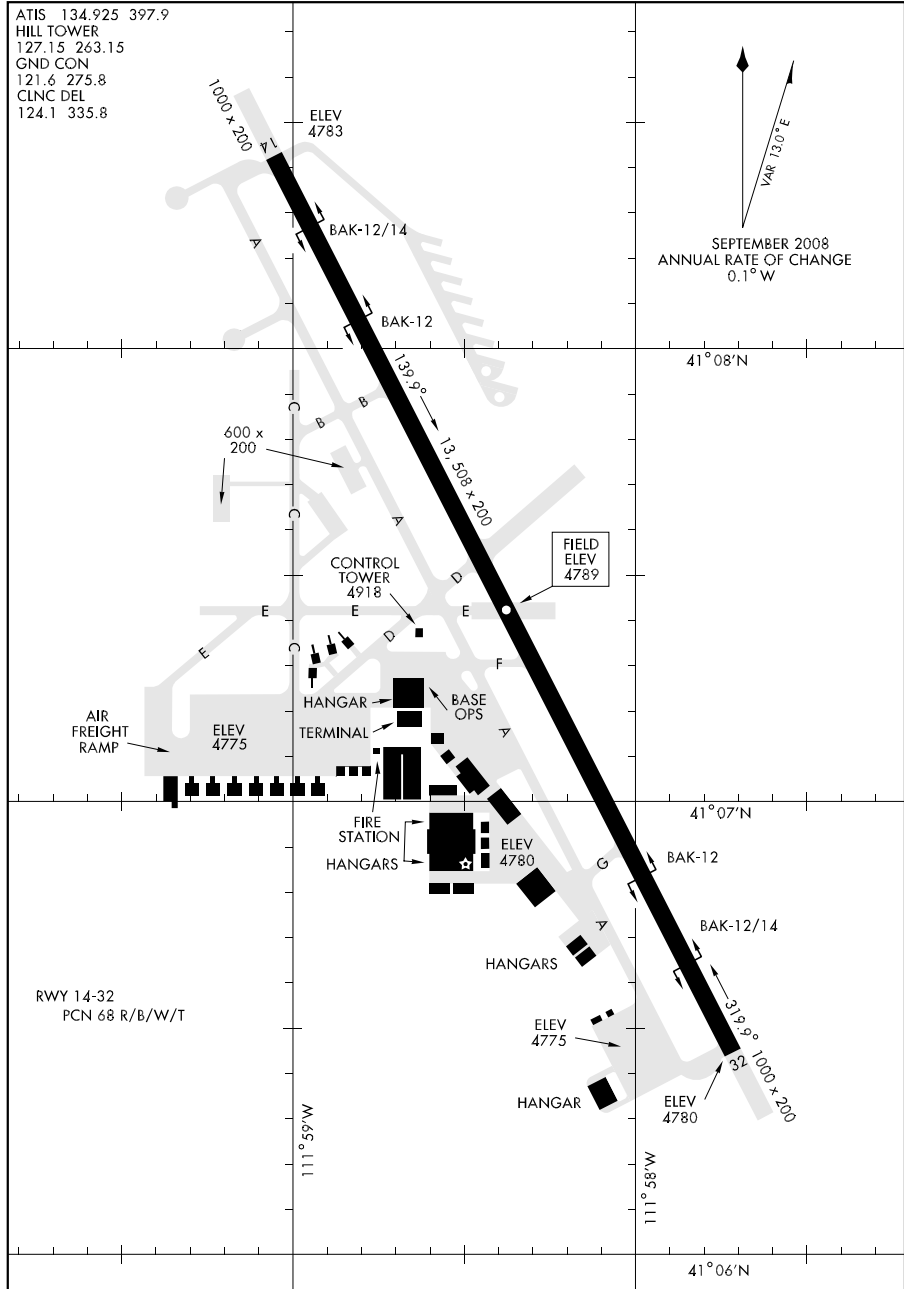

AIRPORT DIAGRAM

WGS DATUM

OGDEN, UTAH

HILL AFB (KHIF)


09071

AIRPORT DIAGRAM

AL-851 (FAA)

HOBBS/LEA COUNTY RGNL (HOB)

HOBBS, NEW MEXICO

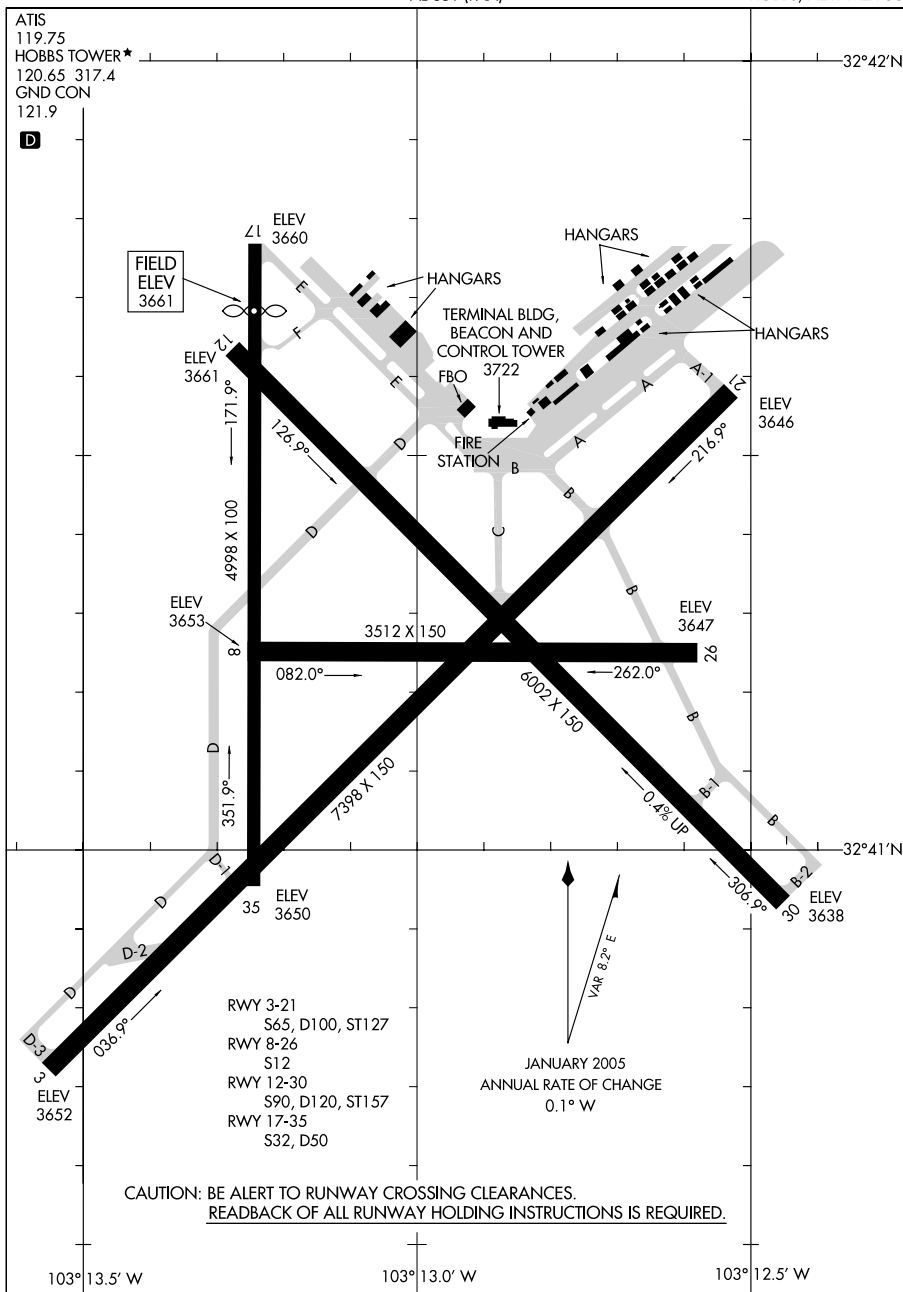

AIRPORT DIAGRAM

09071


HOBBS, NEW MEXICO

HOBBS/LEA COUNTY RGNL (HOB)

09295

AIRPORT DIAGRAM

AL-9408 (FAA)

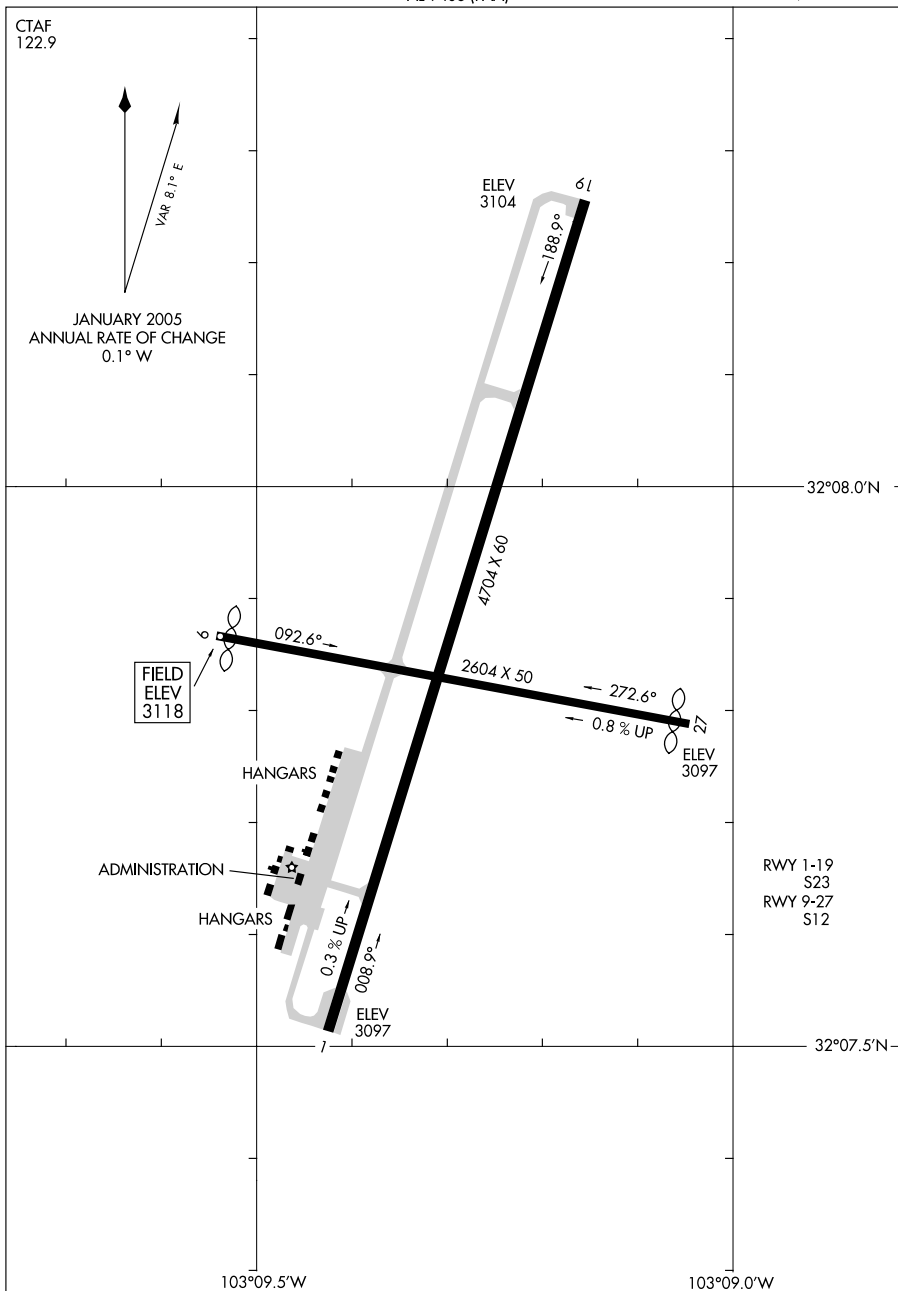JAL/LEA COUNTY (E26)
JAL, NEW MEXICO

AIRPORT DIAGRAM


09295

JAL, NEW MEXICO
JAL/LEA COUNTY (E26)

09295

AIRPORT DIAGRAM

LA VERNE/BRACKETT FIELD (POC)
LA VERNE, CALIFORNIA

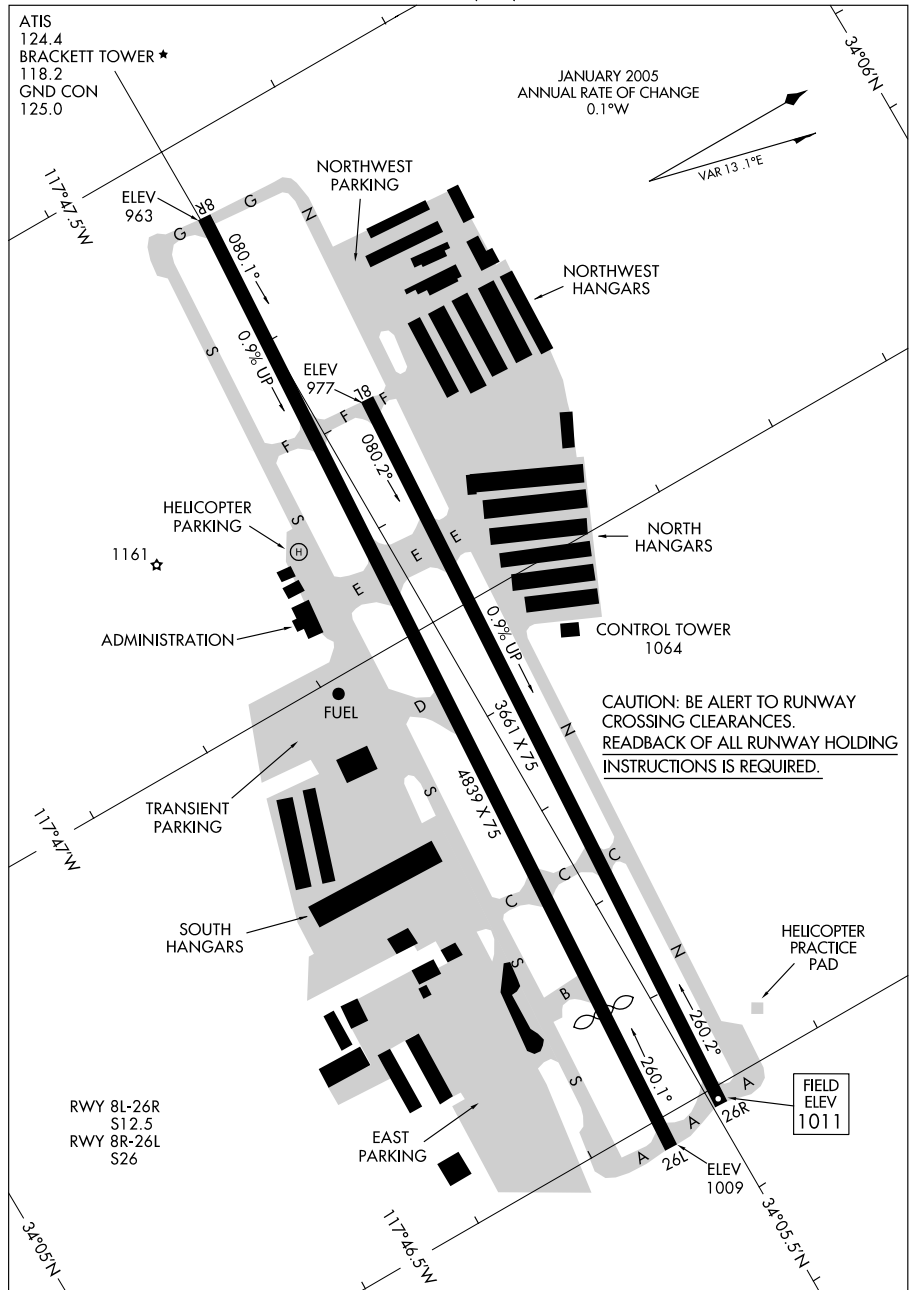

AIRPORT DIAGRAM

LA VERNE, CALIFORNIA
LA VERNE/BRACKETT FIELD (POC)

09295

09015


AIRPORT DIAGRAM

AFD-6341 [USA]

LAGUNA AAF (KLGf)

YUMA PROVING GROUND, ARIZONA

CTAF
126.20 242.175
GND CON
121.8 229.4

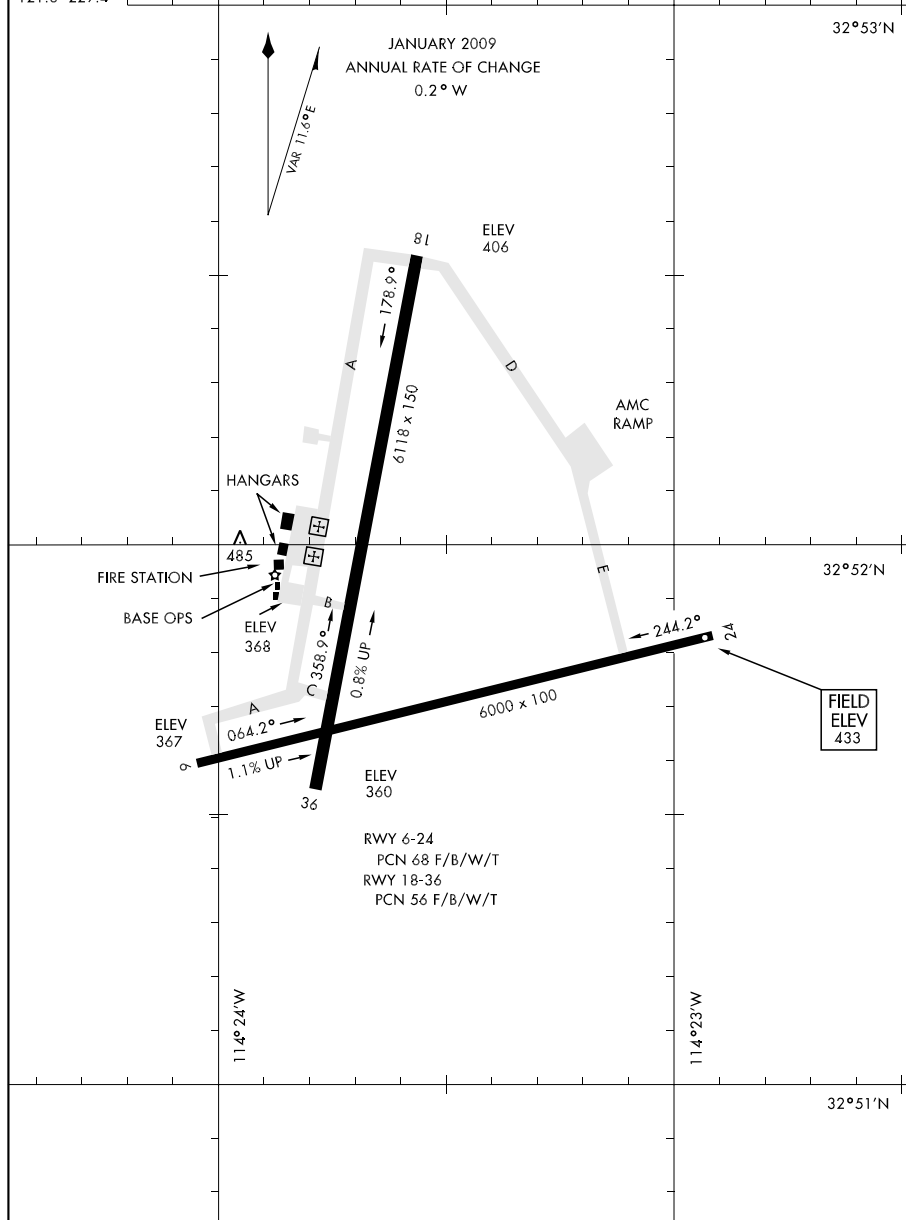


AIRPORT DIAGRAM

YUMA PROVING GROUND, ARIZONA
LAGUNA AAF (KLGf)

07186

AIRPORT DIAGRAM

LANCASTER/ GENERAL WILLIAM J. FOX AIRFIELD (WJF)
AL-5065 (FAA)
LANCASTER, CALIFORNIA

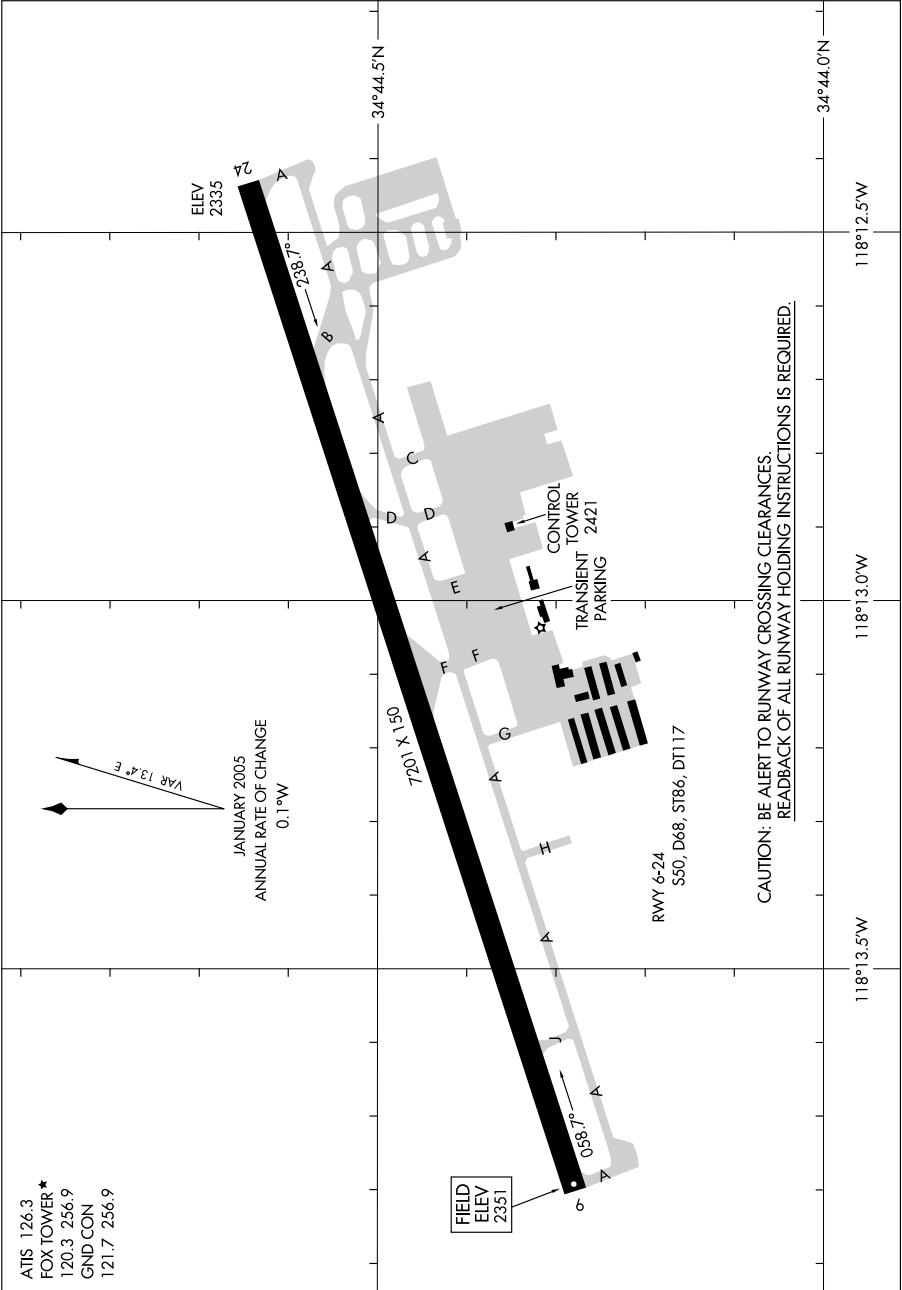

AIRPORT DIAGRAM

07186


LANCASTER, CALIFORNIA
LANCASTER/ GENERAL WILLIAM J. FOX AIRFIELD (WJF)

08325

AIRPORT DIAGRAM

AL-6514 (FAA)

LAS VEGAS/HENDERSON EXECUTIVE (HND)
LAS VEGAS, NEVADA

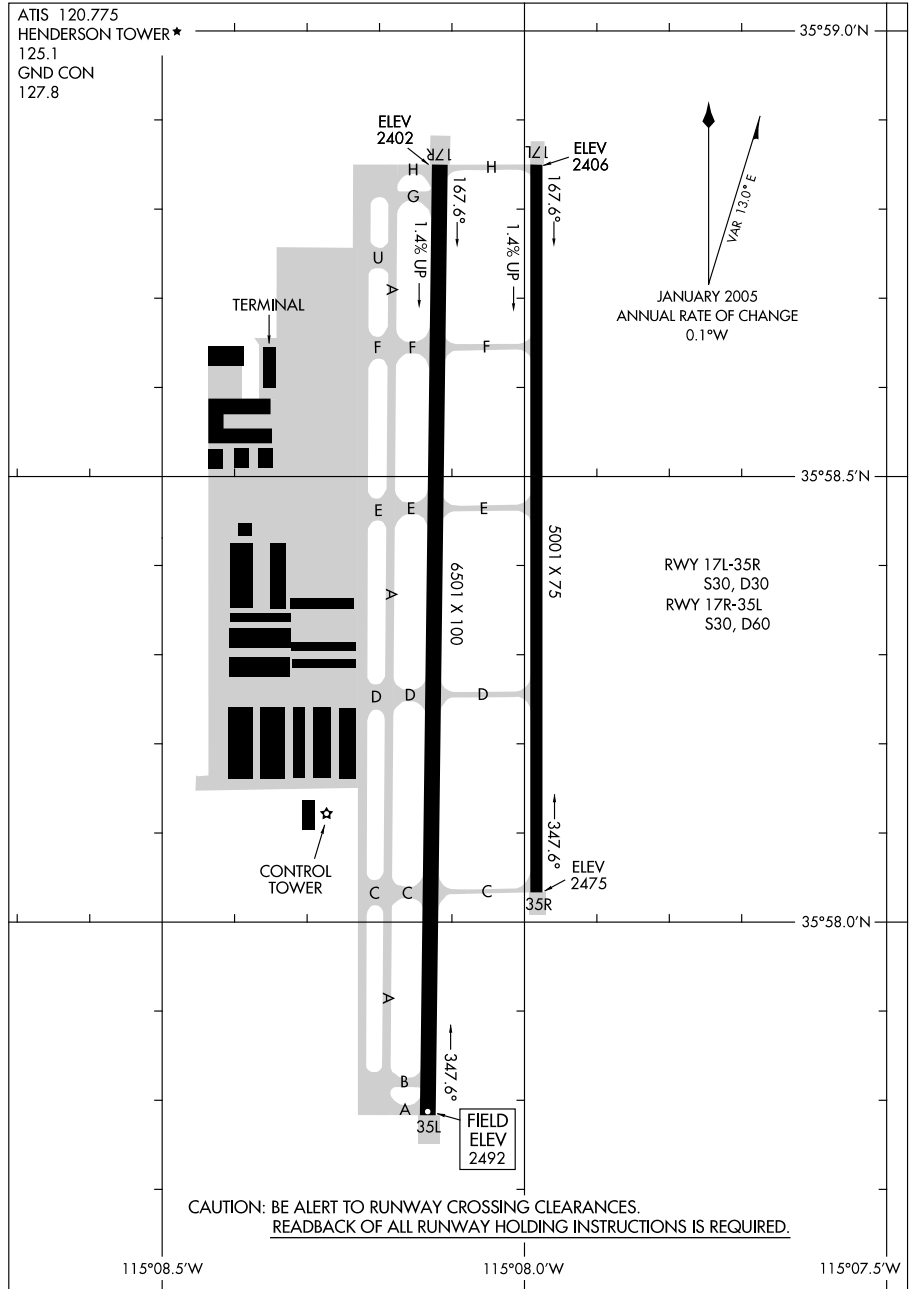

AIRPORT DIAGRAM

08325

LAS VEGAS, NEVADA
LAS VEGAS/HENDERSON EXECUTIVE (HND)


09295

AIRPORT DIAGRAM

AL-662 (FAA)

LAS VEGAS/McCARRAN INTL (LAS)

LAS VEGAS, NEVADA

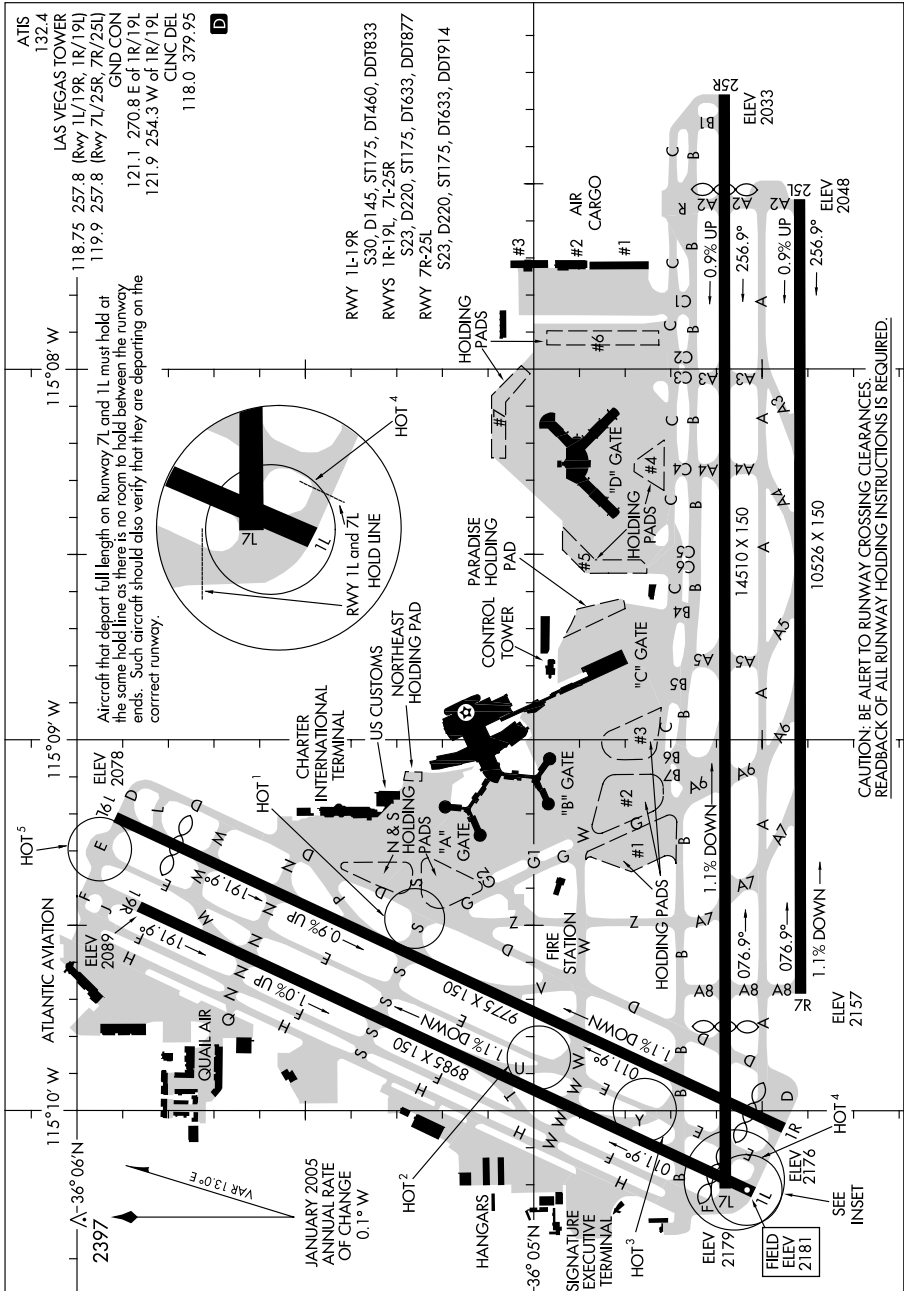

AIRPORT DIAGRAM

09295

LAS VEGAS, NEVADA

LAS VEGAS/McCARRAN INTL (LAS)

08101

AIRPORT DIAGRAM

AFD-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

LEMOORE, CALIFORNIA

ATIS ★

121.575 267.6

LEMOORE TOWER ★

128.3 340.2 Rwy 14L, 32L


128.3 360.2 (Rwy 14R, 32R)

GND CON

121.65 305.2

CLNC DEL

124.1 380.8

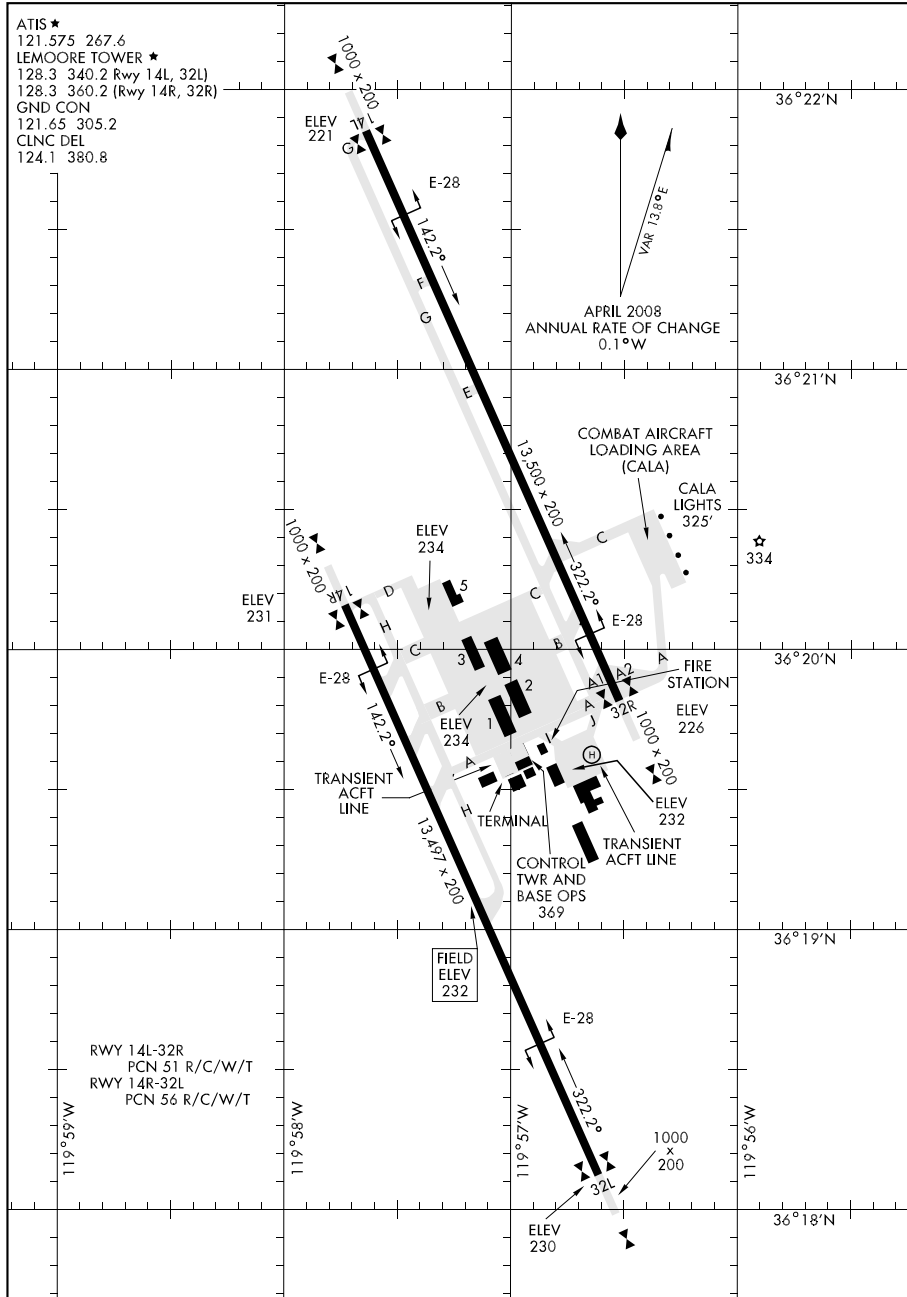

AIRPORT DIAGRAM

LEMOORE, CALIFORNIA


LEMOORE NAS (REEVES FIELD) (KNLC)

09295

AIRPORT DIAGRAM

AL-6075 (FAA)

LIVERMORE MUNI (LVK)
LIVERMORE, CALIFORNIA

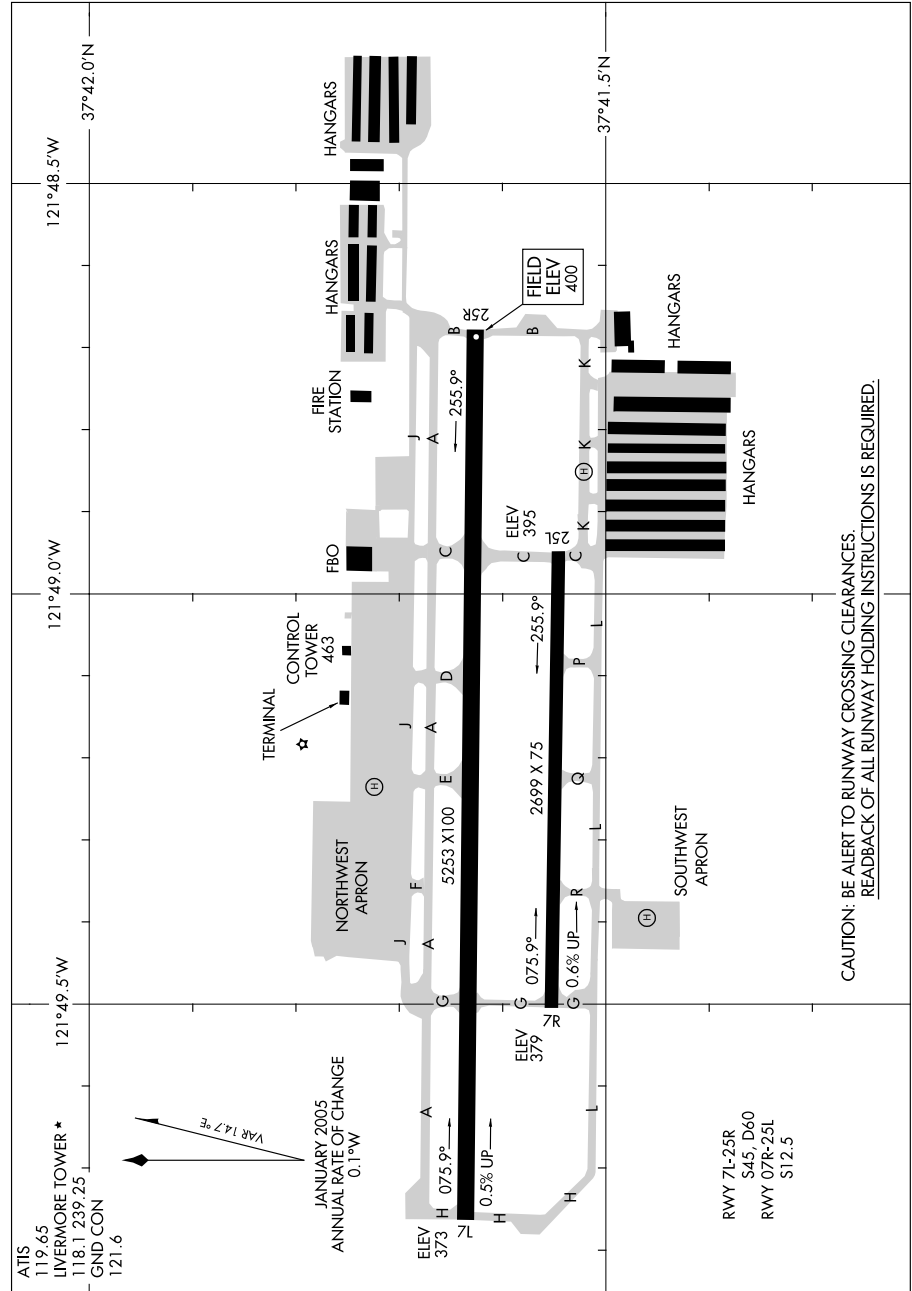

AIRPORT DIAGRAM

LIVERMORE, CALIFORNIA
LIVERMORE MUNI (LVK)

09295

LONG BEACH, CALIFORNIA

LONG BEACH, CALIFORNIA
LONG BEACH (DAUGHERTY FIELD) (LGB)

SW, 22 OCT 2009 to 17 DEC 2009


08101

AIRPORT DIAGRAM

AFD-953 [USA]

LOS ALAMITOS AAF (KSLI)

LOS ALAMITOS, CALIFORNIA

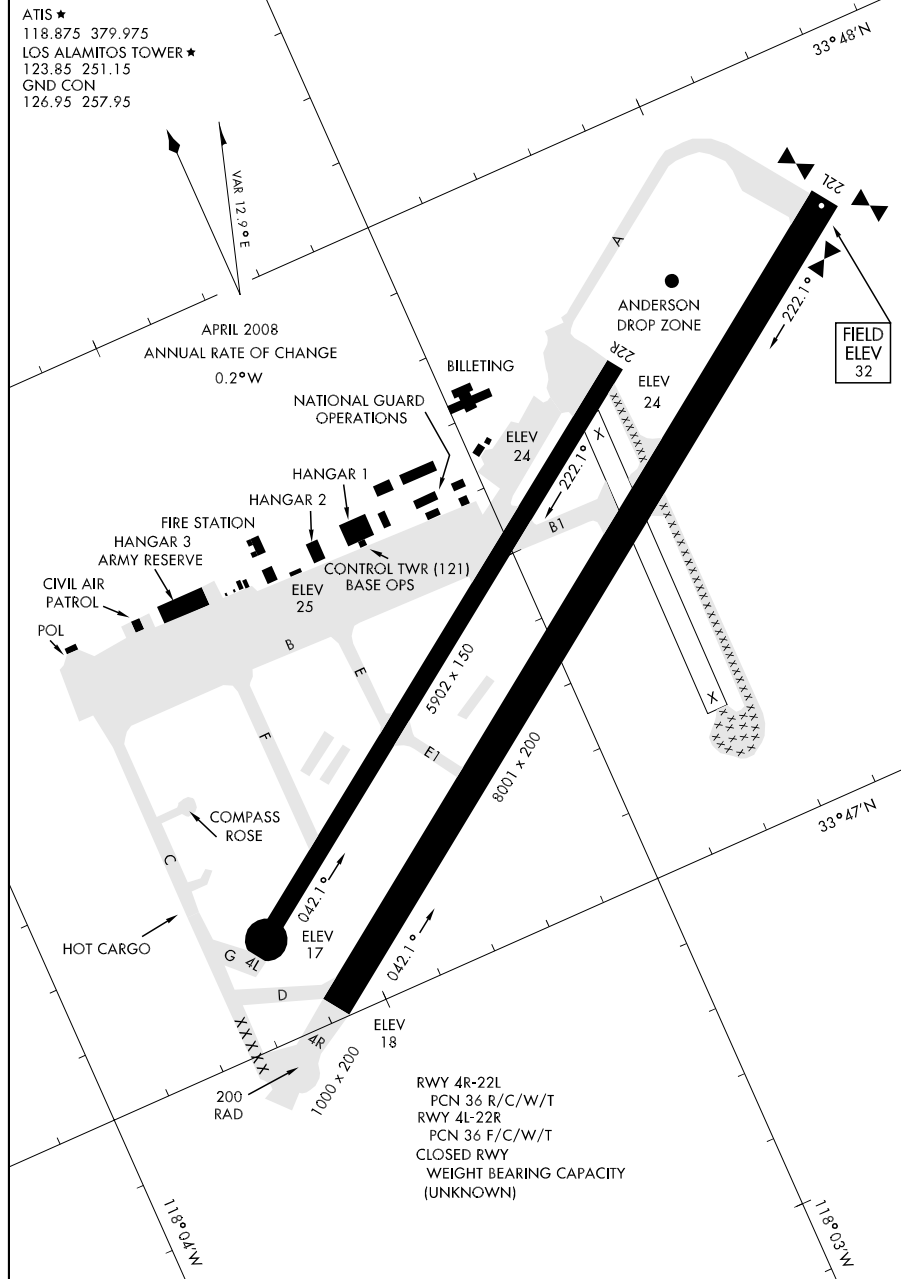

AIRPORT DIAGRAM


LOS ALAMITOS, CALIFORNIA

LOS ALAMITOS AAF (KSLI)

09015

AIRPORT DIAGRAM

AL-237 (FAA)

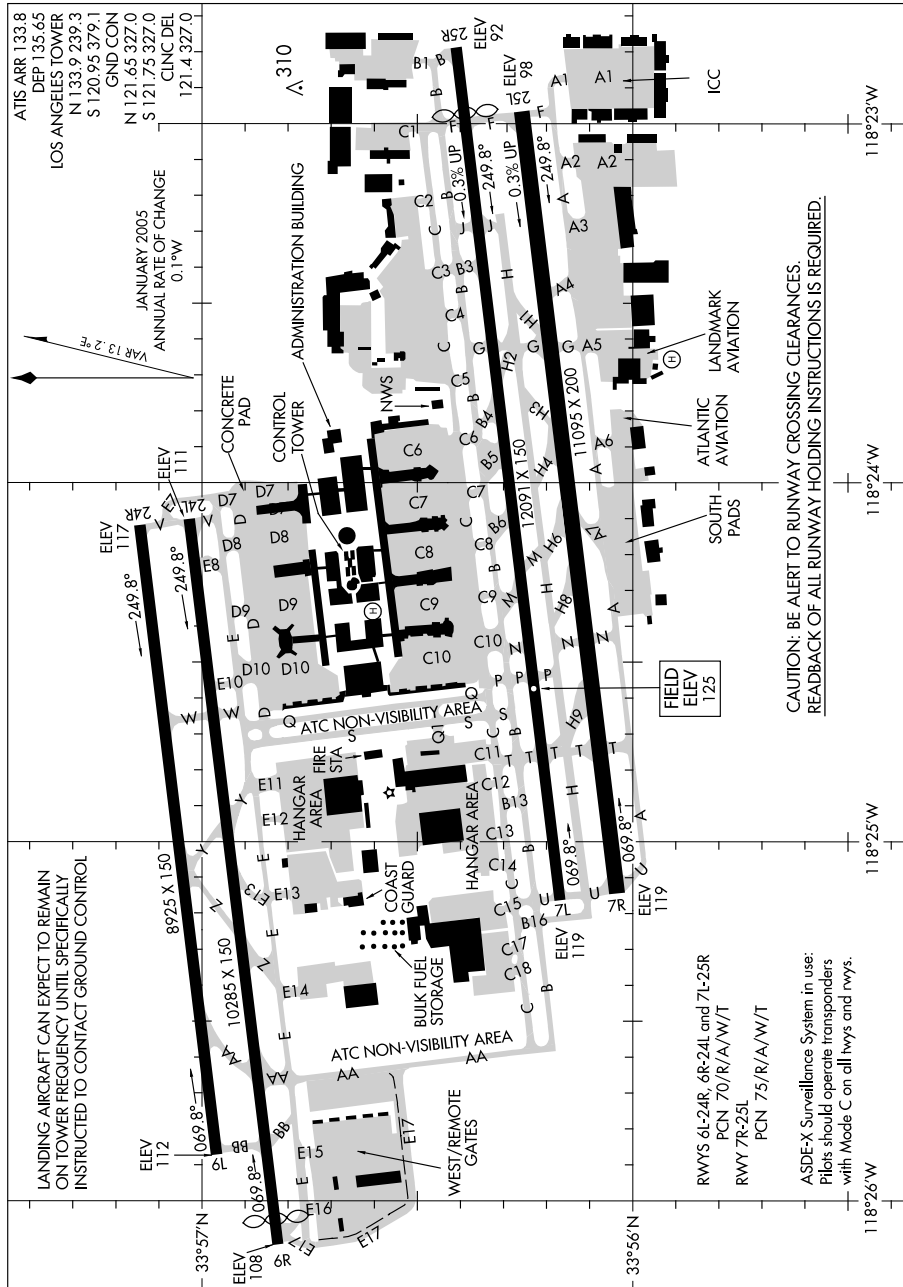LOS ANGELES INTL (LAX)
LOS ANGELES, CALIFORNIA

AIRPORT DIAGRAM

LOS ANGELES, CALIFORNIA
LOS ANGELES INTL (LAX)

09015

09295

AIRPORT DIAGRAM

AL-9132 (FAA)

LOS ANGELES/WHITEMAN (WHP)

LOS ANGELES, CALIFORNIA

ATIS

132.1

WHITEMAN TOWER ★


135.0

GND CON

125.0

D

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

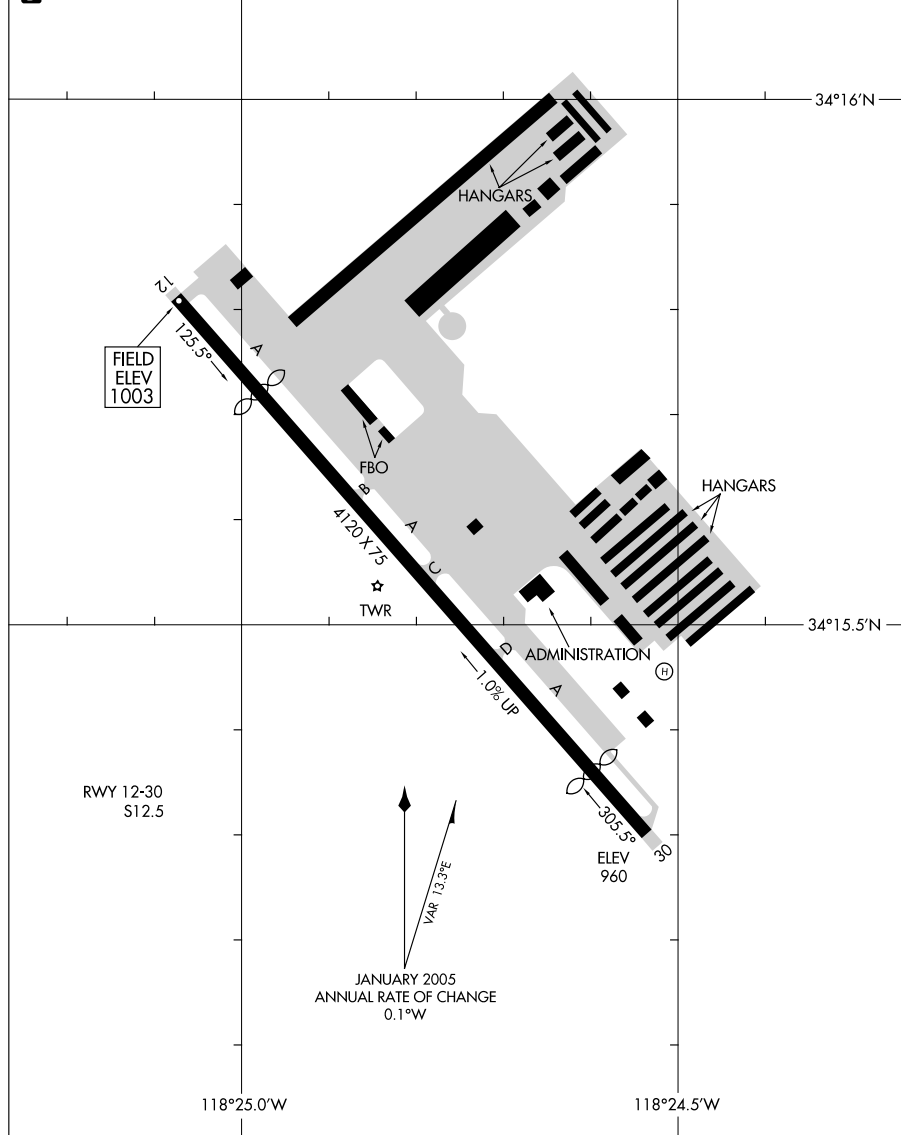

AIRPORT DIAGRAM


09295

LOS ANGELES, CALIFORNIA
 LOS ANGELES/WHITEMAN (WHP)

06271

AIRPORT DIAGRAM

LOVINGTON/LEA COUNTY-ZIP FRANKLIN MEMORIAL (E06)
 AL-6951 (FAA) LOVINGTON, NEW MEXICO

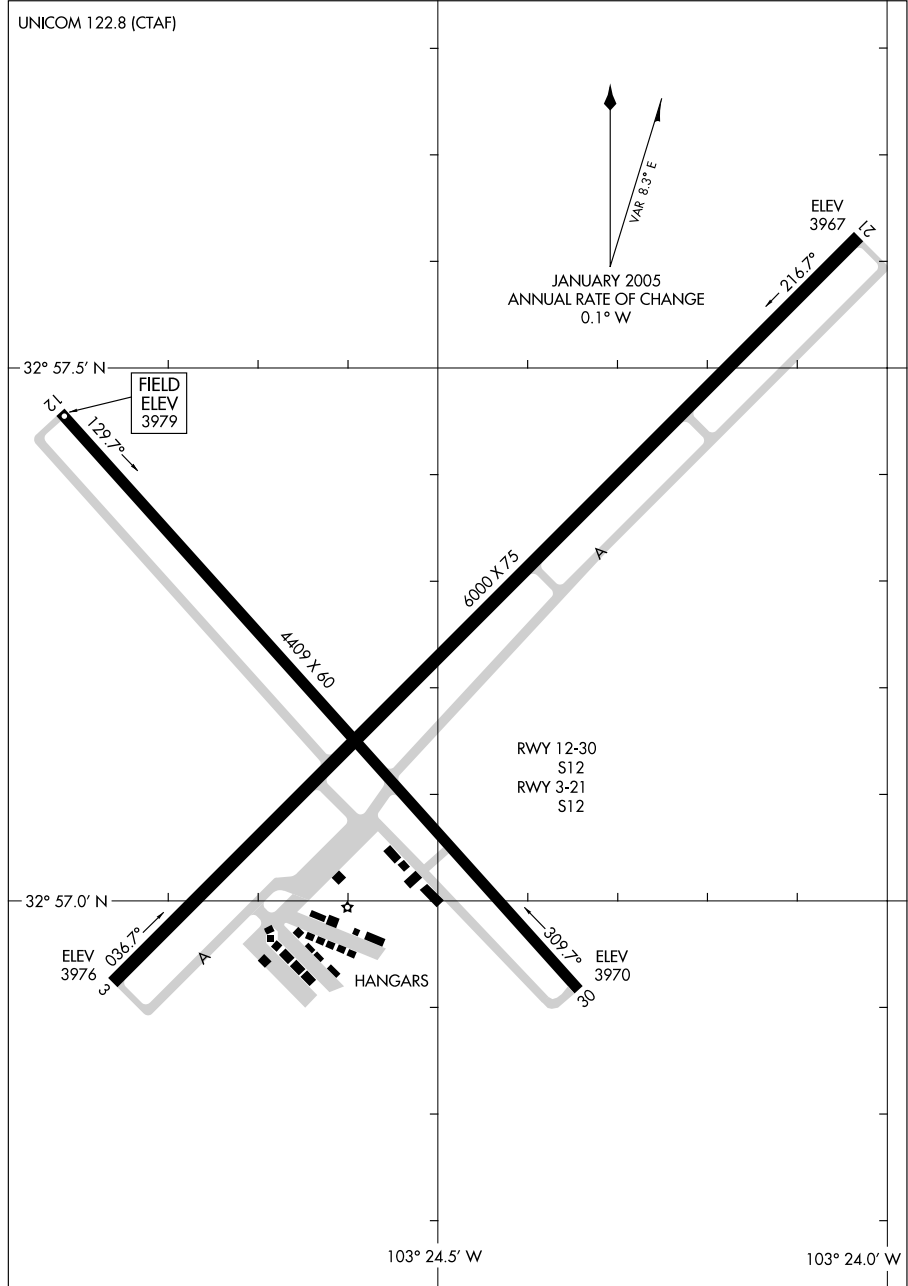

AIRPORT DIAGRAM

06271

LOVINGTON, NEW MEXICO
 LOVINGTON/LEA COUNTY-ZIP FRANKLIN MEMORIAL (E06)


09239

AIRPORT DIAGRAM

AFD-348 [USAF]

MARCH ARB (KRIV)

RIVERSIDE, CALIFORNIA

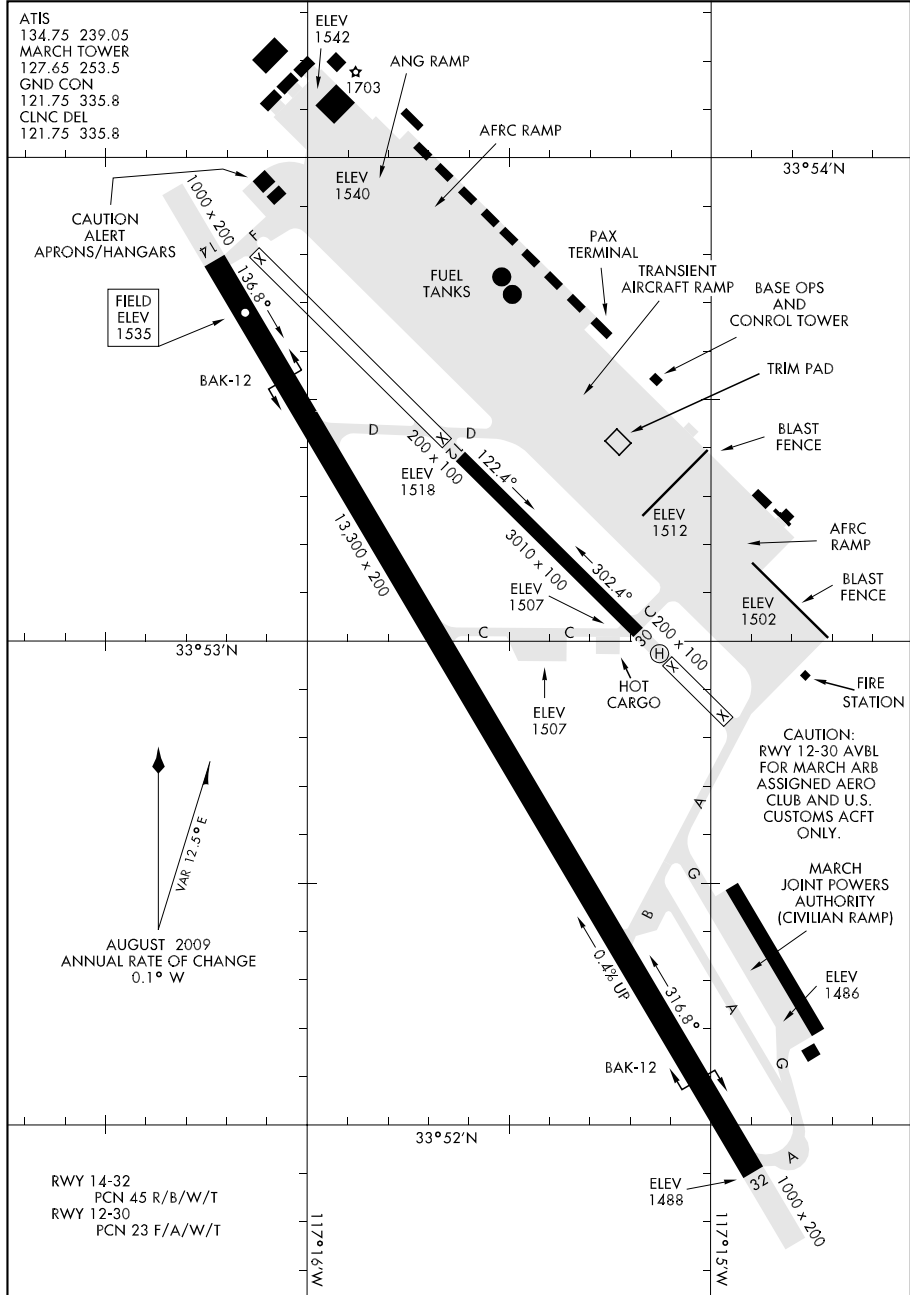

AIRPORT DIAGRAM

RIVERSIDE, CALIFORNIA

MARCH ARB (KRIV)

09295

AIRPORT DIAGRAM

AL-568 (FAA)

MERCED/CASTLE (MER)

MERCED, CALIFORNIA

ATIS

124.475


CASTLE TOWER ★

118.175 235.775

GND CON

133.575

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

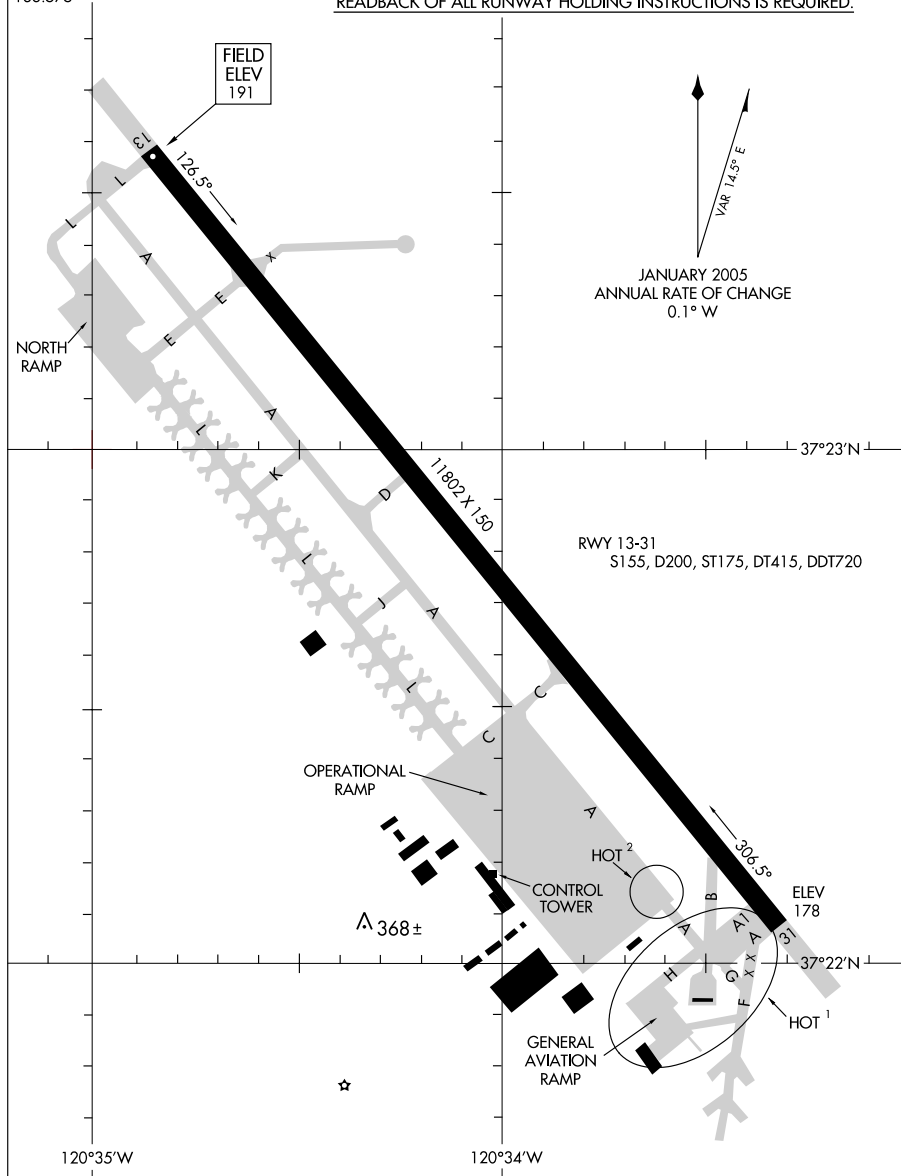

AIRPORT DIAGRAM

09295


MERCED, CALIFORNIA

MERCED/CASTLE (MER)

09295

AIRPORT DIAGRAM

AL-6647 (FAA)

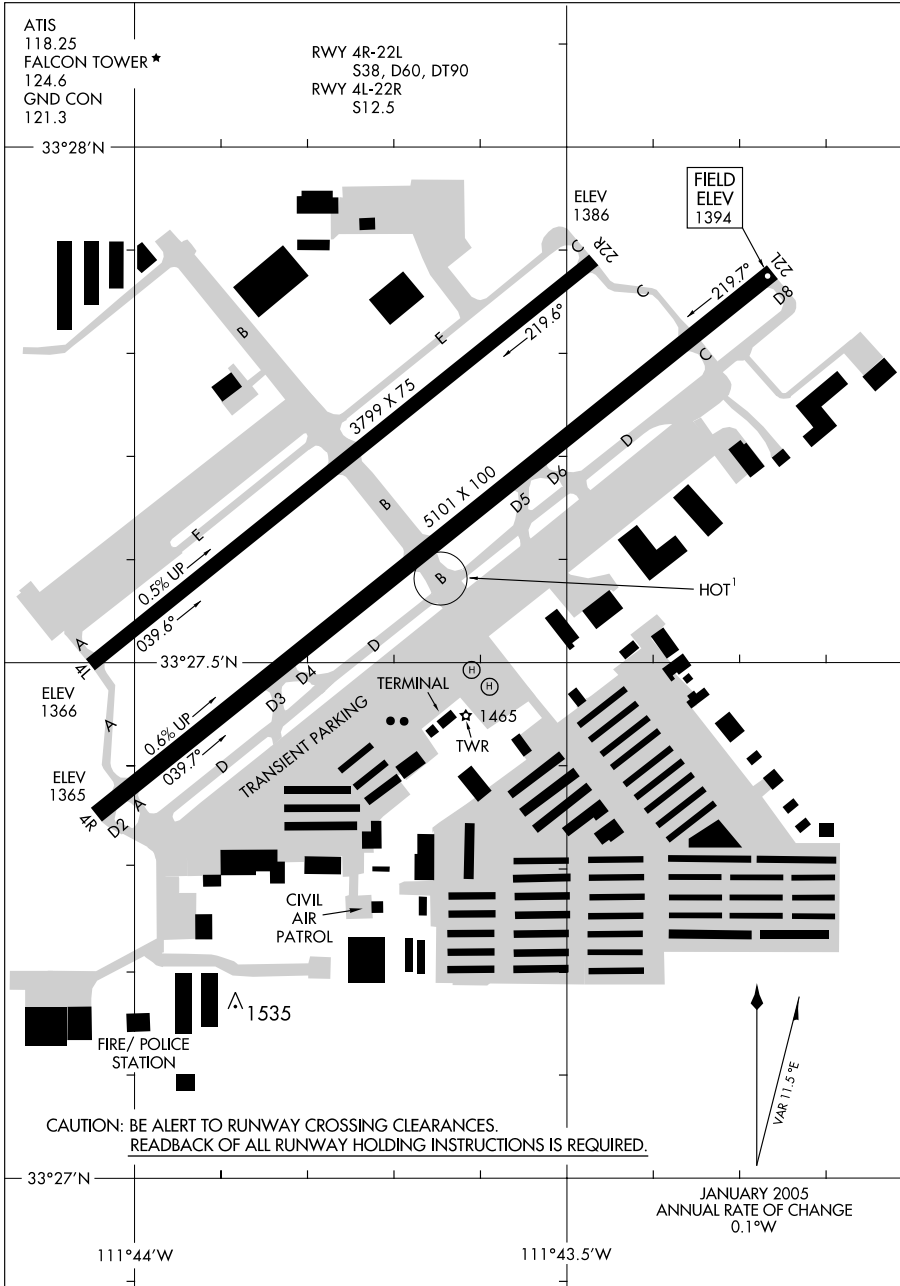MESA/ FALCON FIELD (F'F'Z)
MESA, ARIZONA

AIRPORT DIAGRAM

09295

MESA, ARIZONA
MESA/ FALCON FIELD (F'F'Z)


08101

AIRPORT DIAGRAM

AFD-5071 [USA]

MICHAEL AAF (KDPG)

DUGWAY PROVING GROUND, UTAH

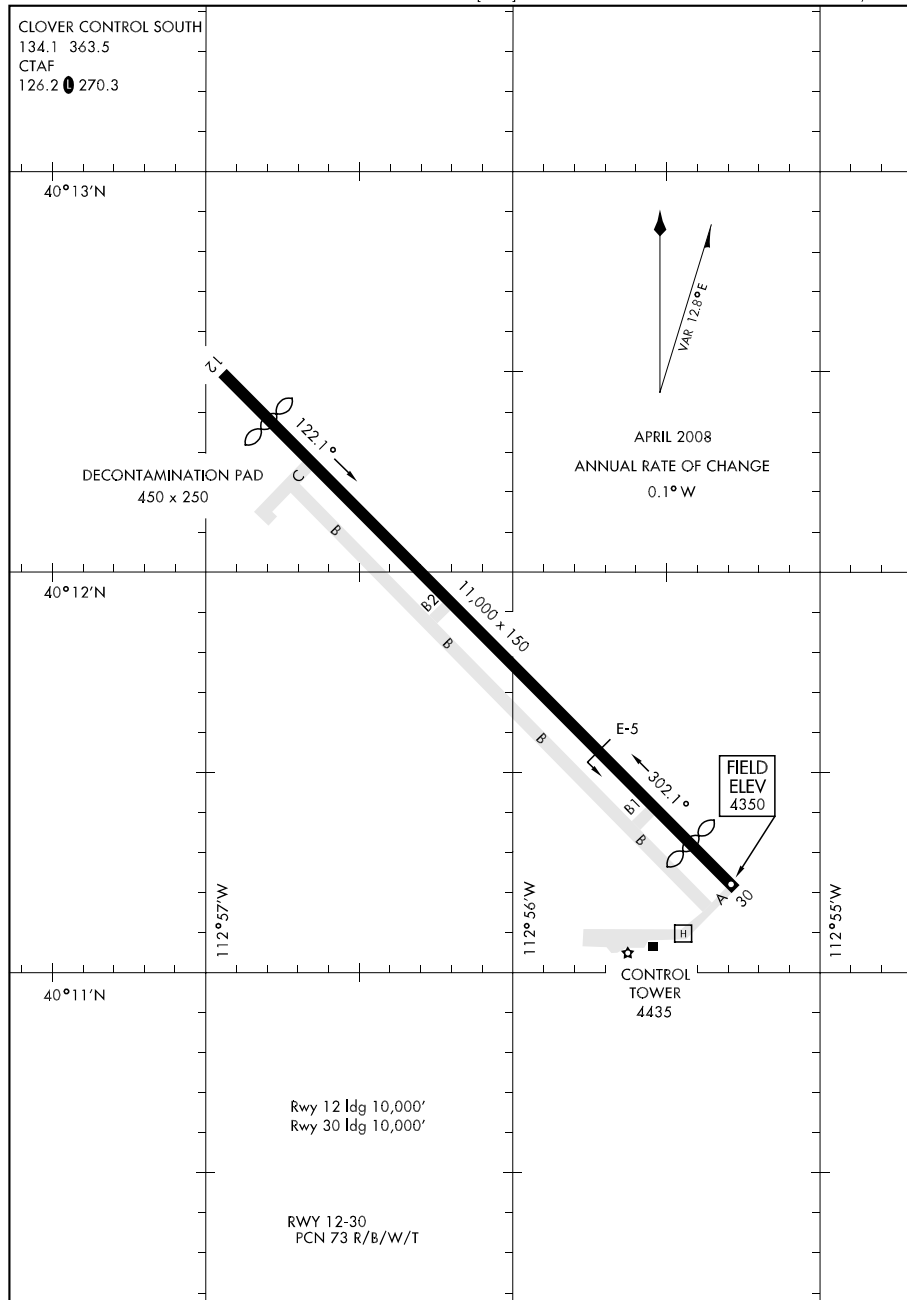

AIRPORT DIAGRAM

DUGWAY PROVING GROUND, UTAH

MICHAEL AAF (KDPG)


09239

MIRAMAR MCAS (MITSCHER FLD) (KNKX)

AIRPORT DIAGRAM

AL-903 [USN]

SAN DIEGO, CALIFORNIA

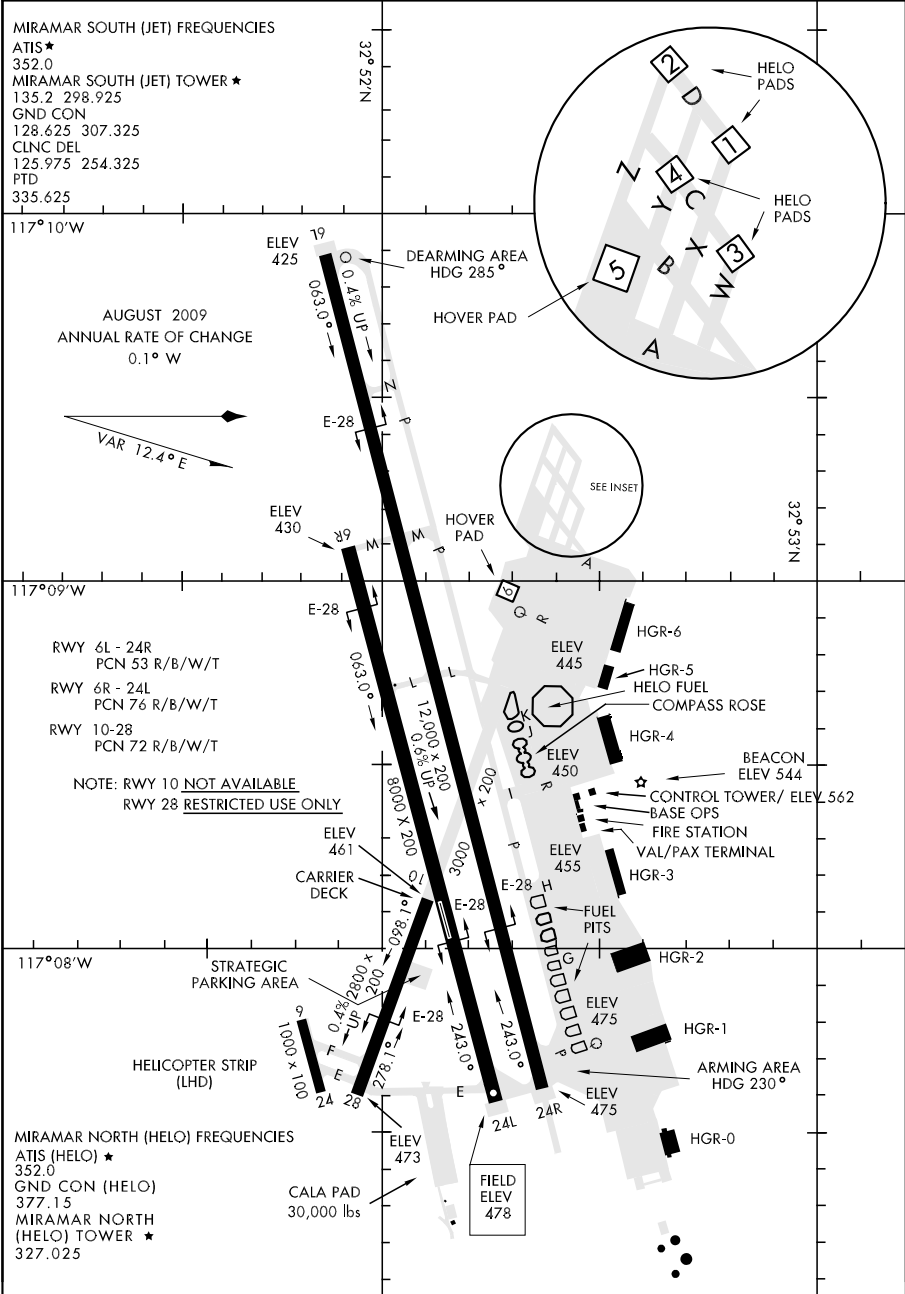

AIRPORT DIAGRAM


SAN DIEGO, CALIFORNIA

MIRAMAR MCAS (MITSCHER FLD) (KNKX)

08045

AIRPORT DIAGRAM

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)
AL-643 (FAA)
MODESTO, CALIFORNIA

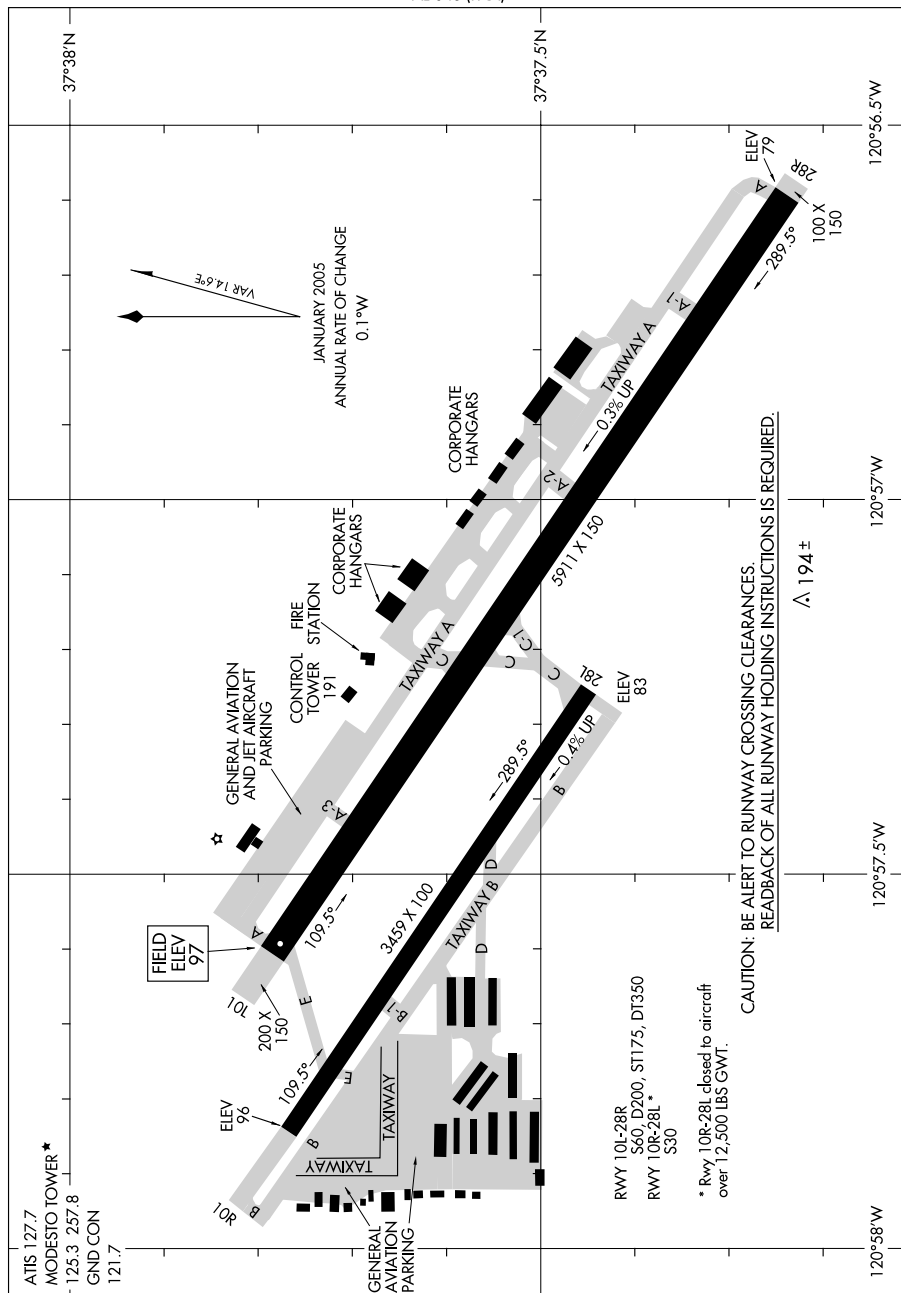

AIRPORT DIAGRAM

08045


MODESTO, CALIFORNIA
MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

09295

AIRPORT DIAGRAM

AL-9353 (FAA)

MOJAVE (MHV)
MOJAVE, CALIFORNIA

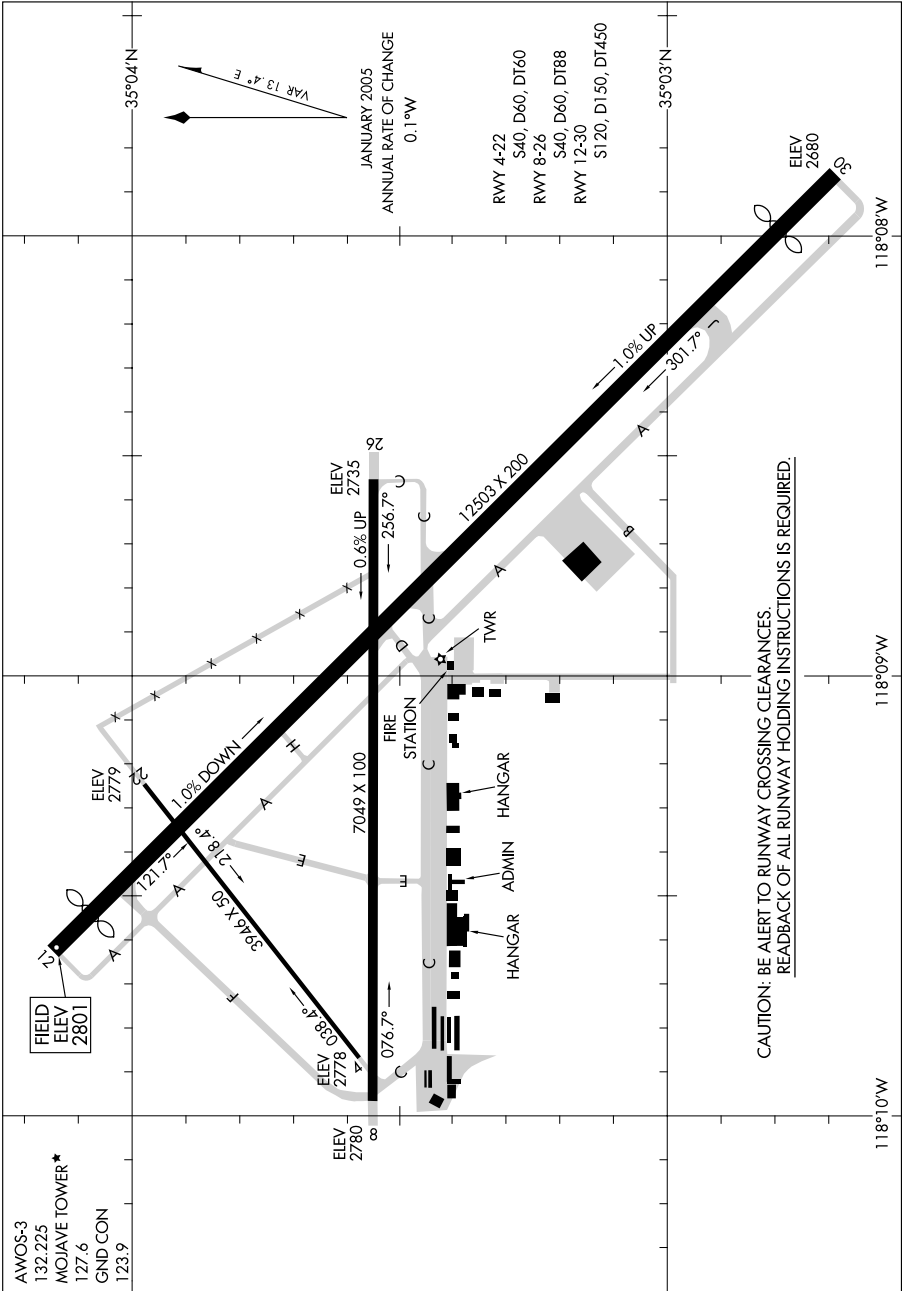

AIRPORT DIAGRAM

09295


MOJAVE, CALIFORNIA
MOJAVE (MHV)

09071

AIRPORT DIAGRAM

AL-271 (FAA)

MONTEREY PENINSULA (MR Y)
MONTEREY, CALIFORNIA

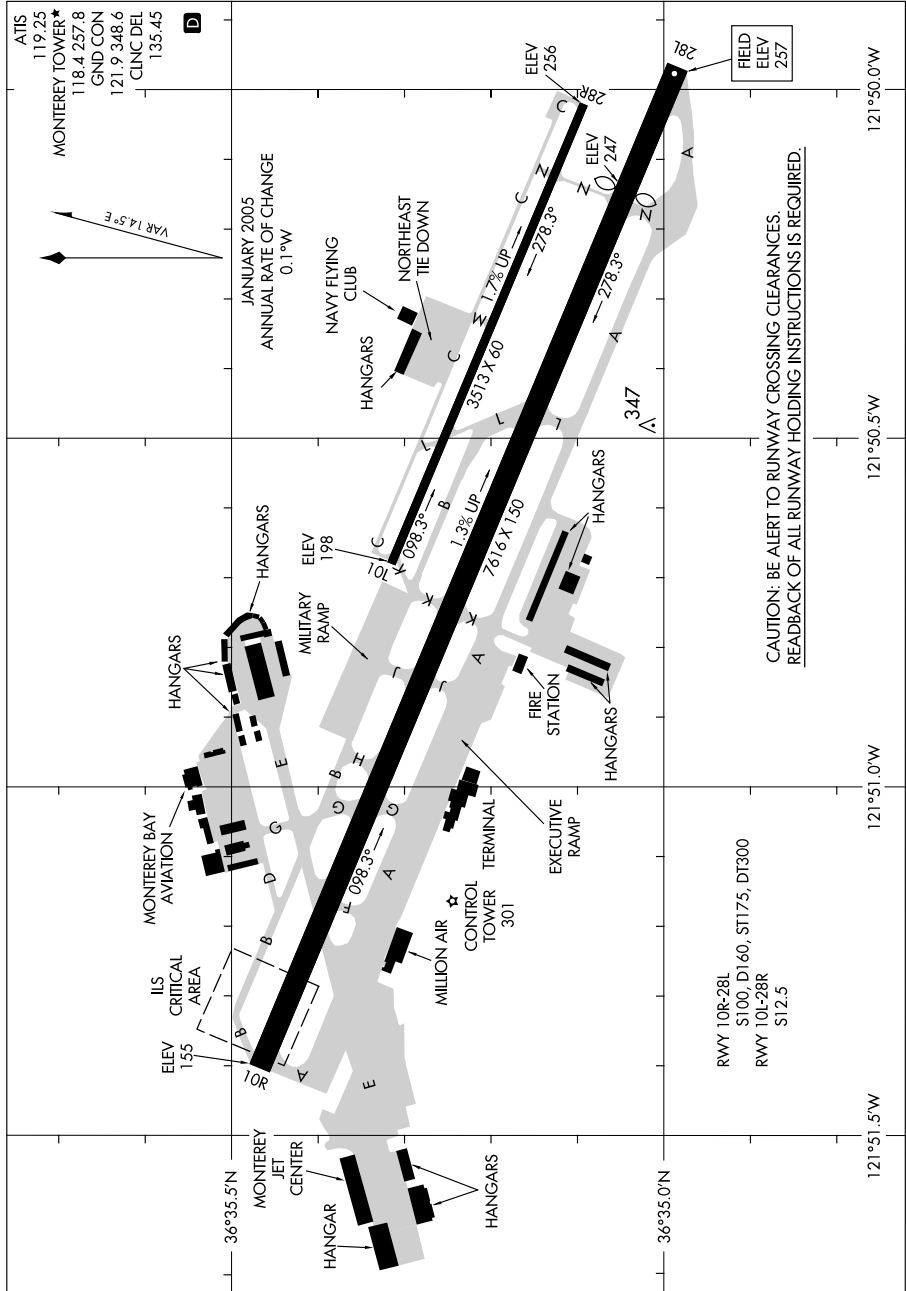

AIRPORT DIAGRAM


09071

MONTEREY, CALIFORNIA
MONTEREY PENINSULA (MR Y)

09071

AIRPORT DIAGRAM

MOUNTAIN VIEW/MOFFETT FEDERAL AIRFIELD (NUQ)
AL-410 (FAA) MOUNTAIN VIEW, CALIFORNIA

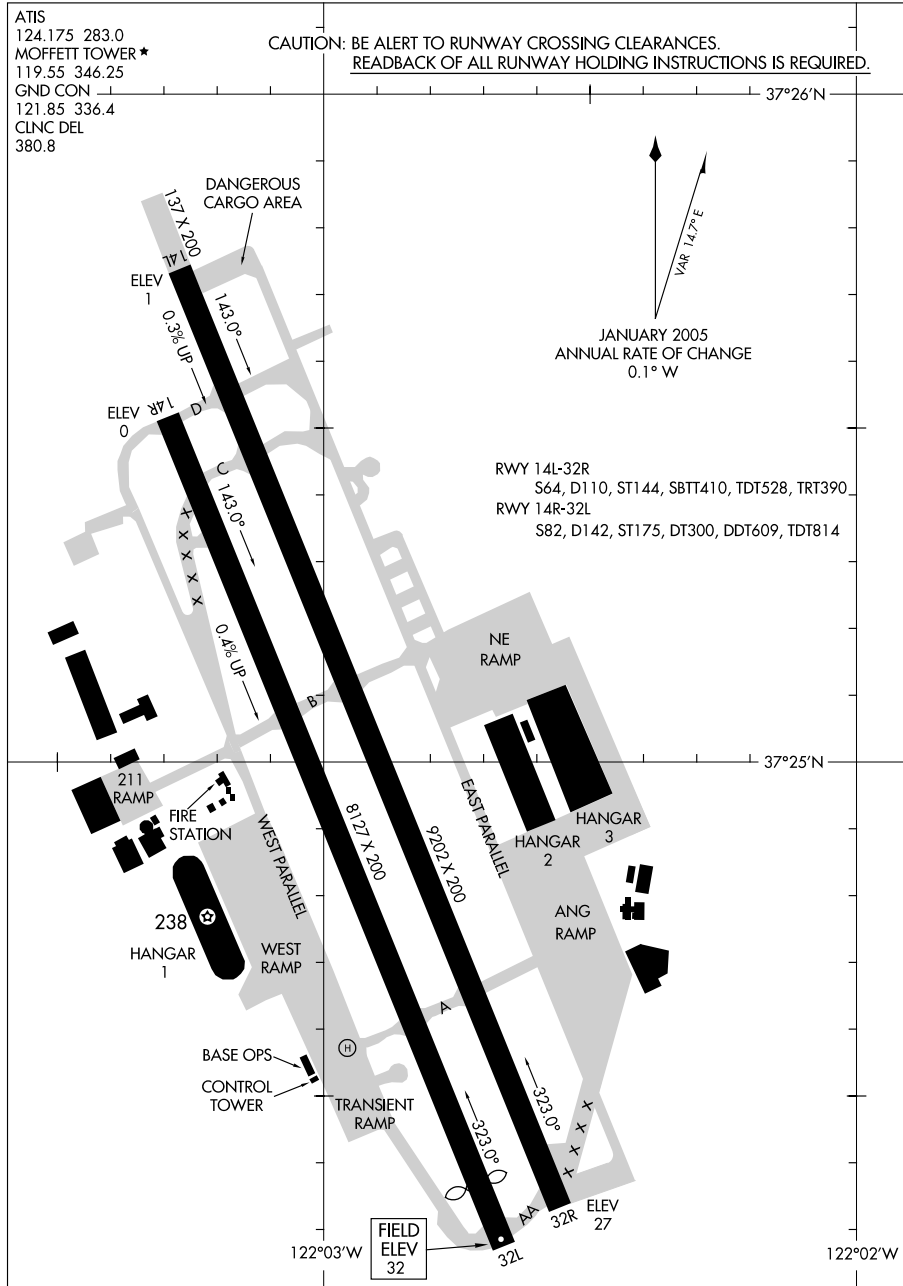

AIRPORT DIAGRAM


09071

MOUNTAIN VIEW, CALIFORNIA
MOUNTAIN VIEW/MOFFETT FEDERAL AIRFIELD (NUQ)

09183

AIRPORT DIAGRAM

AL-281 (FAA)

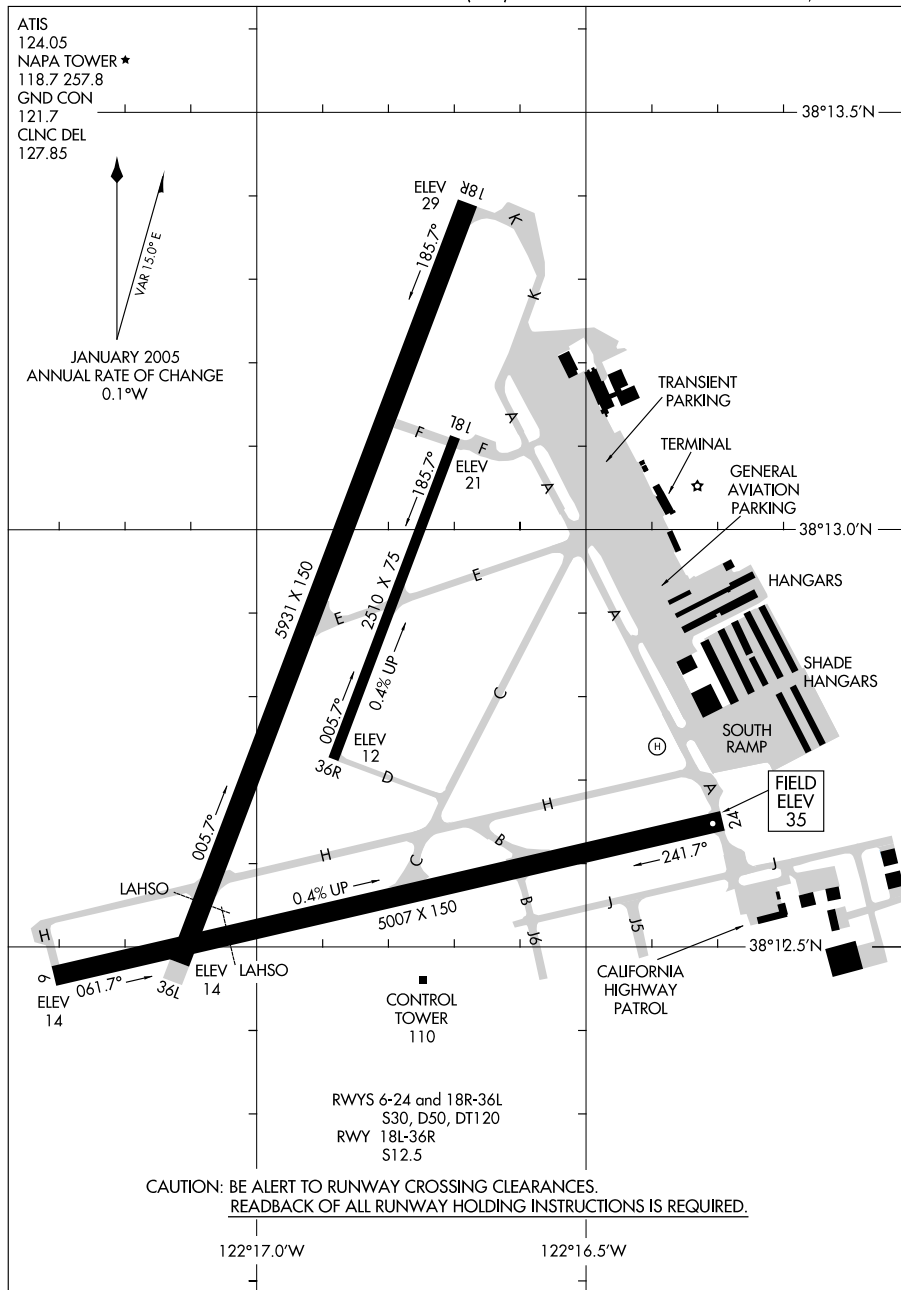NAPA COUNTY (APC)
NAPA, CALIFORNIA

AIRPORT DIAGRAM

09183

NAPA, CALIFORNIA
NAPA COUNTY (APC)


09239

AIRPORT DIAGRAM

AFD-227 [USAF]

NELLIS AFB (KLSV)

LAS VEGAS, NEVADA

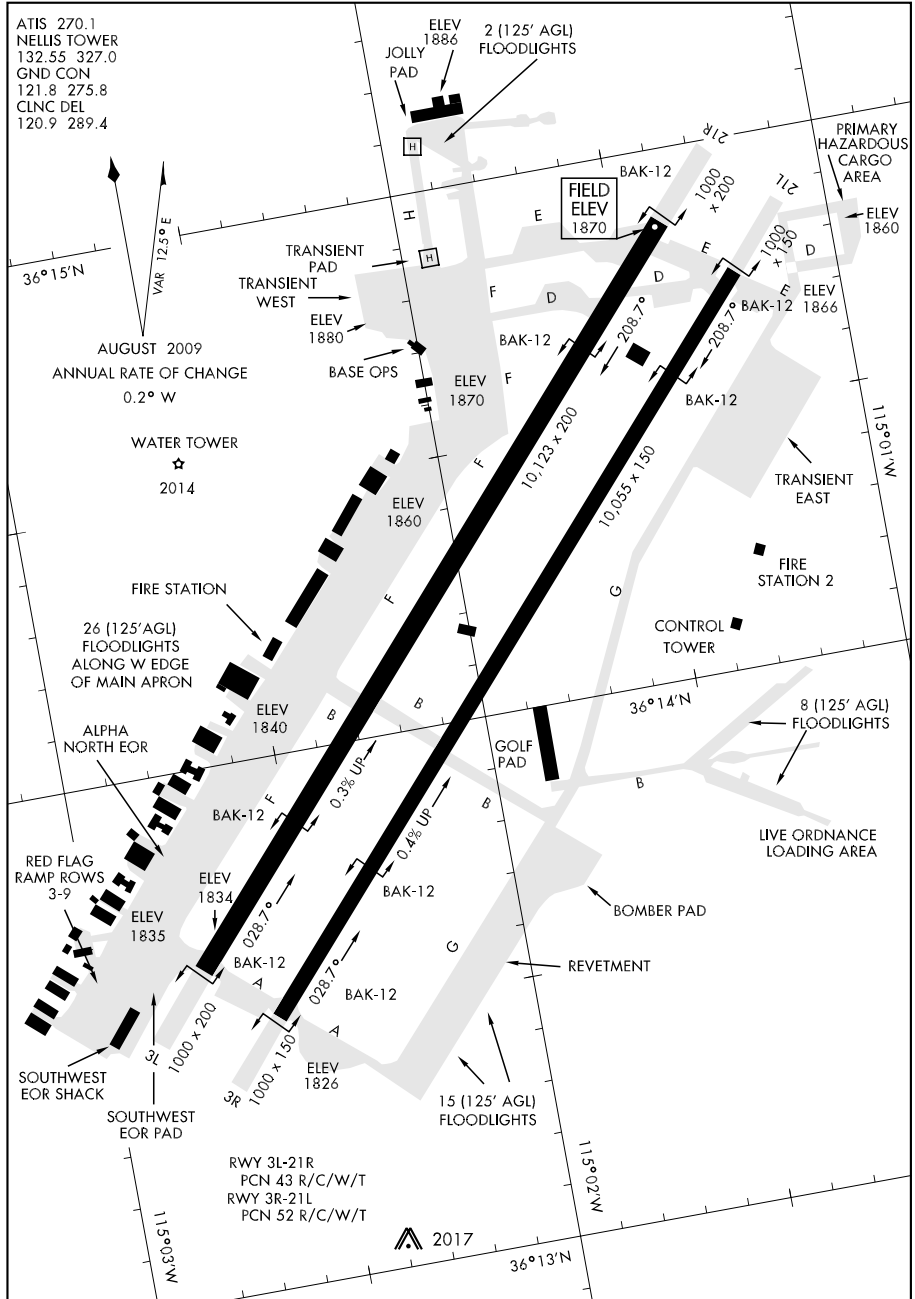

AIRPORT DIAGRAM

LAS VEGAS, NEVADA

NELLIS AFB (KLSV)


09127

NORTH ISLAND NAS (HALSEY FIELD) (KNZY)

AIRPORT DIAGRAM


AFD-374 [USN]

SAN DIEGO, CALIFORNIA

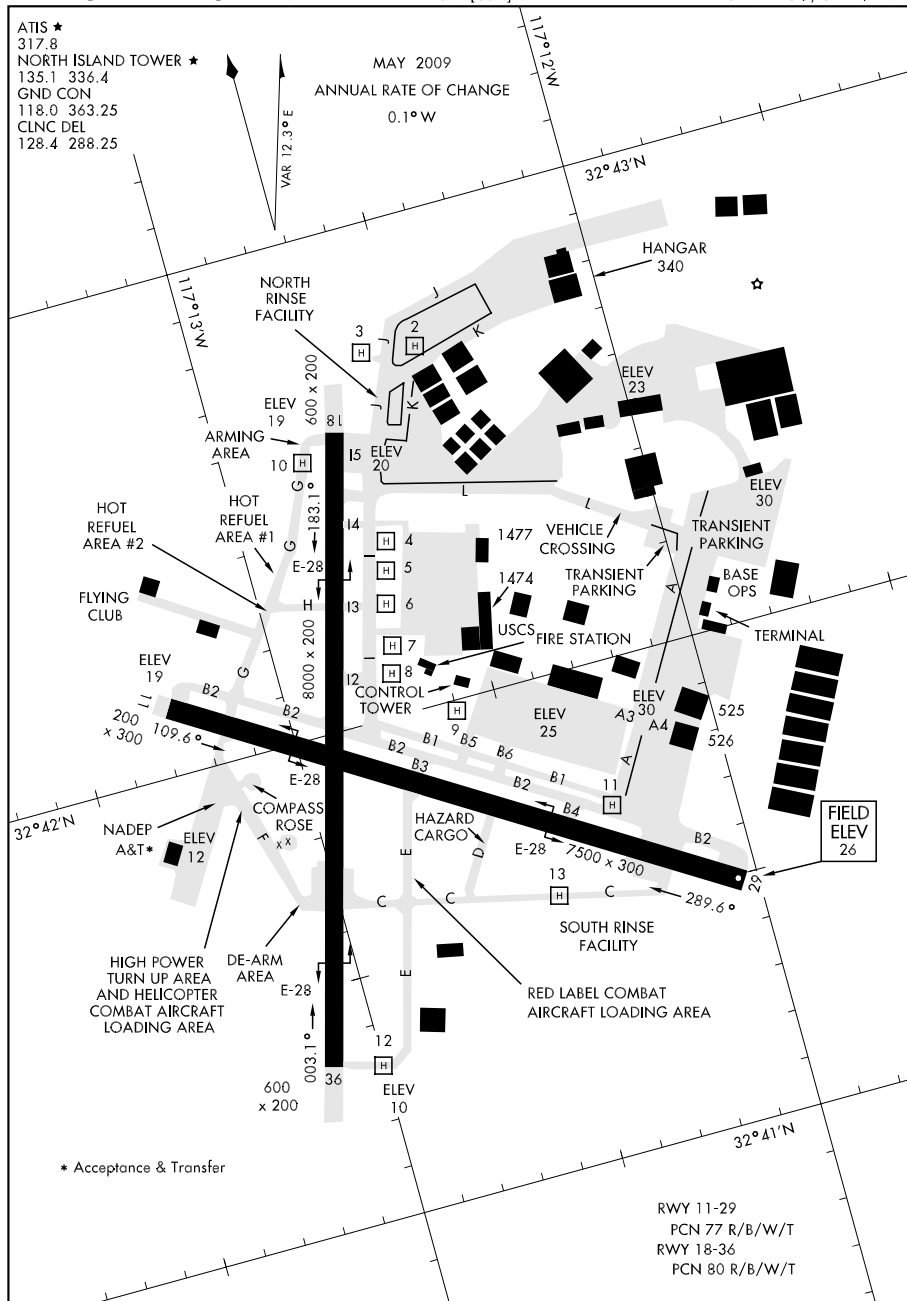

09295

AIRPORT DIAGRAM

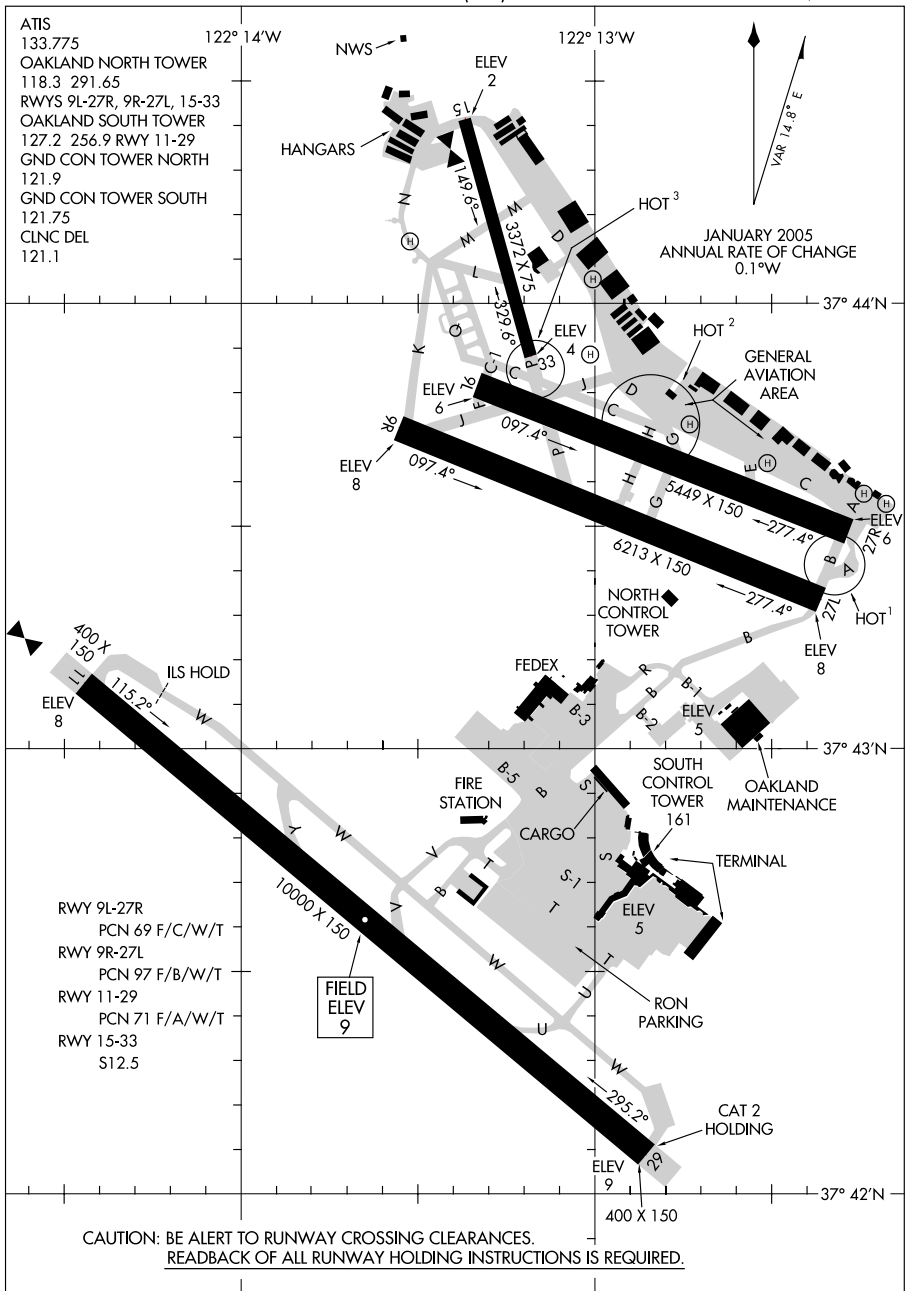

AIRPORT DIAGRAM


09295

OAKLAND, CALIFORNIA
OAKLAND/METROPOLITAN OAKLAND INTL (OAK)

09015

AIRPORT DIAGRAM

AL-297 (FAA)

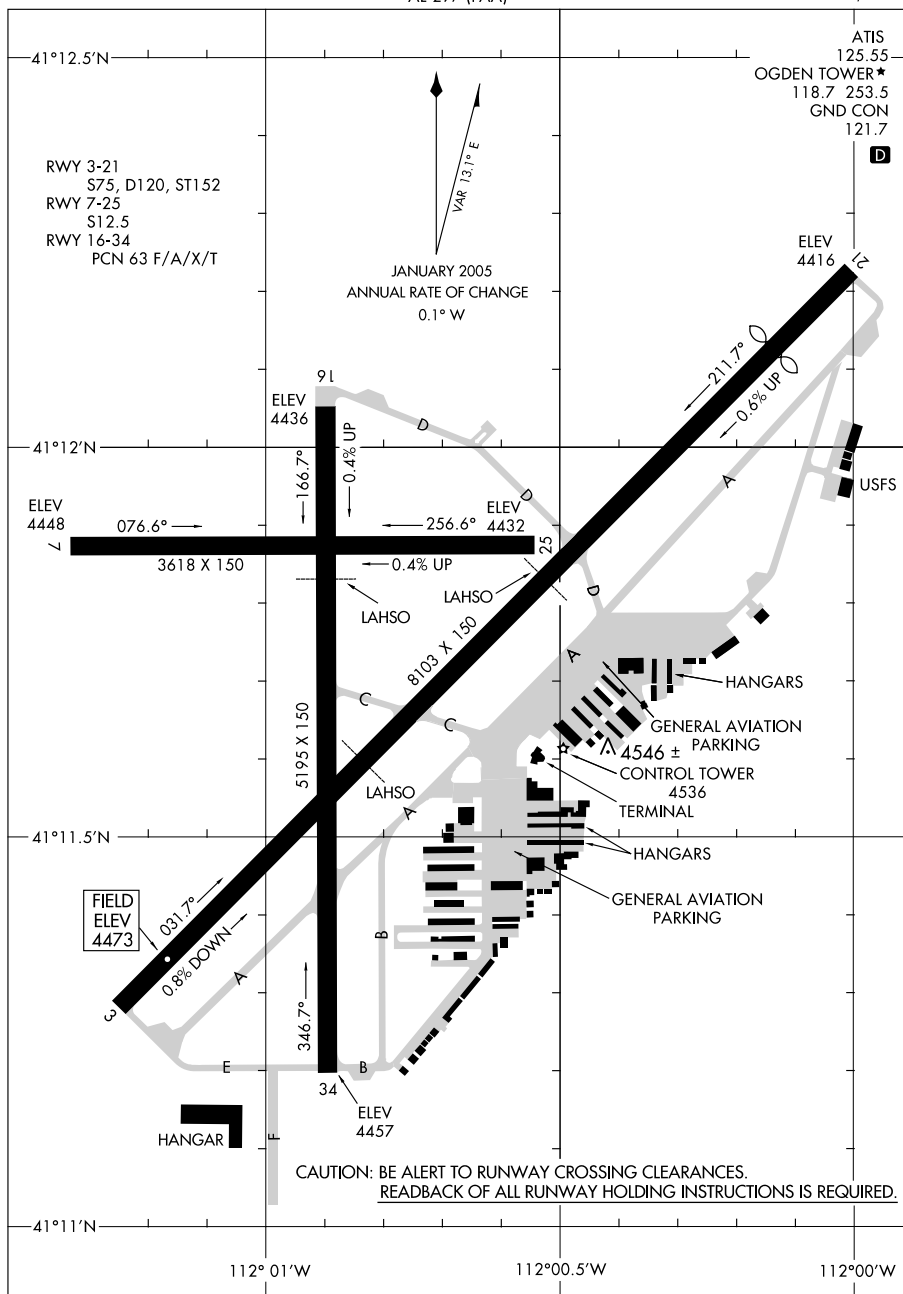 OGDEN-HINCKLEY (OGD)
 OGDEN, UTAH


AIRPORT DIAGRAM


09015

 OGDEN, UTAH
 OGDEN-HINCKLEY (OGD)

09239

AIRPORT DIAGRAM

AL-965 (FAA)

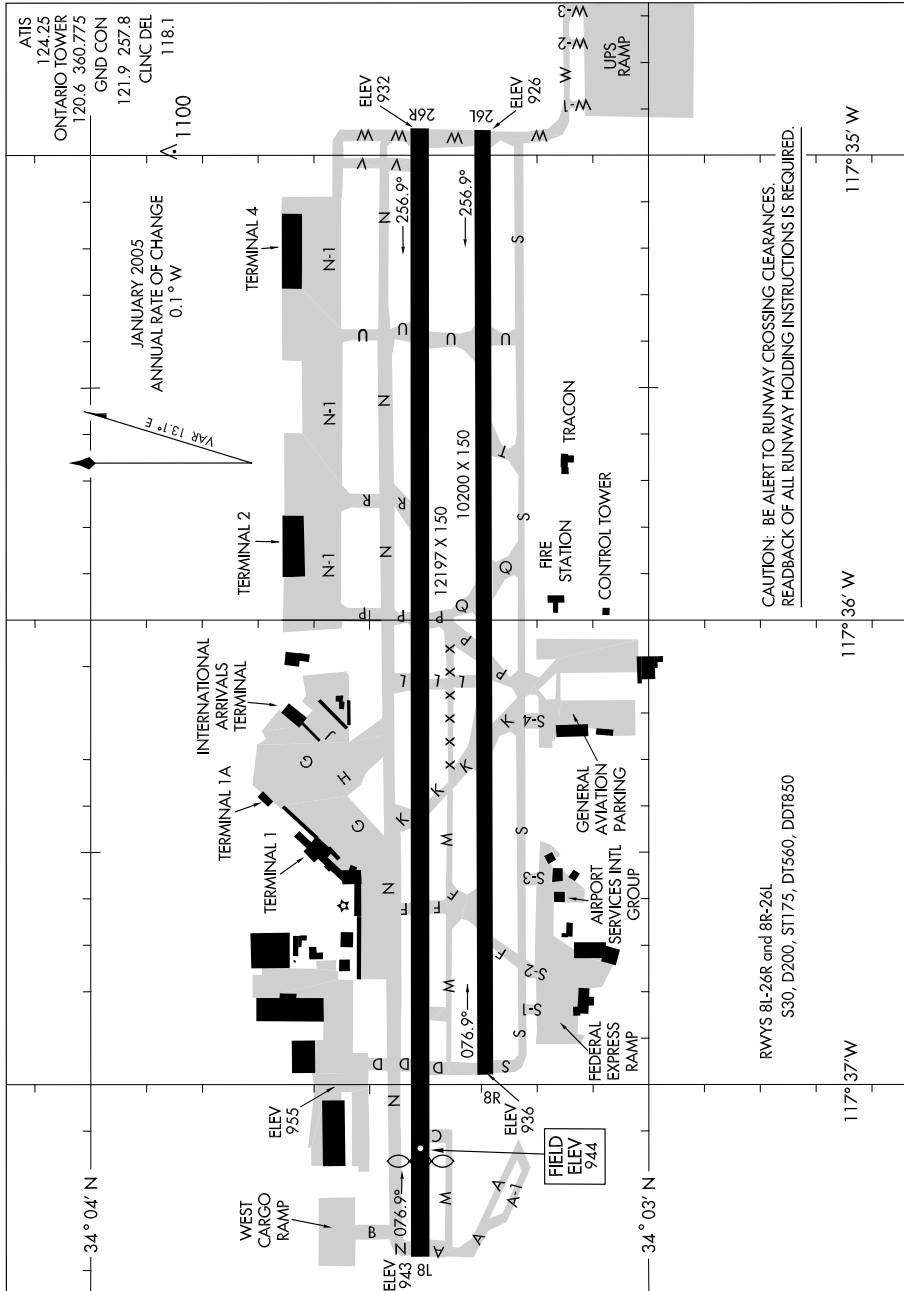ONTARIO INTL (ONT)
ONTARIO, CALIFORNIA

AIRPORT DIAGRAM


09239

ONTARIO, CALIFORNIA
ONTARIO INTL (ONT)

08325

AIRPORT DIAGRAM

AL-674 (FAA)

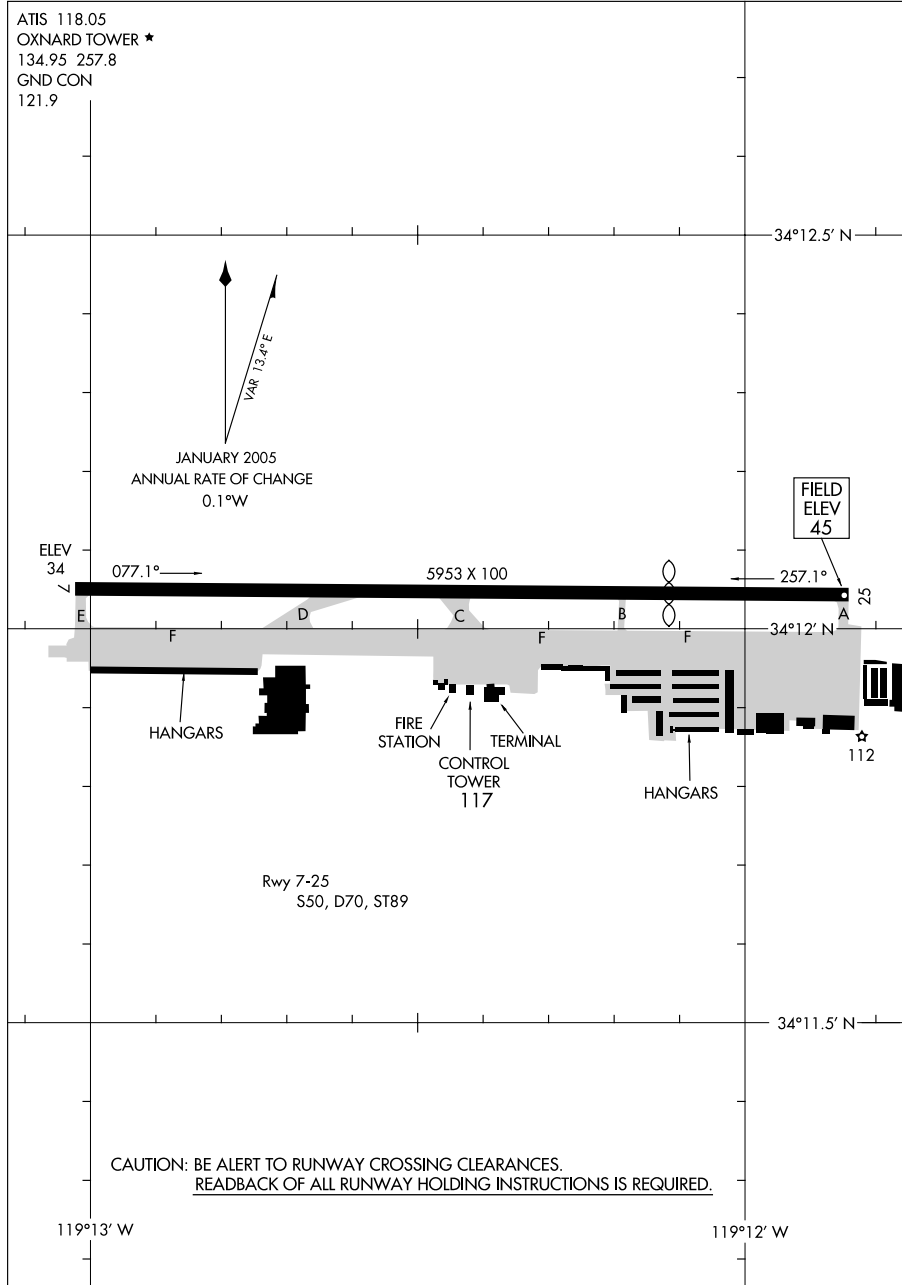OXNARD (OXR)
OXNARD, CALIFORNIA

AIRPORT DIAGRAM

OXNARD, CALIFORNIA
OXNARD (OXR)

08325


09295

AIRPORT DIAGRAM

AL-310 (FAA)

PALMDALE RGNL/USAF PLANT 42 (PMD)

PALMDALE, CALIFORNIA

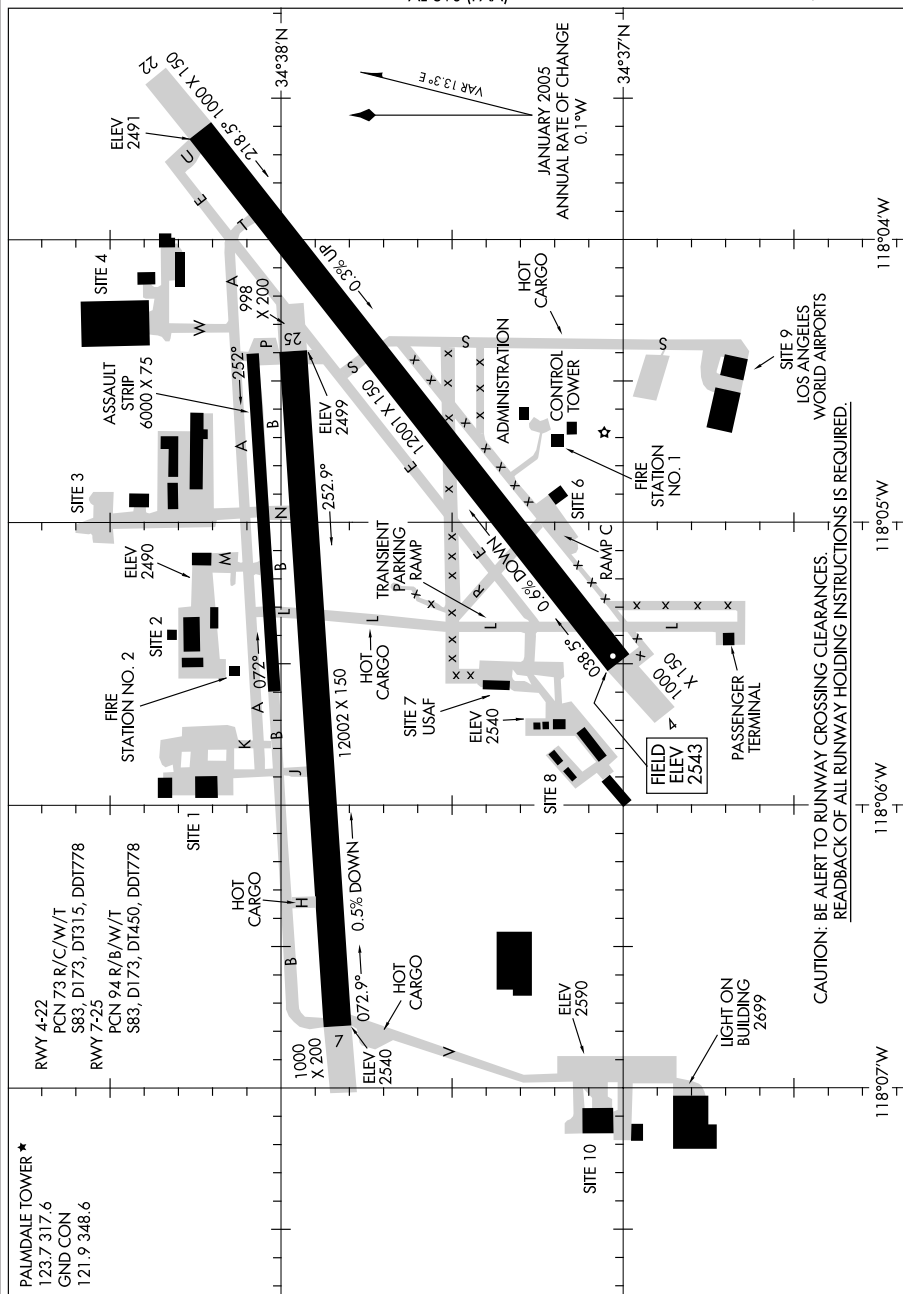


AIRPORT DIAGRAM

09295

PALMDALE RGNL/USAF PLANT 42 (PMD)

08213

AIRPORT DIAGRAM

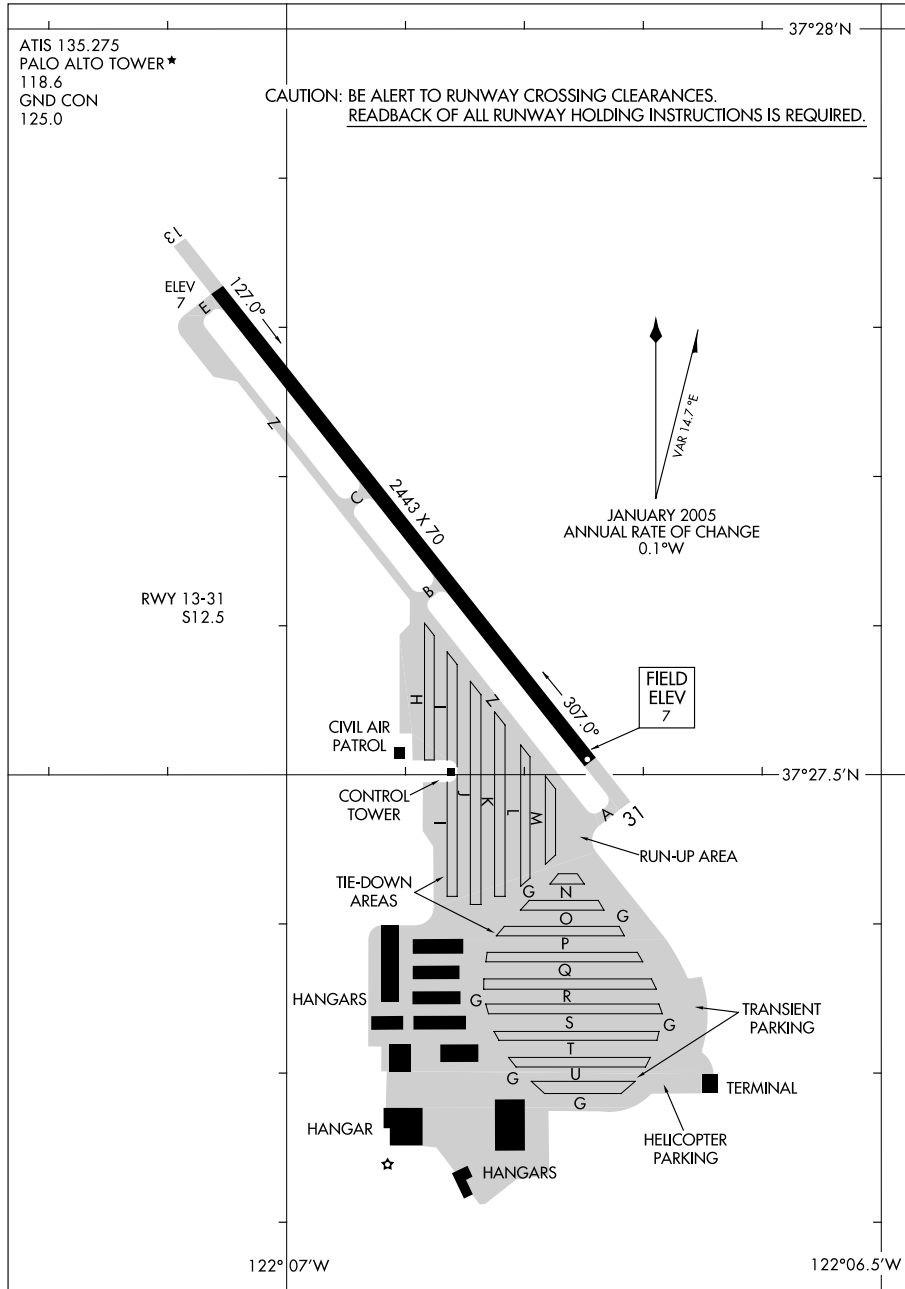PALO ALTO AIRPORT OF SANTA CLARA COUNTY (P.A.O.)
AL-9216 (FAA) PALO ALTO, CALIFORNIA

AIRPORT DIAGRAM

08213


PALO ALTO, CALIFORNIA
PALO ALTO AIRPORT OF SANTA CLARA COUNTY (P.A.O.)

09239

AIRPORT DIAGRAM

PHOENIX SKY HARBOR INTL (PHX)

PHOENIX, ARIZONA

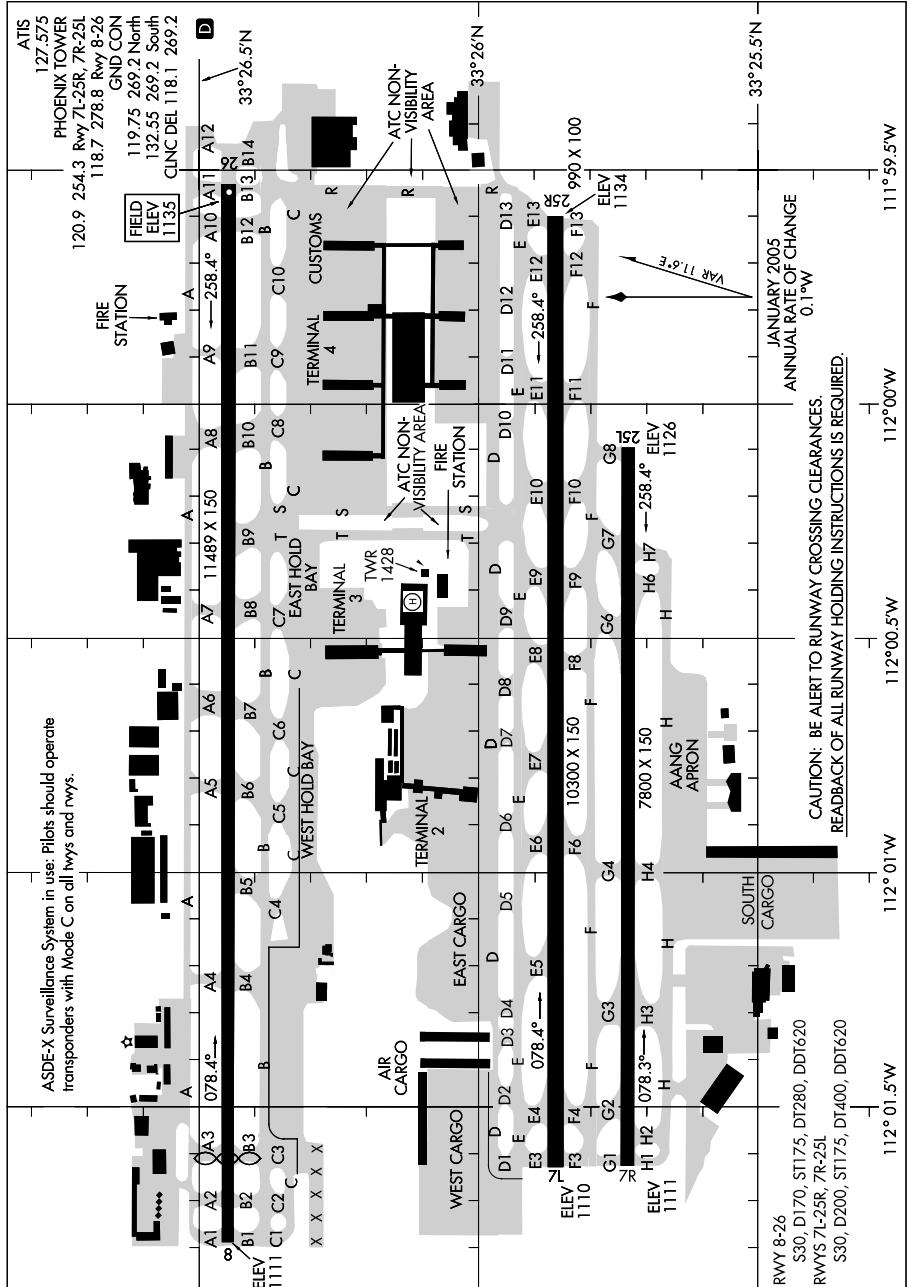

PHOENIX, ARIZONA

PHOENIX SKY HARBOR INTL (PHX)


AIRPORT DIAGRAM

09239

SW, 22 OCT 2009 to 17 DEC 2009

09127

AIRPORT DIAGRAM

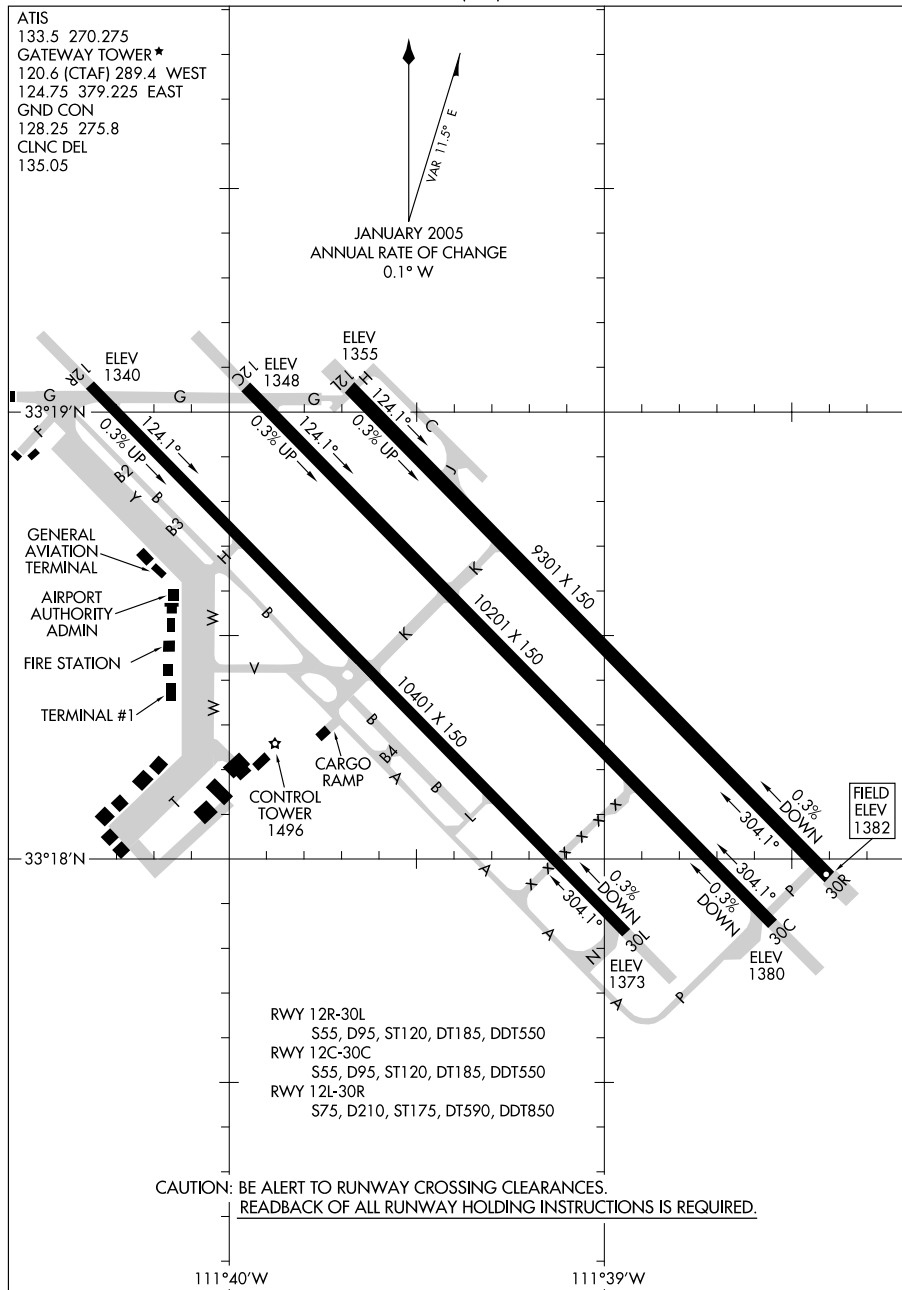PHOENIX-MESA GATEWAY (IWA)
PHOENIX, ARIZONA

AIRPORT DIAGRAM

09127

PHOENIX, ARIZONA
PHOENIX-MESA GATEWAY (IWA)

AIRPORT DIAGRAM

AFD-925 [USN]




OXNARD, CALIFORNIA
POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)

09295

AIRPORT DIAGRAM

AL-683 (FAA)

PROVO MUNI (PVU)
PROVO, UTAH

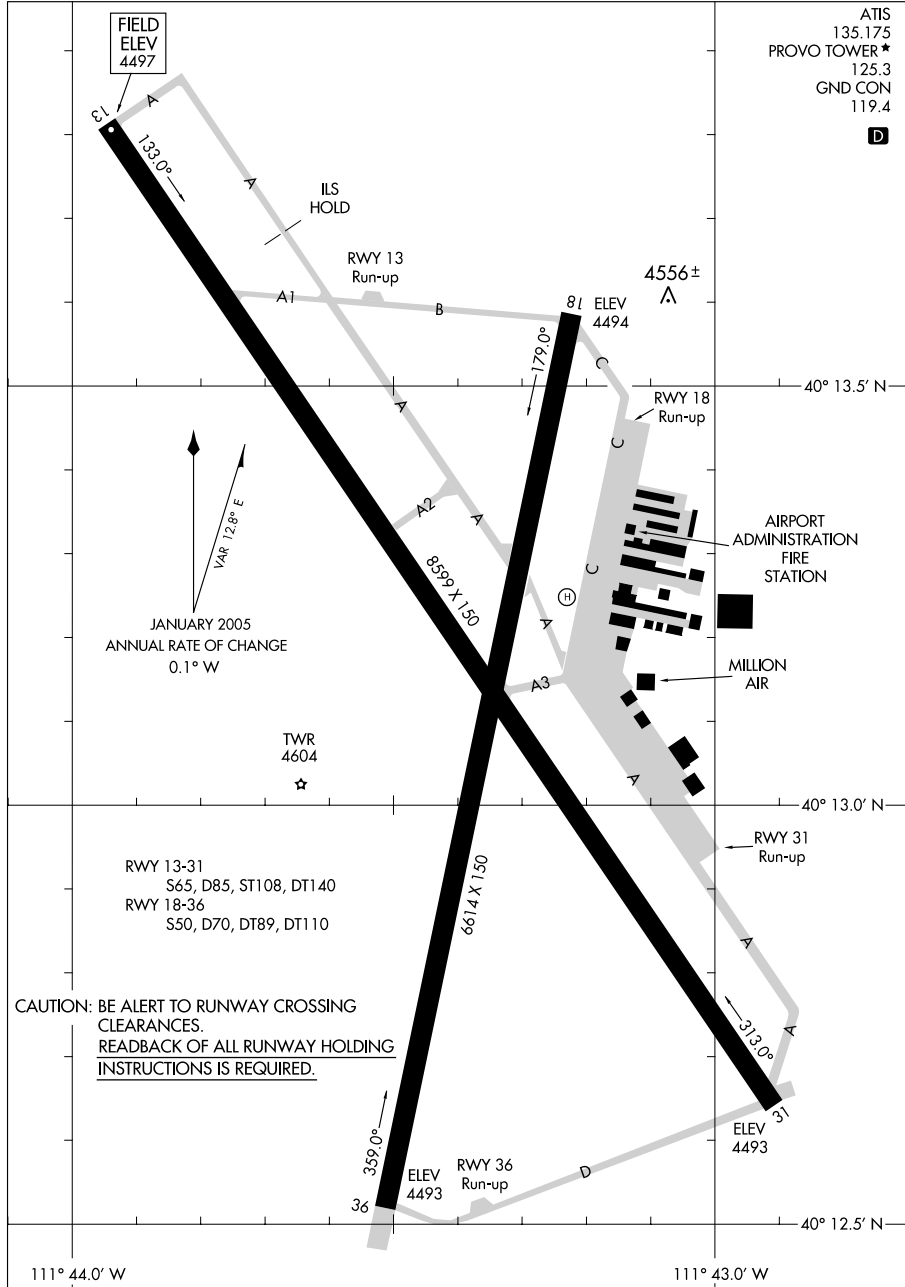

AIRPORT DIAGRAM


09295

PROVO, UTAH
PROVO MUNI (PVU)

09239
AIRPORT DIAGRAM

AL-6667 (FAA)

RAMONA (RNM)
RAMONA, CALIFORNIA

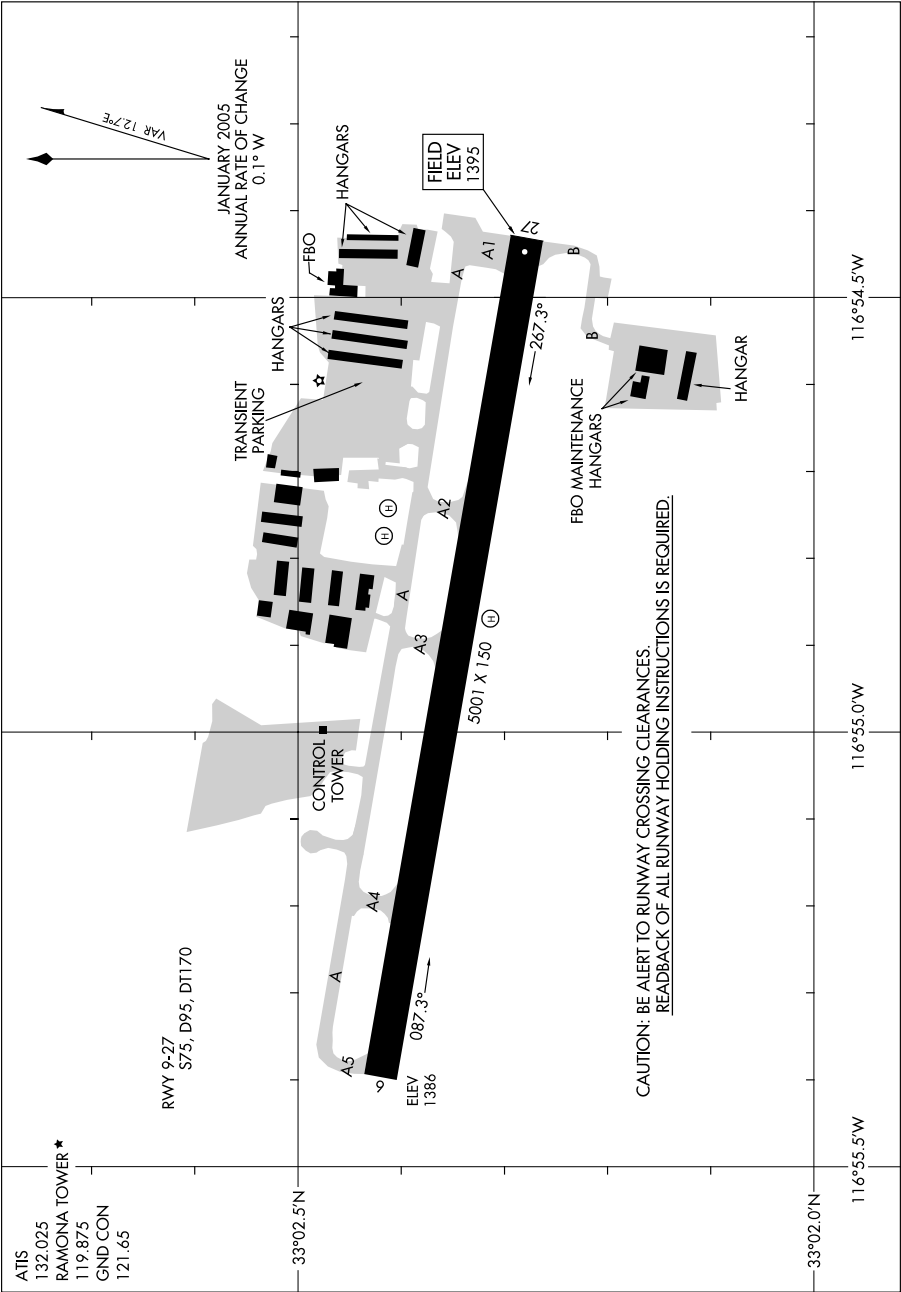

AIRPORT DIAGRAM
09239

RAMONA, CALIFORNIA
RAMONA (RNM)


08325

AIRPORT DIAGRAM

AL-688 (FAA)

REDDING MUNI (RDD)

REDDING, CALIFORNIA

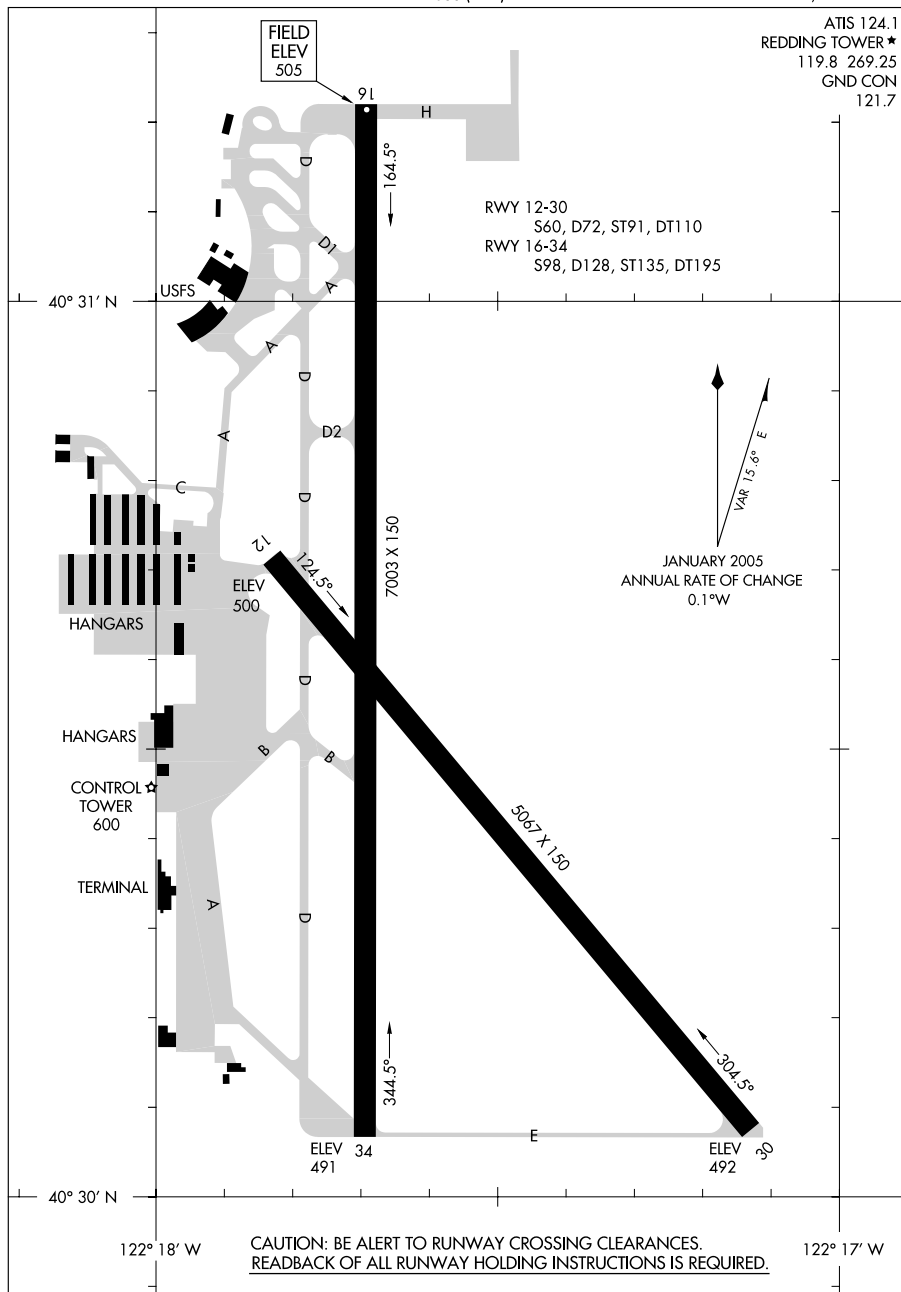

AIRPORT DIAGRAM


08325

REDDING, CALIFORNIA
REDDING MUNI (RDD)

09295

AIRPORT DIAGRAM

RENO/TAHOE INTL (RNO)
RENO, NEVADA

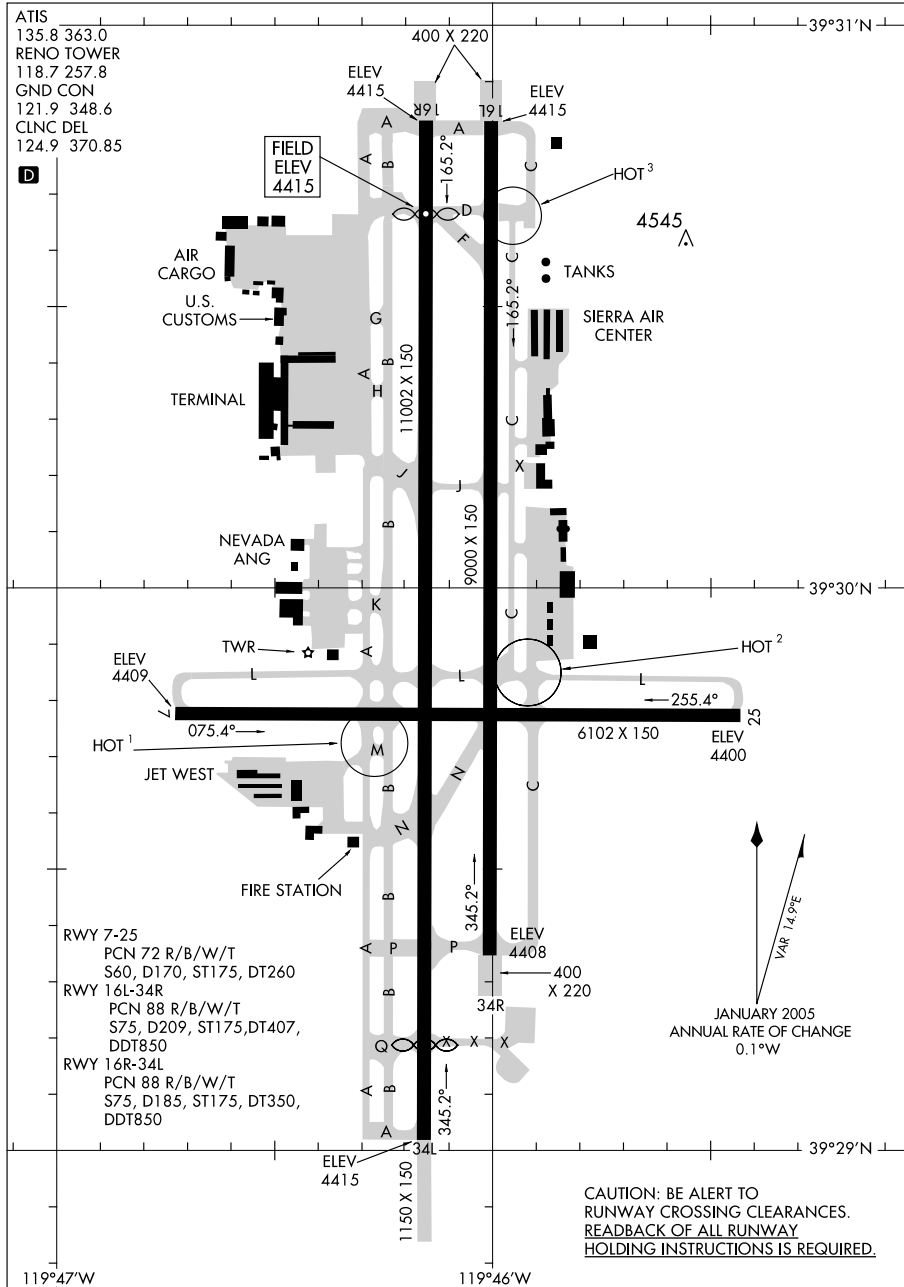


AIRPORT DIAGRAM

09295

RENO, NEVADA
RENO/TAHOE INTL (RNO)

07354

AIRPORT DIAGRAM

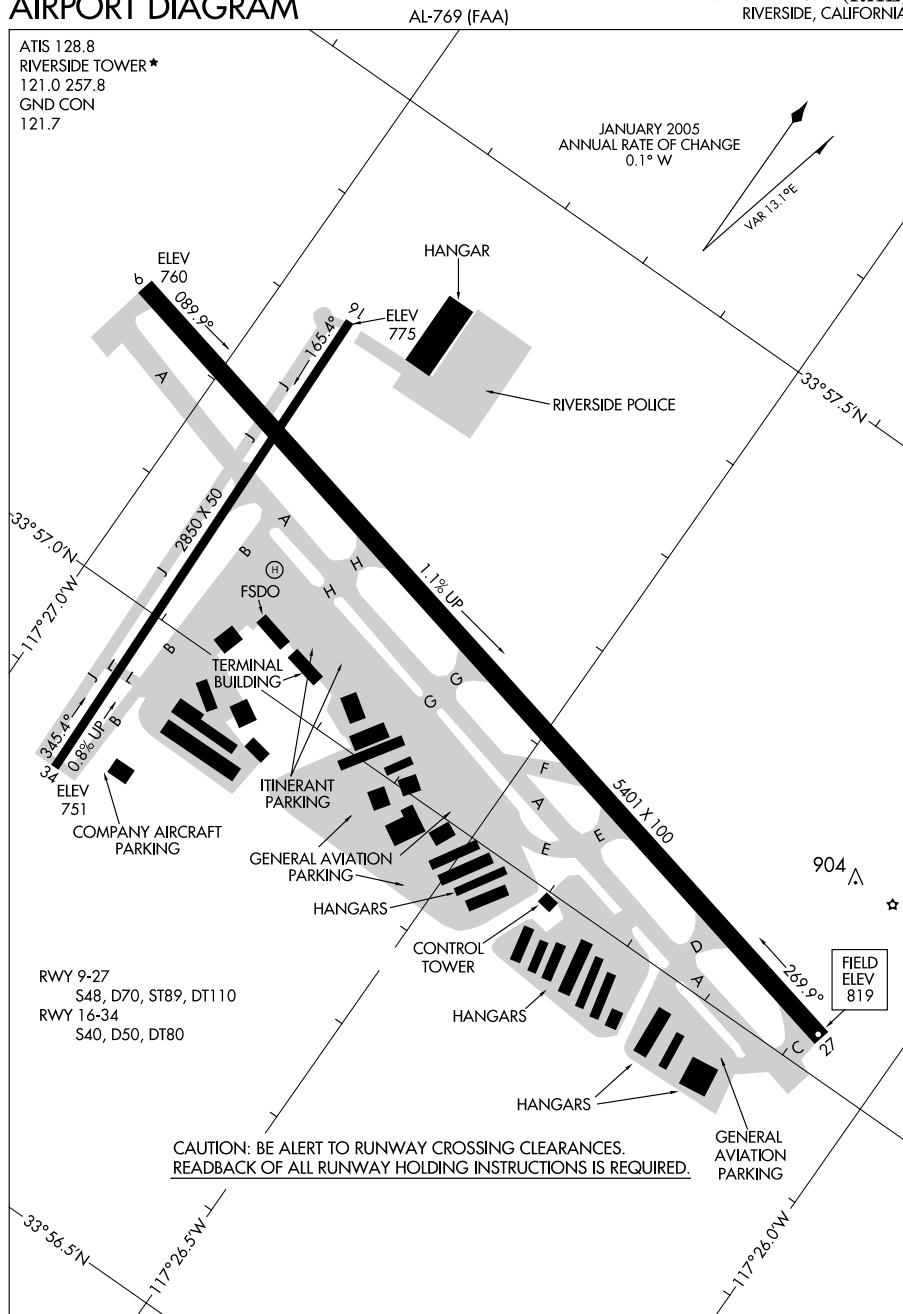RIVERSIDE MUNI (RAL)
RIVERSIDE, CALIFORNIA

AIRPORT DIAGRAM


07354

RIVERSIDE, CALIFORNIA
RIVERSIDE MUNI (RAL)

09295

AIRPORT DIAGRAM

AL-354 (FAA)

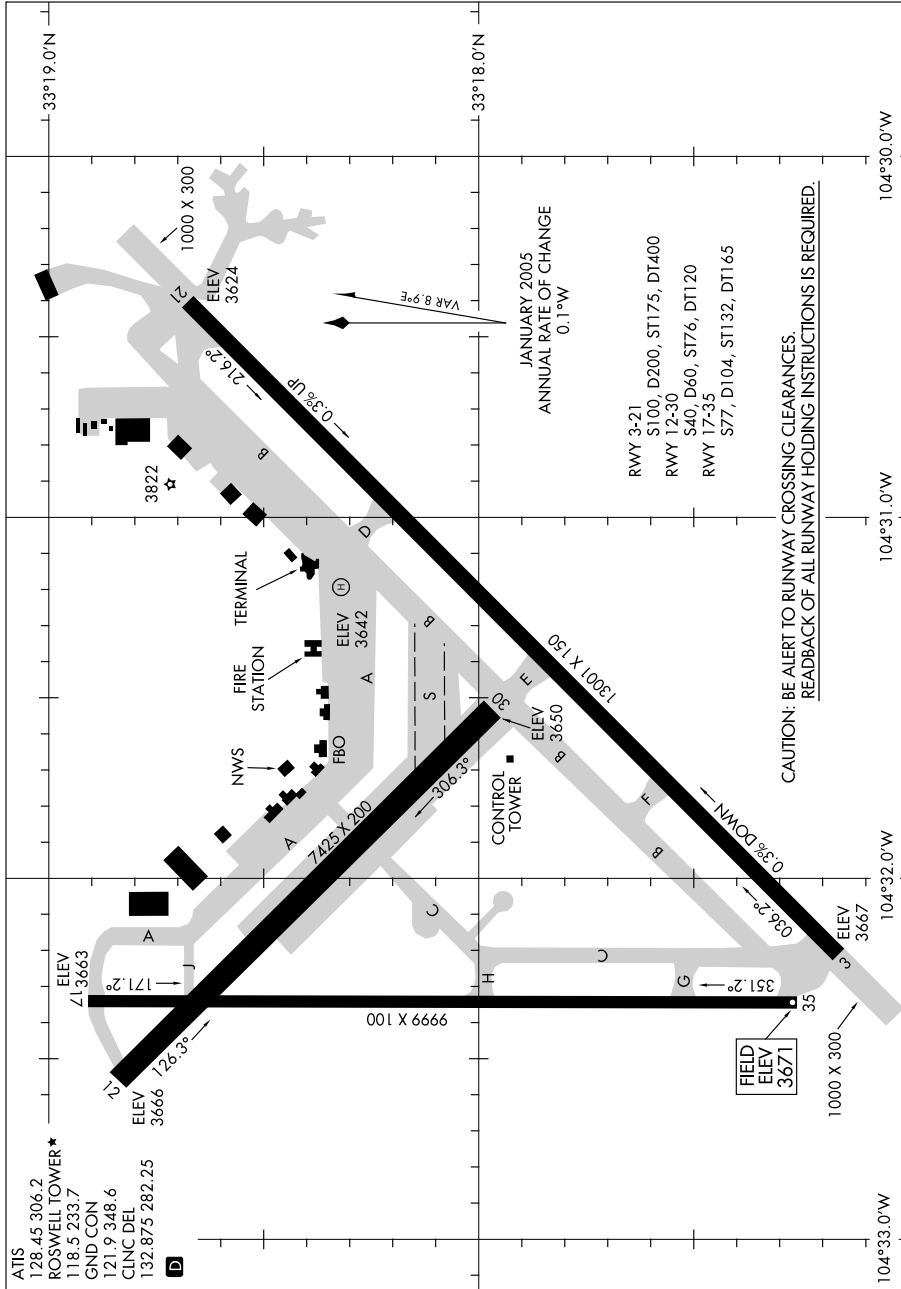ROSWELL INTL AIR CENTER (ROW)
ROSWELL, NEW MEXICO


AIRPORT DIAGRAM

09295

ROSWELL, NEW MEXICO
ROSWELL INTL AIR CENTER (ROW)

09239

AIRPORT DIAGRAM

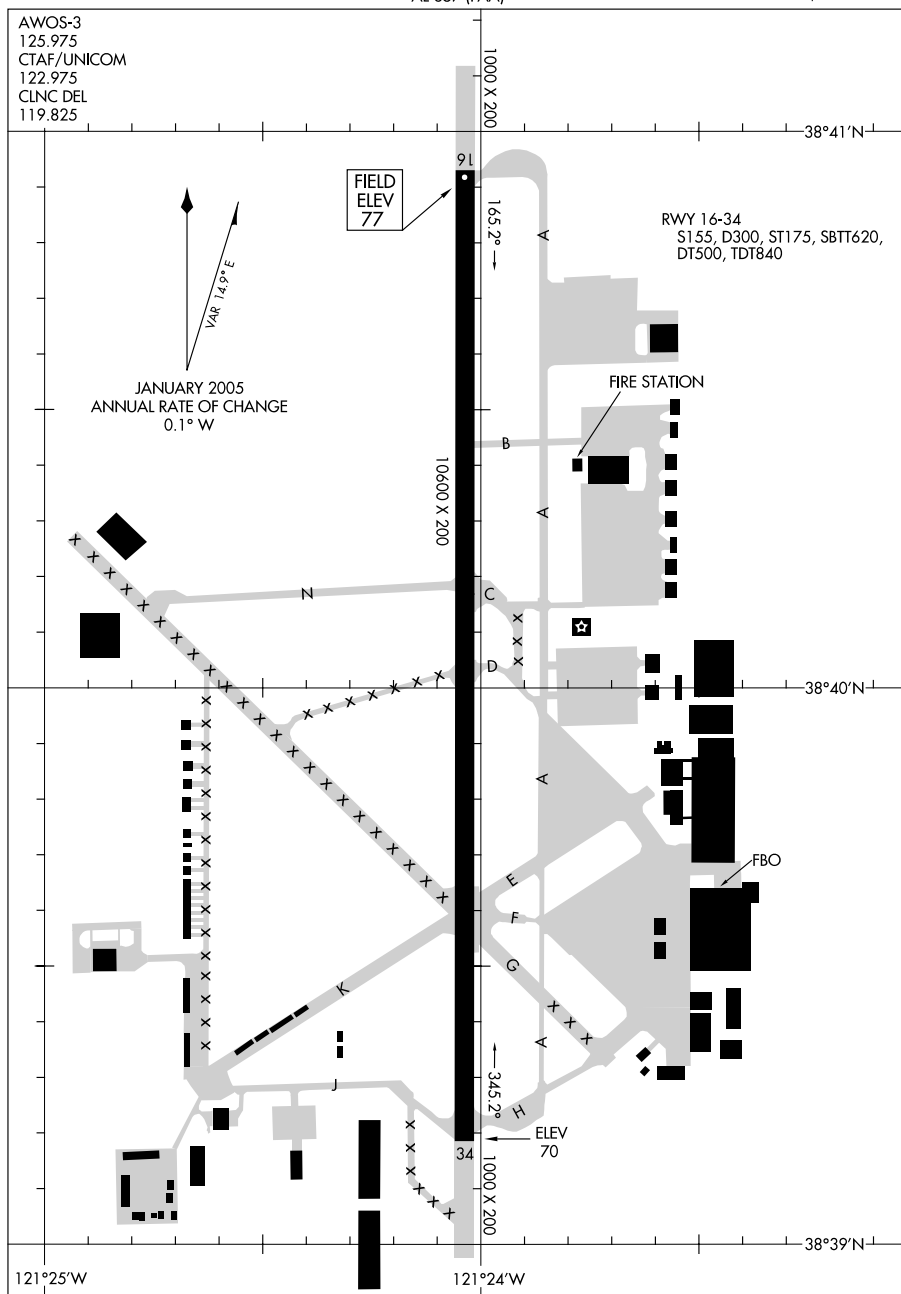SACRAMENTO/ MC CLELLAN AIRFIELD (MCC)
SACRAMENTO, CALIFORNIA

AIRPORT DIAGRAM


09239

SACRAMENTO, CALIFORNIA
SACRAMENTO/ MC CLELLAN AIRFIELD (MCC)

09239

AIRPORT DIAGRAM


AL-358 (FAA)

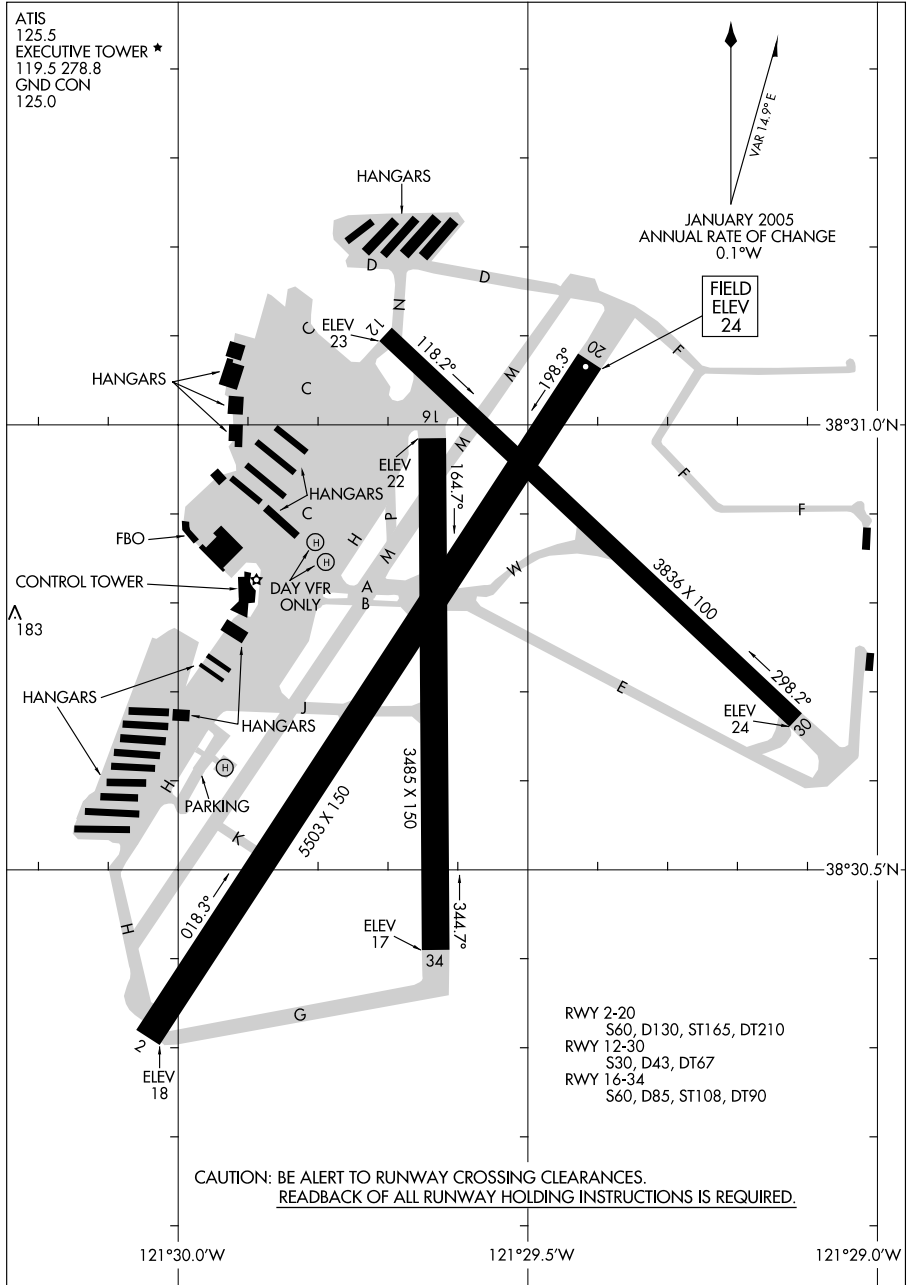SACRAMENTO EXECUTIVE (SAC)
SACRAMENTO, CALIFORNIA

AIRPORT DIAGRAM

09239

SACRAMENTO, CALIFORNIA
SACRAMENTO EXECUTIVE (SAC)

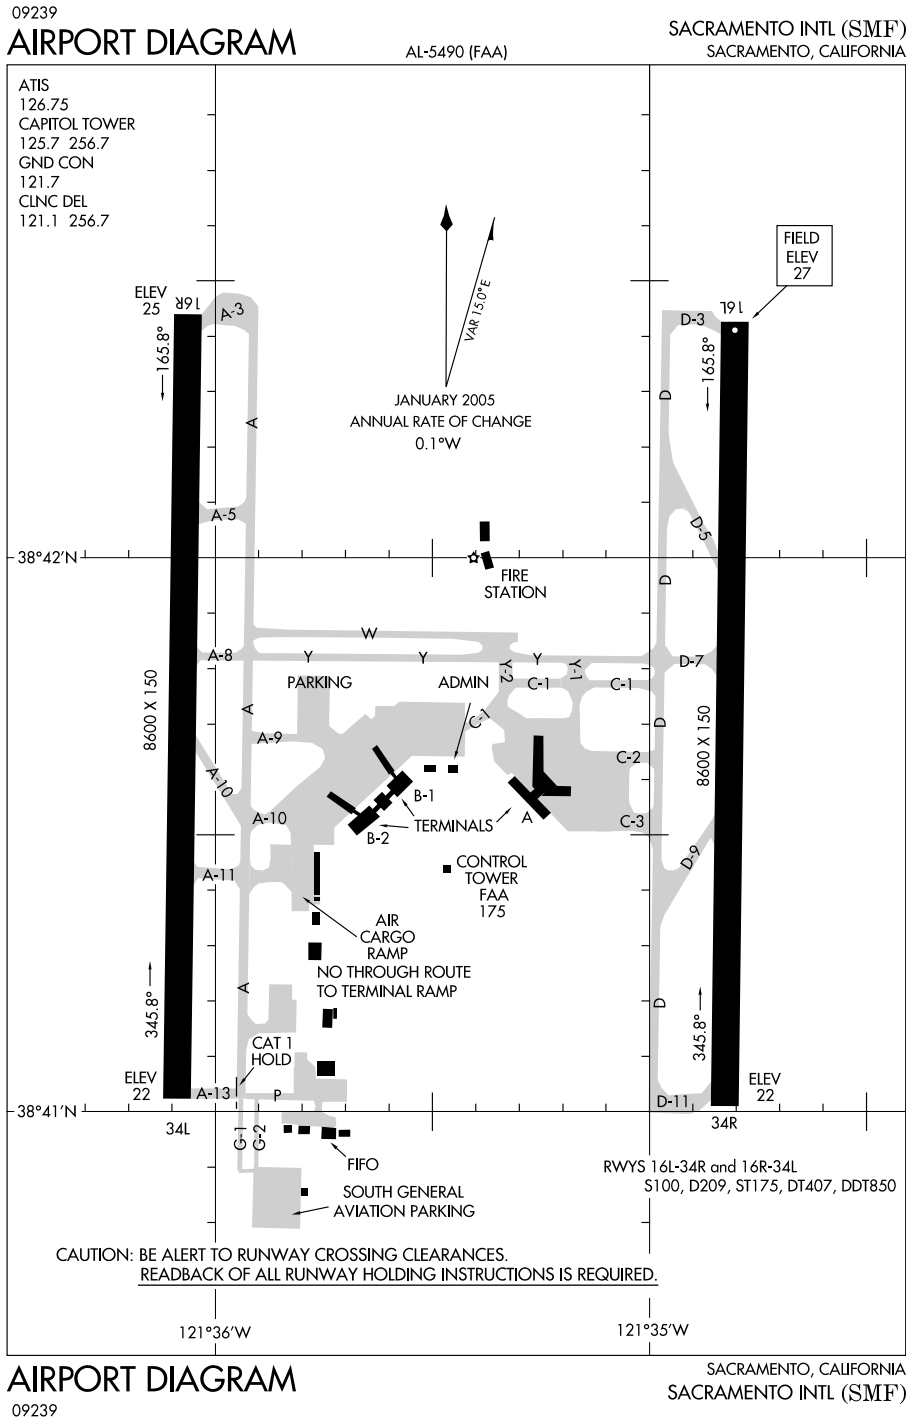


08213

AIRPORT DIAGRAM

AL-356 (FAA)

SACRAMENTO MATHER (MHR)
SACRAMENTO, CALIFORNIA

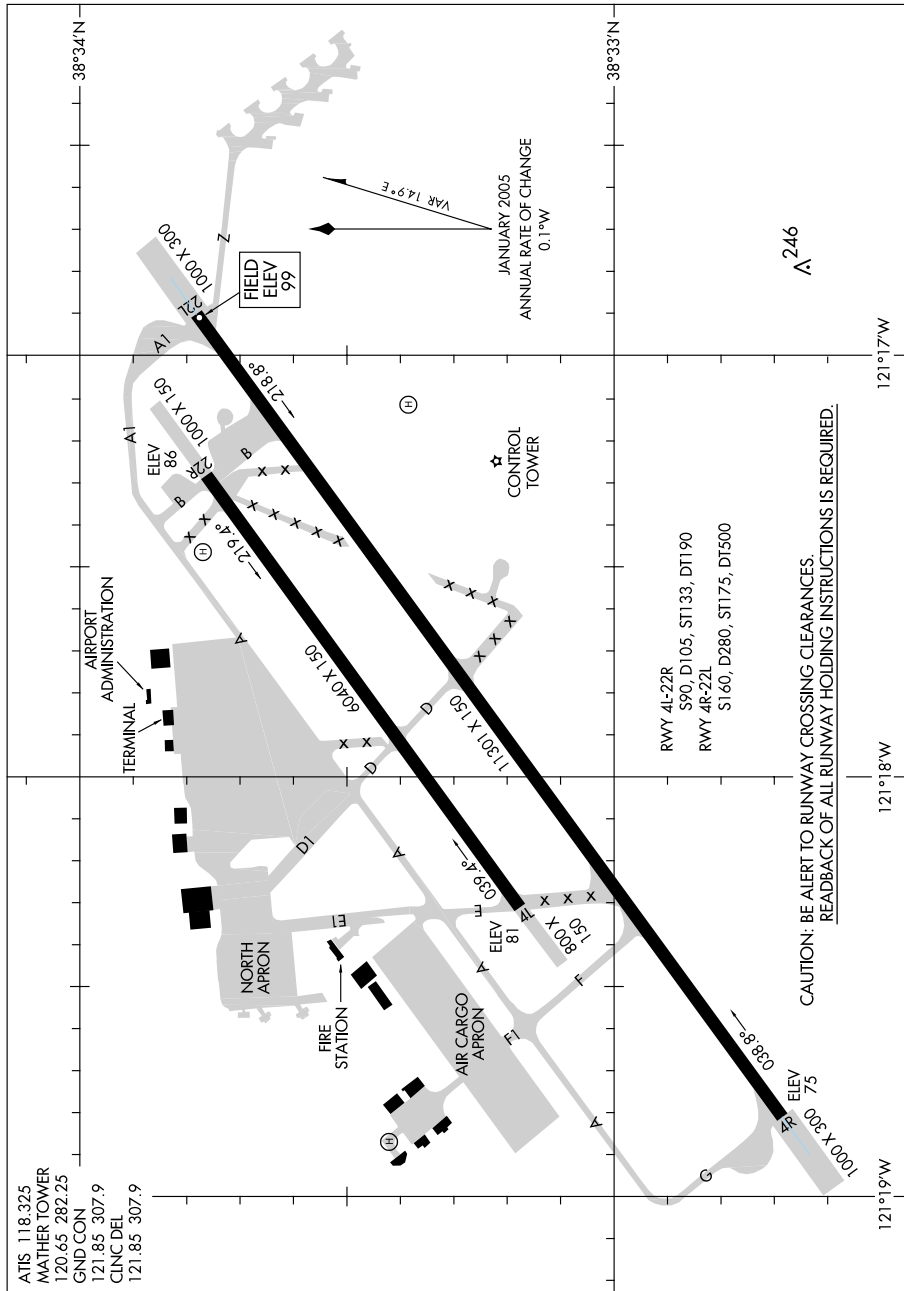

AIRPORT DIAGRAM


SACRAMENTO, CALIFORNIA
SACRAMENTO MATHER (MHR)

08213

09295

AIRPORT DIAGRAM

AL-363 (FAA)

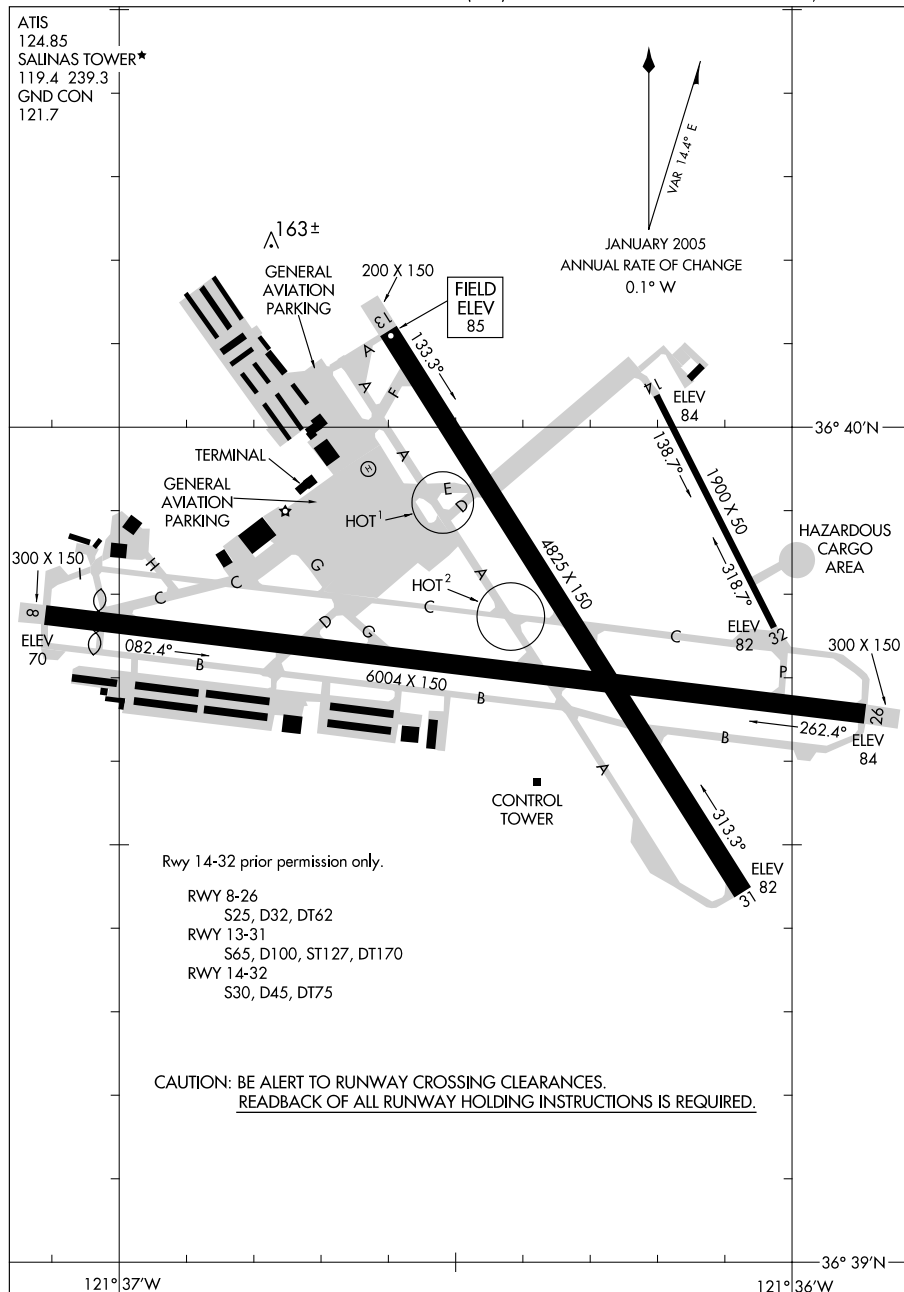SALINAS MUNI (SNS)
SALINAS, CALIFORNIA

AIRPORT DIAGRAM

09295

SALINAS, CALIFORNIA
SALINAS MUNI (SNS)


09239

AIRPORT DIAGRAM

AL-365 (FAA)

SALT LAKE CITY INTL (SLC)

SALT LAKE CITY, UTAH

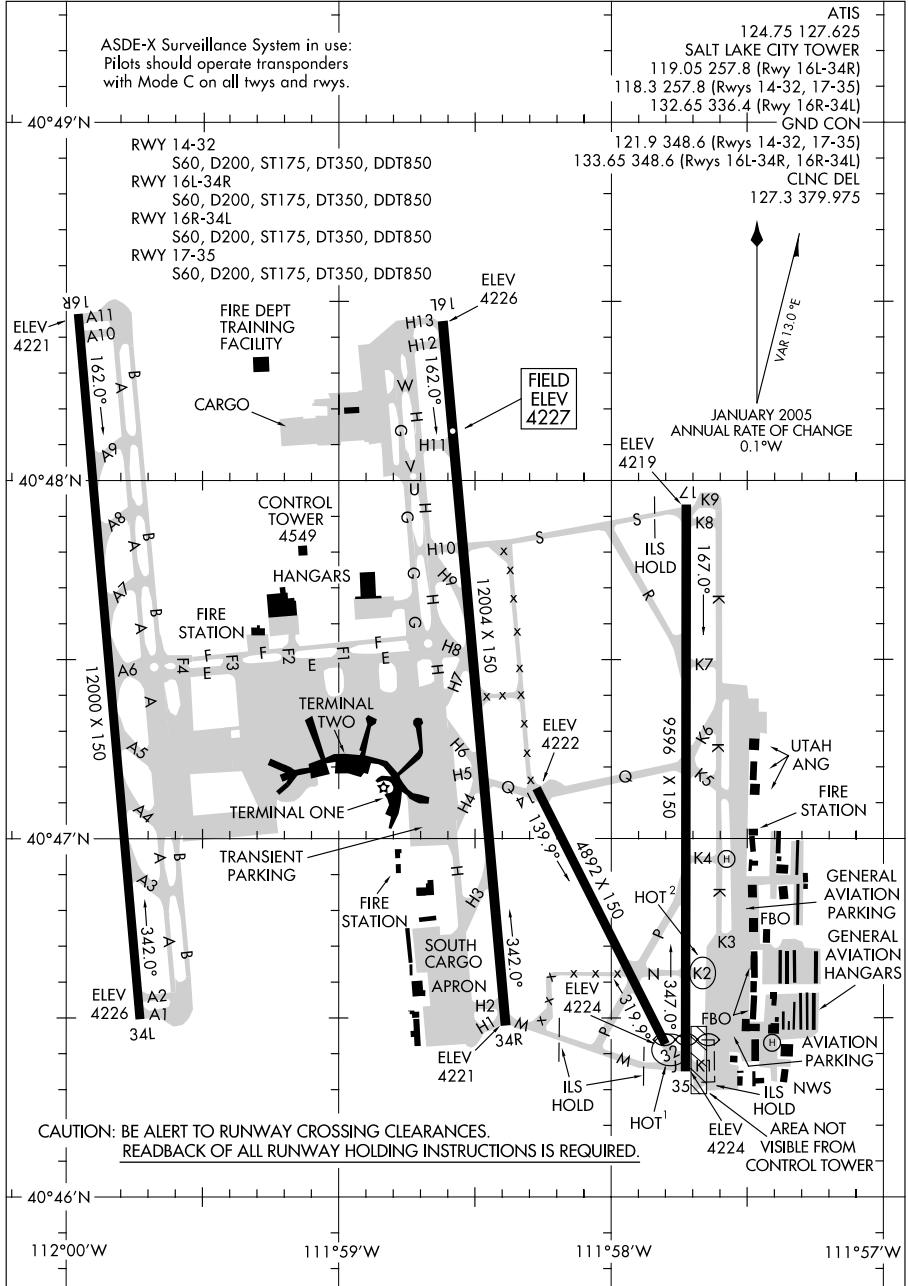

AIRPORT DIAGRAM

09239


SALT LAKE CITY, UTAH

SALT LAKE CITY INTL (SLC)

09071

AIRPORT DIAGRAM

AL-547 (FAA)

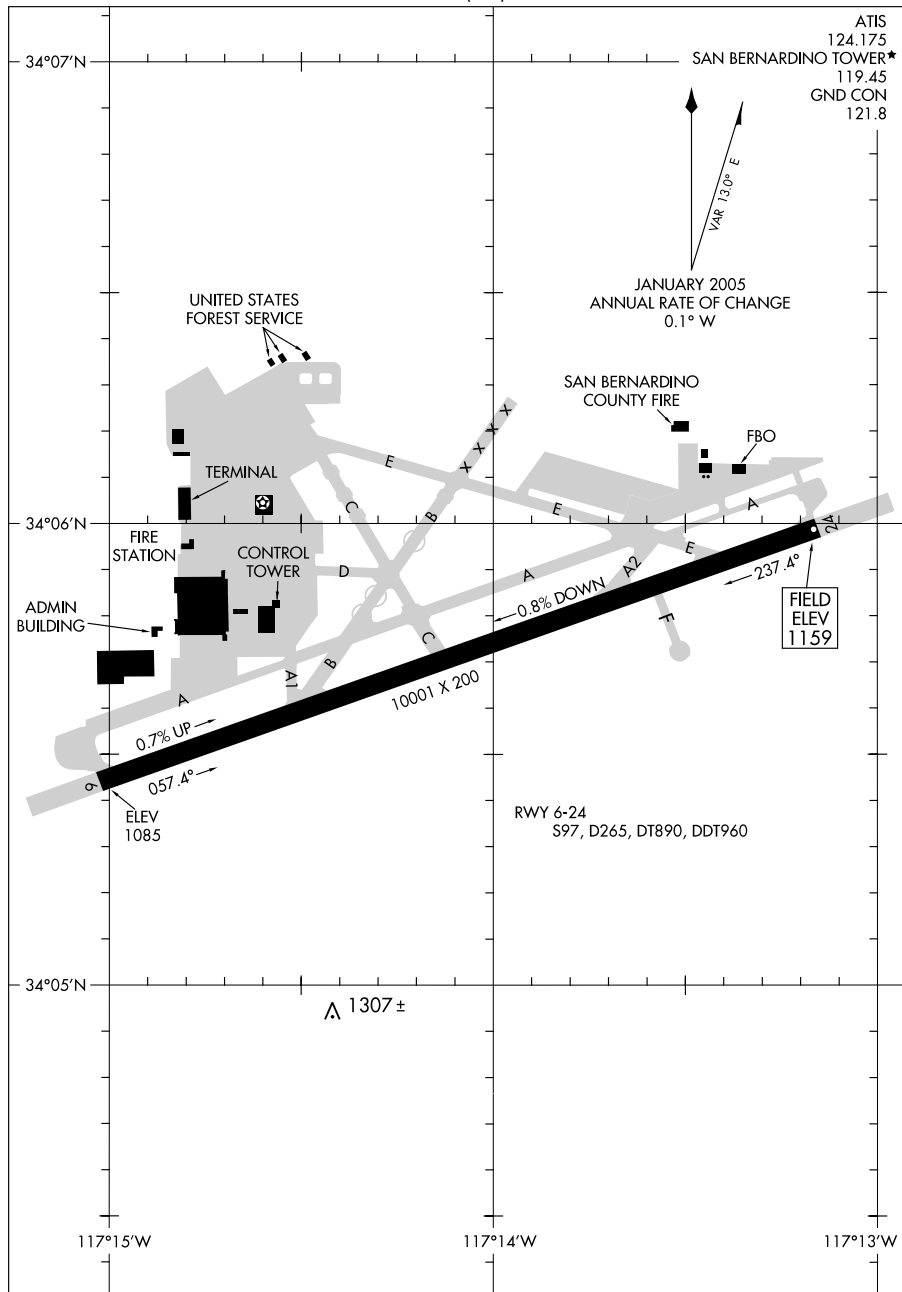SAN BERNARDINO INTL (SBD)
SAN BERNARDINO, CALIFORNIA

AIRPORT DIAGRAM


09071

SAN BERNARDINO, CALIFORNIA
SAN BERNARDINO INTL (SBD)

08157

AIRPORT DIAGRAM

AL-9219 (FAA)

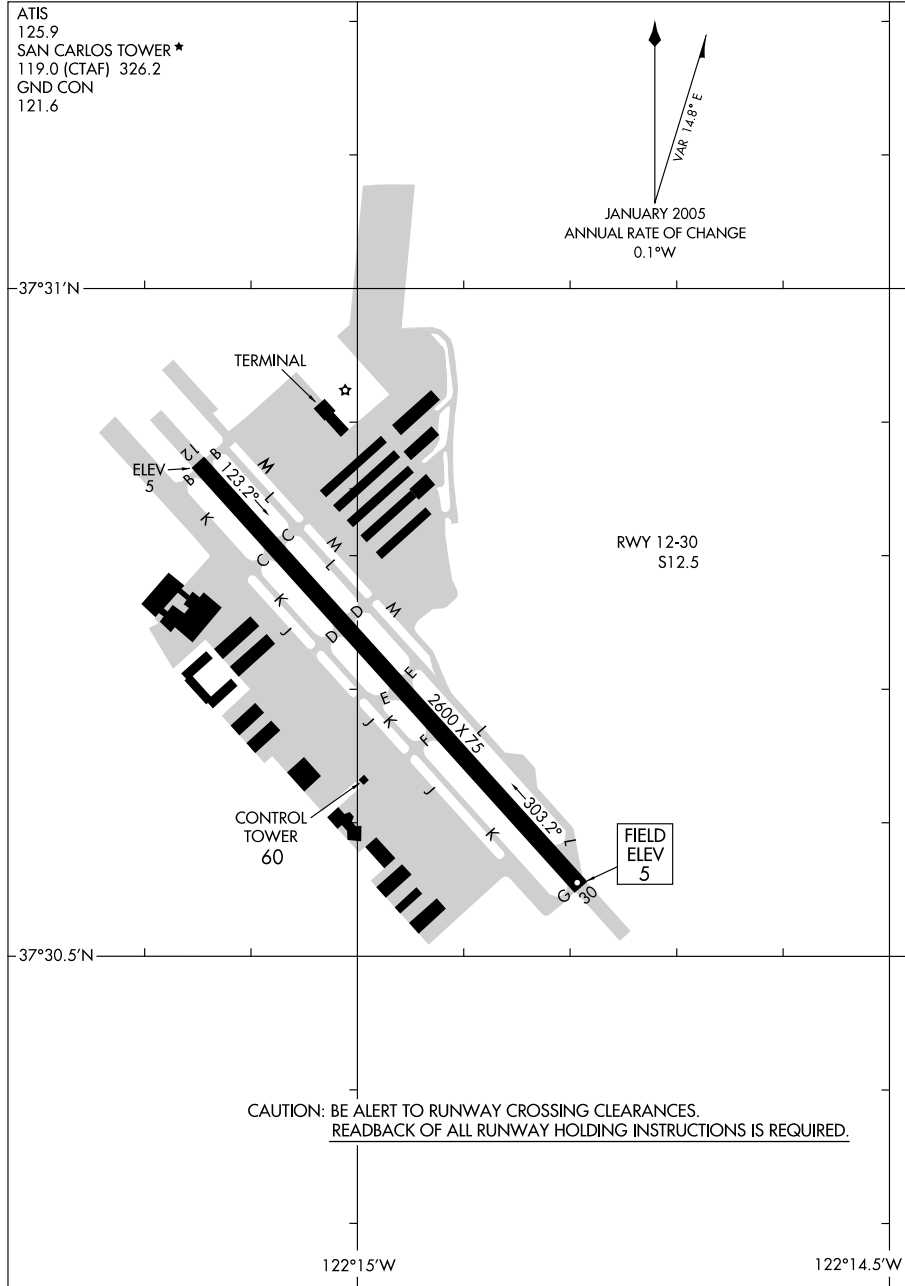SAN CARLOS (SQL)
SAN CARLOS, CALIFORNIA

AIRPORT DIAGRAM

08157

SAN CARLOS, CALIFORNIA
SAN CARLOS (SQL)

05300


AIRPORT DIAGRAM

SAN CLEMENTE ISLAND NALF (FREDERICK SHERMAN FLD) (NUC)

AFD-5126 [USN]

SAN CLEMENTE ISLAND, CALIFORNIA

ATIS ★ 268.8
 SAN CLEMENTE ISLAND TOWER ★
 126.75 278.8
 GND CON
 119.55 352.4

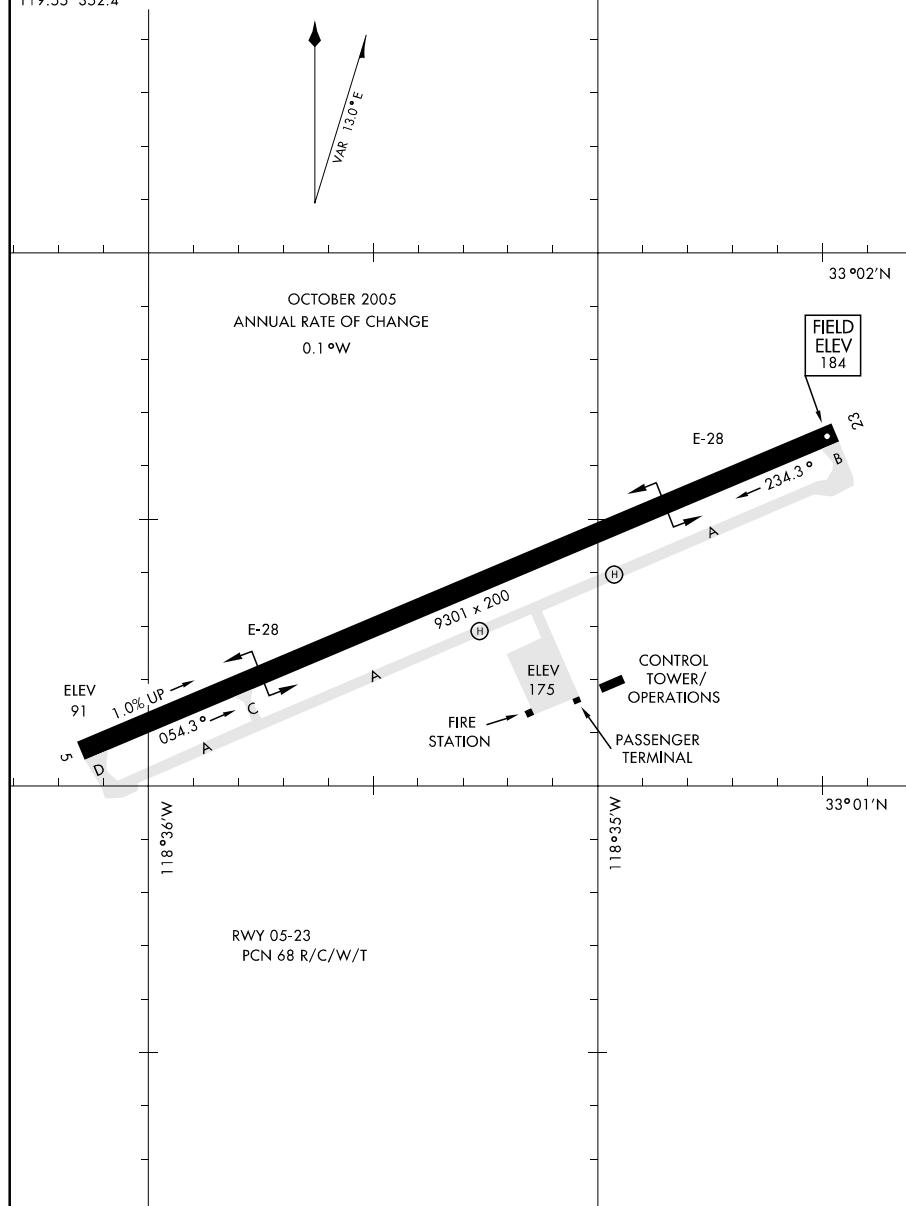

AIRPORT DIAGRAM

SAN CLEMENTE ISLAND, CALIFORNIA


SAN CLEMENTE ISLAND NALF (FREDERICK SHERMAN FLD) (NUC)

08325

AIRPORT DIAGRAM

SAN DIEGO/ BROWN FIELD MUNI (SDM)
SAN DIEGO, CALIFORNIA

AL-5814 (FAA)

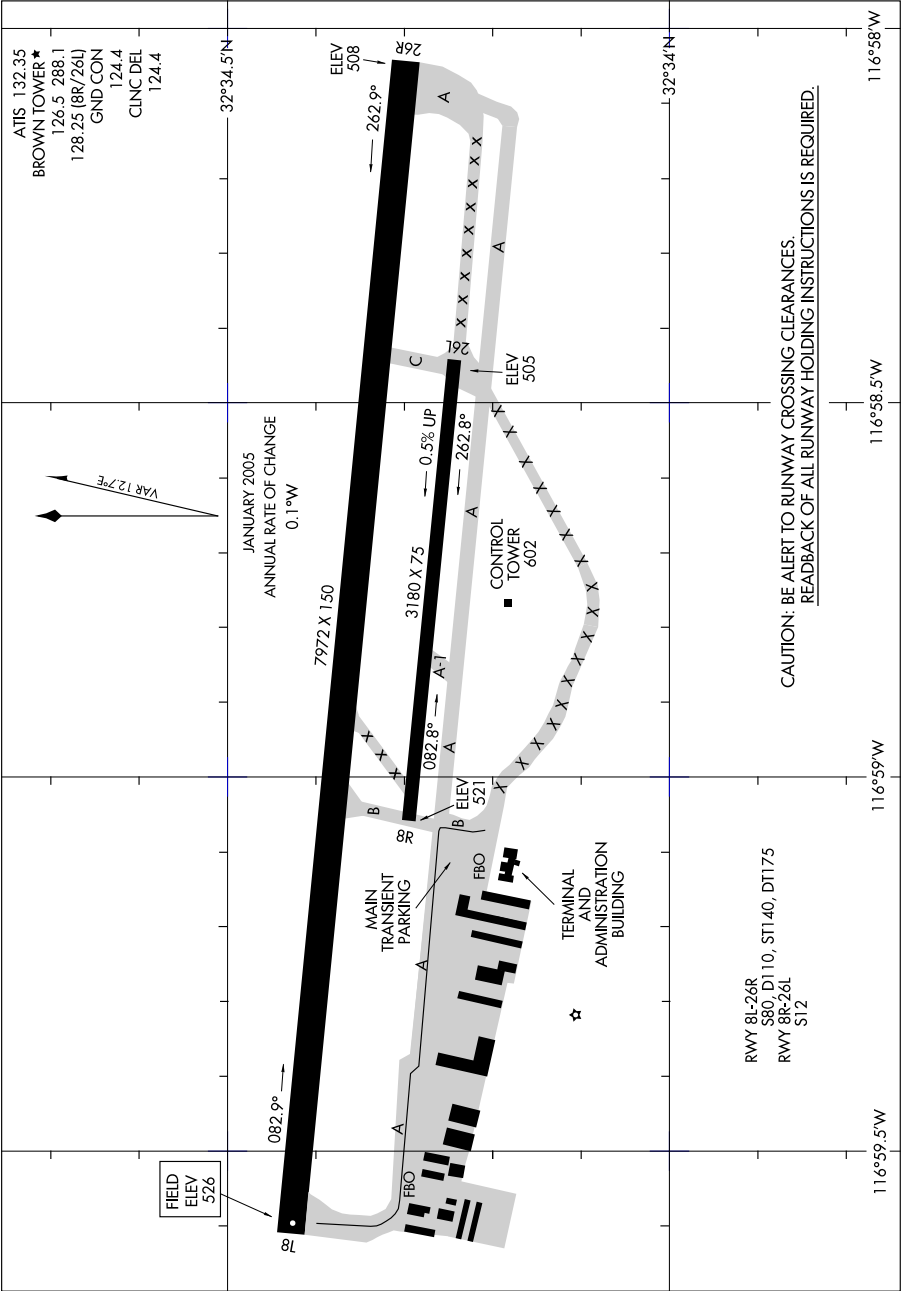

AIRPORT DIAGRAM


SAN DIEGO, CALIFORNIA
SAN DIEGO/ BROWN FIELD MUNI (SDM)

08325

09071

AIRPORT DIAGRAM

AL-5401 (FAA)

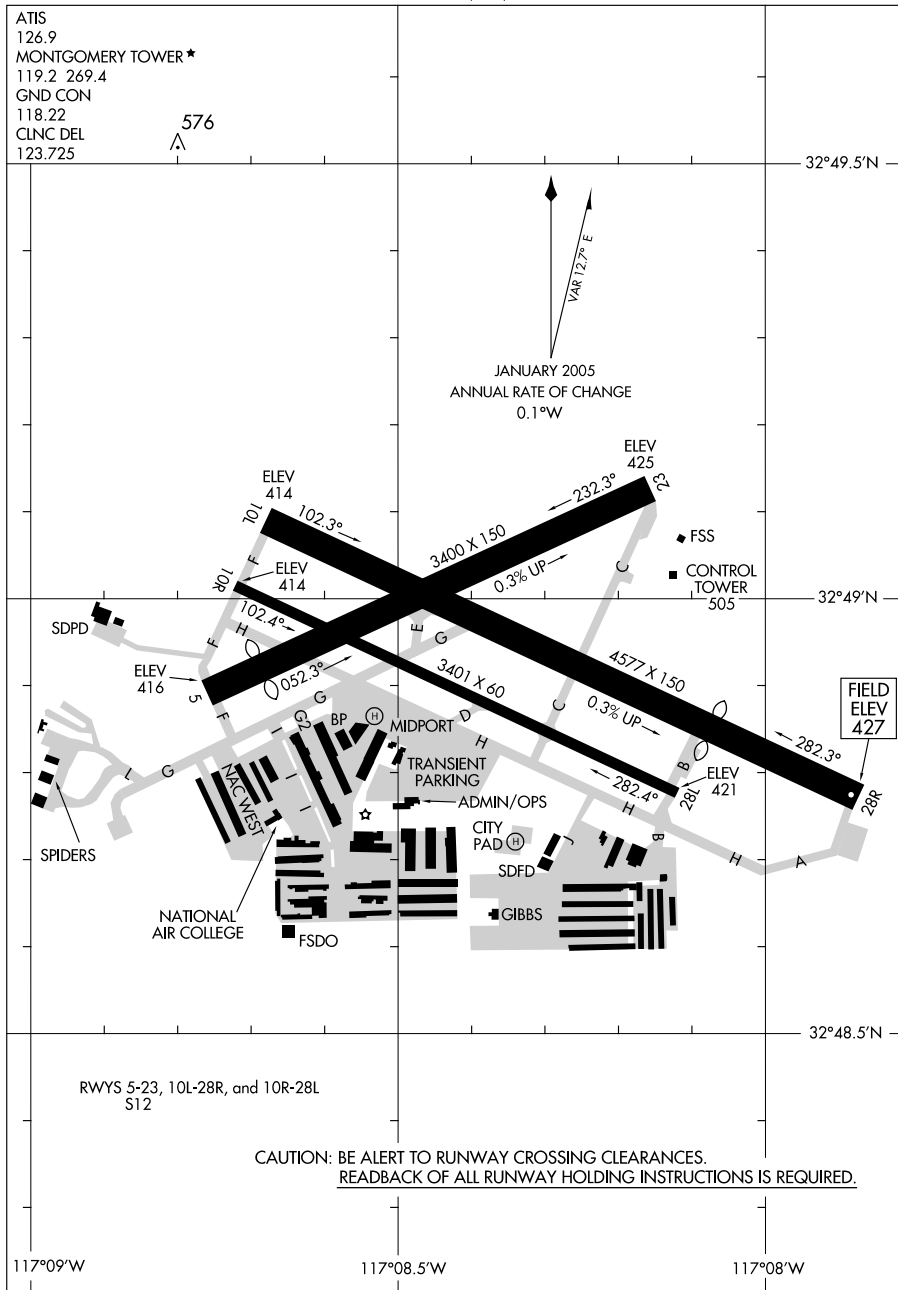SAN DIEGO/MONTGOMERY FIELD (MYF)
SAN DIEGO, CALIFORNIA

AIRPORT DIAGRAM


09071

SAN DIEGO, CALIFORNIA
SAN DIEGO/MONTGOMERY FIELD (MYF)

09071

AIRPORT DIAGRAM

SAN DIEGO INTL (SAN)
SAN DIEGO, CALIFORNIA

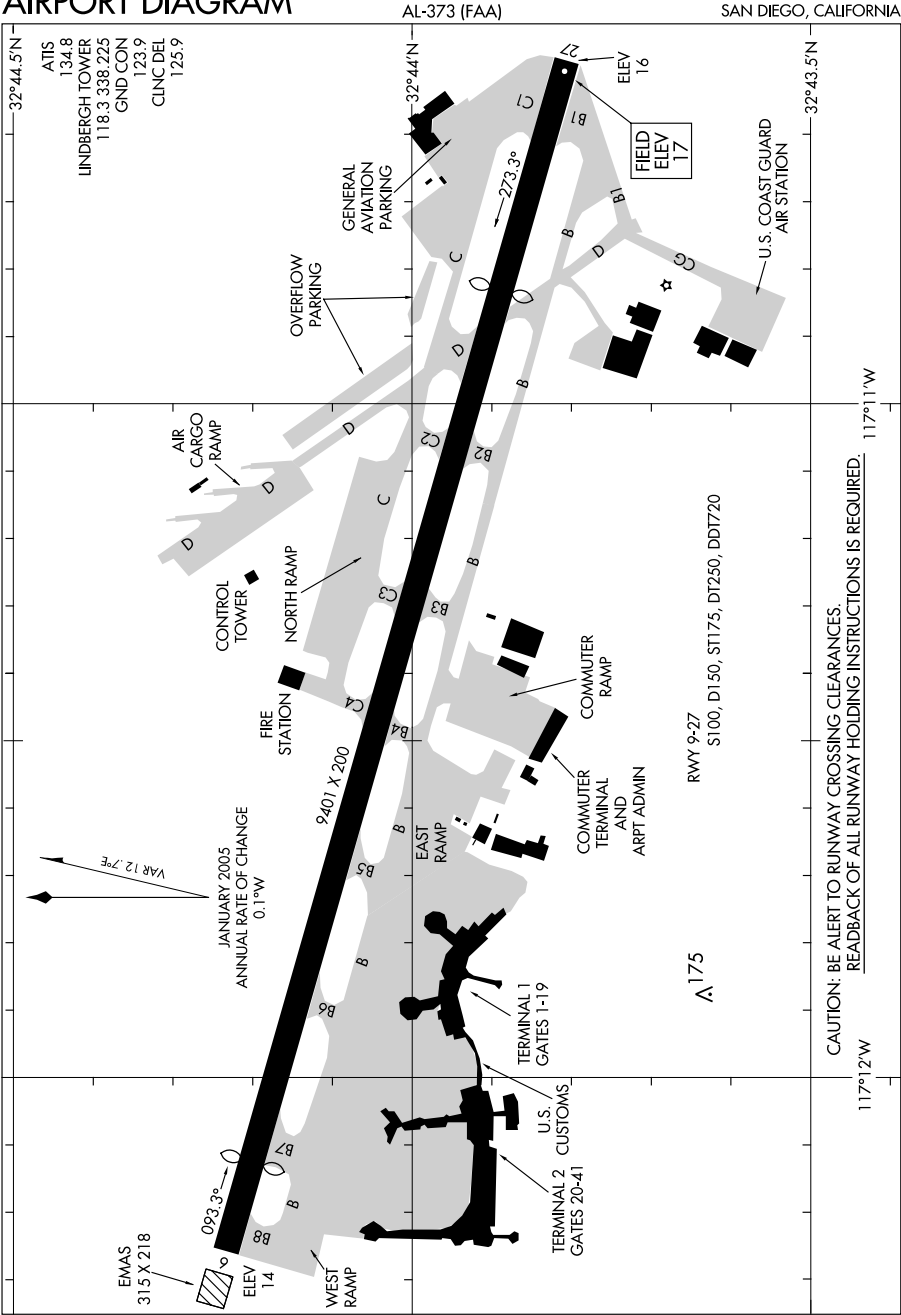

AIRPORT DIAGRAM


SAN DIEGO, CALIFORNIA
SAN DIEGO INTL (SAN)

09071

09295

AIRPORT DIAGRAM

SAN JOSE/ NORMAN Y. MINETA SAN JOSE INTL (SJC)
AL-693 (FAA)
SAN JOSE, CALIFORNIA

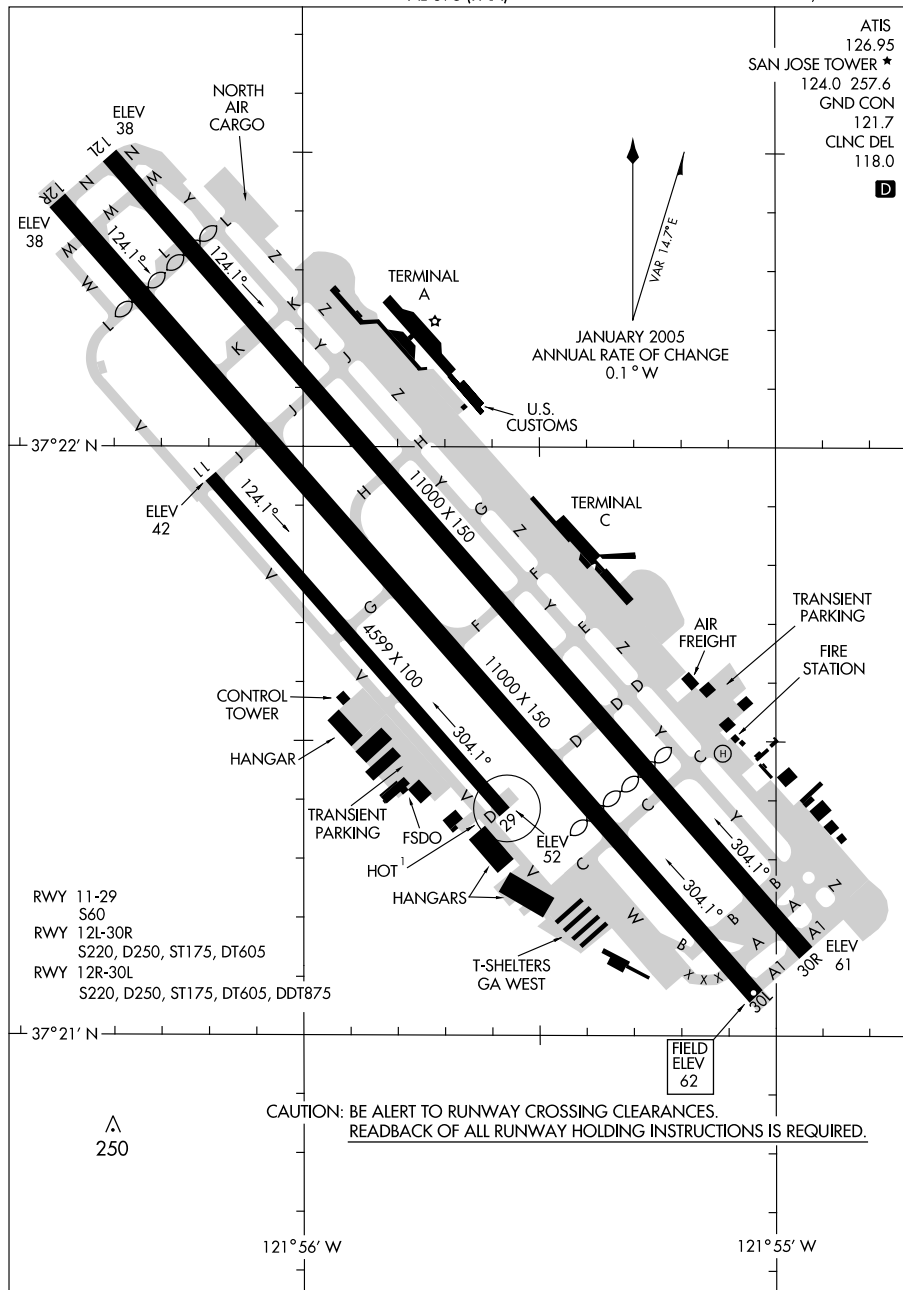

AIRPORT DIAGRAM


09295

SAN JOSE, CALIFORNIA
SAN JOSE/ NORMAN Y. MINETA SAN JOSE INTL (SJC)

09071

AIRPORT DIAGRAM

SAN JOSE/REID-HILLVIEW OF SANTA CLARA COUNTY (R.H.V.)
AL-5591 (FAA)
SAN JOSE, CALIFORNIA

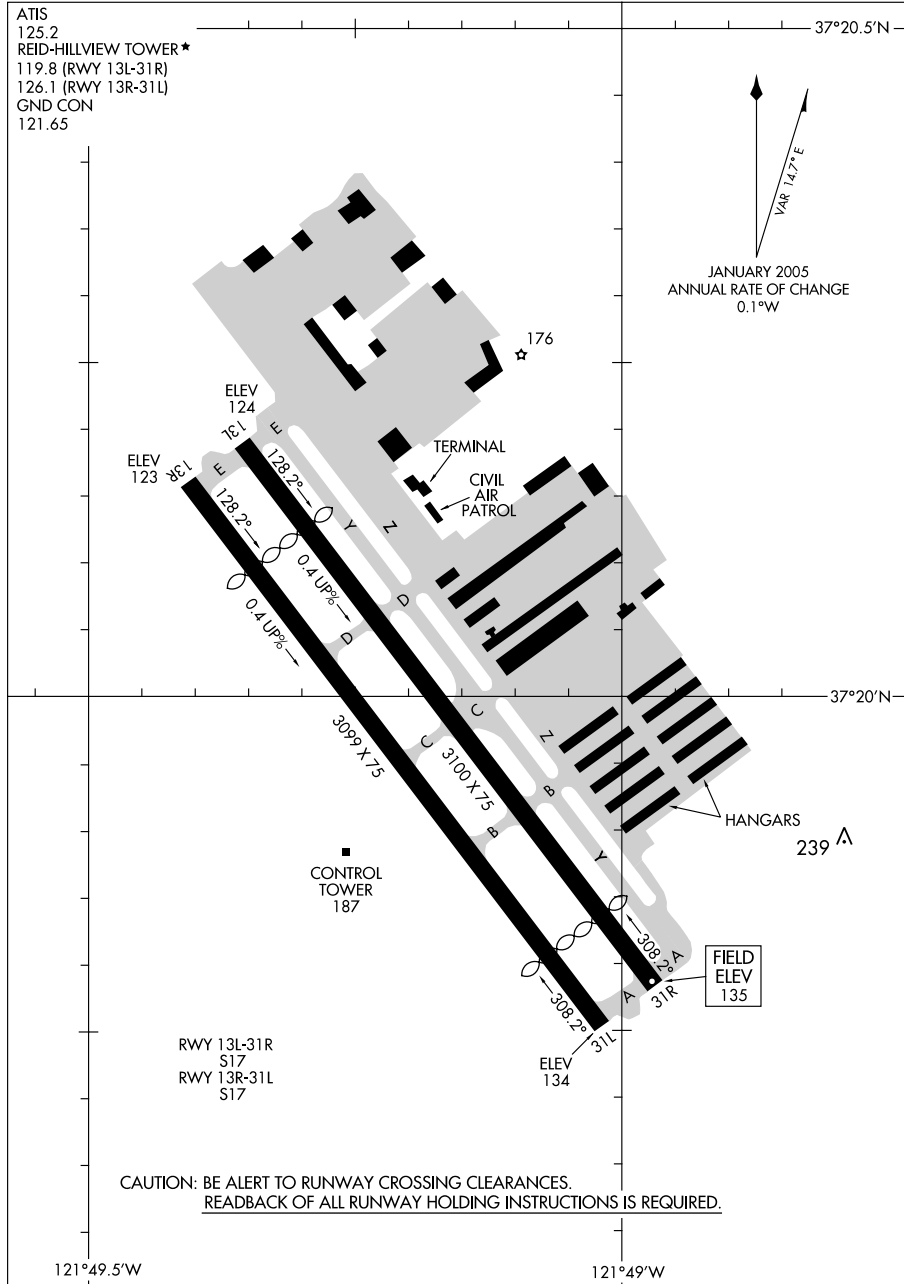

AIRPORT DIAGRAM

09071

SAN JOSE, CALIFORNIA
SAN JOSE/REID-HILLVIEW OF SANTA CLARA COUNTY (R.H.V.)


09239

AIRPORT DIAGRAM

AFD-5162 [USN]

SAN NICOLAS ISLAND NOLF (KNSI)

SAN NICOLAS ISLAND, CALIFORNIA

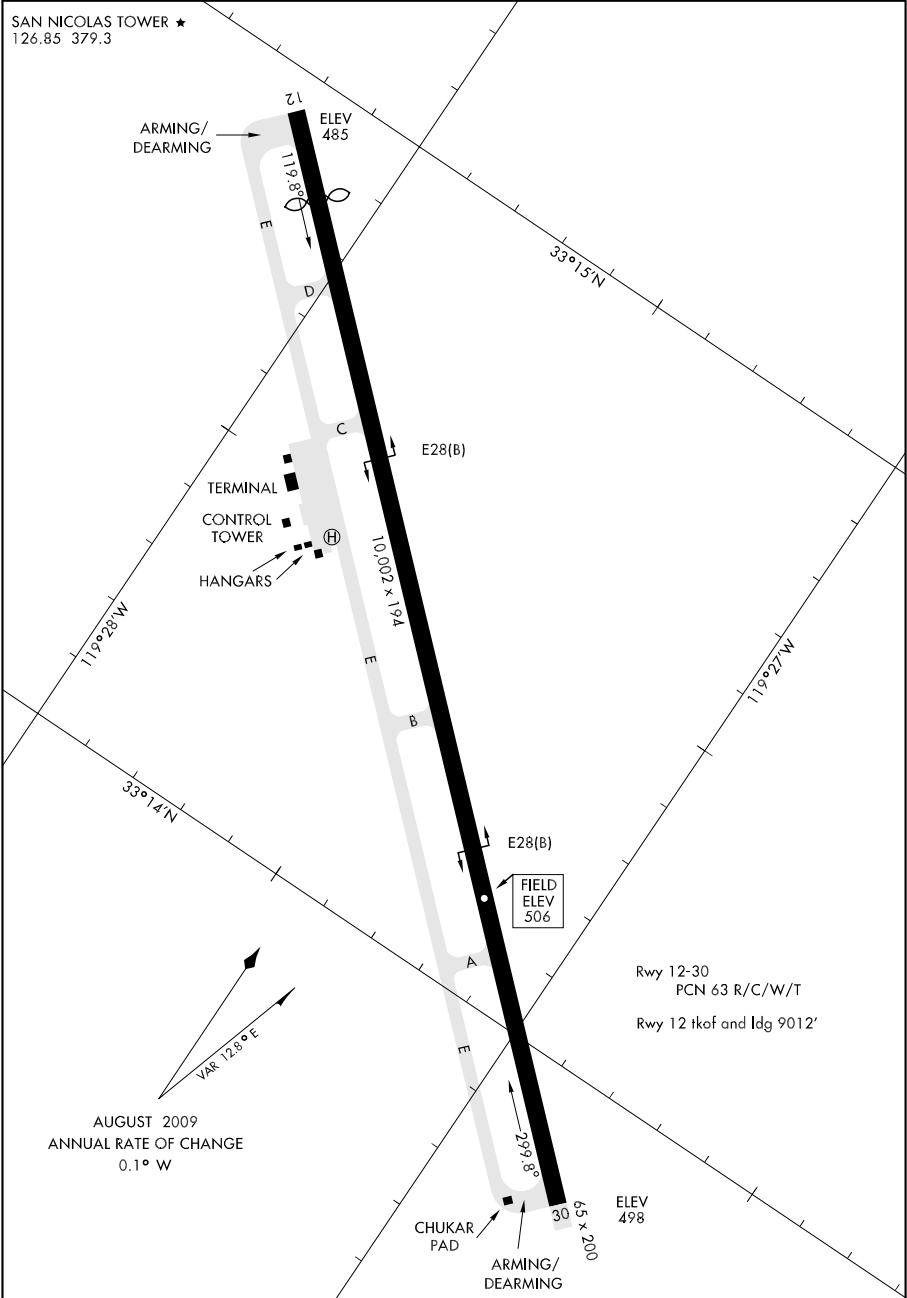

AIRPORT DIAGRAM

SAN NICOLAS ISLAND, CALIFORNIA

SAN NICOLAS ISLAND NOLF (KNSI)


09295

AIRPORT DIAGRAM

SANTA ANA/JOHN WAYNE ARPT-ORANGE COUNTY (SNA)

AL-377 (FAA)

SANTA ANA, CALIFORNIA

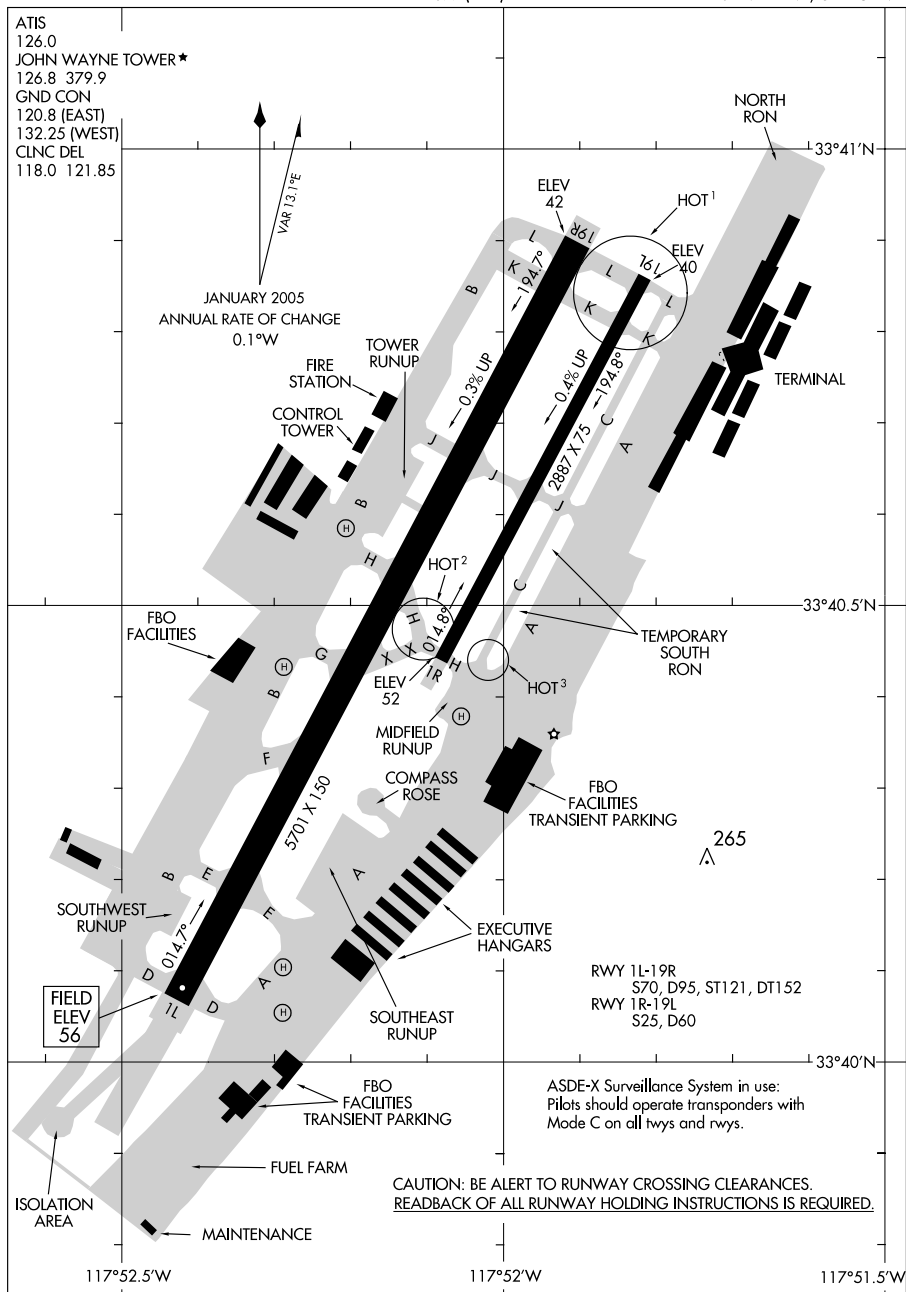

AIRPORT DIAGRAM


09295

SANTA ANA, CALIFORNIA
SANTA ANA/JOHN WAYNE ARPT-ORANGE COUNTY (SNA)

09295

AIRPORT DIAGRAM

AL-378 (FAA)

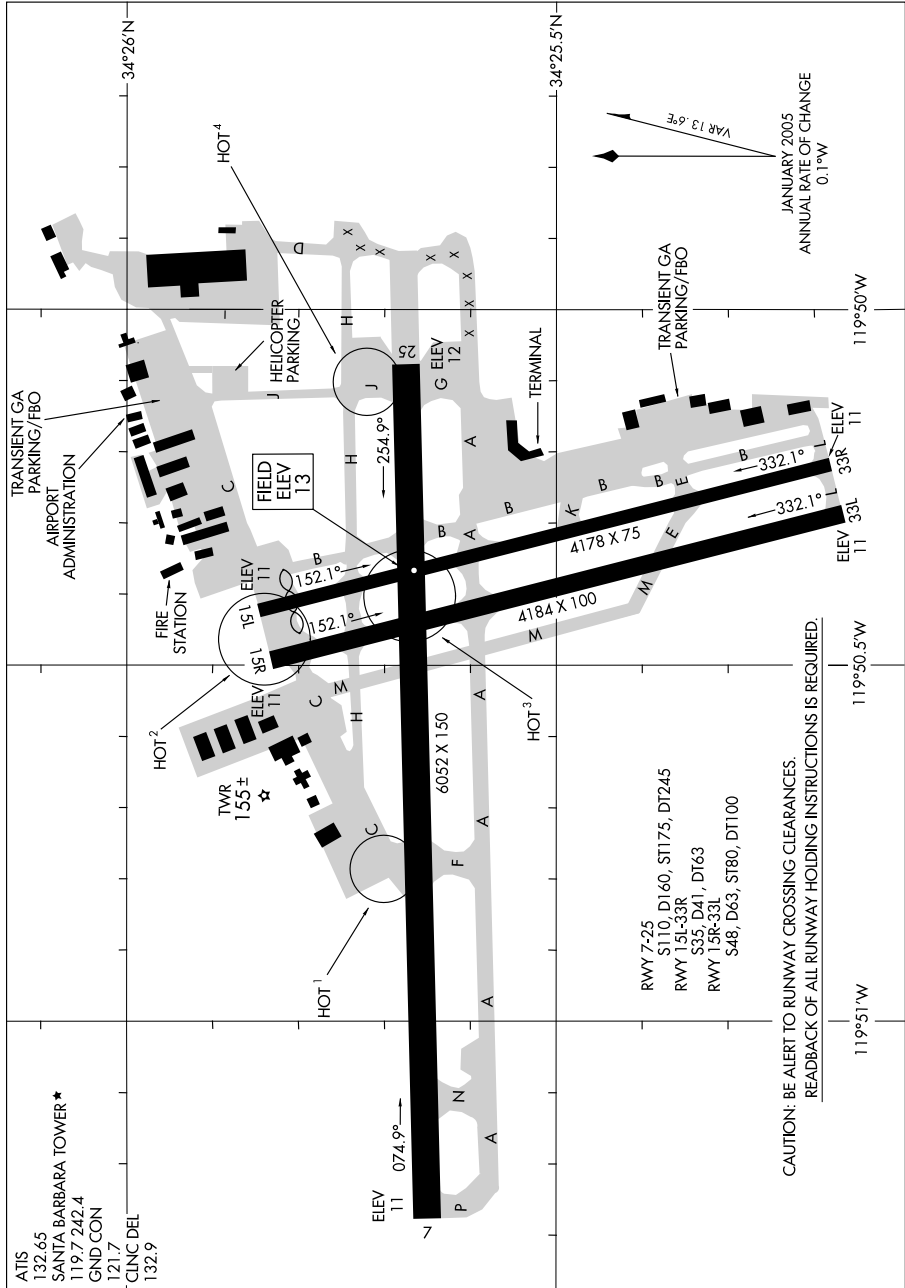SANTA BARBARA MUNI (SBA)
SANTA BARBARA, CALIFORNIA

AIRPORT DIAGRAM


09295

SANTA BARBARA, CALIFORNIA
SANTA BARBARA MUNI (SBA)

07074

AIRPORT DIAGRAM

SANTA MARIA PUBLIC/CAPTAIN G. ALLAN HANCOCK FIELD (SMX)
AL-379 (FAA) SANTA MARIA, CALIFORNIA

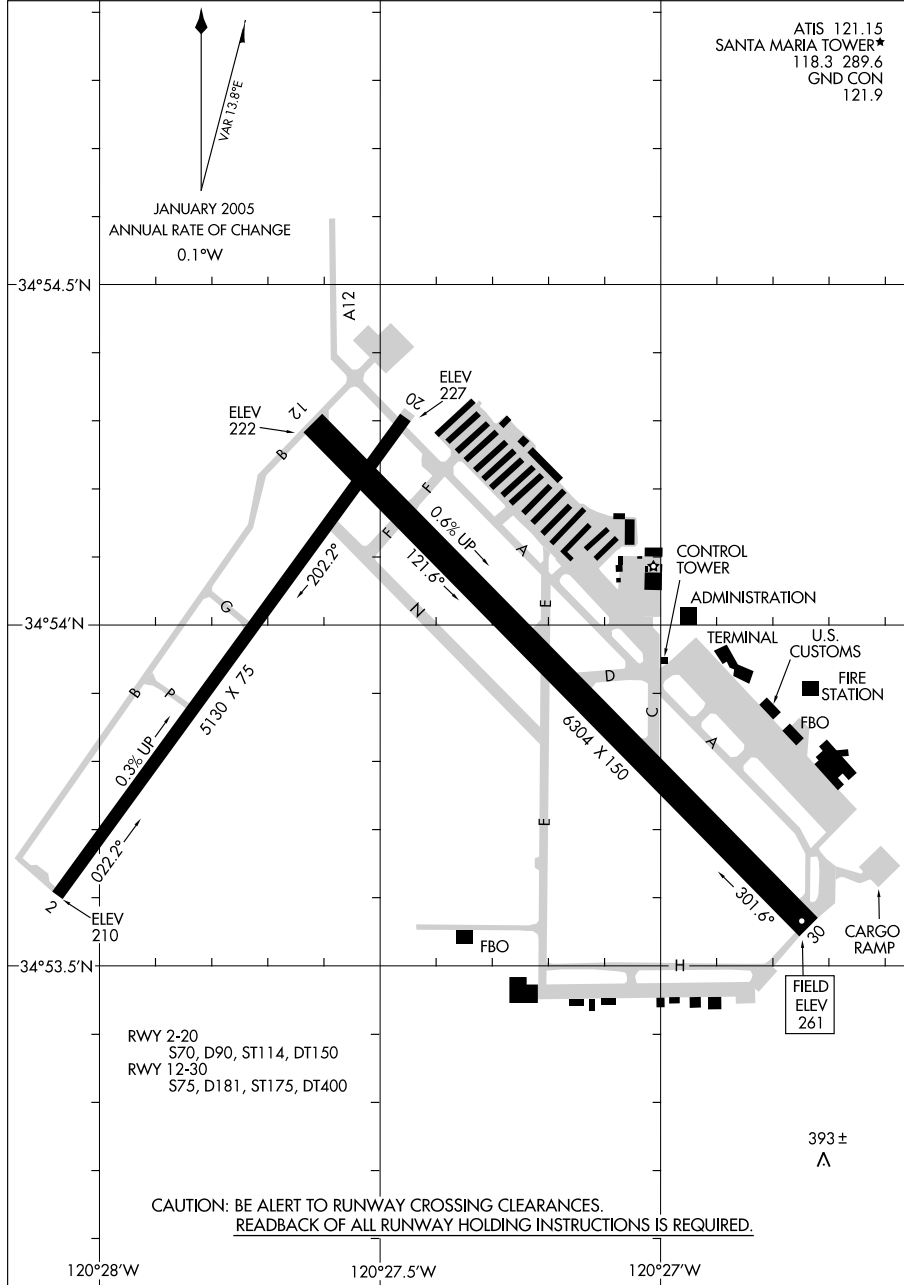

AIRPORT DIAGRAM

SANTA MARIA, CALIFORNIA
SANTA MARIA PUBLIC/CAPTAIN G. ALLAN HANCOCK FIELD (SMX)


07074

06327

AIRPORT DIAGRAM

AL-5023 (FAA)

SANTA MONICA MUNI (SMO)
SANTA MONICA, CALIFORNIA

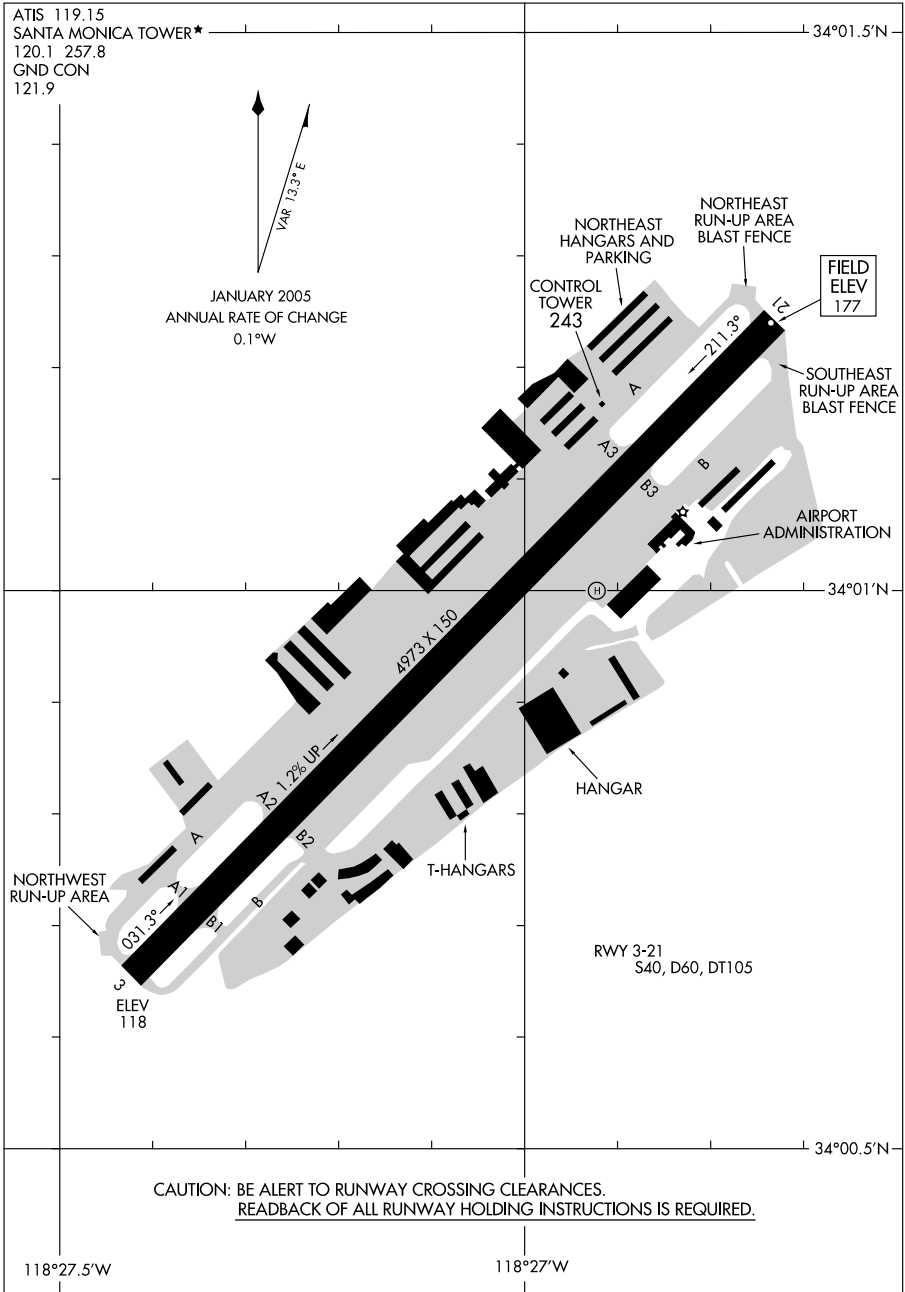

AIRPORT DIAGRAM

06327

SANTA MONICA, CALIFORNIA
SANTA MONICA MUNI (SMO)


09015

AIRPORT DIAGRAM

SANTA ROSA/ CHARLES M. SCHULZ-SONOMA COUNTY (STS)

AL-696 (FAA)

SANTA ROSA, CALIFORNIA

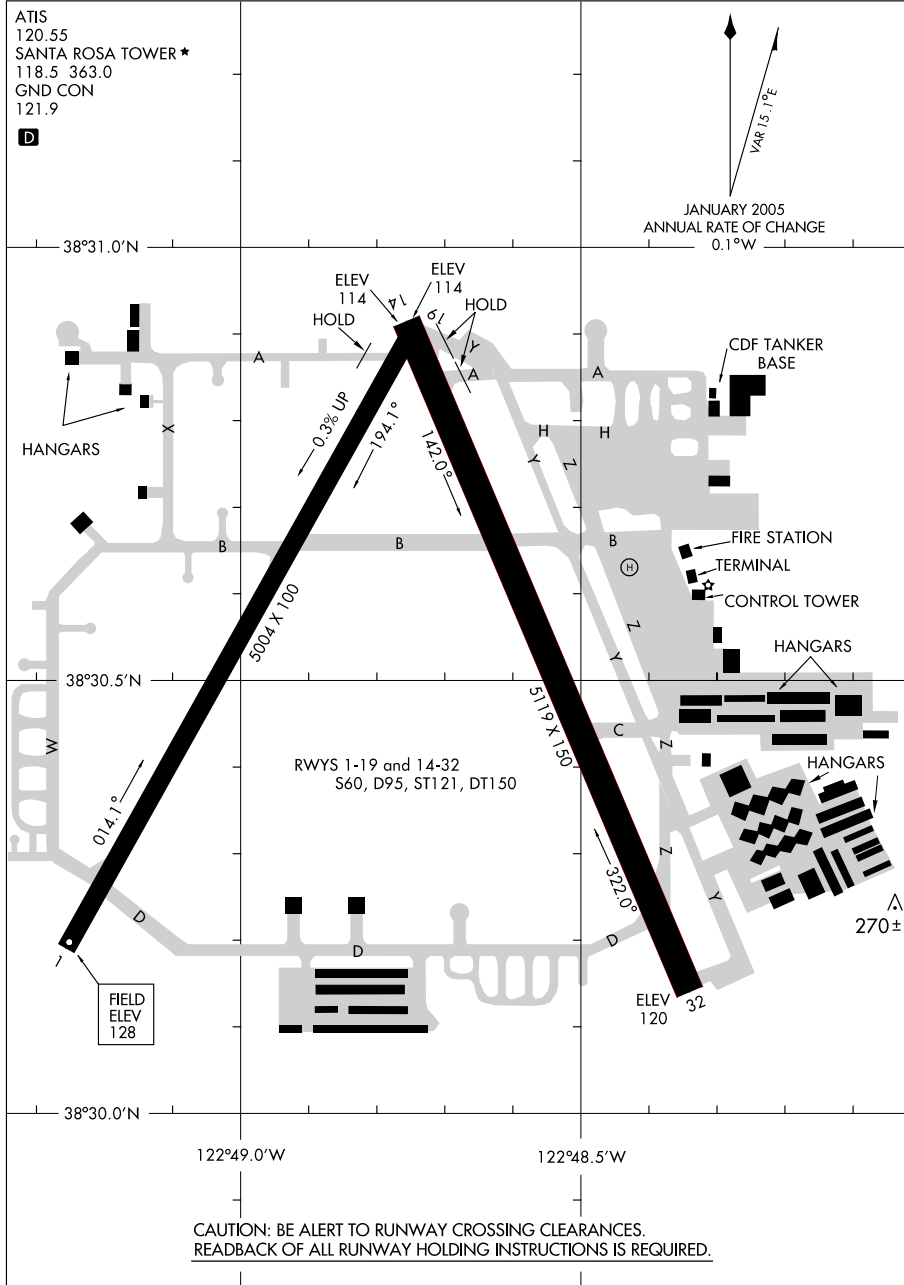

AIRPORT DIAGRAM


09015

SANTA ROSA, CALIFORNIA
SANTA ROSA/ CHARLES M. SCHULZ-SONOMA COUNTY (STS)

09071

AIRPORT DIAGRAM

AL-5651 (FAA)

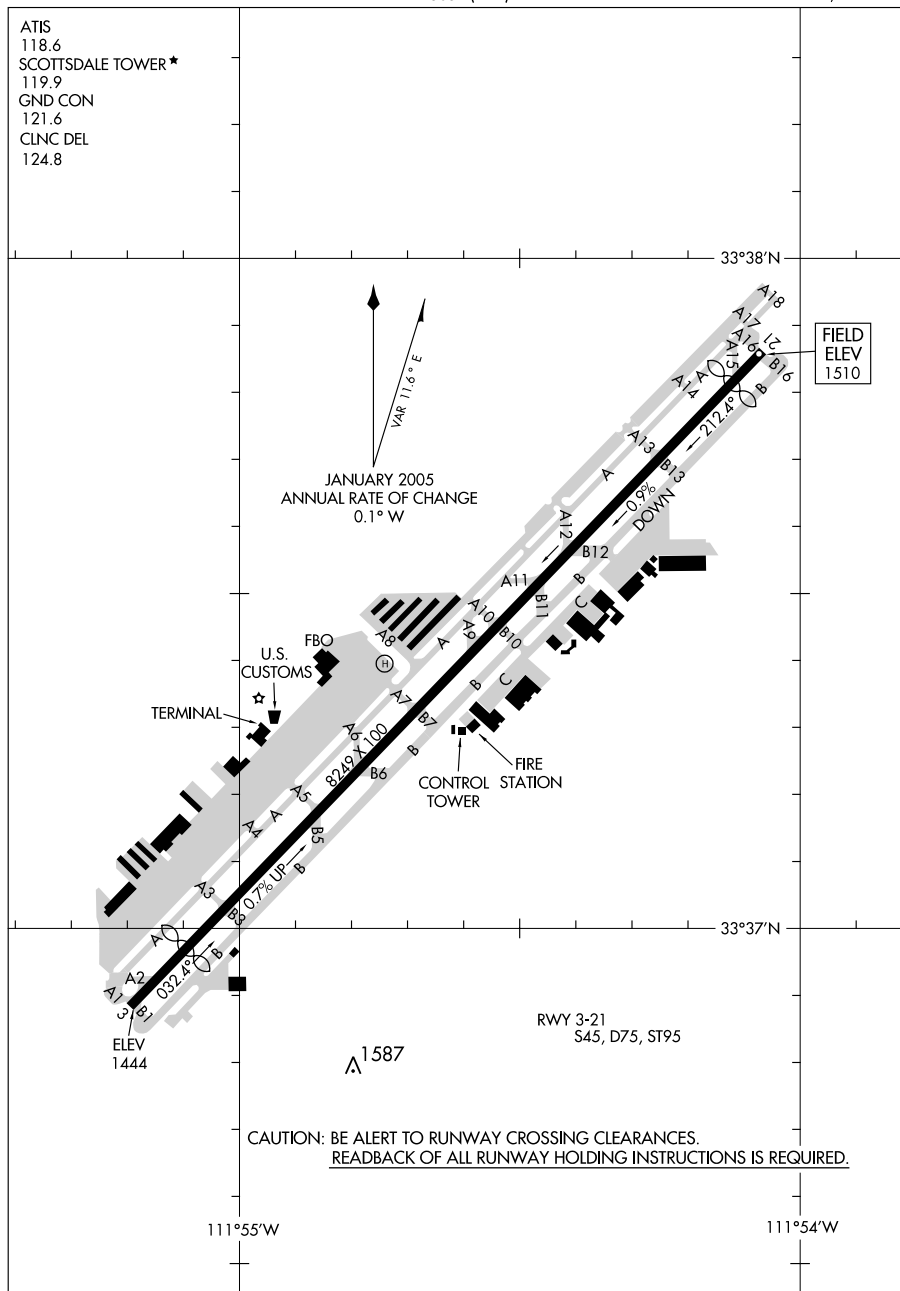SCOTTSDALE (SDL)
SCOTTSDALE, ARIZONA

AIRPORT DIAGRAM

09071


SCOTTSDALE, ARIZONA
SCOTTSDALE (SDL)

09239

AIRPORT DIAGRAM

AL-5416 (FAA)

SOUTH LAKE TAHOE/ LAKE TAHOE (TVL)
SOUTH LAKE TAHOE, CALIFORNIA

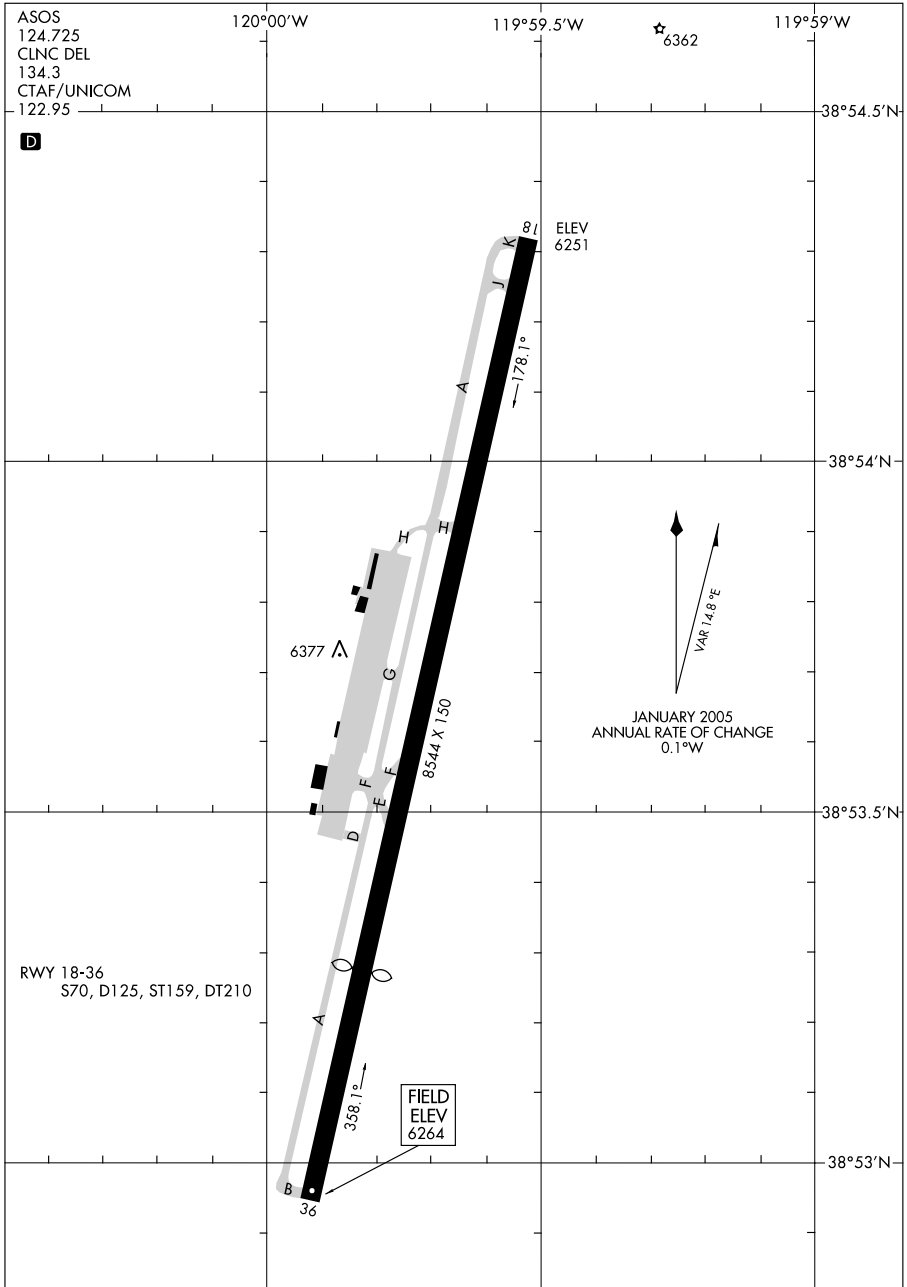

AIRPORT DIAGRAM

09239


SOUTH LAKE TAHOE, CALIFORNIA
SOUTH LAKE TAHOE/ LAKE TAHOE (TVL)

09127

AIRPORT DIAGRAM

AL-407 (FAA)

STOCKTON METROPOLITAN (SCK)
STOCKTON, CALIFORNIA

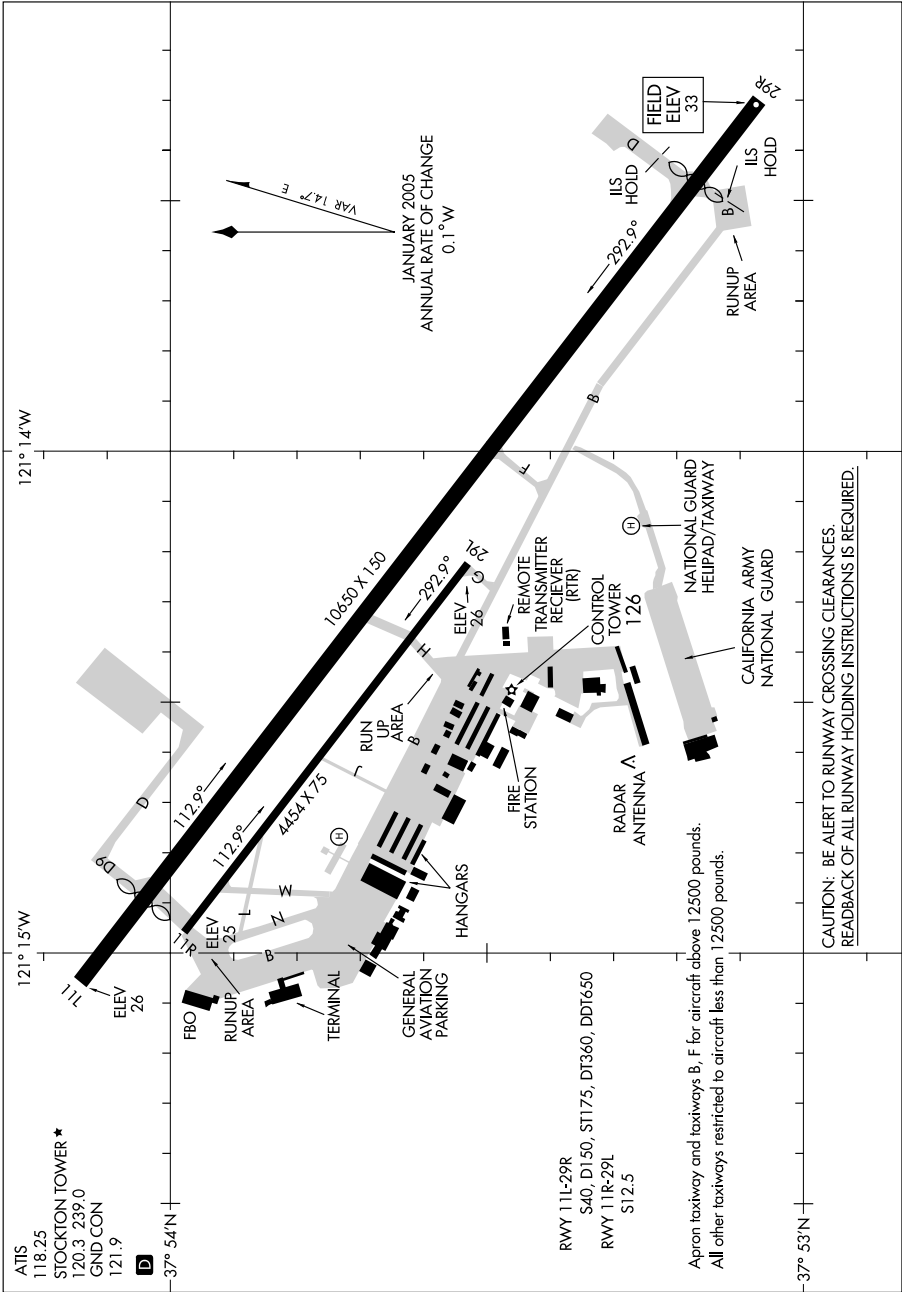

AIRPORT DIAGRAM

09127


STOCKTON, CALIFORNIA
STOCKTON METROPOLITAN (SCK)

09239

AIRPORT DIAGRAM

AL-423 (FAA)

TONOPAH (TPH)
TONOPAH, NEVADA

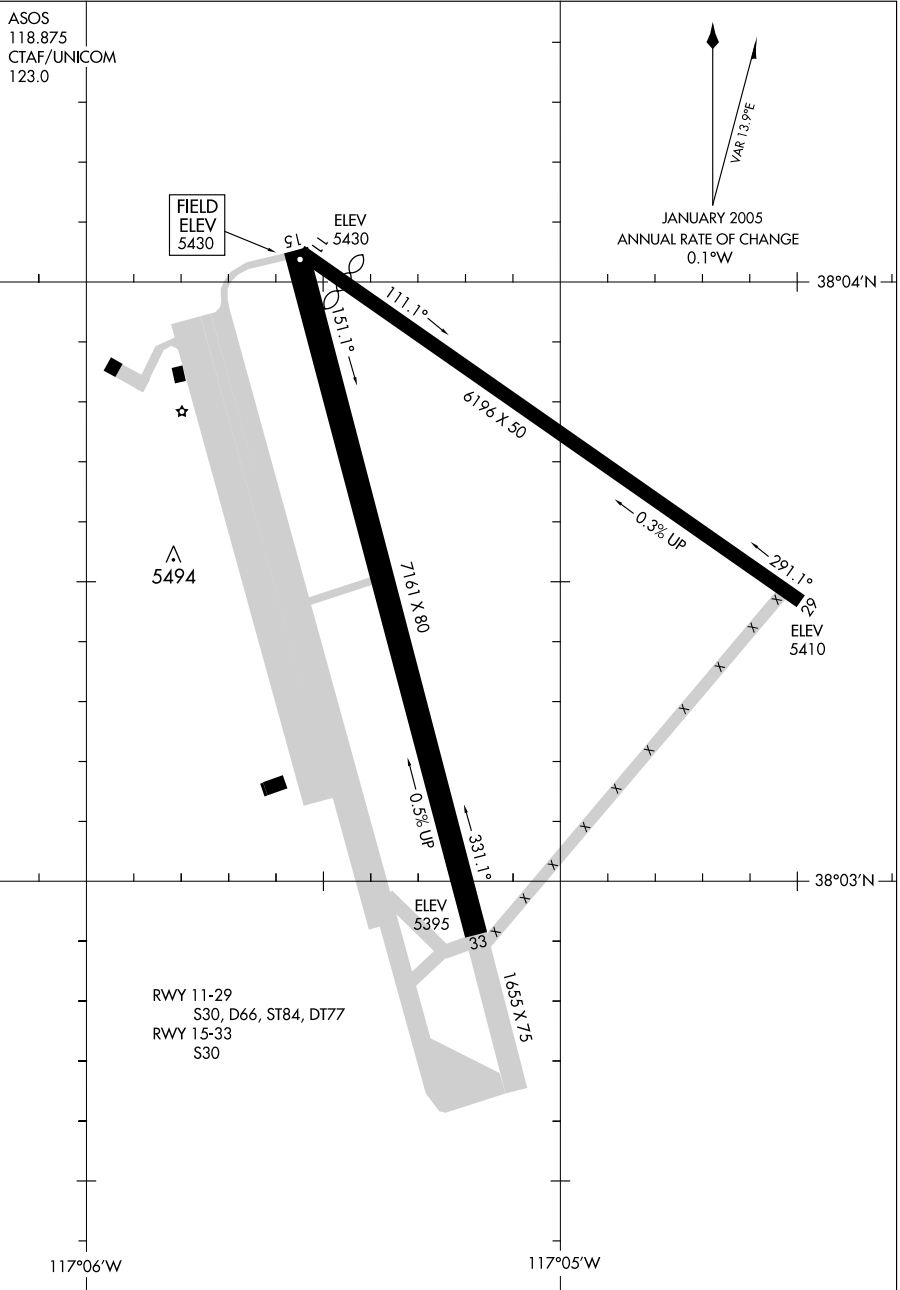

AIRPORT DIAGRAM


TONOPAH, NEVADA
TONOPAH (TPH)

09239

09071
AIRPORT DIAGRAM

AL-5179 (FAA)

TORRANCE/ZAMPERINI FIELD (TOA)
TORRANCE, CALIFORNIA

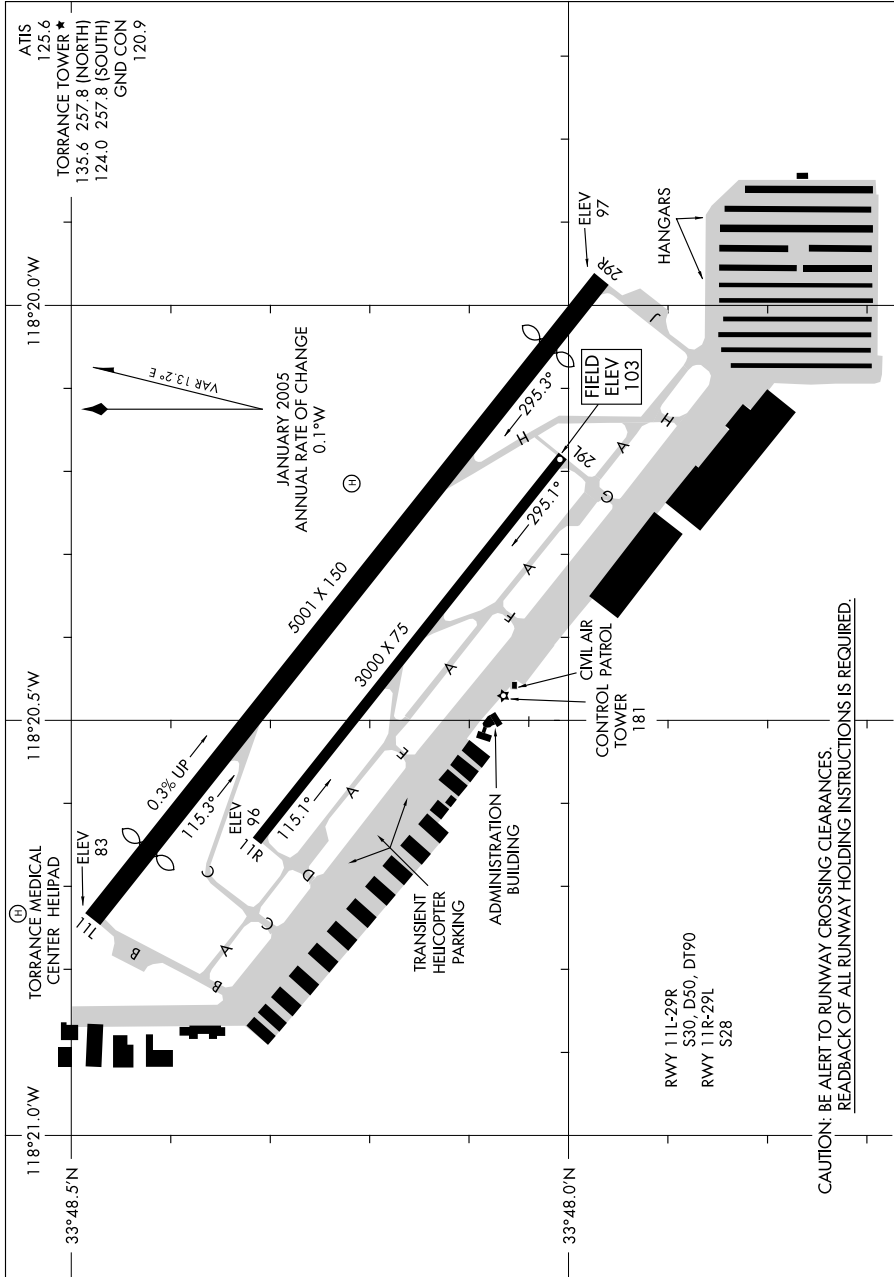

AIRPORT DIAGRAM
09071

TORRANCE, CALIFORNIA
TORRANCE/ZAMPERINI FIELD (TOA)


09071

AIRPORT DIAGRAM

[USAF] AFD-488

TRAVIS AFB (KSUU)

FAIRFIELD, CALIFORNIA

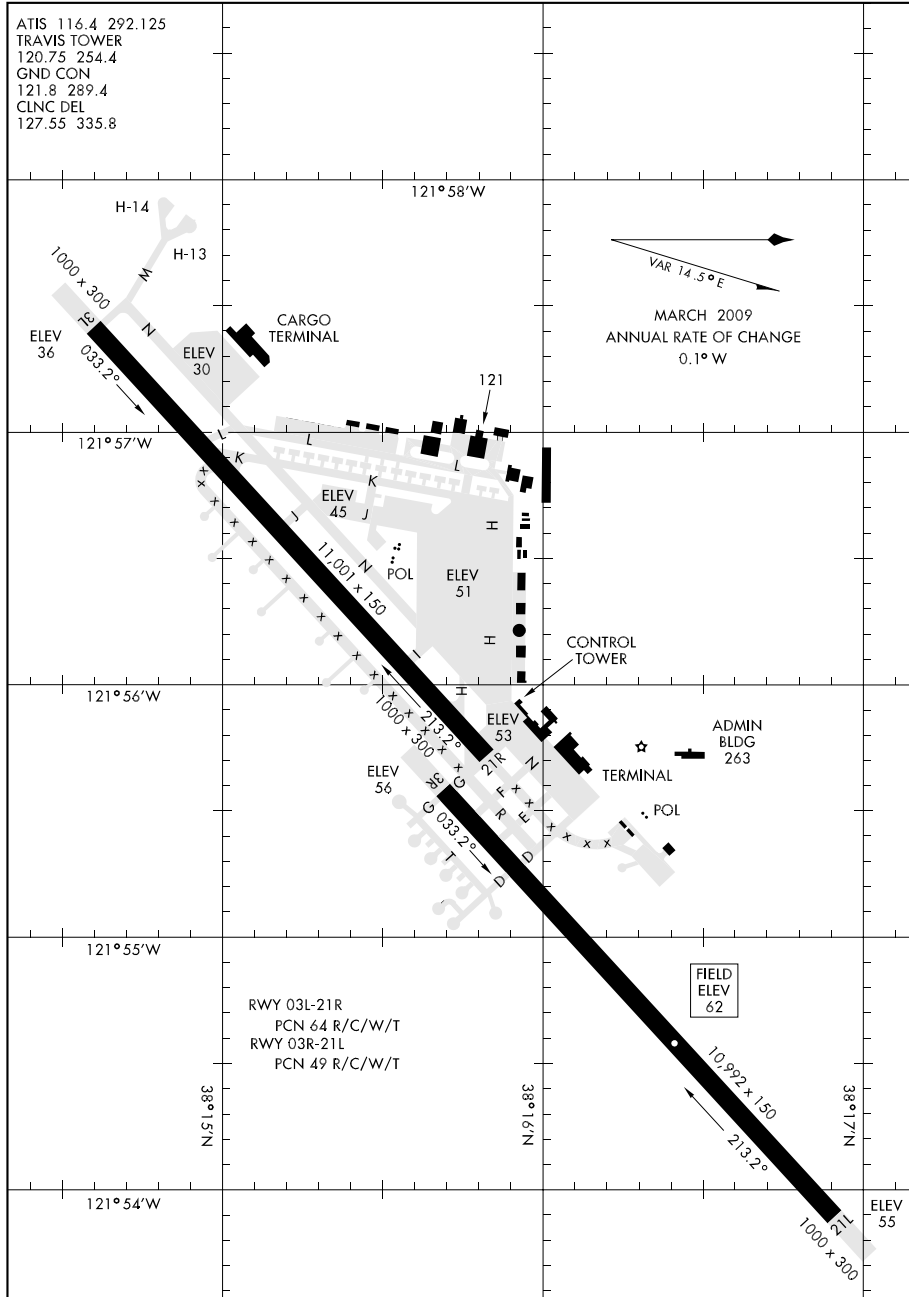

AIRPORT DIAGRAM

 FAIRFIELD, CALIFORNIA
 TRAVIS AFB (KSUU)


09295

AL-6513 (FAA)

TUCSON/RYAN FIELD (RYN)

TUCSON, ARIZONA

AIRPORT DIAGRAM

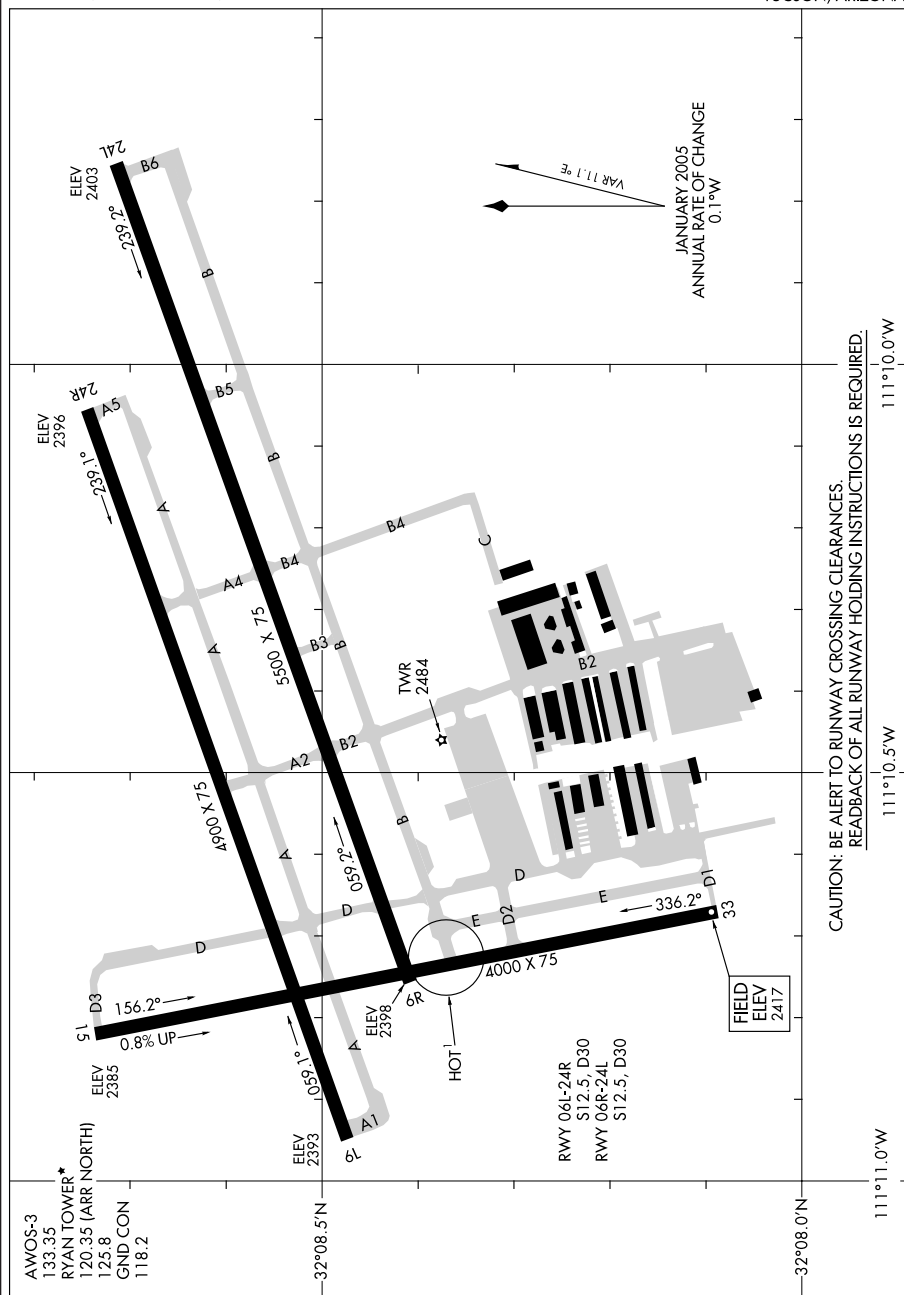

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
 READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM

09295

TUCSON, ARIZONA
TUCSON/RYAN FIELD (RYN)

TUCSON INTL (TUS)
TUCSON, ARIZONATUCSON, ARIZONA
TUCSON INTL (TUS)

SW, 22 OCT 2009 to 17 DEC 2009

09015


AIRPORT DIAGRAM

AFD-3160 [USN]

TWENTYNINE PALMS SELF (KNXP)

TWENTYNINE PALMS, CALIFORNIA

ATIS 386.35
 TWENTYNINE PALMS TOWER
 135.525 340.2
 GND CON
 363.35 41.7

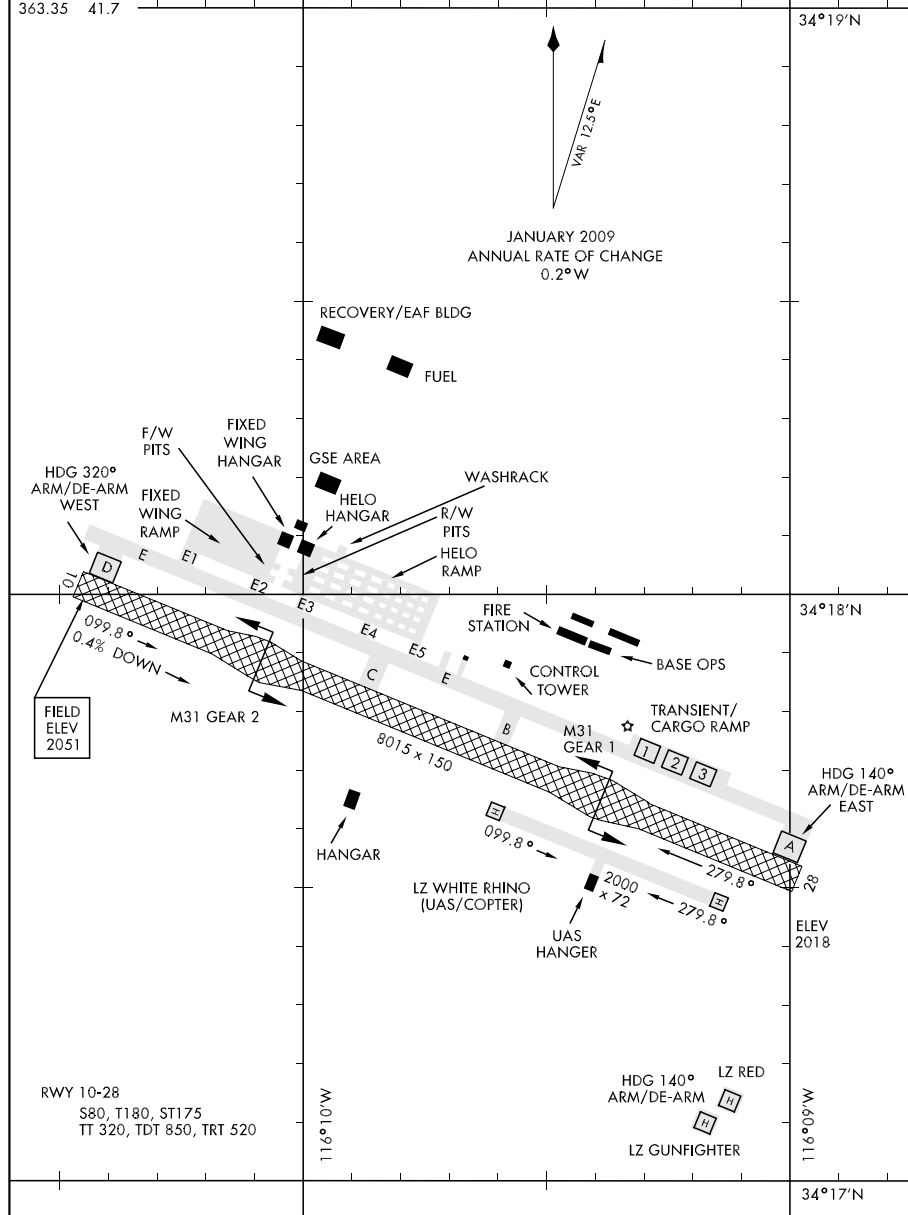

AIRPORT DIAGRAM

TWENTYNINE PALMS, CALIFORNIA
 TWENTYNINE PALMS SELF (KNXP)


07242

AIRPORT DIAGRAM

AFD-770 [USAF]

VANDENBERG AFB (KVBG)

LOMPOC, CALIFORNIA

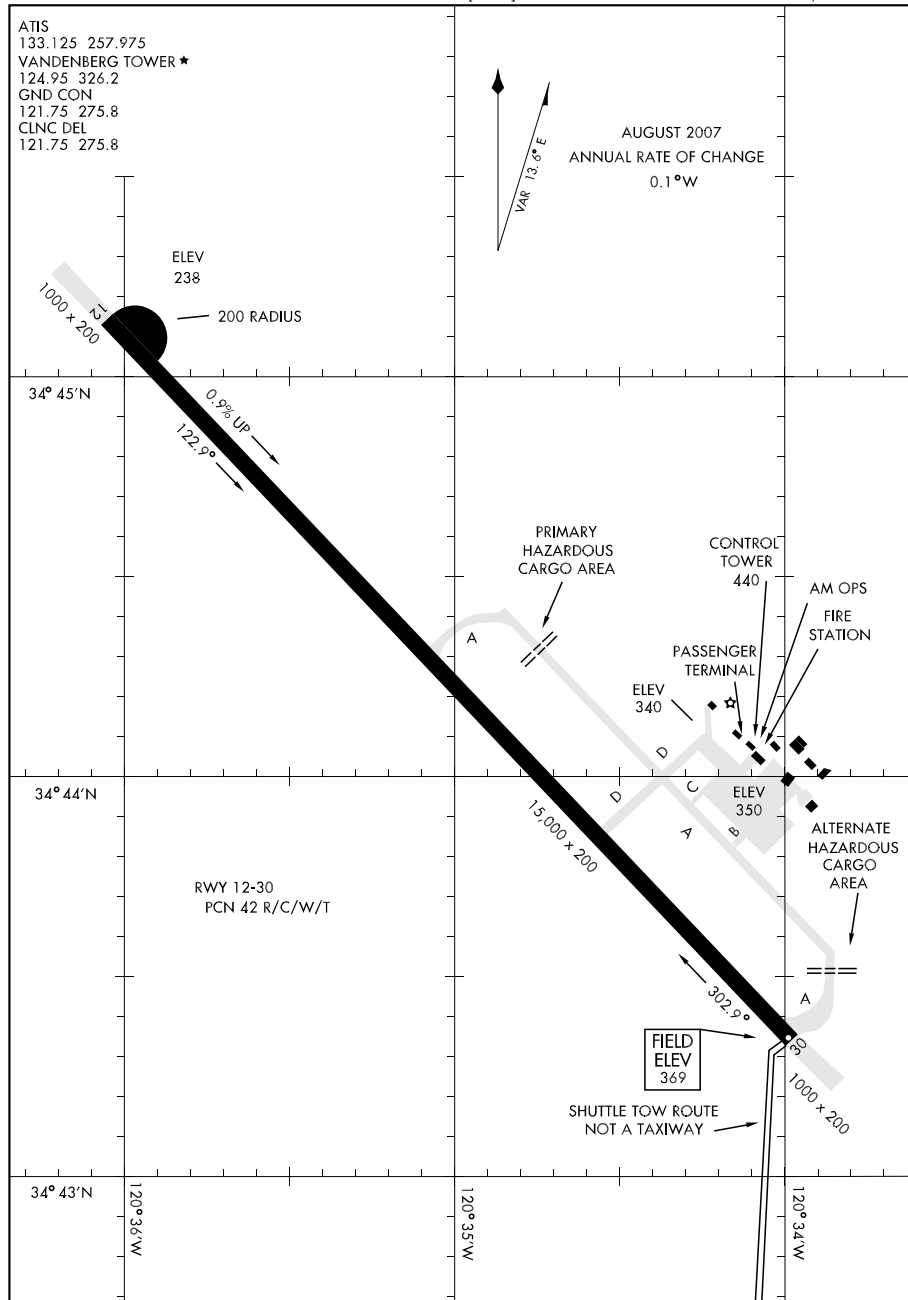

AIRPORT DIAGRAM


LOMPOC, CALIFORNIA

VANDENBERG AFB (KVBG)

09239

AIRPORT DIAGRAM

VICTORVILLE/SOUTHERN CALIFORNIA LOGISTICS (VCV)
 AL-794 (FAA)
 VICTORVILLE, CALIFORNIA

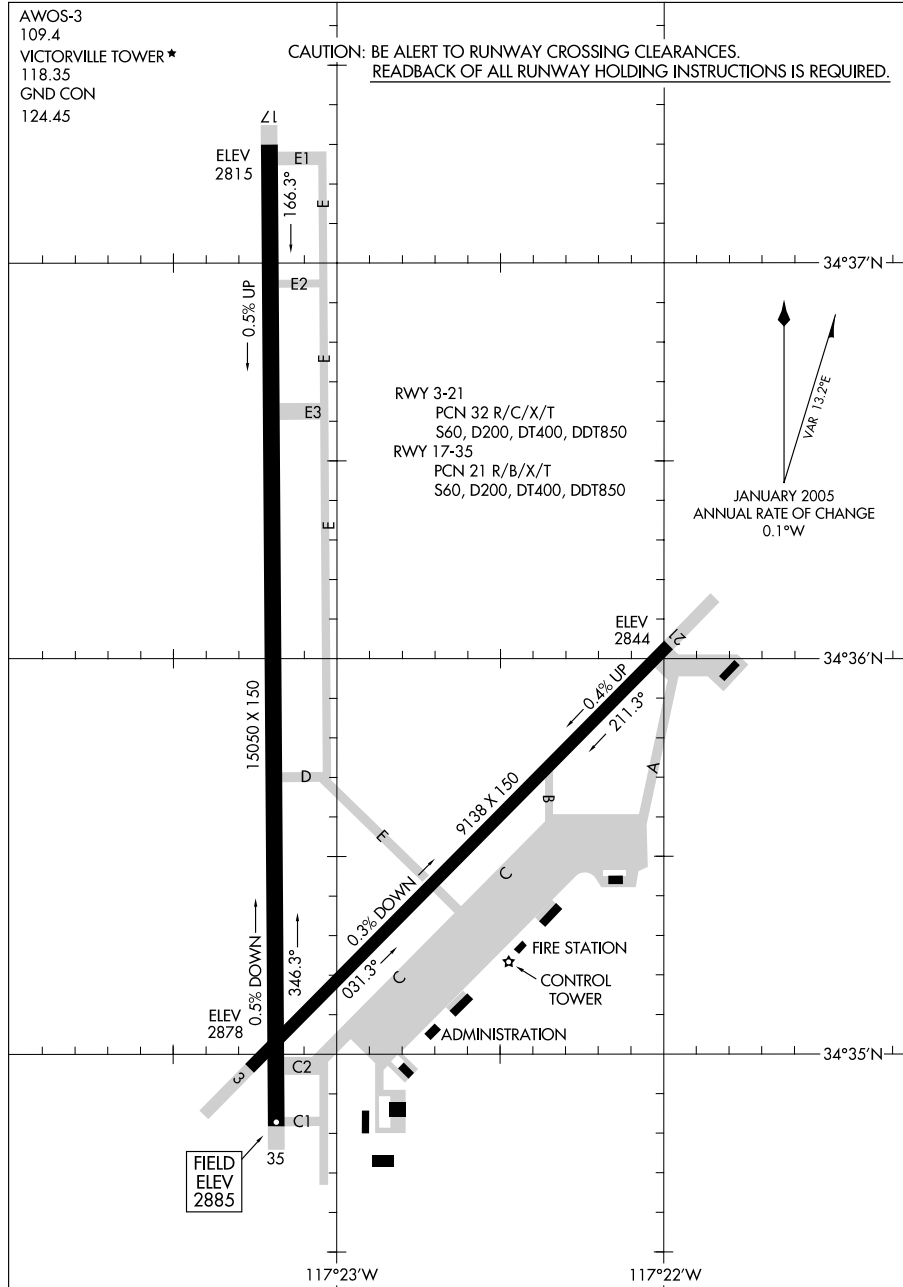

AIRPORT DIAGRAM

09239

VICTORVILLE, CALIFORNIA
 VICTORVILLE/SOUTHERN CALIFORNIA LOGISTICS (VCV)


09295

AIRPORT DIAGRAM

AFD-511 [USN]

YUMA MCAS/YUMA INTL (KNYL)

YUMA, ARIZONA

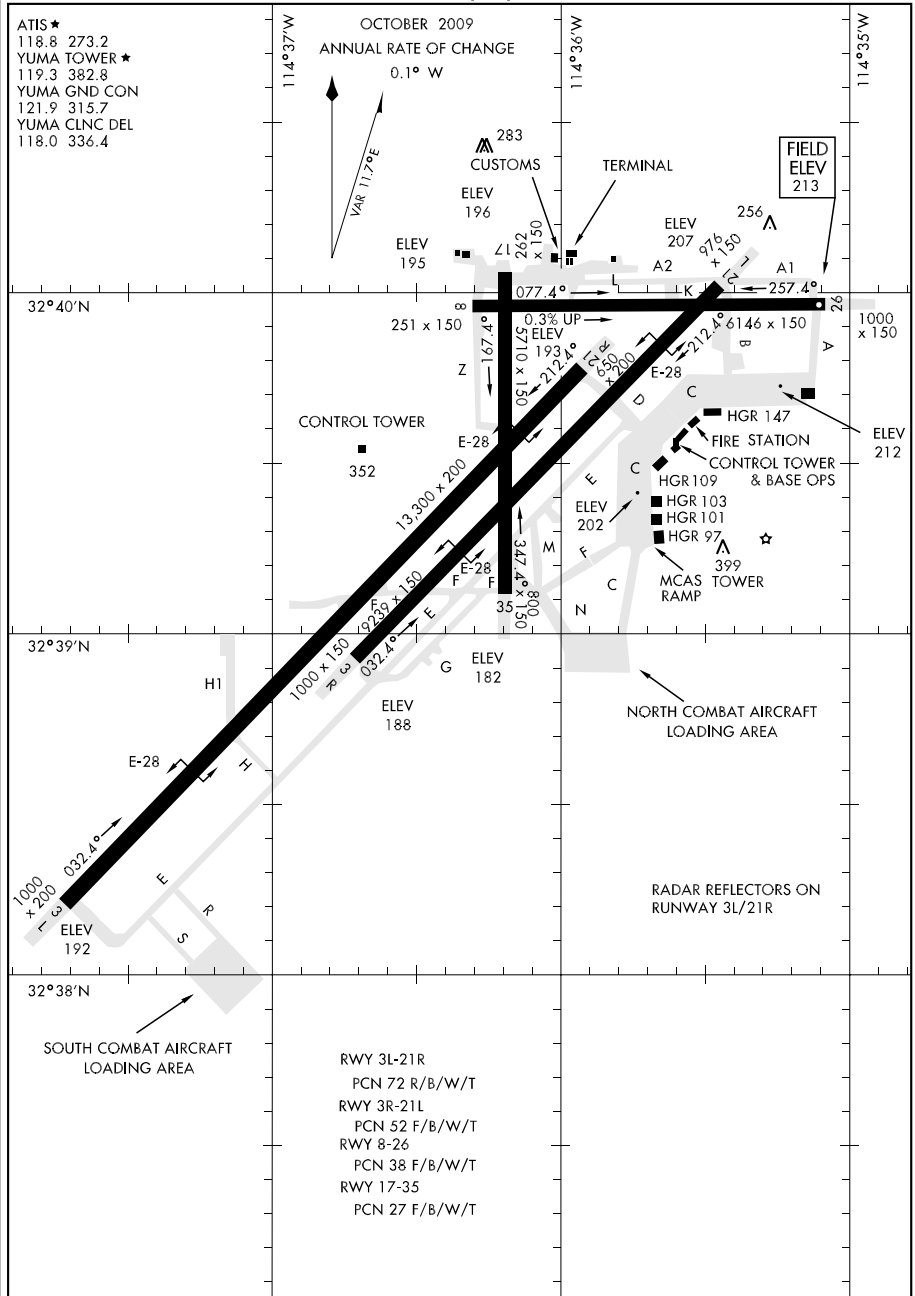


AIRPORT DIAGRAM

YUMA, ARIZONA

YUMA MCAS/YUMA INTL (KNYL)

**INTENTIONALLY
LEFT
BLANK**

NATIONAL WEATHER SERVICE (NWS)
UPPER AIR OBSERVING STATIONS (UAOS)
AND
WEATHER RADAR NETWORK

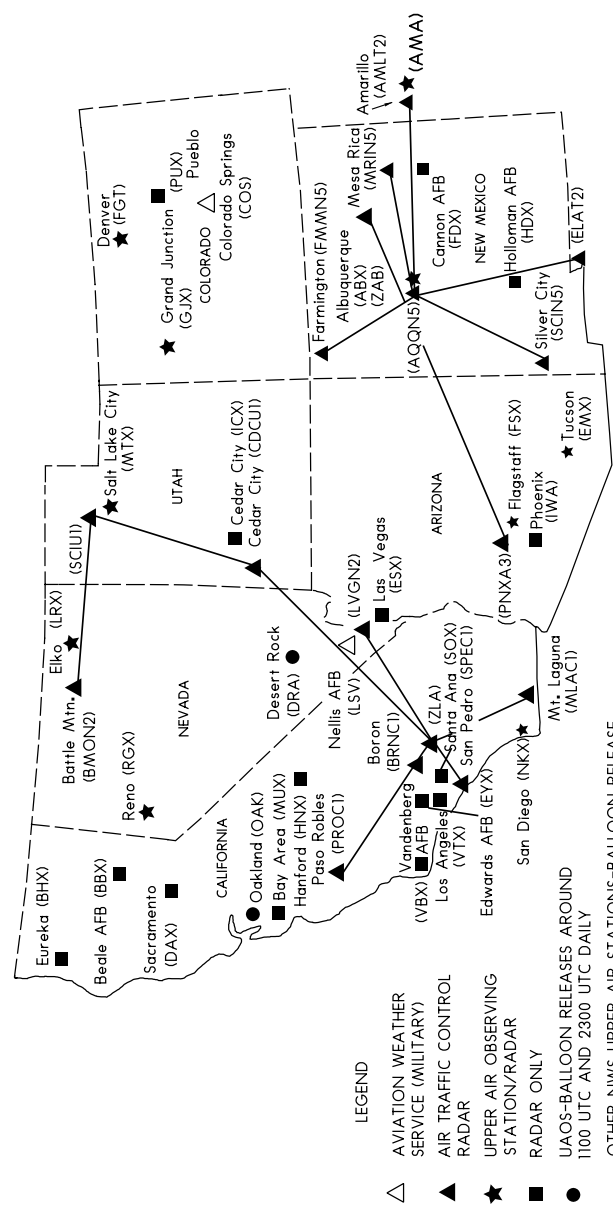

NOTE: FOR RELEASE LATER THAN 1130 UTC AND 2330 UTC, AND FOR SPECIAL RELEASES AT OTHER THAN THE SCHEDULED HOURS, AN AERONAUTICAL INFORMATION MESSAGE WILL BE FILED.